

Stealthwatch Flow Sensor 1200

First Ship Date: 5/2017


Final Ship Date: Currently Shipping

The Stealthwatch Flow Sensor 1200 has the following general configuration. Your model may look slightly different.

Front View



Back View

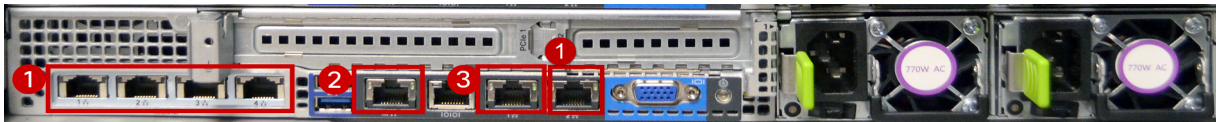

1. Monitoring ports
2. CIMC management port
3. Stealthwatch management port

Specifications

| | |
|------------------|--|
| UCS Platform | UCSC-C220-M4S |
| Network/NIC | Monitoring ports: 5; 100/1000 copper Note: All monitoring ports are used to receive raw network traffic. CIMC management port: 1; 100/1000 copper SW management port: 1; 100/1000 copper |
| Rated to Monitor | 1 Gbps * |
| Processor | 1.7 GHz E5-2609 v4 |
| Memory | 8 GB DDR4 (2x) - 16 GB total |
| Storage | 300 GB HDD (2x) - 600 GB total RAID1 |
| Throughput | 1 Gbps |

| | |
|---------------------|---|
| Rack Units | 1U |
| Weight | 37.9 pounds (17.2 kg) |
| Dimensions | Height: 1.7 inches (4.3 cm) Width: 16.9 inches (42.9 cm) Depth: 29.8 inches (75.8 cm) |
| Power | Redundant 770W AC 50/60 Auto Ranging (100v to 240V) |
| Humidity (Relative) | Operating: 10% to 90% Storage: 5% to 93% |
| Altitude | Operating: 0 feet to 10,000 feet (0 meters to 3,048 meters) Storage: 0 feet to 40,000 feet (0 meters to 12,192 meters) |
| Heat Dissipation | 664.86 BTU per hour maximum (estimated) |
| Temperature | Operating: 41° F to 95° F (5° C to 35° C) Derate the maximum temperature by 1°C for every 305 meters of altitude above sea level. Storage: -40° F to 149° F (-40° C to 65° C) |

* These numbers are generated in our test environments using average customer data. There are several factors that may affect your specific performance, such as traffic type, average size of packets, and more. While we do our best to represent the data as fairly and accurately as possible, your environment may experience different limits.