



Avaya Definity CM 2.0 to Cisco IAD243X using PRI T1 DMS-100 ISDN with SIP

January 10, 2007 Initial Version

Table of Contents

Introduction	1
Network Topology.....	2
Limitations.....	2
Hardware Requirements	3
Software Requirements	3
Features	3
Features Supported.....	3
Features Not Supported	3
Configuration.....	3
Configuration Sequence and Tasks for the Avaya System.....	3
Avaya PBX Configuration	4
Cisco IAD2432 24FXS Configuration	10
Acronyms	13

Introduction


This is an application note for connectivity to the Avaya Definity G3 Communications Manager 2.0 with Cisco IAD243X Gateway via PRI DMS100-to-SIP communication (10/100baseT).

The network topology diagram (Figure 1) shows the test setup for end-to-end interoperability with the Cisco IAD243X Gateway connected to the PBX via PRI DMS-100 ISDN (T1). IP trunk connectivity between the IAD243X's is achieved by using SIP protocol.



Network Topology

Figure 1. Basic Call Setup

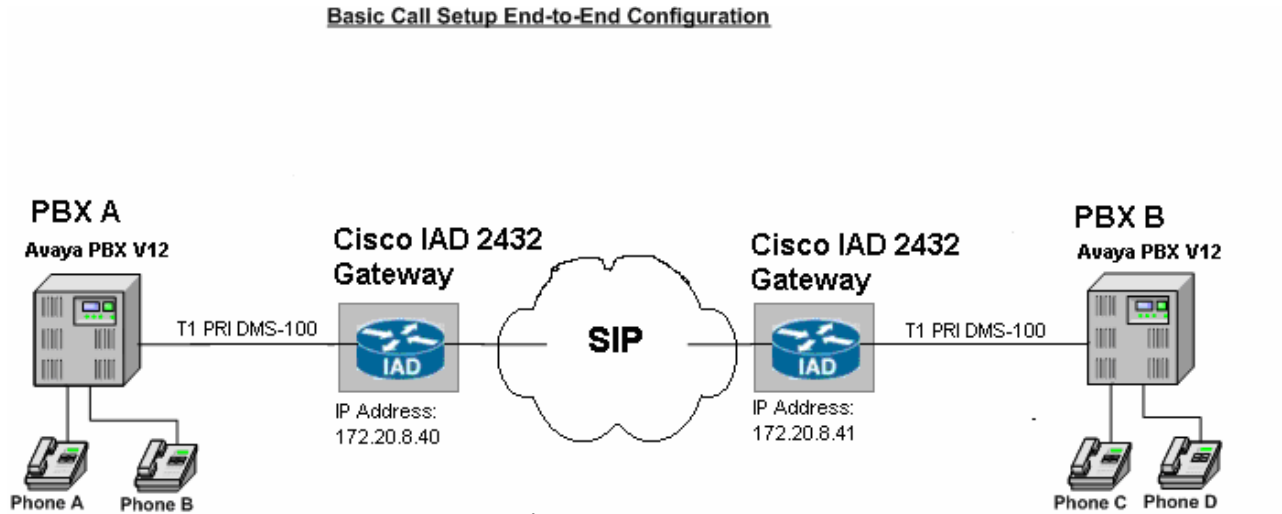

Limitations

Connected Name feature does not interoperate. The limitation is due to the IAD2432 not supporting this feature.

Overlap sending/receiving is not supported in IOS when configured for ISDN “switch-type primary-dms100.”

Connected Number does not follow the CallForward feature (e.g. If Phone A calls Phone C, and Phone C is forwarded to Phone D, the connected number displayed on Phone A will be Phone C’s number, not Phone D’s). The limitation is due to the IAD2432.

Connected number restriction is not honored. The limitation is due to the IAD2432

Avaya Definity G3 V12 only supports ISDN switch-type DMS250 and Cisco IOS only supports ISDN switch-type DMS-100. The testing conducted to obtain this Interoperability Application Note is based on these parameters being configured.

When a call conference is initiated by the external calling phone to conference a local phone (i.e. Phone A calls Phone C, Phone A conferences Phone D), in order for the call not to drop between the local phones at the instance that the conferencing phone leaves (i.e. Phone A hangs-up), the Avaya trunk configuration must be set for “Disconnect Supervision – In? yes Out? yes. This is detailed in the Configuration section.



Hardware Requirements

- 2 Cisco IAD2432 24FXS
- 2 Avaya Definity G3 w/ TN464F circuit pack
- 4 Avaya Digital stations 8410D
- 1 Cisco Catalyst switch (CAT6500)

Software Requirements

- Avaya PBX: G3 Version 12 Communications Manager 2.0
- Cisco IOS Release: c2430-ik9o3s-mz-124-9.T1

Features

Features Supported

- Basic end-to-end calls with CLIP (Calling Number) and COLP (Connected Number)
- Calling Number Restricted (CLIR calling number only)
- Call Transfer – Local and Network/External
- Call Waiting
- Call on-hold
- Call Forward (Unconditional, Busy and No answer) – local and Network/External
- 3-way Conference

Features Not Supported

- Connected Name presentation
- Overlap sending/receiving

Configuration

Configuration Sequence and Tasks for the Avaya System

1. DS1 Configuration
2. Trunk group
3. Signaling Group
4. Assign trunk members
5. Uniform-dialing
6. ARR
7. Route Pattern
8. Digital station config



Avaya PBX Configuration

```
1 | 2 |
DS1 CIRCUIT PACK

Location: 01A12                      Name: Tony B.IAD test
Bit Rate: 1.544                      Line Coding: b8zs
Line Compensation: 1                 Framing Mode: esf
Signaling Mode: isdn-pri
Connect: pbx                          Interface: network
TN-C7 Long Timers? n                Country Protocol: 1
Interworking Message: PROGRESS       Protocol Version: c
Interface Companding: mulaw          CRC? n
Idle Code: 11111111
DCP/Analog Bearer Capability: 3.1kHz

Slip Detection? n                    Near-end CSU Type: other

Block Progress Indicator? n
```



```
1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
TRUNK GROUP
Group Number: 12                Group Type: isdn                CDR Reports: y
Group Name: Tony B. IAD testing  COR: 1                TN: 1                TAC: 612
Direction: two-way              Outgoing Display? n        Carrier Medium: PRI/BRI
Dial Access? y                  Busy Threshold: 99         Night Service:
Queue Length: 0
Service Type: tie                Auth Code? n                TestCall ITC: rest
Far End Test Line No:
TestCall BCC: 4
TRUNK PARAMETERS
Codeset to Send Display: 0      Codeset to Send National IEs: 6
Max Message Size to Send: 260  Charge Advice: none
Supplementary Service Protocol: a Digit Handling (in/out): enbloc/enbloc
Trunk Hunt: descend            QSIG Value-Added? n
Digital Loss Group: 13
Calling Number - Delete:        Insert:                    Numbering Format: unk-unk
Bit Rate: 1200                  Synchronization: async   Duplex: full
Disconnect Supervision - In? y  Out? y
Answer Supervision Timeout: 0
```



```
1 2 3 4 5 6 7 8 9 10
TRUNK FEATURES
  ACA Assignment? n           Measured: none           Wideband Support? n
                               Internal Alert? n         Maintenance Tests? y
                               Data Restriction? n       NCA-TSC Trunk Member: 1
                               Send Name: y             Send Calling Number: y
  Used for DCS? n
  Suppress # Outpulsing? n    Numbering Format: public
  Outgoing Channel ID Encoding: preferred  UUI IE Treatment: service-provider
                               Replace Restricted Numbers? y
                               Replace Unavailable Numbers? y
                               Send Connected Number: y
  Send UUI IE? n
  Send UCID? n
  Send Codeset 6/7 LAI IE? n           Ds1 Echo Cancellation? n
  SBS? n  Network (Japan) Needs Connect Before Disconnect? n
```

```
1 2 3 4 5
SIGNALING GROUP
Group Number: 12           Group Type: isdn-pri
  Associated Signaling? y   Max number of NCA TSC: 12
  Primary D-Channel: 01A1224  Max number of CA TSC: 12
                               Trunk Group for NCA TSC: 12
  Trunk Group for Channel Selection: 12  X-Mobility/Wireless Type: NONE
  Supplementary Service Protocol: a
```



1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

```

TRUNK GROUP
Administered Members (min/max): 1/4
Total Administered Members: 4

GROUP MEMBER ASSIGNMENTS

   Port      Code Sfx Name      Night      Sig Grp
1: 01A1201  TN464  F              12
2: 01A1202  TN464  F              12
3: 01A1203  TN464  F              12
4: 01A1204  TN464  F              12
5:
6:
7:
8:
9:
10:
11:
12:
13:
14:
15:

```

Note: When adding members to the trunk group you will need to add all available ports to the trunk group. For T1 you will configure all 23 available timeslots (e.g. 01A1201 thru 01A1223). Do so in a sequential manner.

1	2
---	---

```

UNIFORM DIAL PLAN TABLE
Percent Full

 Matching      Insert      Node      Matching      Insert
Pattern  Len Del  Digits  Net Conv  Num  Pattern  Len Del  Digits  Net Conv
4001      4  0   612   aar  n              4  0   612   aar  n
4002      4  0   612   aar  n              4  0   612   aar  n

```

1	2
---	---

```

AAR DIGIT ANALYSIS TABLE
Percent Full: 9


   Dialed      Total      Route      Call      Node      ANI
   String      Min Max    Pattern    Type      Num      Req'd
612           7  7      12        aar       n

```




```
1 2 3 4
STATION
FEATURE OPTIONS
  LWC Reception: spe
  LWC Activation? y
  LWC Log External Calls? n
  CDR Privacy? n
  Redirect Notification? y
  Per Button Ring Control? n
  Bridged Call Alerting? n
  Active Station Ringing: single
  H.320 Conversion? n
  Service Link Mode: as-needed
  Multimedia Mode: basic
  MWI Served User Type:
  Emergency Location Ext: 2004
  Auto Select Any Idle Appearance? n
  Coverage Msg Retrieval? y
  Auto Answer: none
  Data Restriction? n
  Idle Appearance Preference? n
  Restrict Last Appearance? n
  Per Station CPN - Send Calling Number?
  Audible Message Waiting? y
  Display Client Redirection? y
  Select Last Used Appearance? n
  Coverage After Forwarding? s
  Multimedia Early Answer? n
  Direct IP-IP Audio Connections? y
  IP Audio Hairpinning? y
```

```
1 2 3 4
STATION
SITE DATA
  Room:
  Jack:
  Cable:
  Floor:
  Building:
  Headset? n
  Speaker? n
  Mounting: d
  Cord Length: 0
  Set Color:
ABBREVIATED DIALING
  List1:
  List2:
  List3:
BUTTON ASSIGNMENTS
  1: call-appr
  2: call-appr
  3: cfwd-bsyda Ext:
  4:
  5:
  6:
  7:
  8:
  9:
  10: last-numb
```

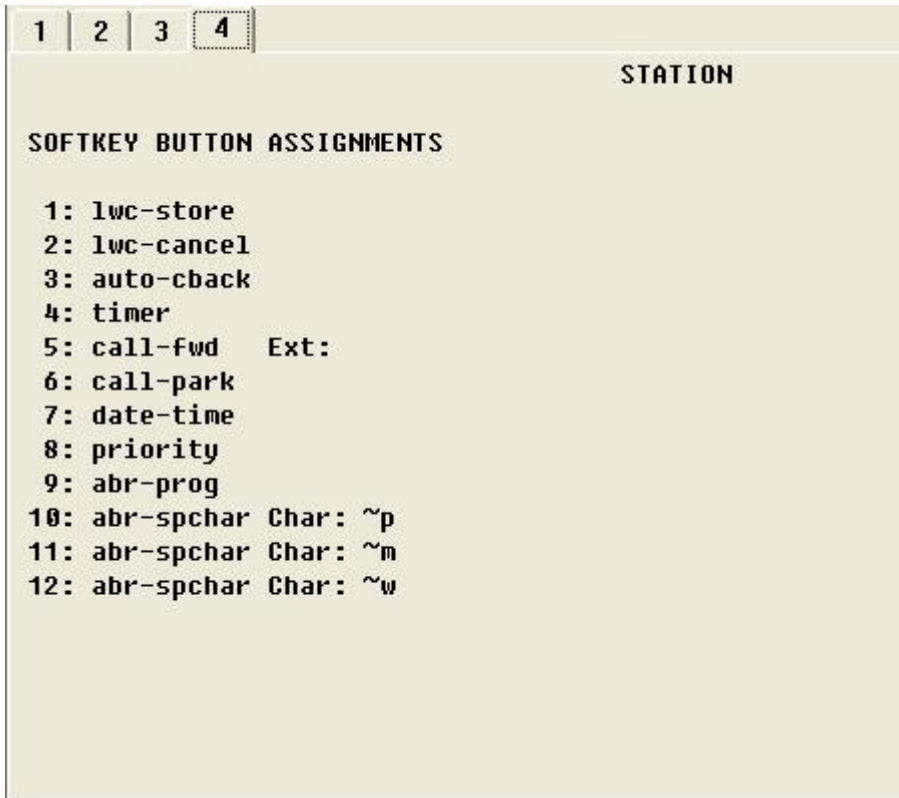

Cisco IAD2432 24FXS Configuration

```
IAD_V7#sh run
Building configuration...

Current configuration : 2033 bytes
!
version 12.4
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
!
hostname IAD_V7
!
boot-start-marker
boot system flash:c2430-ik9o3s-mz-124-9.T1.bin
boot-end-marker
!
card type t1 1
enable secret 5 $1$WJPz$ZoIKHvDdxxTEDUc2AwOoM0
!
no aaa new-model
!
resource policy
!
network-clock-participate T1 1/0
network-clock-participate T1 1/1
network-clock-select 1 T1 1/0
!
!
no ip domain lookup
```



```
!  
!  
!  
isdn switch-type primary-ni  
isdn gateway-max-interworking  
!  
voice-card 0  
!  
!  
!  
!  
controller T1 1/0  
framing esf  
linecode b8zs  
pri-group timeslots 1-2,24  
!  
controller T1 1/1  
framing esf  
linecode b8zs  
!  
!  
!  
!  
!  
interface FastEthernet0/0  
ip address 172.20.8.40 255.255.255.0  
ip broadcast-address 0.0.0.0  
duplex auto  
speed auto  
!  
interface FastEthernet0/1  
no ip address  
ip broadcast-address 0.0.0.0  
shutdown  
duplex auto  
speed auto  
!  
interface Serial1/0:23  
no ip address  
encapsulation hdlc  
isdn switch-type primary-dms100  
isdn incoming-voice voice  
isdn supp-service name calling ie 40 cs 0  
no cdp enable  
!  
ip default-gateway 172.20.8.1  
ip http server  
no ip http secure-server  
!  
ip route 0.0.0.0 0.0.0.0 172.20.8.1  
!  
!  
!  
!  
control-plane  
!  
!  
voice-port 1/0:23  
!  
voice-port 2/0  
!  
voice-port 2/1
```



```
!  
voice-port 2/2  
!  
voice-port 2/3  
!  
voice-port 2/4  
!  
voice-port 2/5  
!  
voice-port 2/6  
!  
voice-port 2/7  
!  
voice-port 2/8  
!  
voice-port 2/9  
!  
voice-port 2/10  
!  
voice-port 2/11  
!  
voice-port 2/12  
!  
voice-port 2/13  
!  
voice-port 2/14  
!  
voice-port 2/15  
!  
voice-port 2/16  
!  
voice-port 2/17  
!  
voice-port 2/18  
!  
voice-port 2/19  
!  
voice-port 2/20  
!  
voice-port 2/21  
!  
voice-port 2/22  
!  
voice-port 2/23  
!  
!  
!  
!  
!  
dial-peer voice 4000 voip  
destination-pattern 4...  
supplementary-service pass-through  
session protocol sipv2  
session target ipv4:172.20.8.41  
!  
dial-peer voice 2000 pots  
destination-pattern 2...  
supplementary-service pass-through  
direct-inward-dial  
port 1/0:23  
forward-digits all  
!  
!  
!  
!  
line con 0  
password cisco
```



```
login
line aux 0
line vty 0 4
password cisco
login
!
end

IAD_V7#
```

Acronyms

Acronym	Definitions
IAD	Integrated Access Device
SIP	Session Initiation Protocol



Important Information

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.



Corporate Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters

Cisco Systems International
BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: 31 0 20 357 1000
Fax: 31 0 20 357 1100

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-7660
Fax: 408 527-0883

Asia Pacific Headquarters

Cisco Systems, Inc.
Capital Tower
168 Robinson Road
#22-01 to #29-01
Singapore 068912
www.cisco.com
Tel: +65 317 7777
Fax: +65 317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on the Cisco Web site at www.cisco.com/go/offices.

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia • Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland • Israel • Italy • Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal • Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan • Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

© 2007 Cisco Systems, Inc. All rights reserved.

CCVP, the Cisco Logo, and the Cisco Square Bridge logo are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn is a service mark of Cisco Systems, Inc.; and Access Registrar, Aironet, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, Follow Me Browsing, FormShare, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, iPhone, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, LightStream, Linksys, MeetingPlace, MGX, Networking Academy, Network Registrar, Packet, PIX, ProConnect, RateMUX, ScriptShare, SlideCast, SMARTnet, StackWise, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0612R)

Printed in the USA