

Stealthwatch UDP Director 2200

First Ship Date: 5/2017


Final Ship Date: Currently Shipping

The Stealthwatch UDP Director 2200 has the following general configuration. Your model may look slightly different.

Front View



Back View

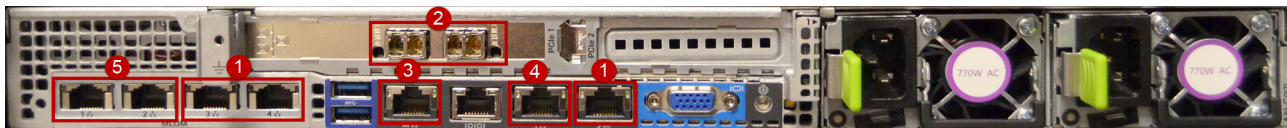

1. Monitoring ports
2. Reserved ports

Note: You can use either copper cable or the fiber optic cable, but not both.

3. CIMC management port
4. Stealthwatch management port
5. HA Cross Connect ports

Specifications

UCS Platform	UCSC-C220-M4S
Network/NIC	<p>Monitoring ports: 3; 100/1000 copper</p> <p>Note: All monitoring ports are enabled in promisc mode by default. If desired, you can use them to receive all packets on those interfaces (ingress only) and forward only those matched in any forwarding rules.</p> <p>Reserved ports: 2; 1 GB Base-SX LC</p> <p>CIMC management port: 1; 100/1000 copper</p> <p>Stealthwatch management port: 1; 100/1000 copper</p> <p>HA Cross Connect ports: 2</p>

	Note: HA ports are used only in an HA environment where two UDPD2000 series appliances are cross-connected and HA configurations have been provisioned. (Refer to the Stealthwatch System Hardware Configuration Guide for details.)
Processor	2.2 GHz E5-2650 v4
Memory	16 GB DDR4 (16x) - 256 GB total
Storage	300 GB HDD (6x) - 1.2 TB total RAID6
Packet Replication Rate	Input: 37,500 pps Output: 75,000 pps
RAID Cache	2 GB
Rack Units	1U
Weight	37.9 pounds (17.2 kg)
Dimensions	Height: 1.7 inches (4.3 cm) Width: 16.9 inches (42.9 cm) Depth: 29.8 inches (75.8 cm)
Power	Redundant 770W AC 50/60 Auto Ranging (100v to 240V)
Humidity (Relative)	Operating: 10% to 90% Storage: 5% to 93%
Altitude	Operating: 0 feet to 10,000 feet (0 meters to 3,048 meters) Storage: 0 feet to 40,000 feet (0 meters to 12,192 meters)
Heat Dissipation	1164.77 BTU per hour maximum (estimated)
Temperature	Operating: 41° F to 95° F (5° C to 35° C) Derate the maximum temperature by 1°C for every 305 meters of altitude above sea level. Storage: -40° F to 149° F (-40° C to 65° C)