Application Note

AT&T IP Flexible Reach Service With Enhanced Features Using MIS / PNT or AT&T Virtual Private Network Transport With Cisco Unified Communications Manager v. 10.5.2 and Cisco UBE v. 10.0.2 On an ISR 4431 Router with SIP Interface APR 2015

Note: Testing was conducted in tekVizion labs

Table of Contents

Introduction

Service Providers today, such as AT&T, are offering alternative methods to connect to the PSTN via their IP network. Most of these services utilize SIP as the primary signaling method and a centralized IP to TDM gateway to provide on-net and off-net services. AT&T IP Flexible Reach is a service provider offering that allows connection to the PSTN and may offer the end customer a viable alternative to traditional PSTN connectivity via either analog or T1 lines. A demarcation device between these services and customer owned services is recommended. The Cisco Unified Border Element (Cisco UBE) provides demarcation, security, interworking and session management services.

- This application note describes the necessary steps and configurations of Cisco Unified Communications Manager (Cisco UCM) 10.5.2, Cisco Unity Connection 10.5.2, Cisco Unified CM IM and Presence 10.5.2, Cisco Integrated Services Routers (ISR) Version 15.4(3) S2 with connectivity to AT&T's IP Flex-Reach SIP trunk service. It also covers support and configuration example of Cisco Unity Connection (CUC) messaging integrated with Cisco Unified Communications Manager (Cisco UCM). The deployment model covered in this application note is Cisco Integrated Services Routers (ISR) to PSTN (AT&T IP Flexible Reach SIP). AT&T IP Flexible Reach provides inbound and outbound call service.

- Testing was performed in accordance to AT&T's IP Flexible Reach test plan and all features were verified. Key features verified are: inbound and outbound basic call (including international calls), calling name delivery, calling number and name restriction, CODEC negotiation, intra-site transfers, intra-site conferencing, call hold and resume, call forward (forward all, busy and no answer), leaving and retrieving voicemail (Cisco Unity Connection), CISCO auto-attendant (BACD), fax G.711 and T38 (G3 and SG3 speeds), teleconferencing, failover of unresponsive SIP network to PSTN and outbound/inbound calls to/from TDM networks.

The Cisco Unified Border Element function configuration detailed in this document is based on a lab environment with a simple dial-plan used to ensure proper interoperability between AT&T SIP network and Cisco Integrated services router. The configurations described in this document details the important commands for successful interoperability. Care must be taken by the network administrator deploying Cisco ISR to ensure these commands are set per each dial-peer required, to interoperate done AT&T SIP network.

- Consult your Cisco representative for the correct IOS image and for the specific application and Device Unit License and Feature License requirements for all your Cisco Unified Communication Manager with Cisco Unified Border Element components.

Network Topology

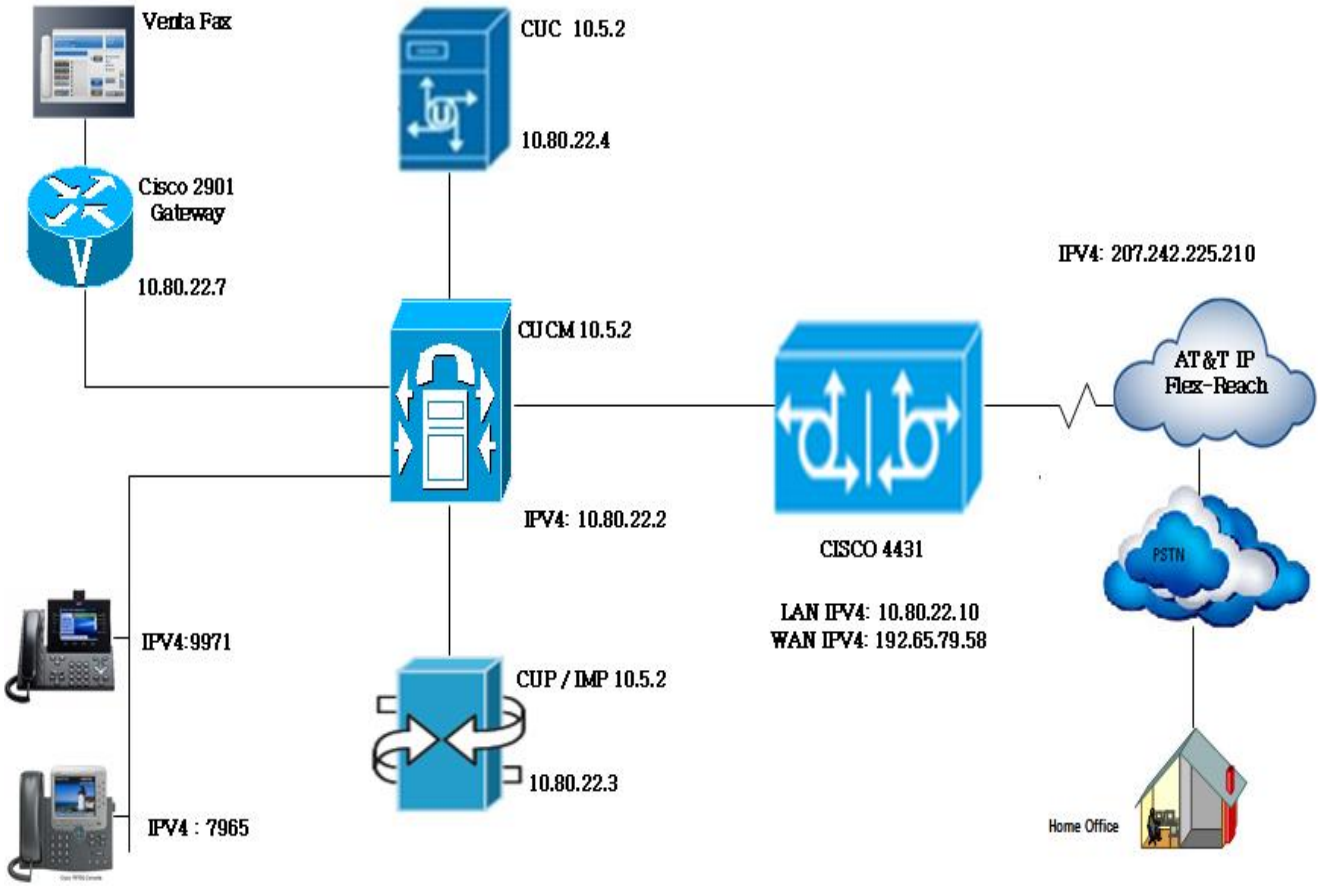

Hardware Components

- UCS-C240 VMWare server running ESXi 5.5
- Cisco IP Phones. This solution was tested with Cisco 7965 & Cisco 9971 phones
- Cisco ISR4431/K9 (1RU) processor with 1687596K/6147K bytes of memory.
- Processor board ID FTX1845AJ9S
  4 Gigabit Ethernet interfaces
  32768K bytes of non-volatile configuration memory.
  4194304K bytes of physical memory.
  7057407K bytes of flash memory at bootflash:

Software Requirements

- Cisco UCM: System version: 10.5.2.10000-5, including Business Edition 6000 and Business Edition 7000.
- ISR: ISR Software (X86_64_LINUX_IOSD-UNIVERSALK9-M), Version 15.4 (3)S2, RELEASE SOFTWARE (fc3).
- System image file is "bootflash:isr4400-universalk9.03.13.02.S.154-3.S2-ext.SPA.bin".
- Cisco Unity Connection version: System version: 10.5.2.10000-5
- Cisco Unified CM IM and Presence: System version: 10.5.2.10000-9
- Cisco Jabber client version: V-9.1.3 Build 13181
- VentaFax client version: 7.3.233.582 I

Features

Features – Supported

- Basic Call using G.729 and G711
- Calling Party Number Presentation and Restriction
- Calling Name Presentation
- AT&T Advanced 8YY Call Prompter (8YY)
- Cisco UBE Delayed-Offer-to-Early-Offer conversion of an initial SIP INVITE without SDP
- Intra-site Call Transfer
- Intra-site Conference
- Call Hold and Resume
- Call Forward All, Busy and No Answer
- AT&T IP Teleconferencing
- RTCP
- Fax over G.711 (See Caveat section for details)
- Incoming DNIS Translation and Routing
- Outbound calls to AT&T's IP and TDM networks
- Inbound calls from AT&T's IP and TDM networks
- CPE voicemail managed service, leave and retrieve voice messages via incoming AT&T SIP trunk (Cisco Unity Connection)
- Auto-attendant transfer-to service (See Caveat section for details)
- Failover (From non-responsive SIP network to ATT SIP network)
- Inbound & Outbound Calls using Cisco Jabber
- Emergency and 411 calls were terminated to a voicemail platform in lab environment within AT&T for test

Network Based Features - Supported

- Call forward (Unconditional, Busy, No Answer, Not reachable)
- Sequential Ringing
- Simultaneous Ringing

NOTE: Using the AT&T IP Flexible Reach Portal, provision TN(s) on the CPE with the Sequential Ring and simultaneous feature. Provisioning is self-explanatory. Please contact your AT&T representative, if you need help with the provisioning Network based feature.

Features - Not Supported

- Cisco UCM Codec negotiation of G.722.1
- Network-Based Blind Call Transfer
- Network-Based Consultative Call Transfer

Caveats

Fax

- The maximum fax rate achieved using G711u (G3 or SG3) is only 14400 kbps.
- G711Passthrough test is achieved using “fax protocol pass-through g711ulaw”.
- Fax protocol T38 has been tested.

Auto-Attendant

- The CUC auto-attendant feature was used to test attendant functionality using the default codec G711 for auto attendant prompts. G729 prompts can be used but was not tested.

Hold/Resume & Music on Hold (MOH)

- Re-invites for hold/resume from PSTN network is potentially dependent on the carrier/network through which the call is traversing.

Ring back Tone on Early Unattended Transfer

- Caller does not hear ring back tone when a call is transferred to PSTN user.

PBX Based Call Forward Unconditional

- PBX Based Unconditional Call Forwarding test is temporarily blocked due to AT&T Flexible Reach network issue.

SIP Provisional Acknowledgement/Early media

- To play early media sent by ATT, Cisco UCM needs to be enabled with PRACK if 1XX contains SDP on Cisco UCM SIP Profile.
- Some PSTN network call prompters utilize early-media cut-through to offer menu options to the caller (DTMF select menu) before the call is connected. In order for Cisco UCM/Cisco UBE solution to achieve successful early-media cut-through, the Cisco UCM to Cisco UBE call leg must be enabled with SIP PRACK. To enable SIP PRACK on the Cisco UCM, the SIP Profile “SIP Rel1XX Options” setting must be set to “Send PRACK”. The SIP Profile is found under Device>Device Settings>SIP Profile, This feature can be assigned on a per SIP trunk basis using SIP profiles. SIP PRACK provisioning on Cisco UCM 9.X and newer software versions is enabled under SIP Profile configuration page, while SIP PRACK support on Cisco UCM 7.X and older software versions is enabled under the Service Parameters configuration page.

AT&T IP Teleconferencing (IPTC)

Following scenarios were not executed due to limitations on AT&T network

- IPTC - Hold & Resume
- IPTC - PBX-Based Attended Transfer
- IPTC - PBX-Based 3-way Call Conference

Configuration Considerations

- To enable conference on AT&T IP Flexible Reach and Cisco UCM SIP trunk, it is required to configure a conference bridge (CFB) resource to initiate a three-way conference between end-points. See configuration section for details.
- Forwarded calls from Cisco UCM user to PSTN (out to AT&T's IP Flexible Reach service), AT&T serviced areas require that the SIP Diversion header contain the full 10-digit DID number of the forwarding party. In this application note the assumption has been made that a typical customer will utilize extension numbers (4-digit assignments in this example) and map 10-digit DID number using Cisco UBE translation profile. This is because the Cisco UCM uses 4-digit extensions on Cisco UCM IP phones and it is necessary to expand the 4-digit extension included in the Diversion header of a forwarding INVITE message to its full 10-digit DID number when the IP phone is set to call-forward. The requirement to expand the Diversion-Header has been achieved by the use of a SIP profile in Cisco UBE (See configuration section for details).
- Upon receiving inbound calls, AT&T SIP network will always have the first choice codec presented in the initial SIP INVITE (unless the end-device does not support the listed preferred codec), and processes calls accordingly. Customers wishing to place/receive G.711-only calls must configure separate voice class codec on Cisco UBE with G.711 as the first choice.
- SIP Profiles may also be employed to advertise desired RTP payload packet size.
- "voice-class sip privacy id" needs to configure in Cisco UBE dial peer to make call From a CPE Phone to PSTN phone, Pass Calling Party Number (CPN), marked private.
- This test environment is not configured with Cisco UBE High Availability (HA)
- Cisco UCM sends a SIP UPDATE message to Cisco UBE for a call transfer. AT&T network does not support the SIP UPDATE message causing the Cisco UBE to timeout and the call transfer is not completed. As a workaround, SIP profile has been applied on the Cisco UBE to remove UPDATE from the allowed headers (See configuration section for details).

Emergency 911/E911 Services Limitations and Restrictions

- Emergency 911/E911 Services Limitations and Restrictions - Although AT&T provides 911/E911 calling capabilities, AT&T does not warrant or represent that the equipment and software (e.g., IP PBX) reviewed in this customer configuration guide will properly operate with AT&T IP Flexible Reach to complete 911/E911 calls; therefore, it is Customer's responsibility to ensure proper operation with its equipment/software vendor
- While AT&T IP Flexible Reach services support E911/911 calling capabilities under certain Calling Plans, there are circumstances when E911/911 service may not be available, as stated in the Service Guide for AT&T IP Flexible Reach found at http://new.serviceguide.att.com. Such circumstances include, but are not limited to, relocation of the end user's CPE, use of a non-native or virtual telephone number, failure in the broadband connection, loss of electrical power and delays that may occur in updating the Customer's location in the automatic location information database. Please review the AT&T IP Flexible Reach Service Guide in detail to understand the limitations and restrictions

ISR Configuration

ATT_IPFR_4K#**show version**

Cisco IOS XE Software, Version 03.13.02.S - Extended Support Release

Cisco IOS Software, ISR Software (X86_64_LINUX_IOSD-UNIVERSALK9-M), Version 15.4(3)S2, RELEASE SOFTWARE (fc3)

Technical Support: http://www.cisco.com/techsupport

Copyright (c) 1986-2015 by Cisco Systems, Inc.

Compiled Fri 30-Jan-15 15:19 by mcpre

Cisco IOS-XE software, Copyright (c) 2005-2015 by cisco Systems, Inc.

All rights reserved. Certain components of Cisco IOS-XE software are

licensed under the GNU General Public License ("GPL") Version 2.0. The

software code licensed under GPL Version 2.0 is free software that comes

with ABSOLUTELY NO WARRANTY. You can redistribute and/or modify such

GPL code under the terms of GPL Version 2.0. For more details, see the

documentation or "License Notice" file accompanying the IOS-XE software,

or the applicable URL provided on the flyer accompanying the IOS-XE

software.

ROM: IOS-XE ROMMON

ATT_IPFR_4K uptime is 1 week, 2 days, 5 hours, 35 minutes

Uptime for this control processor is 1 week, 2 days, 5 hours, 37 minutes

System returned to ROM by reload

System image file is "bootflash:/isr4400-universalk9.03.13.02.S.154-3.S2-ext.SPA.bin"

Last reload reason: Reload Command

This product contains cryptographic features and is subject to United States and local country laws governing import, export, transfer and use. Delivery of Cisco cryptographic products does not imply third-party authority to import, export, distribute or use encryption. Importers, exporters, distributors and users are responsible for compliance with U.S. and local country laws. By using this product you agree to comply with applicable laws and regulations. If you are unable to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:

http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to

export@cisco.com.

Technology Package License Information:

Technology Technology-package Technology-package

Current Type Next reboot

---

appx appxk9 EvalRightToUse appxk9

uc uck9 Evaluation uck9

security None None None

ipbase ipbasek9 Permanent ipbasek9

cisco ISR4431/K9 (1RU) processor with 1687596K/6147K bytes of memory.

Processor board ID FTX1845AJ9S

4 Gigabit Ethernet interfaces

32768K bytes of non-volatile configuration memory.

4194304K bytes of physical memory.

7057407K bytes of flash memory at bootflash:.

Configuration register is 0x2102

ATT_IPFR_4K# **sh running-configuration**

Building configuration...

Current configuration : 11300 bytes

!

! Last configuration change at 14:28:41 UTC Wed Apr 22 2015 by cisco

!

version 15.4

service config

service timestamps debug datetime msec

service timestamps log datetime msec

```
no platform punt-keepalive disable-kernel-core
!
hostname ATT_IPFR_4K
!
boot-start-marker
boot-end-marker
!
!
vrf definition Mgmt-intf
 !
 address-family ipv4
 exit-address-family
 !
 address-family ipv6
 exit-address-family
!
logging queue-limit 1000000000
logging buffered 10000000
logging rate-limit 10000
enable secret 5 $1$EWC0$6QpPfaUZ/L04rhx3qQlj7/
enable password tekV1z10n
!
aaa new-model
!
!
!
```

```
!
!
!
!
aaa session-id common
!
!
!
!
!
!
!
!
!
!
no ip domain lookup
ip domain name tekvizion.com
!
!
!
!
!
!
!
```

```
!
!
!
subscriber templating
multilink bundle-name authenticated
!
!
!
!
!
!
!
cts logging verbose
!
!
voice service voip
 no ip address trusted authenticate
 address-hiding [1]
 mode border-element [2]
 allow-connections sip to sip [3]
 redirect ip2ip
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 sip
```

[1] Hide signaling and media peer addresses from endpoints other than gateway.

[2] If the mode border-element command is not entered, border-element-related commands are not available for Cisco Unified Border Element voice connections on the Cisco 2900 and Cisco 3900 series platforms with a universal feature set. The mode border-element command is not available on any other platforms.

[3] This command enables Cisco UBE basic IP-to-IP voice communication feature.

```
 header-passing
 error-passthru [4]
 asserted-id pai [5]
 no update-callerid
 early-offer forced [6]
 midcall-signaling passthru [7]
 privacy-policy passthru [8]
 g729 annexb-all
!
voice class codec 1 [9]
 codec preference 1 g729r8 bytes 30
 codec preference 2 g711ulaw
!
voice class codec 2
 codec preference 1 g711ulaw
 codec preference 2 g729r8 bytes 30
!
voice class codec 3
 codec preference 1 g711ulaw
```

---

[4] This command allows SIP error messages to pass-through end-to-end without modification through Cisco UBE.

[5] This command enables router to send P-Asserted ID within the SIP Message Header. Alternatively, this command can also be applied to individual dial-peers (voice-class sip asserted-id pai).

[6] This command enables delay offer-to-early offer conversion of initial SIP INVITE message to calls matched to this dial-peer level.

[7] This command must be enabled at a global level to maintain integrity of SIP signaling between AT&T network and Cisco Unified Communications Manager (Cisco UCM) across Cisco UBE.

[8] This command allows for privacy settings to be transparently passed between AT&T network and Cisco UCM. This command can either be set at a global level, such as in this example, or it can be set at the dial-peer level.

[9] This command configures the codec preference to be assigned to dial-peers. Alternatively, single code can be configured into individual dial-peers.

```
!
!
voice class sip-profiles 1
 response ANY sip-header Allow-Header modify "UPDATE," ""
 request INVITE sip-header Diversion modify "<sip:(.*)@(.*)>" "<sip:732320\1@\2>" [10]
 request INVITE sdp-header Audio-Attribute modify "a=ptime:20" "a=ptime:30" [11]
 response ANY sdp-header Audio-Attribute modify "a=ptime:20" "a=ptime:30"
 request INVITE sdp-header Audio-Attribute add "a=ptime:30" [12]
!
!
!
!
!
voice translation-rule 1 [13]
 rule 1 /^.*\(40..\)/ /732320\1/
!
voice translation-rule 2
 rule 2 /^\+\(1\)\(7.........\)/ /\2/
!
```

[10] This SIP profile expands the Diversion header number from a 4-digit extension to a full 10-digit DID number in order to obtain interoperability with AT&T's served users during call-forward scenarios. The six digits in "sip: 732216" are variable and must be replaced with the first 6 digits of the DID's provisioned for the customer site.

[11] Cisco 6900-series IP phones use ptime value of 20 ms. AT&T networks prefer ptime value of 30 ms. This SIP profile modifies SDP ptime value from 20 to 30 ms and it should be applied to dial-peers where G729 is the preferred codec. If the customer creates a dial-peer specifically for G711, a sip-profile without modifying the ptime value should be applied. This is because G711 RTP was not defaulting to 20ms.

[12] This SIP profile is required in order to advertise the ptime=30 attribute in the outgoing SIP INVITE from Cisco UBE to AT&T. Currently RFC's do not have a standard method to advertise ptime values for each offered codec within a SDP offering with multiple codecs. This SIP profile allows for Cisco UBE to include the ptime attribute with a value of 30ms.

[13] This command used to convert 4 digit to 10 digit in contact header otherwise ATT will send 6xx error response while executing network related feature.

```
!
voice translation-profile NPA
 translate calling 1
!
voice translation-profile test+1
 translate called 2
!
!
!
license udi pid ISR4431/K9 sn FOC18261KJL
license boot level appxk9
license boot level uck9
spanning-tree extend system-id
!
username cisco privilege 15 password 0 tekV1z10n
!
redundancy
 mode none
!
!
!
ip tftp source-interface GigabitEthernet0
ip ssh version 1
!
!
!
```

```
!
!
!
!
interface GigabitEthernet0/0/0
 no ip address
 shutdown
 negotiation auto
!
interface GigabitEthernet0/0/1
 no ip address
 shutdown
 negotiation auto
!
interface GigabitEthernet0/0/2 [14]
 description LAN interface
 ip address 10.80.22.10 255.255.255.0 [15]
 negotiation auto
!
interface GigabitEthernet0/0/3 [16]
 description WAN interface
 ip address 192.65.79.58 255.255.255.224
 negotiation auto
!
```

[14] WAN interface to AT&T
[15] LAN interface to Cisco UCM
[16] Cisco UBE LAN interface IPv4 Address

```
interface GigabitEthernet0
 vrf forwarding Mgmt-intf
 ip address 10.64.2.202 255.255.0.0
 negotiation auto
!
ip forward-protocol nd
no ip http server
no ip http secure-server
ip route 0.0.0.0 0.0.0.0 192.65.79.33
ip route 172.16.0.0 255.255.0.0 10.80.22.1
ip route vrf Mgmt-intf 0.0.0.0 0.0.0.0 10.64.1.1
!
!
!
!
!
!
!
control-plane
!
 !
 !
 !
 !
!
mgcp behavior rsip-range tgcp-only
```

```
mgcp behavior comedia-role none
mgcp behavior comedia-check-media-src disable
mgcp behavior comedia-sdp-force disable
!
mgcp profile default
!
!
!
!
dial-peer voice 200 voip
 description "Outgoing To AT&T .IP PBX facing side"
 no modem passthrough
 session protocol sipv2
 incoming called-number [27]T
 voice-class codec 1
 voice-class sip asymmetric payload full
 voice-class sip asserted-id pai
 voice-class sip privacy-policy passthru
 voice-class sip profiles 1
 voice-class sip bind control source-interface GigabitEthernet0/0/2
 voice-class sip bind media source-interface GigabitEthernet0/0/2
 dtmf-relay rtp-nte
 fax-relay sg3-to-g3
 fax rate 14400
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
```

```
!
dial-peer voice 214 voip [17]
 description "Outgoing To AT&T"-AT&T facing side
 destination-pattern [2-9]T
 no modem passthrough
 session protocol sipv2 [18]
 session target ipv4:207.242.225.210
 voice-class codec 1 [19]
 voice-class sip asymmetric payload full [20]
 voice-class sip asserted-id pai
 voice-class sip privacy-policy passthru [21]
 voice-class sip early-offer forced
 voice-class sip profiles 1 [22]
 voice-class sip bind control source-interface GigabitEthernet0/0/3 [23]
 voice-class sip bind media source-interface GigabitEthernet0/0/3
 dtmf-relay rtp-nte [24]
 no fax-relay sg3-to-g3
 fax rate 14400
```

---

[17] Dial peer for AT&T facing network

[18] Session protocol SIPv2 is used for this testing

[19] Assigns voice class codec 1 settings to dial-peer (codec support and filtering).

[20] Configures the dynamic SIP asymmetric payload support.

[21] This command allows for privacy settings to be transparently passed between AT&T network and Cisco UCM. In this example, the command is set at the dial-peer level, you can also set the command at a global level to affect all dial-peers without necessarily setting the command on each dial-peer.

[22] This command enables the dial peer to use SIP profile 1

[23] Configure the Cisco UBE SIP messaging to use the HSRP virtual address in SIP messaging. Once HSRP is configured under the physical interface and the bind command is issued, calls to the physical IP address will fail. This is because the SIP listening socket is now bound to the virtual IP address but the signaling packets use the physical IP address, and therefore cannot be handled.

[24] This command used to pass RTP NTE (RFC2833) DTMF with respect to the dial peers used for the call.

```
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none [25]
 no vad
!
dial-peer voice 800 voip
 description " Incoming AT&T to IP-PBX . AT&T facing side "
 translation-profile incoming test+1
 huntstop
 no modem passthrough
 session protocol sipv2
 incoming called-number +1[37][13][24]32040..
 voice-class codec 1
 voice-class sip asymmetric payload full
 voice-class sip asserted-id pai
 voice-class sip privacy-policy passthru
 voice-class sip profiles 1
 voice-class sip bind control source-interface GigabitEthernet0/0/3
 voice-class sip bind media source-interface GigabitEthernet0/0/3
 dtmf-relay rtp-nte
 fax rate 14400
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
!
dial-peer voice 700 voip
 description " Incoming AT&T to IP-PBX - IP-PBX facing side "
 huntstop
```

[25] This command enables T38 fax protocol for calls terminating on this dial-peer

```
 destination-pattern [37][13][24].......
 no modem passthrough
 session protocol sipv2
 session target ipv4:10.80.22.2:5060
 voice-class codec 1
 voice-class sip asymmetric payload full
 voice-class sip asserted-id pai
 voice-class sip privacy-policy passthru
 voice-class sip early-offer forced
 voice-class sip profiles 1
 voice-class sip bind control source-interface GigabitEthernet0/0/2
 voice-class sip bind media source-interface GigabitEthernet0/0/2
 dtmf-relay rtp-nte
 fax-relay sg3-to-g3
 fax rate 14400
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
!
dial-peer voice 100 voip
 description "Outgoing To AT&T"-AT&T facing side
 destination-pattern 73236.....
 no modem passthrough
 session protocol sipv2
 session target ipv4:207.242.225.210
 voice-class codec 1
 voice-class sip asymmetric payload full
```

```
 voice-class sip asserted-id pai
 voice-class sip privacy-policy passthru
 voice-class sip profiles 1
 voice-class sip bind control source-interface GigabitEthernet0/0/3
 voice-class sip bind media source-interface GigabitEthernet0/0/3
 dtmf-relay rtp-nte
 fax rate 14400
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
!
dial-peer voice 300 voip
 description " Int'l calls to AT&T - AT&T facing side "
 destination-pattern 011T
 no modem passthrough
 session protocol sipv2
 session target ipv4:207.242.225.210
 voice-class codec 1
 voice-class sip asymmetric payload full
 voice-class sip asserted-id pai
 voice-class sip privacy-policy passthru
 voice-class sip early-offer forced
 voice-class sip profiles 1
 voice-class sip bind control source-interface GigabitEthernet0/0/3
 voice-class sip bind media source-interface GigabitEthernet0/0/3
 dtmf-relay rtp-nte
 fax rate 14400
```

```
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
!
dial-peer voice 400 voip
 description " Int'l calls to AT&T - IP-PBX facing side "
 no modem passthrough
 session protocol sipv2
 incoming called-number 011T
 voice-class codec 1
 voice-class sip asymmetric payload full
 voice-class sip asserted-id pai
 voice-class sip privacy-policy passthru
 voice-class sip profiles 1
 voice-class sip bind control source-interface GigabitEthernet0/0/2
 voice-class sip bind media source-interface GigabitEthernet0/0/2
 dtmf-relay rtp-nte
 fax rate 14400
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
!
dial-peer voice 500 voip
 description " N11 Calls to AT&T - AT&T facing side "
 destination-pattern .11
 no modem passthrough
 session protocol sipv2
 session target ipv4:207.242.225.210
```

```
 voice-class codec 1
 voice-class sip asymmetric payload full
 voice-class sip asserted-id pai
 voice-class sip privacy-policy passthru
 voice-class sip early-offer forced
 voice-class sip profiles 1
 voice-class sip bind control source-interface GigabitEthernet0/0/3
 voice-class sip bind media source-interface GigabitEthernet0/0/3
 dtmf-relay rtp-nte
 fax rate 14400
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
!
dial-peer voice 600 voip
 description " N11 Calls to AT&T - IP-PBX facing side "
 no modem passthrough
 session protocol sipv2
 incoming called-number .11
 voice-class codec 1
 voice-class sip asymmetric payload full
 voice-class sip asserted-id pai
 voice-class sip privacy-policy passthru
 voice-class sip profiles 1
 voice-class sip bind control source-interface GigabitEthernet0/0/2
 voice-class sip bind media source-interface GigabitEthernet0/0/2
 dtmf-relay rtp-nte
```

```
 fax rate 14400
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
!
dial-peer voice 122 voip
 description "OPERATOR TESTING"
 destination-pattern 0
 no modem passthrough
 session protocol sipv2
 session target ipv4:207.242.225.210
 voice-class codec 1
 voice-class sip asymmetric payload full
 voice-class sip asserted-id pai
 voice-class sip privacy-policy passthru
 voice-class sip early-offer forced
 voice-class sip profiles 1
 voice-class sip bind control source-interface GigabitEthernet0/0/3
 voice-class sip bind media source-interface GigabitEthernet0/0/3
 dtmf-relay rtp-nte
 fax rate 14400
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
!
dial-peer voice 141 voip
 description "Network Feature"
 translation-profile outgoing NPA
```

```
 destination-pattern *..
 no modem passthrough
 session protocol sipv2
 session target ipv4:207.242.225.210
 voice-class codec 1
 voice-class sip asymmetric payload full
 voice-class sip asserted-id pai
 voice-class sip privacy-policy passthru
 voice-class sip early-offer forced
 voice-class sip profiles 1
 voice-class sip bind control source-interface GigabitEthernet0/0/3
 voice-class sip bind media source-interface GigabitEthernet0/0/3
 dtmf-relay rtp-nte
 fax rate 14400
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
!
dial-peer voice 2151 voip
 description "Outgoing To AT&T"-AT&T facing side
 destination-pattern 7323204292
 no modem passthrough
 session protocol sipv2
 session target ipv4:207.242.225.210
 voice-class codec 1
 voice-class sip asymmetric payload full
 voice-class sip asserted-id pai
```

```
 voice-class sip privacy-policy passthru
 voice-class sip early-offer forced
 voice-class sip profiles 1
 voice-class sip bind control source-interface GigabitEthernet0/0/3
 voice-class sip bind media source-interface GigabitEthernet0/0/3
 dtmf-relay rtp-nte
 fax rate 14400
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
!
!
gateway
 media-inactivity-criteria all
 timer receive-rtcp 5
 timer receive-rtp 86400
!
sip-ua
 no remote-party-id
 retry invite 2
 timers expires 1800000
 connection-reuse
!
!
line con 0
 logging synchronous
 stopbits 1
```

```
line aux 0
 stopbits 1
line vty 0
 session-timeout 90
 exec-timeout 960 0
 no activation-character
 logging synchronous
 transport preferred ssh
 transport input all
 stopbits 1
line vty 1 4
 exec-timeout 960 0
 logging synchronous
 transport input all
!
!
end
```

Cisco UCM Configuration

The configuration screen shots shows general over view of lab configuration for this interoperability testing.

Cisco UCM Version:

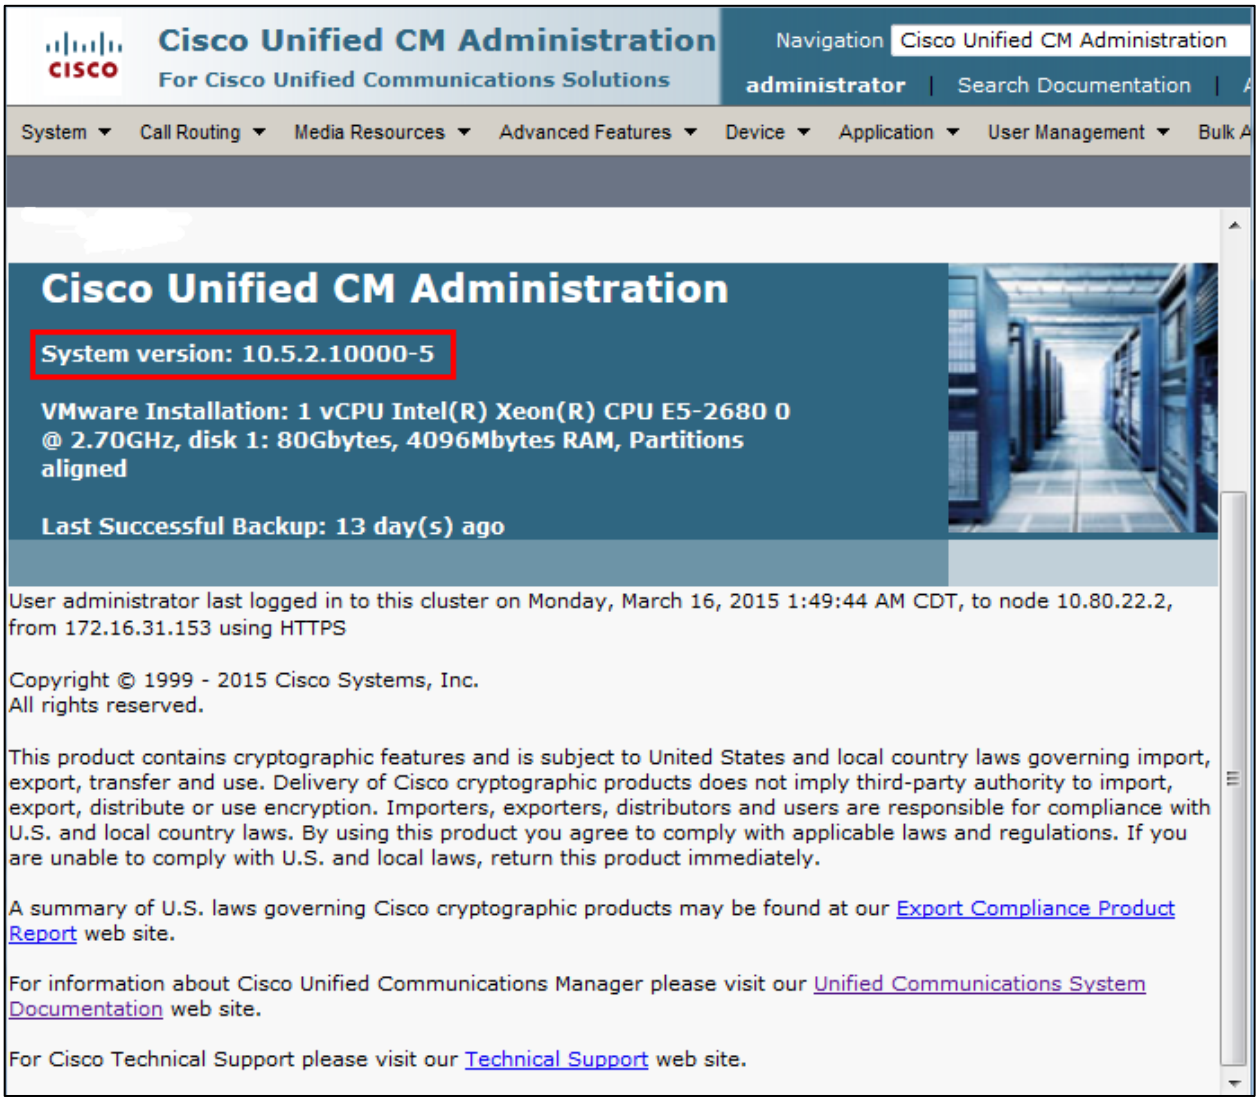

Cisco UCM Audio Codec Preference List

Navigation Path: System → Region Information → Audio codec preference list

Cisco UCM 10.5.2 has a feature called Audio Codec Preference List. This feature allows to configure the order of audio codec preference both for Inter and Intra Region calls. Audio Codec Preference list is assigned to the Region used by the Device Pool for Phones and by Conference Bridges. Based on user requirement, different codec regions can be assigned as their first choice codec with this configuration

for inbound calls as well as conferences initiated by Cisco IP phones. Audio codec preference for outbound calls is determined by Cisco UBE (via configuration of voice-class codec)

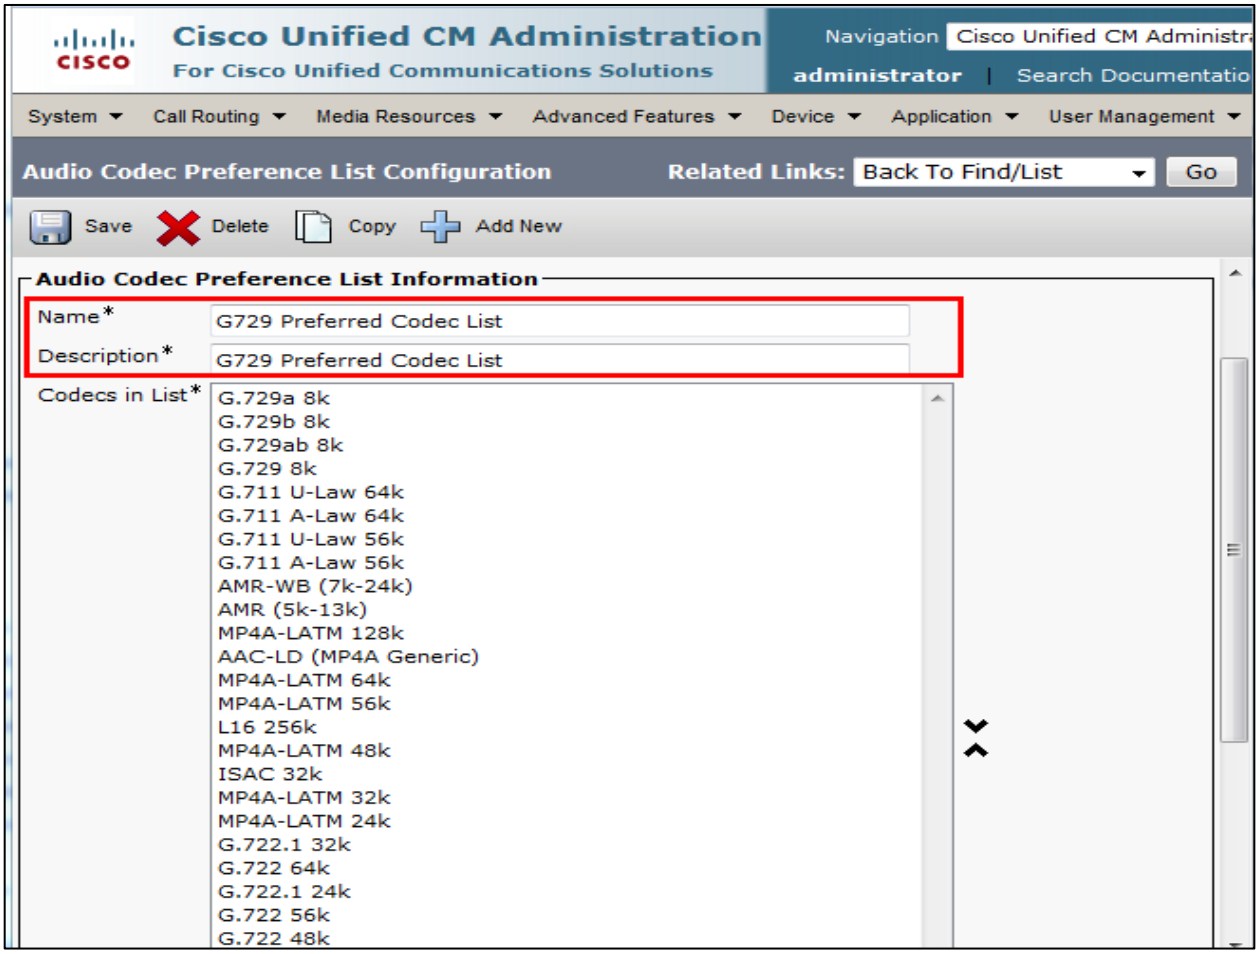

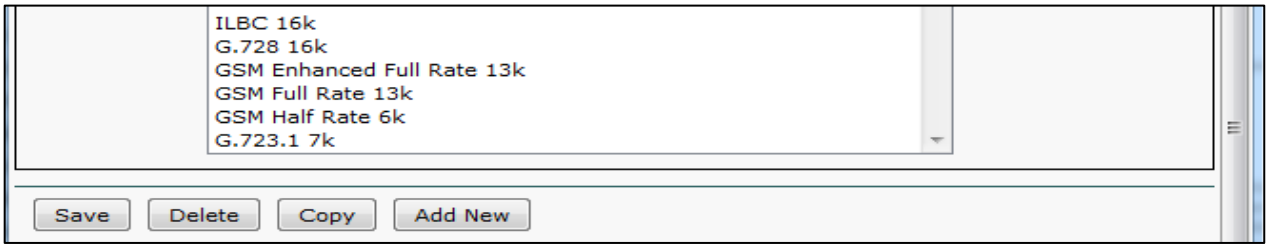

Cisco UCM Region Configuration

Navigation Path: System → Region Information → Region

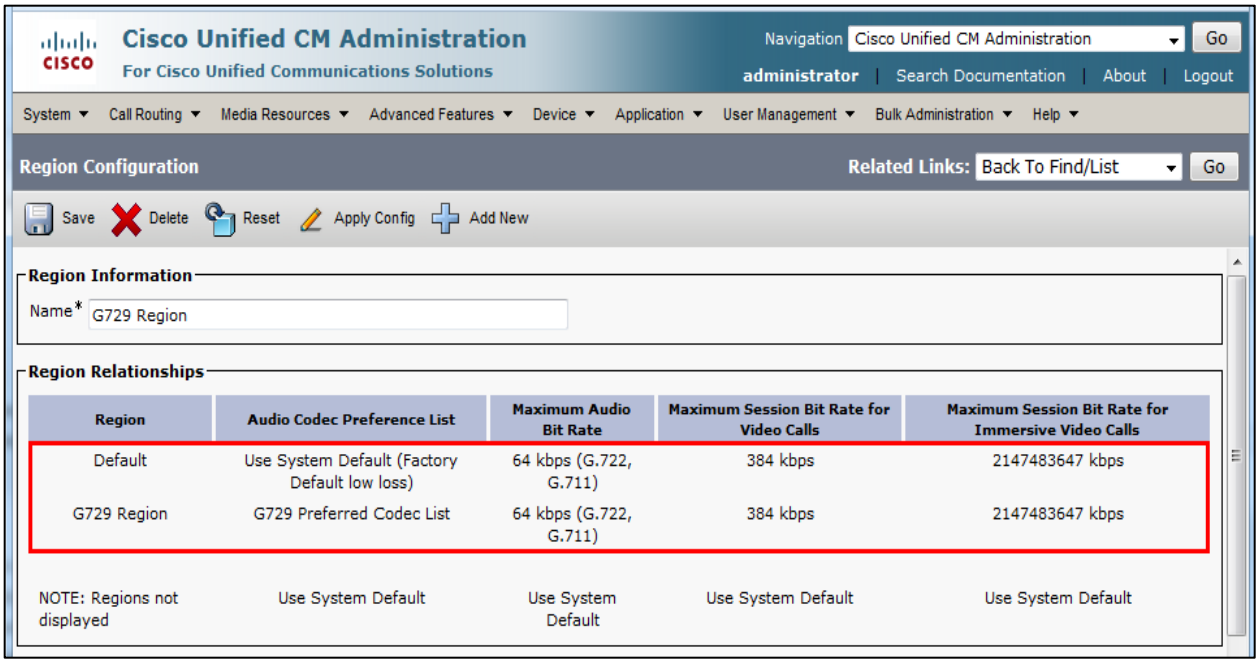

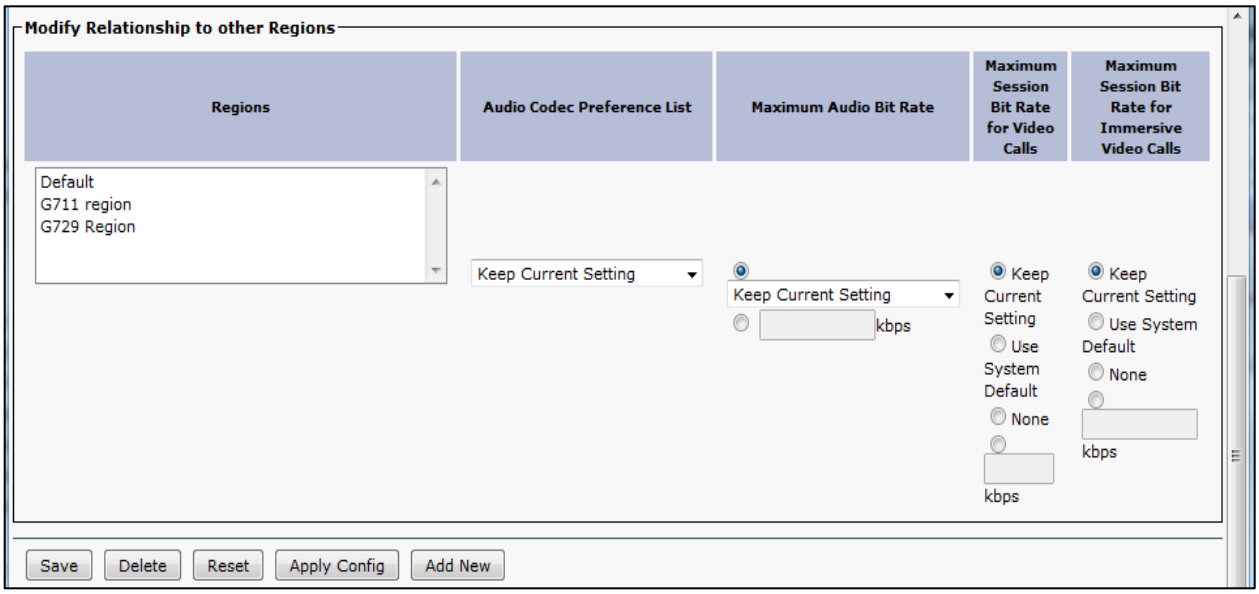

Device Pool Configuration

Navigation Path: System → Device Pool

"G729_pool" Device Pool is configured for testing the interoperability. No special consideration needs to be taken when configuring the Device Pools. Optionally, a Media Resource Group List can be added to the Device Pools, if needed, to assign selected Media Resources (Conference Bridges, Transcoders, MoH servers, Annunciators) to devices.

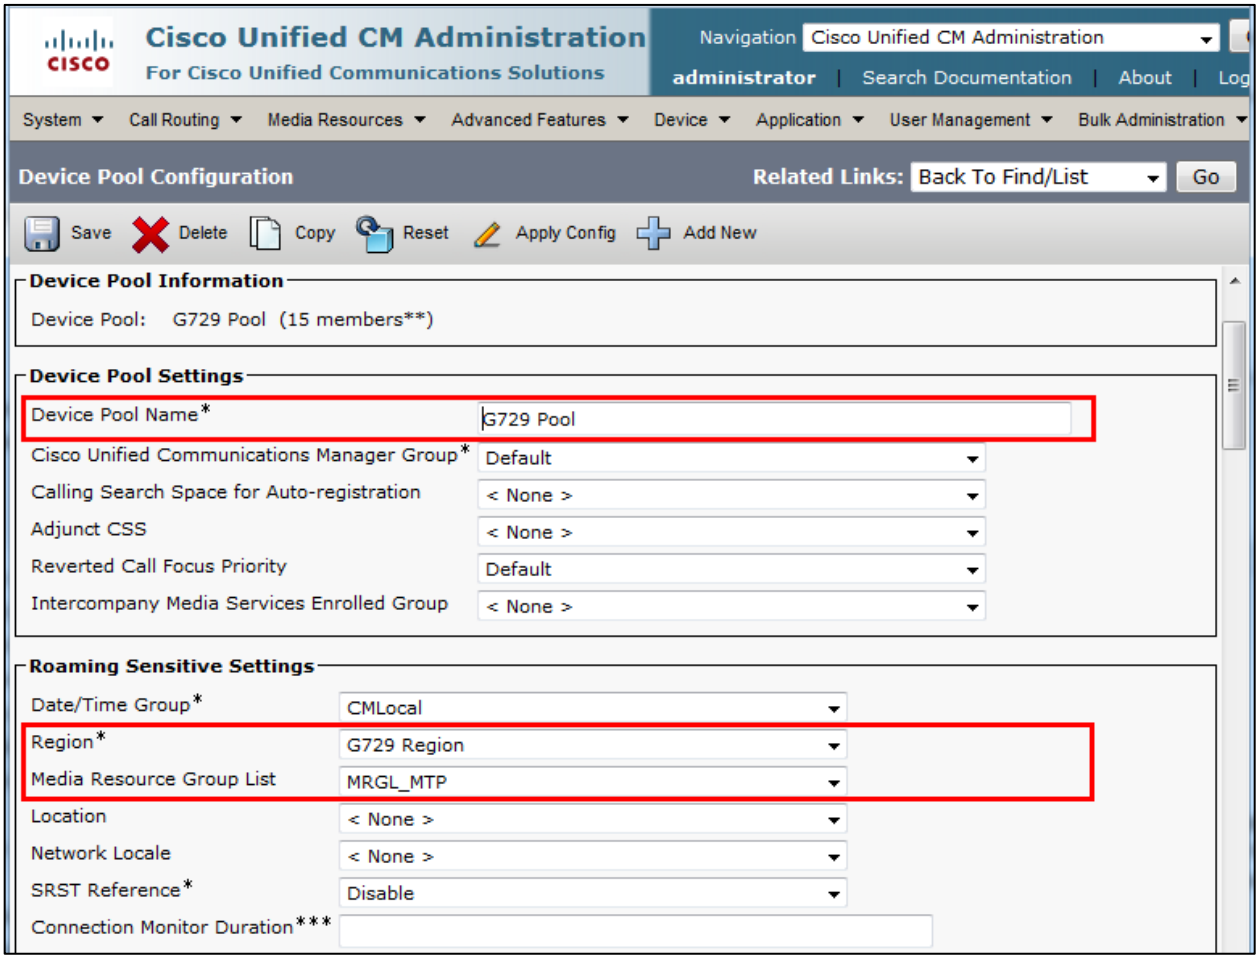

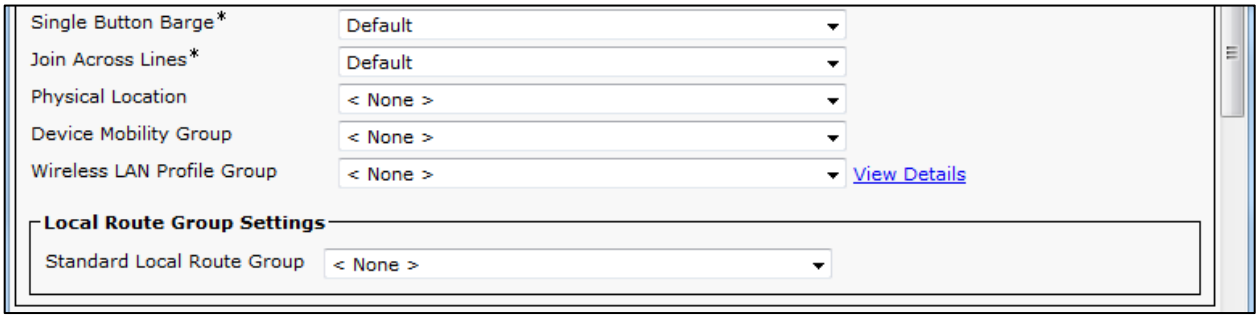

Device Pool Configuration (continued…)

Device Mobility Related Information**

Device Mobility Calling Search Space	< None >
AAR Calling Search Space	< None >
AAR Group	< None >
Calling Party Transformation CSS	< None >
Called Party Transformation CSS	< None >

Geolocation Configuration

Geolocation	< None >
Geolocation Filter	< None >

Call Routing Information

Incoming Calling Party Settings

If the administrator sets the prefix to Default this indicates call processing will use prefix at the next level setting (DevicePool/Service Parameter). Otherwise, the value configured is used as the prefix unless the field is empty in which case there is no prefix assigned.

Clear Prefix Settings | Default Prefix Settings

Number Type	Prefix	Strip Digits	Calling Search Space
National Number	Default		< None >
International Number	Default		< None >
Unknown Number	Default		< None >
Subscriber Number	Default		< None >

Incoming Called Party Settings

If the administrator sets the prefix to Default this indicates call processing will use prefix at the next level setting (DevicePool/Service Parameter). Otherwise, the value configured is used as the prefix unless the field is empty in which case there is no prefix assigned.

Clear Prefix Settings | Default Prefix Settings

Number Type	Prefix	Strip Digits	Calling Search Space
National Number	Default	0	< None >
International Number	Default	0	< None >
Unknown Number	Default	0	< None >
Subscriber Number	Default	0	< None >

Device Pool Configuration (continued…)

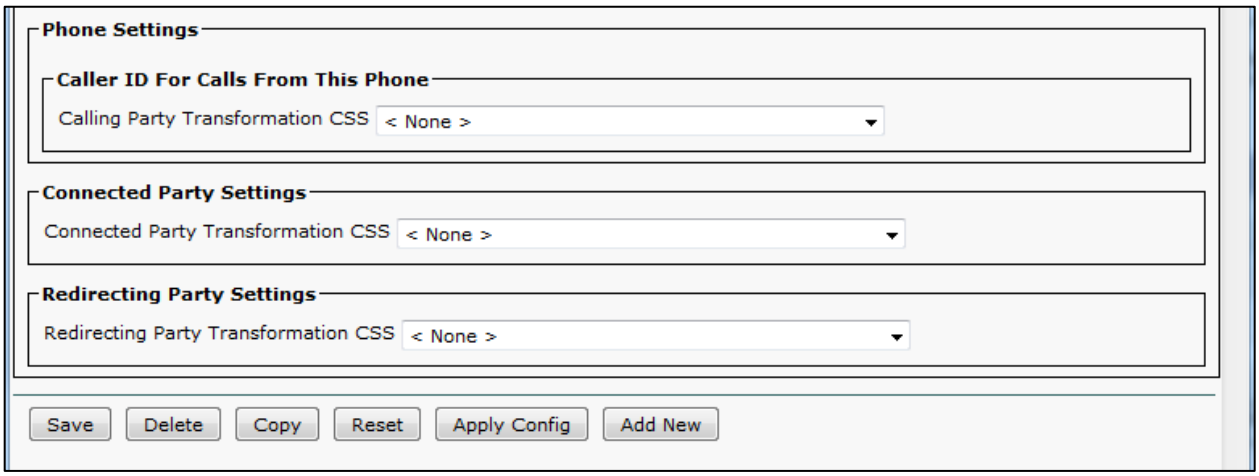

Annunciator Configuration

Navigation: Media Resource → Annunciator

Set Name* = ANN_2.
Set Description = ANN_clus32pubsub. This is used for this example
Set Device Pool* = G729_pool.

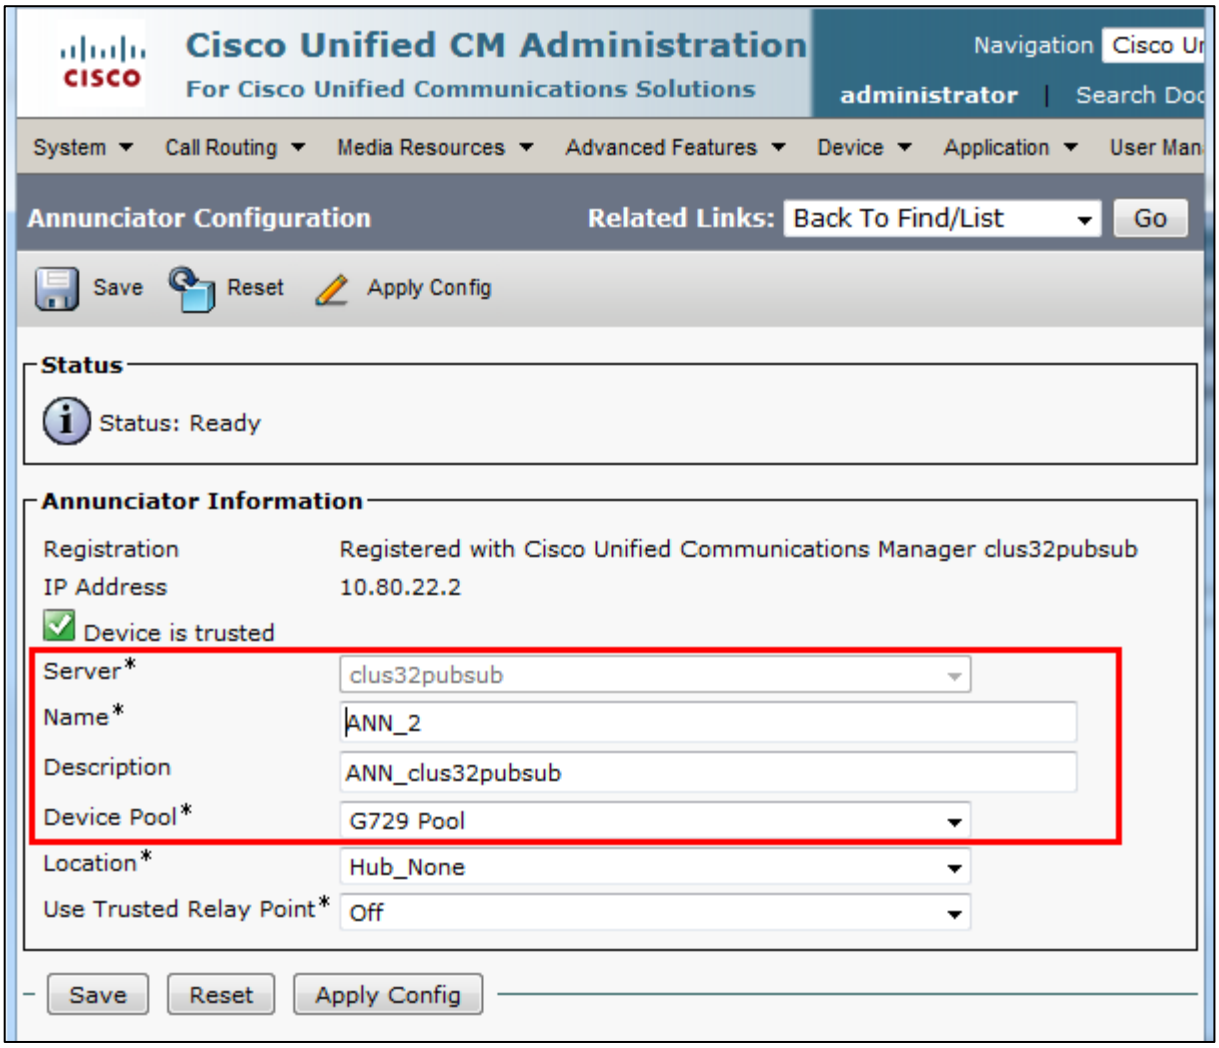

Conference Bridge Configuration

Navigation: Media Resources → Conference Bridge

Set Conference Bridge Type* = Cisco Conference Bridge Software.
Set Host Server = clus32pubsub. This is used for this example.
Set Conference Bridge Name* = CFB_2.
Set Description = CFB_clus32pubsub. This is used in this example.
Set Device Pool* = G729_pool.

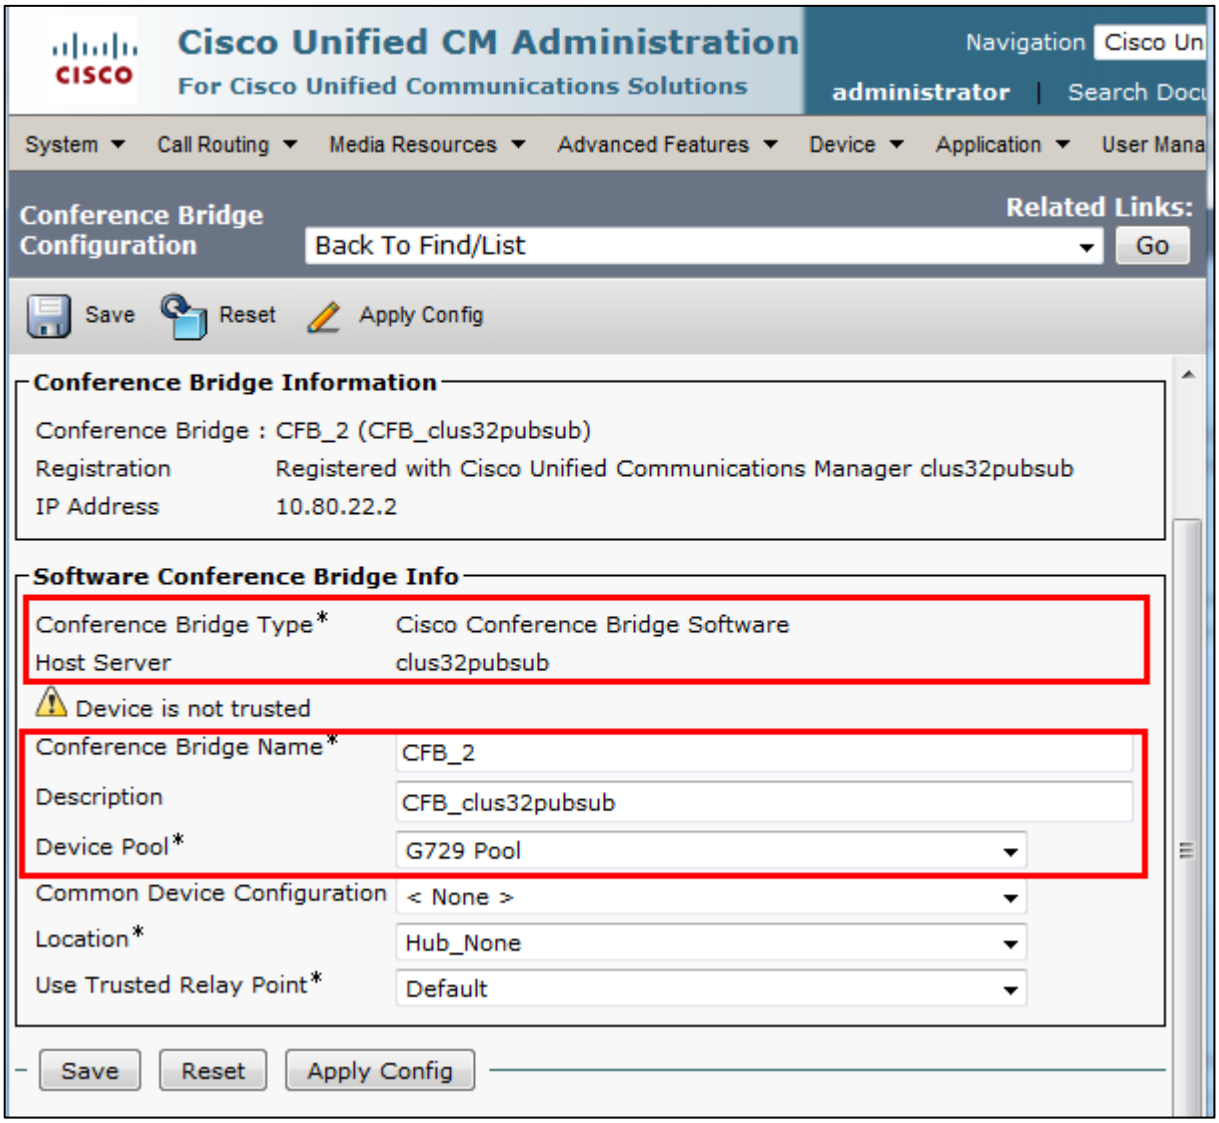

Media Termination Point Configuration

Navigation: Media Resource→Media Termination Point

Set Media Termination Point Name* = MTP_2
Set Description = MTP_clus32pubsub. This is used for this example
Set Device pool* = G729 Pool

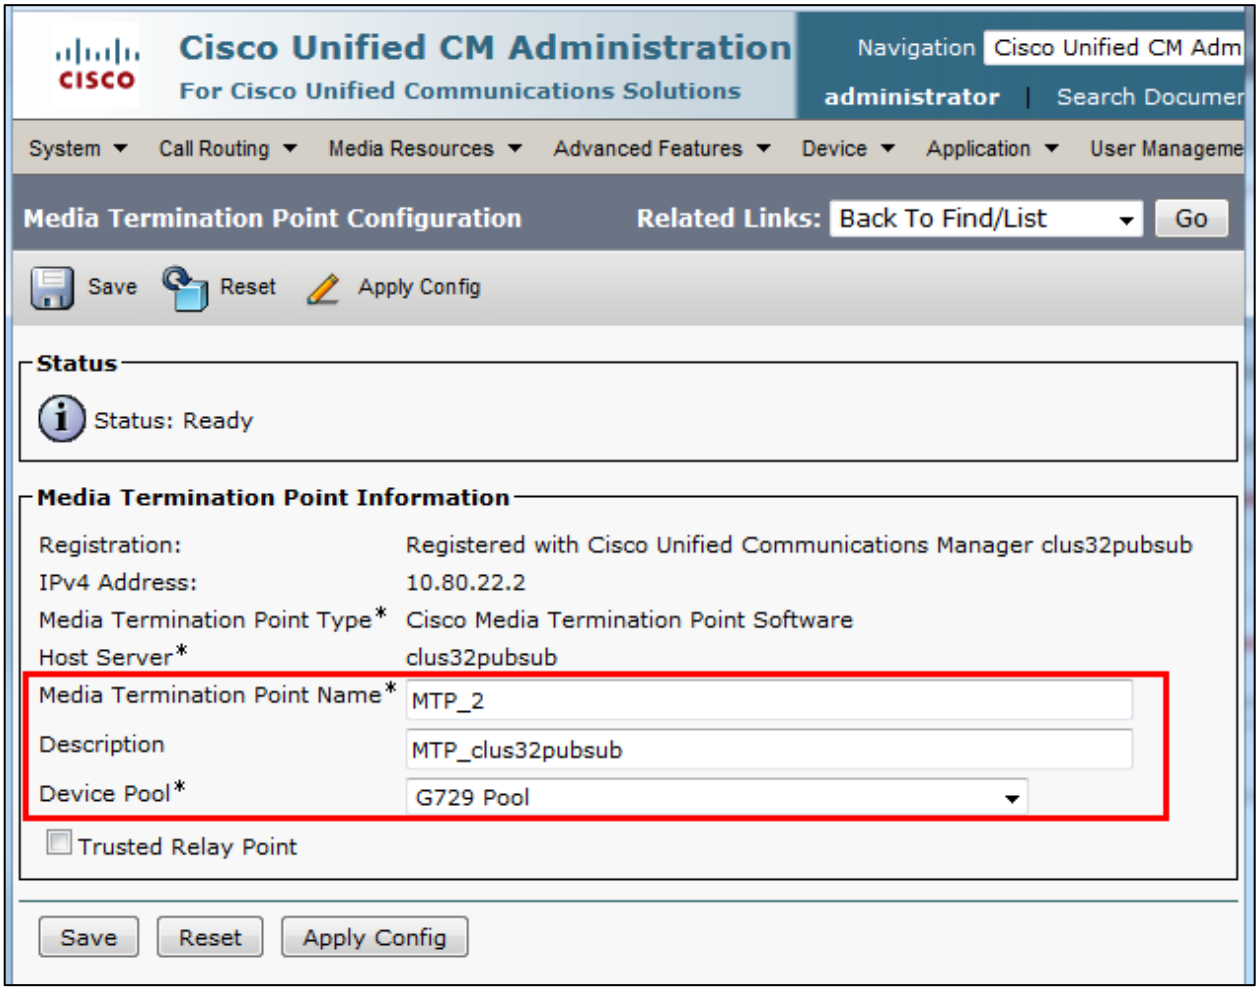

Music on Hold Server Configuration

Navigation: Media Resources → Music on Hold Server

Set Music on Hold Server Name* = MOH_2.
Set Description = MOH_clus32pubsub. This is used for this example.
Set Device Pool* = G729_pool.

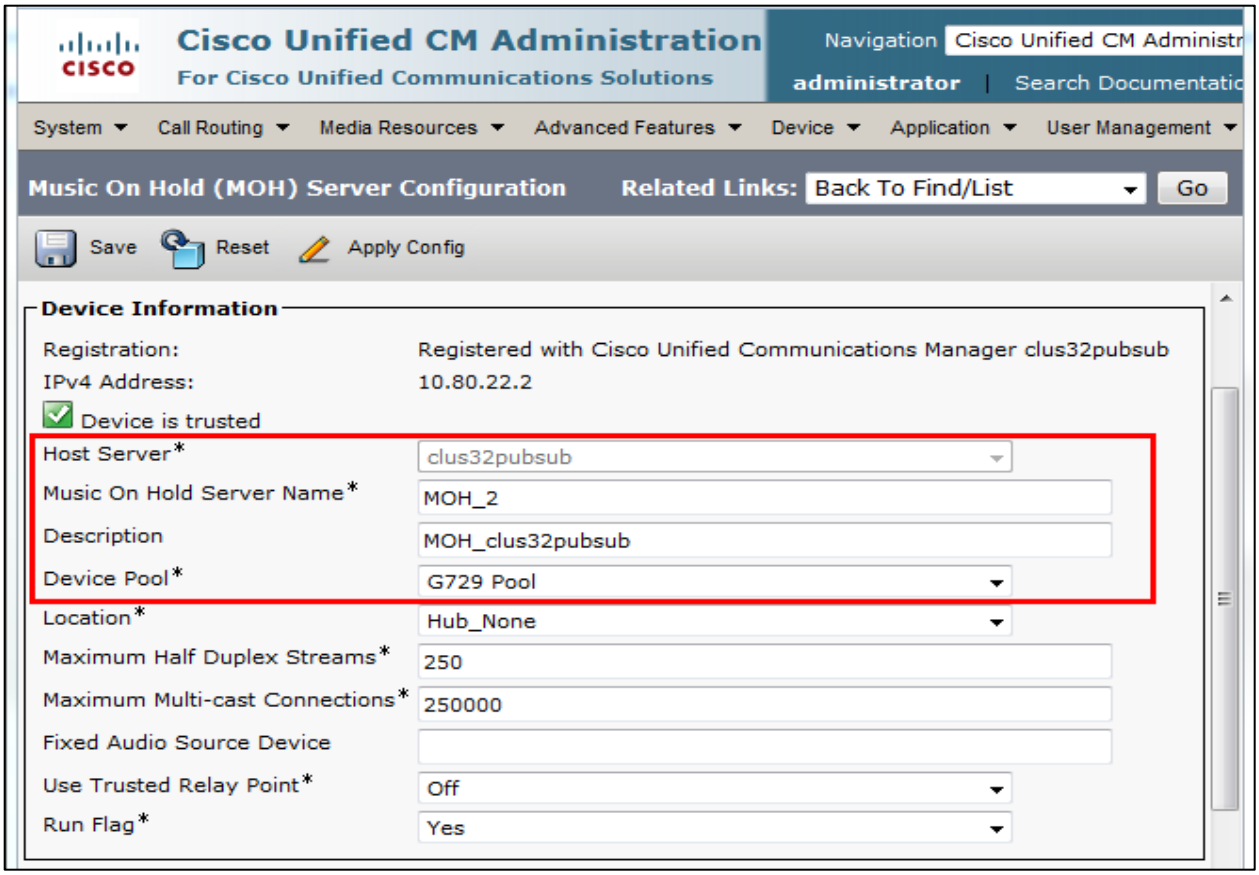

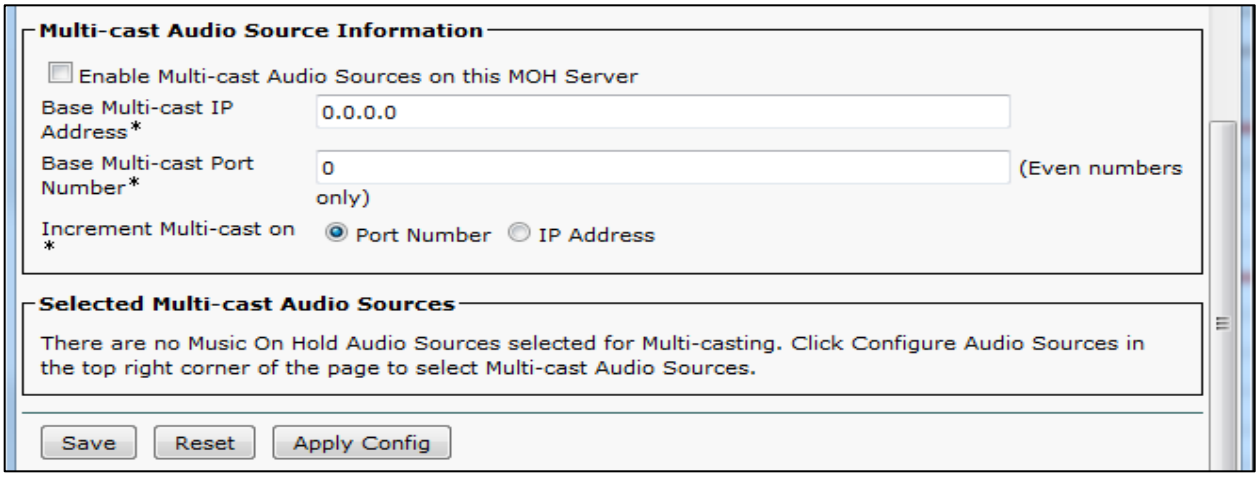

Music on Hold Service (IP Voice Media Streaming App) Parameter Settings

Navigation: System → Service Parameter

Note: Make sure codecs G.729 Annex A and G.711 mulaw are configured in parameter Supported MOH Codecs.

Select Server* = clus32pubsub--CUCM Voice/Video (Active). This is used in this example.
Select Service* = Cisco IP Voice Media Streaming App (Active).

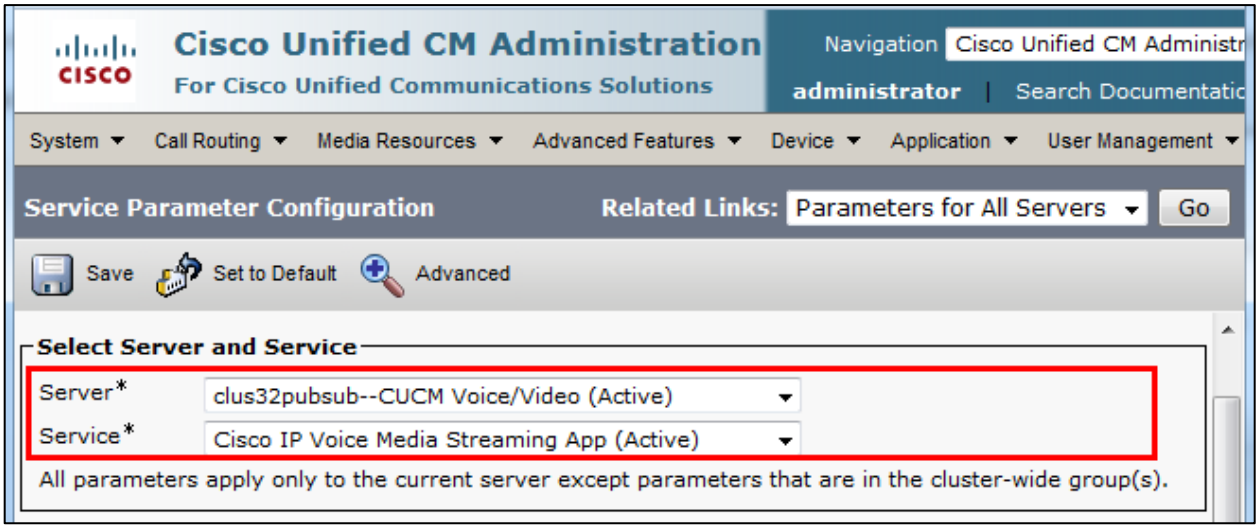

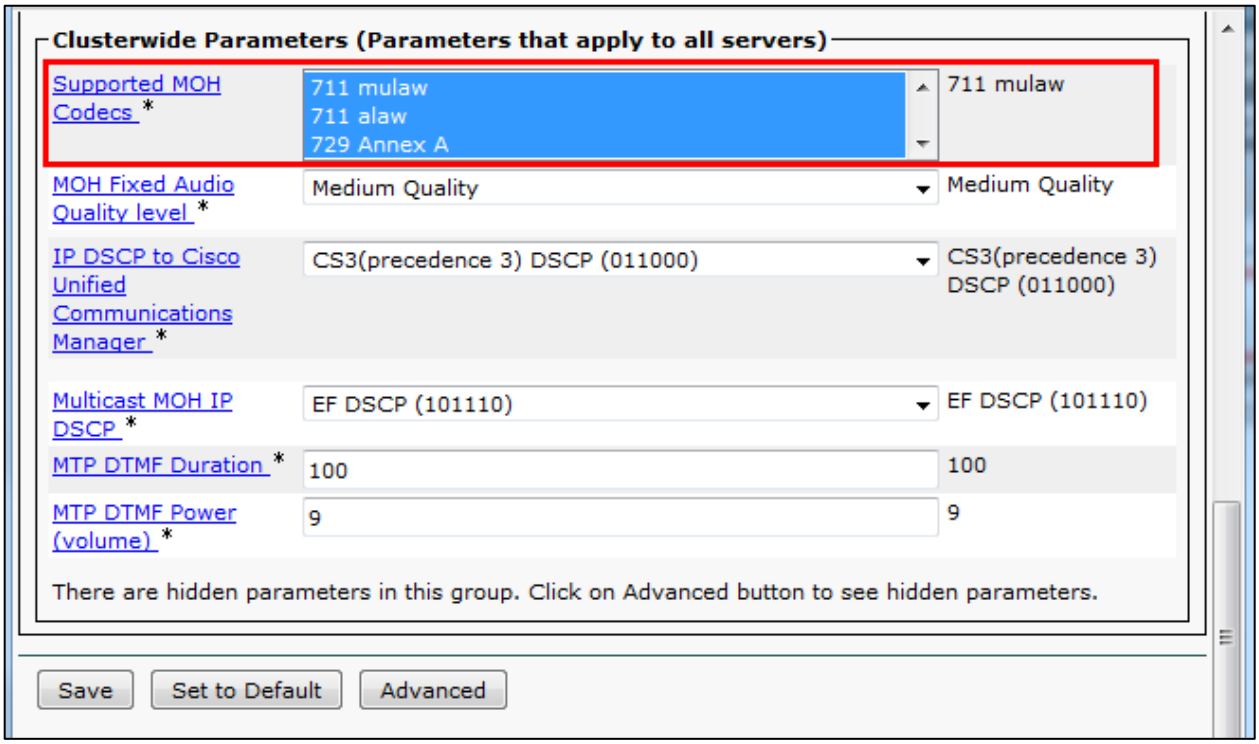

Music on Hold Service (Duplex Streaming) Parameter Settings

Navigation: System → Service Parameter

Select Server* = clus32pubsub--CUCM Voice/Video (Active). This is used in this example.

Select Service* = Cisco CallManager (Active).
Select Duplex Streaming Enabled * = True

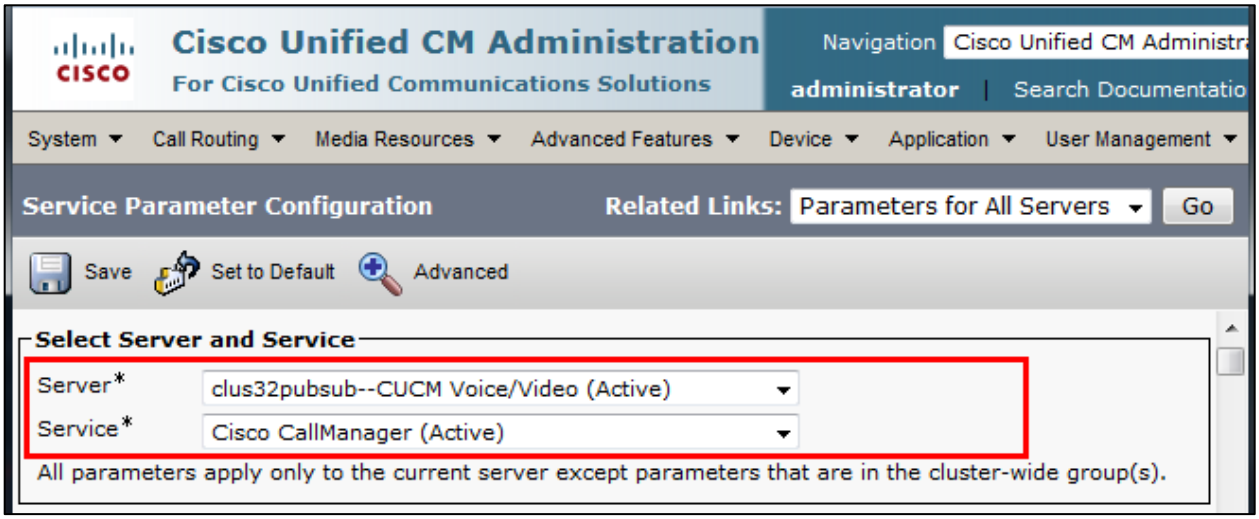

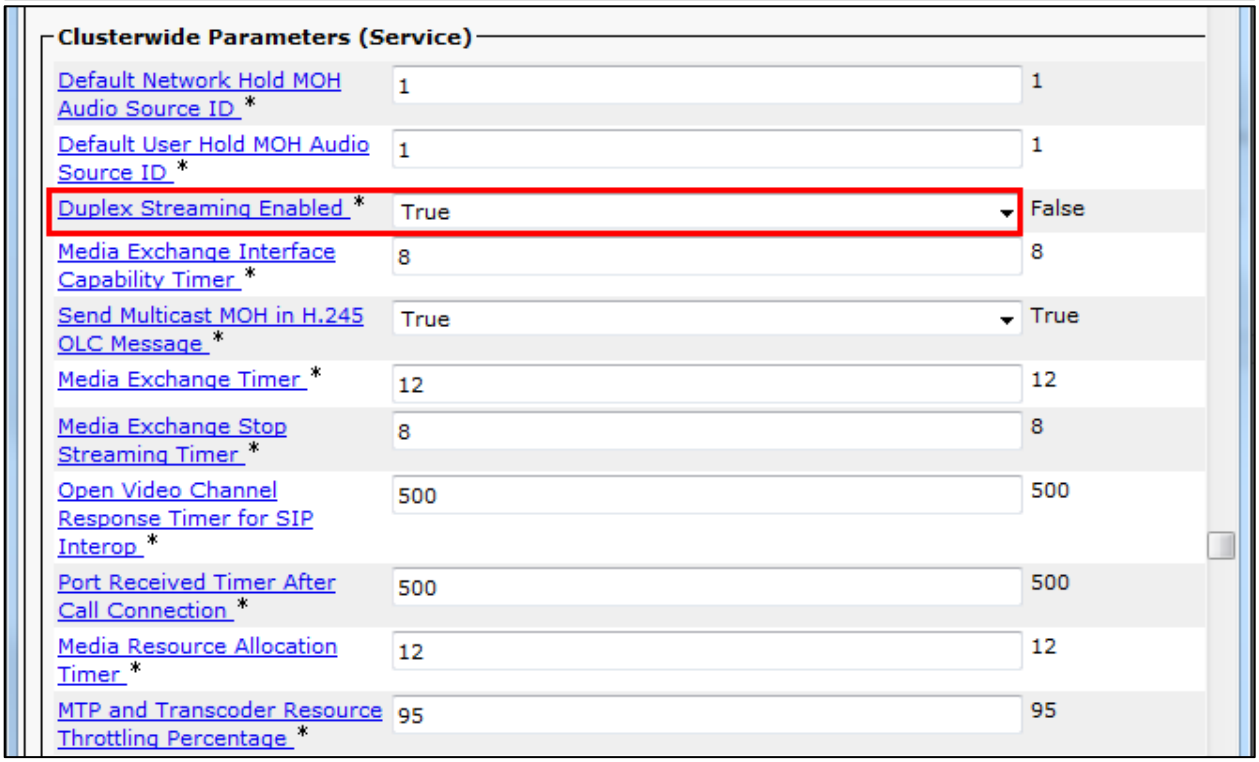

Media Resource Group Configuration

Navigation Path: Media Resources → Media Resources group

The Media Resource Group (MRG) contains media resources, such as Conference Bridge, Transcoder, MoH server and Annunciator. It will be assigned to a Media Resource Group List (MRGL) which is used to allocate media resources to groups of devices through Device Pools, or individually by configuring a valid MRGL at the device configuration page.

Set Name*= MRG_MTP - This is used for this example.
Set Description = MRG_MTP - This text is used to define this Media Resource Group List.
Set all Resources in the selected Media Resources Box.

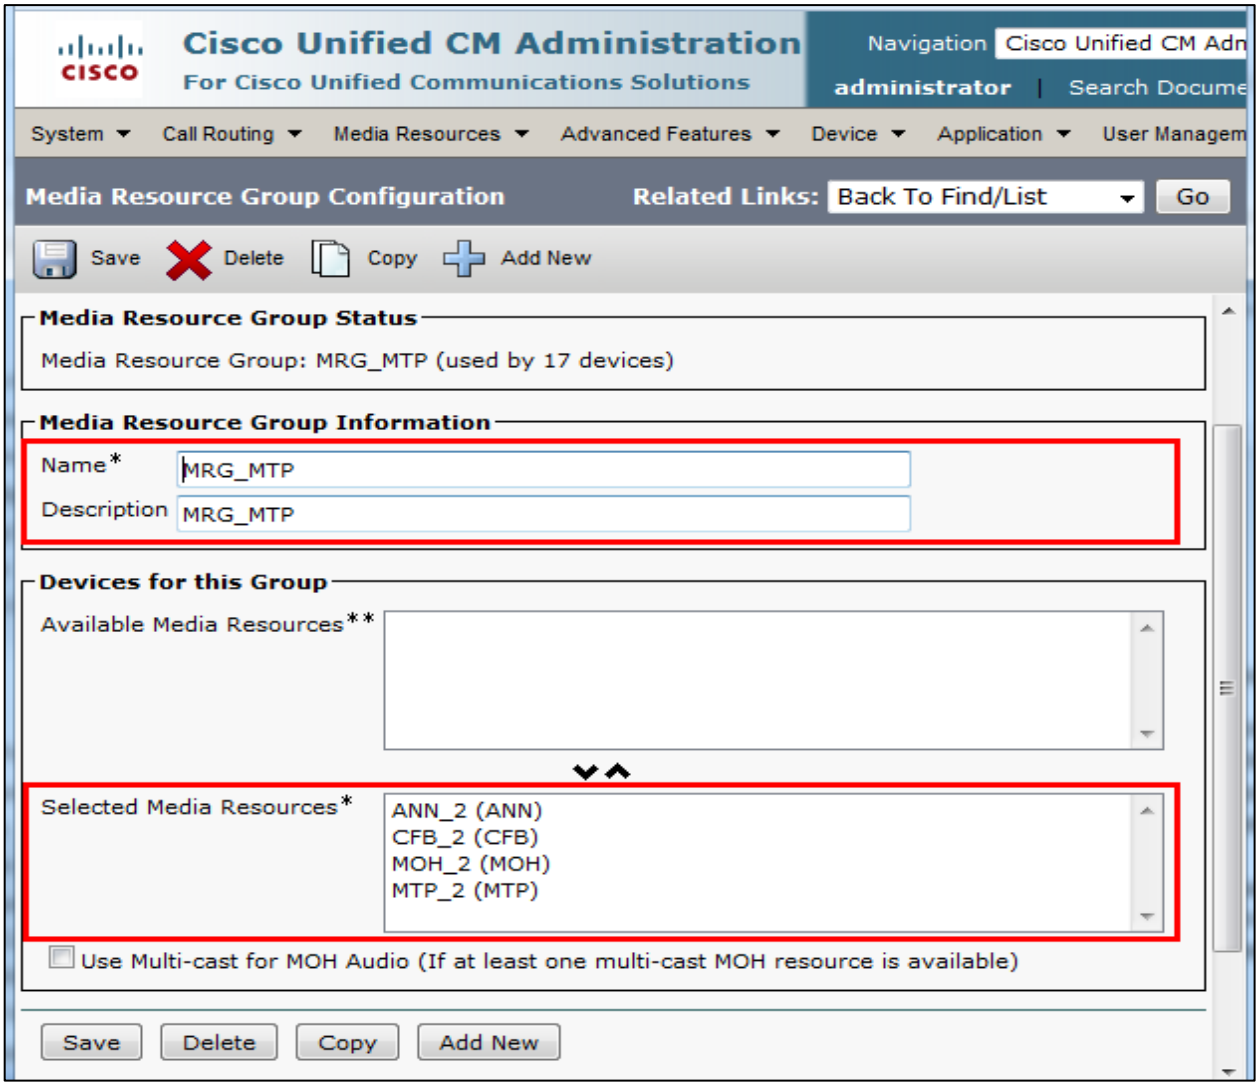

Media Resource Group List Configuration

Navigation Path: Media Resources → Media Resource Group List

Set Name = MRGL_MTP.

Set selected Media Resource Groups = MRG_MTP.

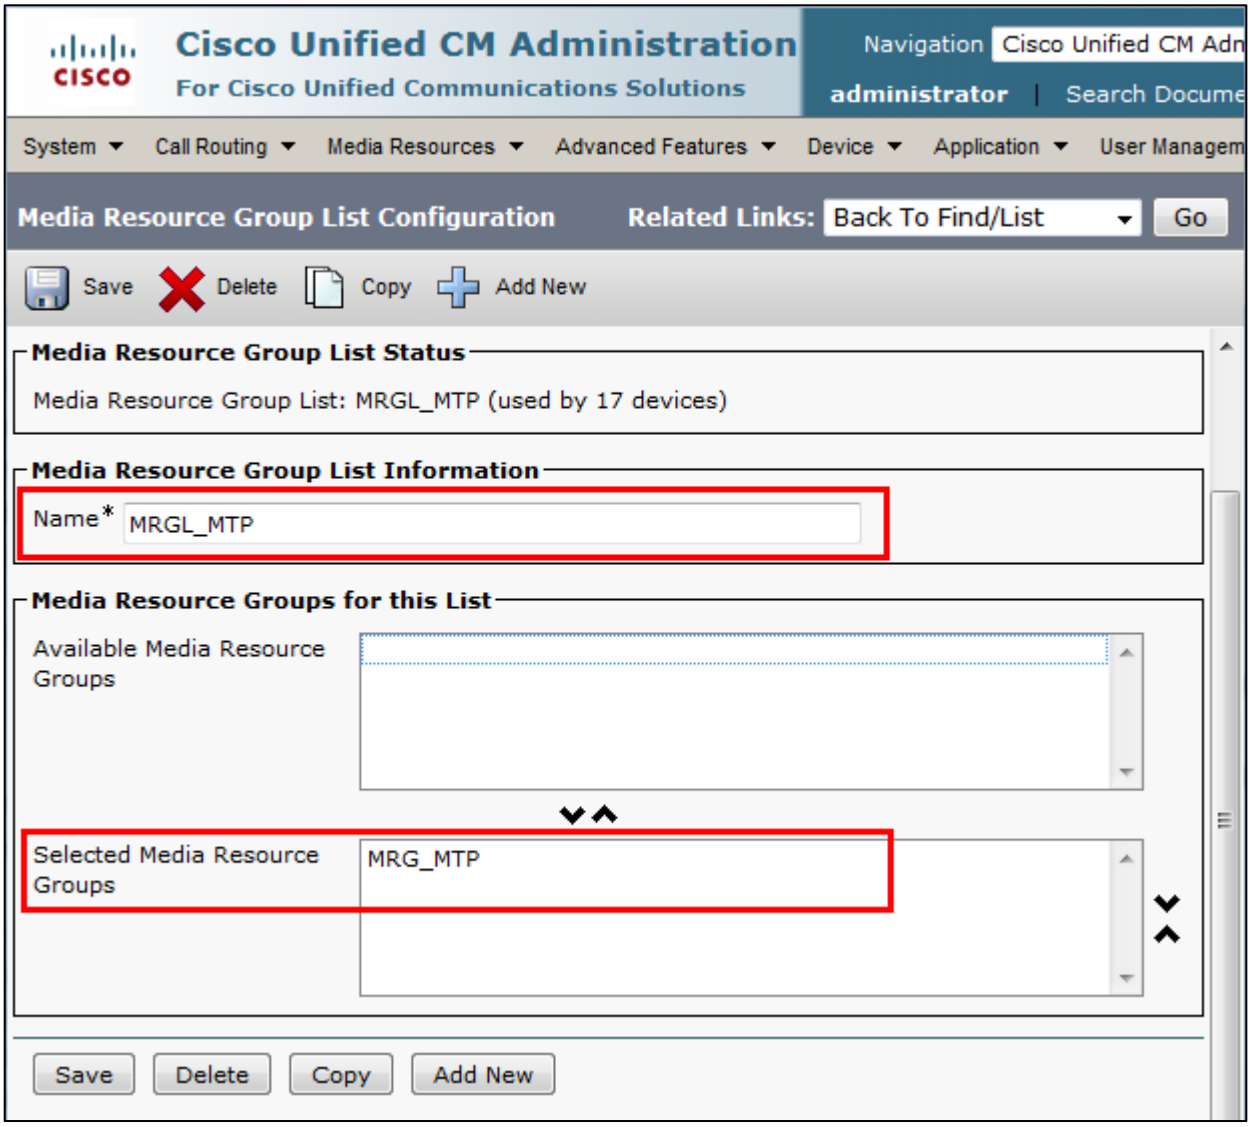

UC Service Configuration

Navigation: User Management → User Settings → UC Service

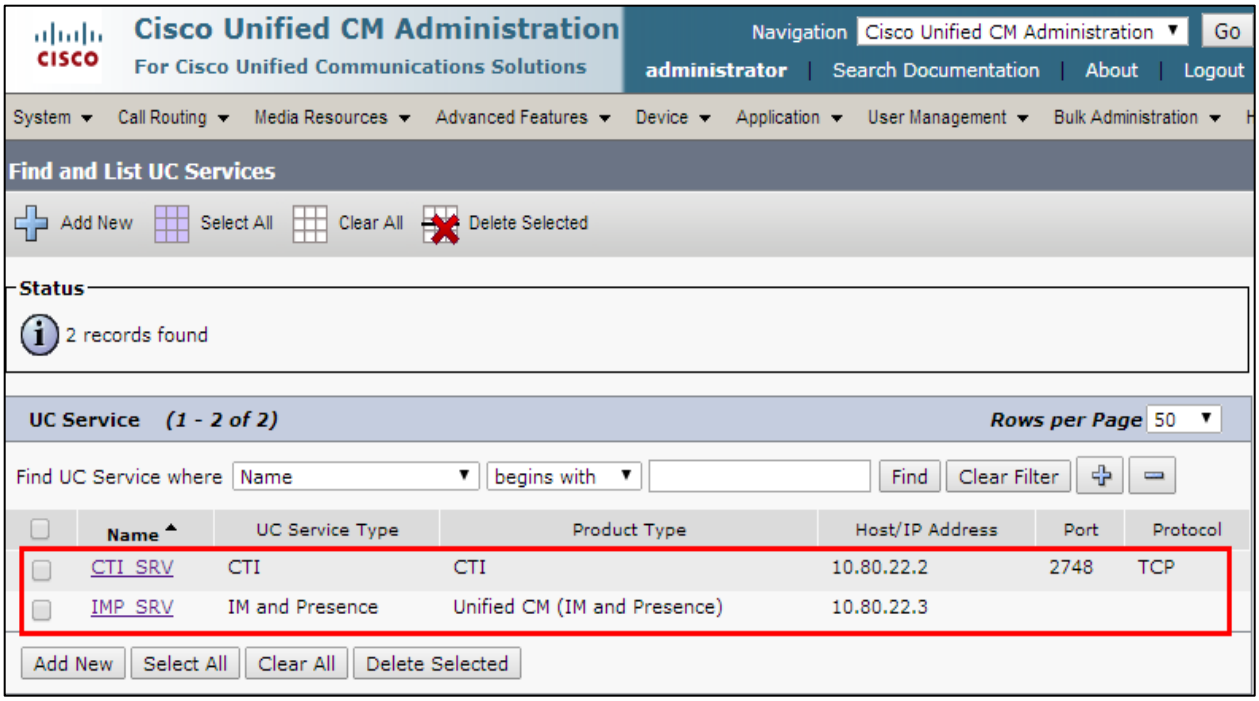

UC Service Configuration (Contd…)

Select UC Service Type: = CTI
Set Name* = CTI_SRV. This is used in this example.

Set Description = CTI for Jabber Clients. This is used in this example.
Set Host Name/IP Address* = 10.80.22.2 (Cisco UCM Address)

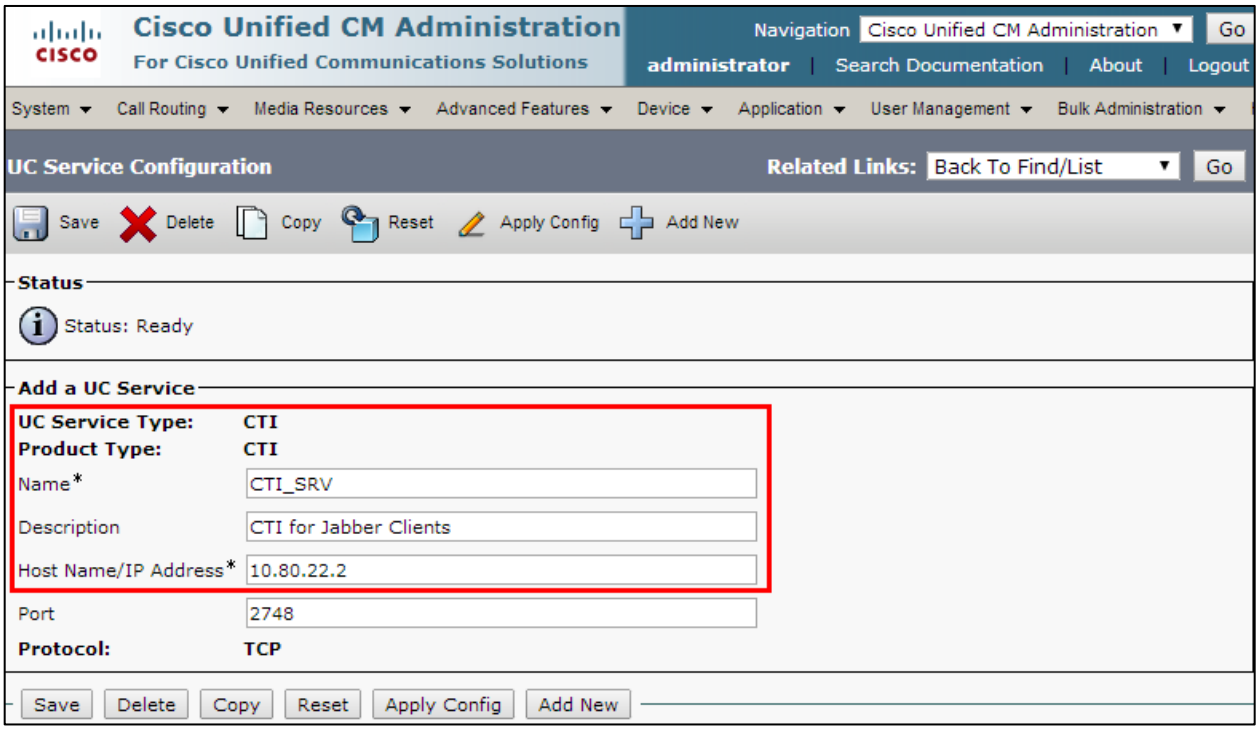

UC Service Configuration (Contd…)

Select UC Service Type: = IM and Presence
Set Name* = IMP_SRV. This is used in this example.

Set Description = IM Presence. This is used in this example.
Set Host Name/IP Address* = 10.80.22.3 (Cisco UCM IM & Presence IP Address)

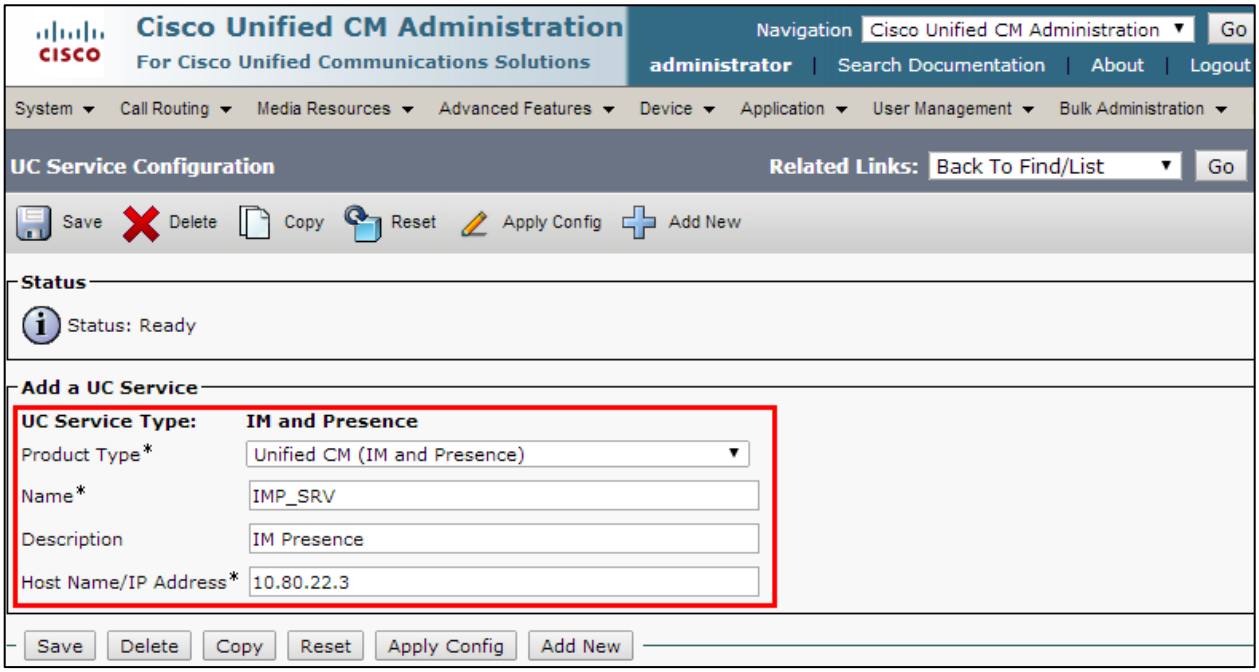

Service Profile Configuration

Navigation: User Management → User Settings → Service Profile

Set Name* = Jabber_SVC_Profile. This is used in this example.

Set Description = Jabber Service Profile. This is used in this example.
Check - Make this the default service profile for the system.

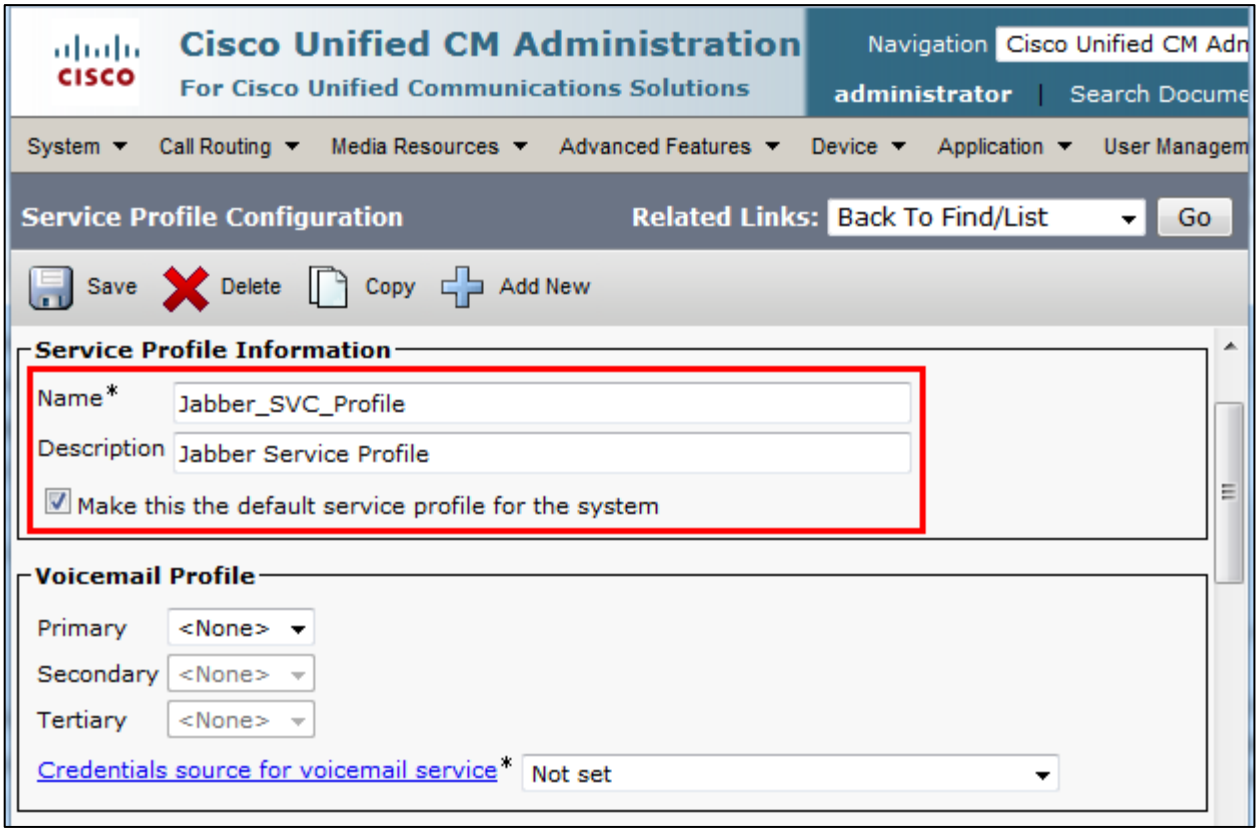

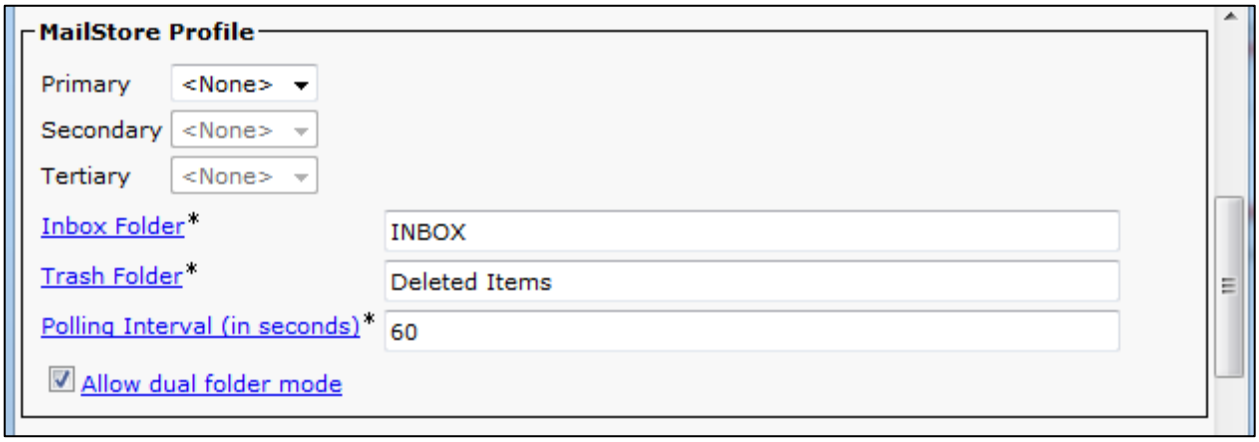

Service Profile Configuration (Contd…)

Conferencing Profile

Primary	<None>
Secondary	<None>
Tertiary	<None>
Server Certificate Verification	Any
Credentials source for web conference service*	Not set

Directory Profile

Primary	<None>
Secondary	<None>
Tertiary	<None>

☑ Use UDS for Contact Resolution

☑ Use Logged On User Credential

Username	administrator
Password	••••••••••
Search Base 1	
Search Base 2	
Search Base 3	

☑ Recursive Search on All Search Bases

Search Timeout (seconds)*	5
Base Filter (Only used for Advance Directory)	
Predictive Search Filter (Only used for Advance Directory)	

IM and Presence Profile

Primary	IMP_SRV
Secondary	<None>
Tertiary	<None>

CTI Profile

Primary	CTI_SRV
Secondary	<None>
Tertiary	<None>

End User Configuration

Navigation: User Management → End User

Set User ID* = jabber1 – This is used in this example.
Set Password = Password for profile.
Set Directory URI = jabber1@lab.tekvizion.com.

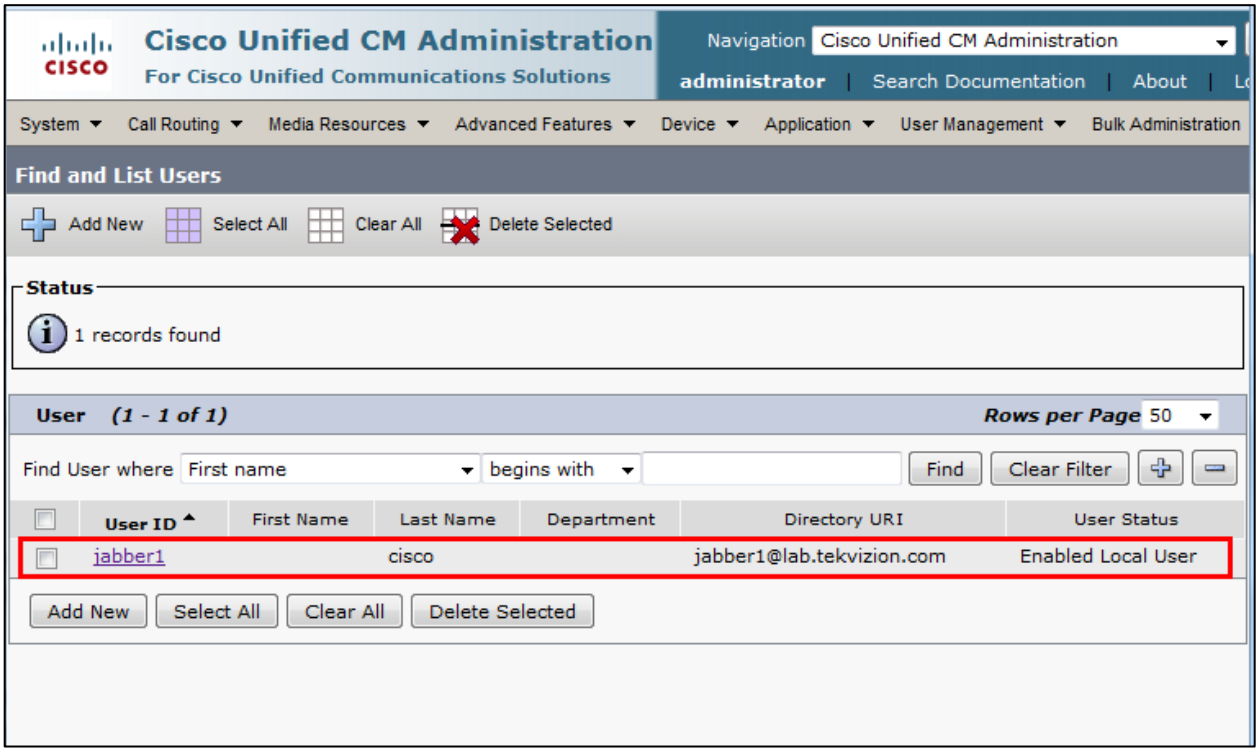

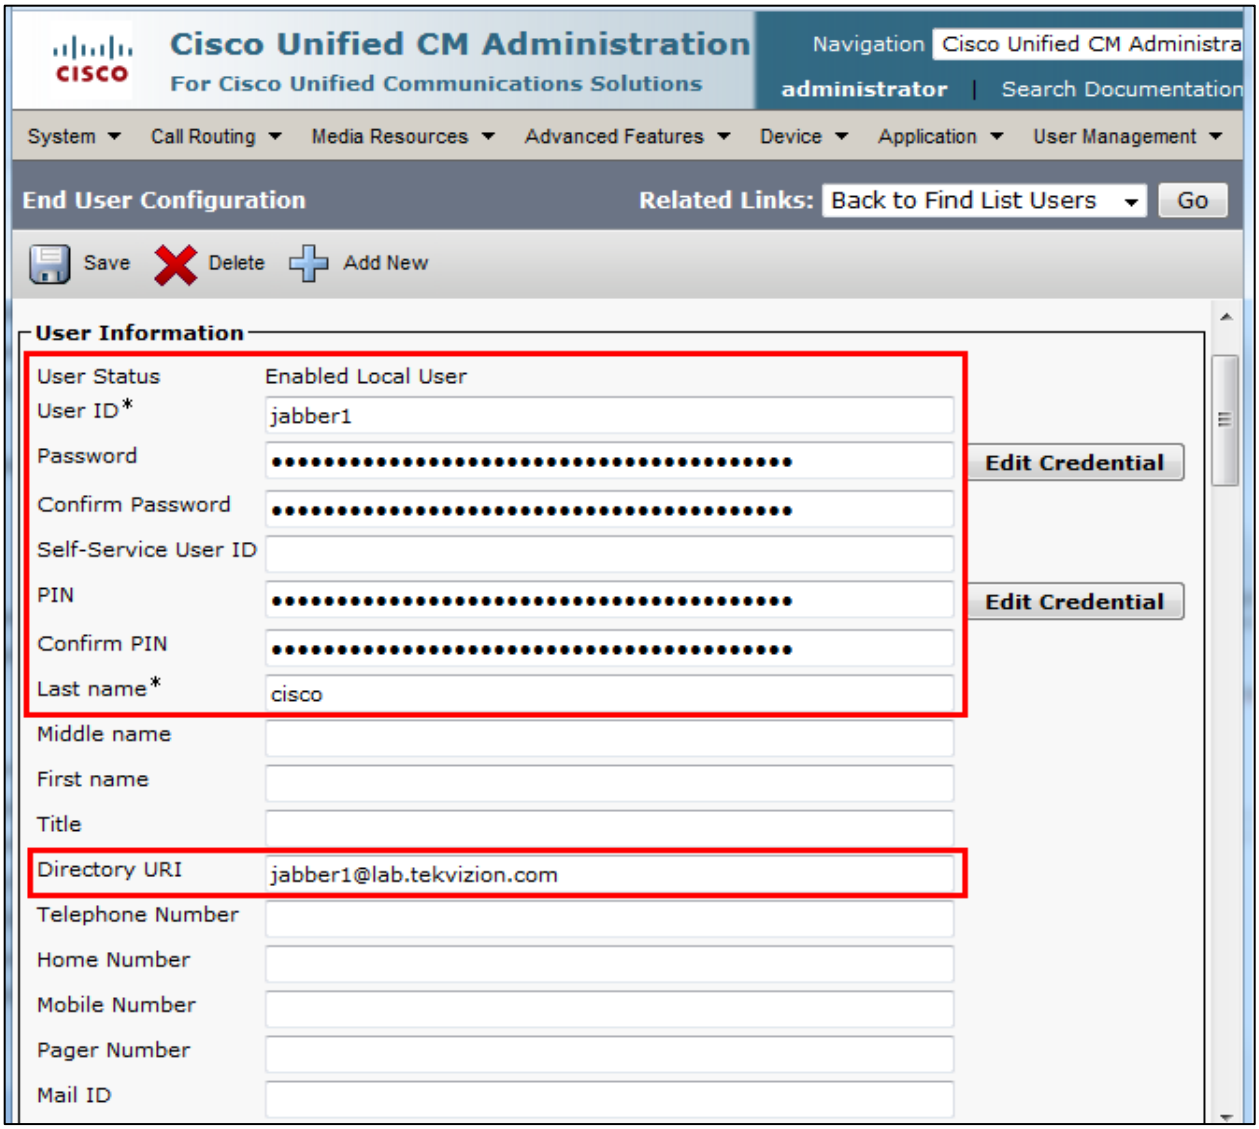

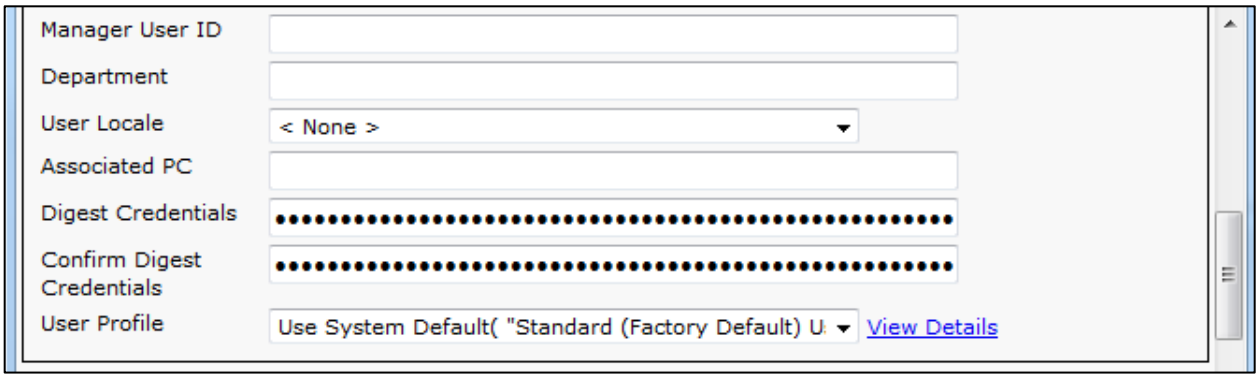

End User Configuration(continued…)

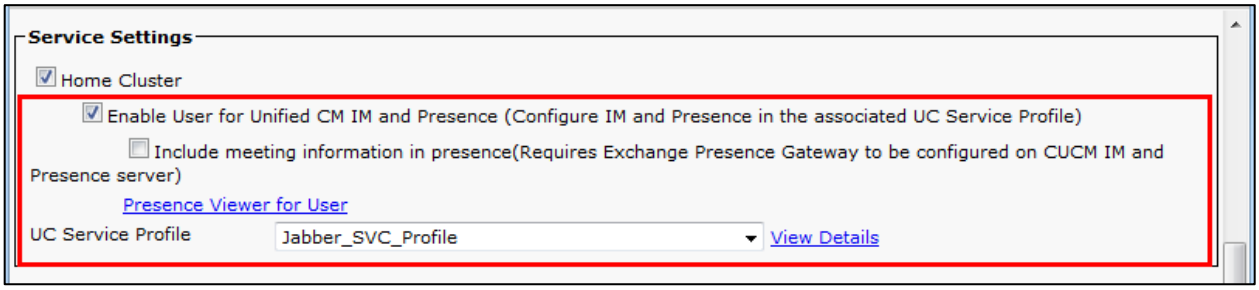

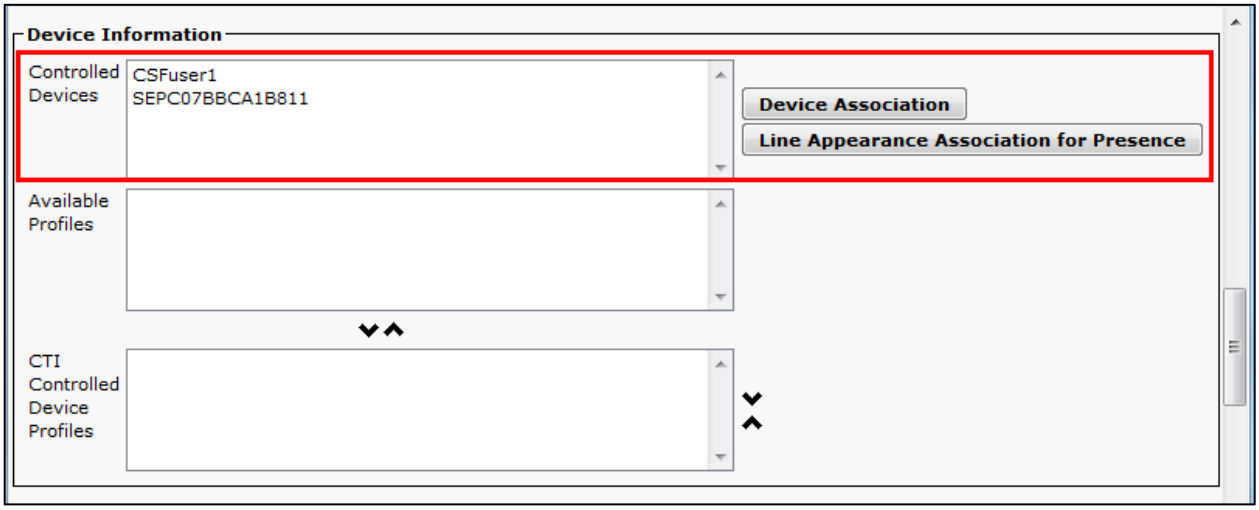

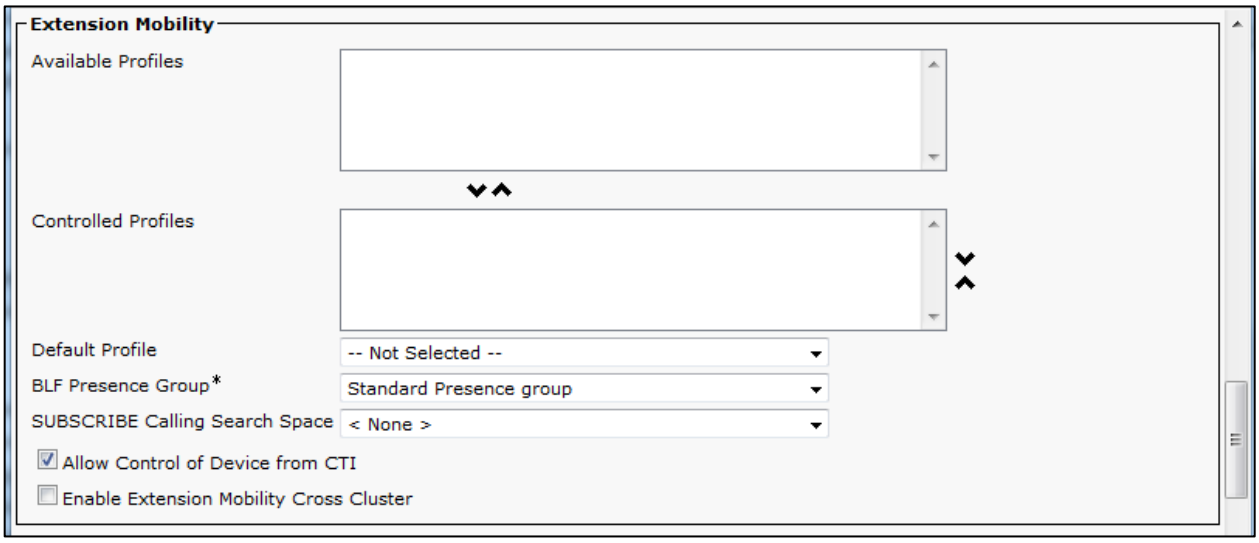

End User Configuration(continued…)

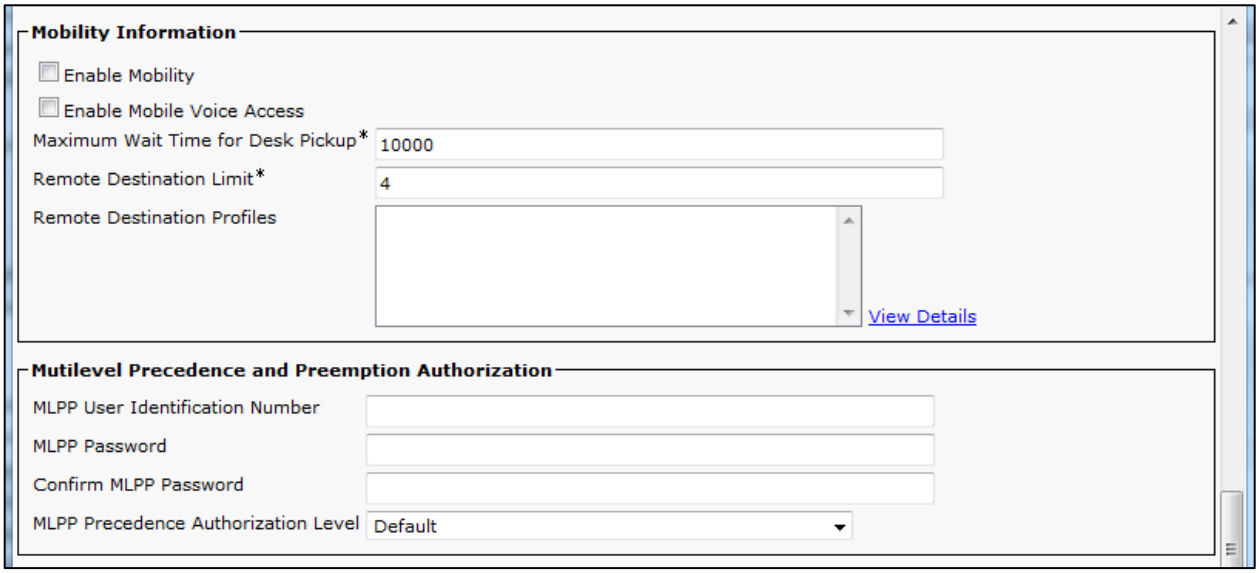

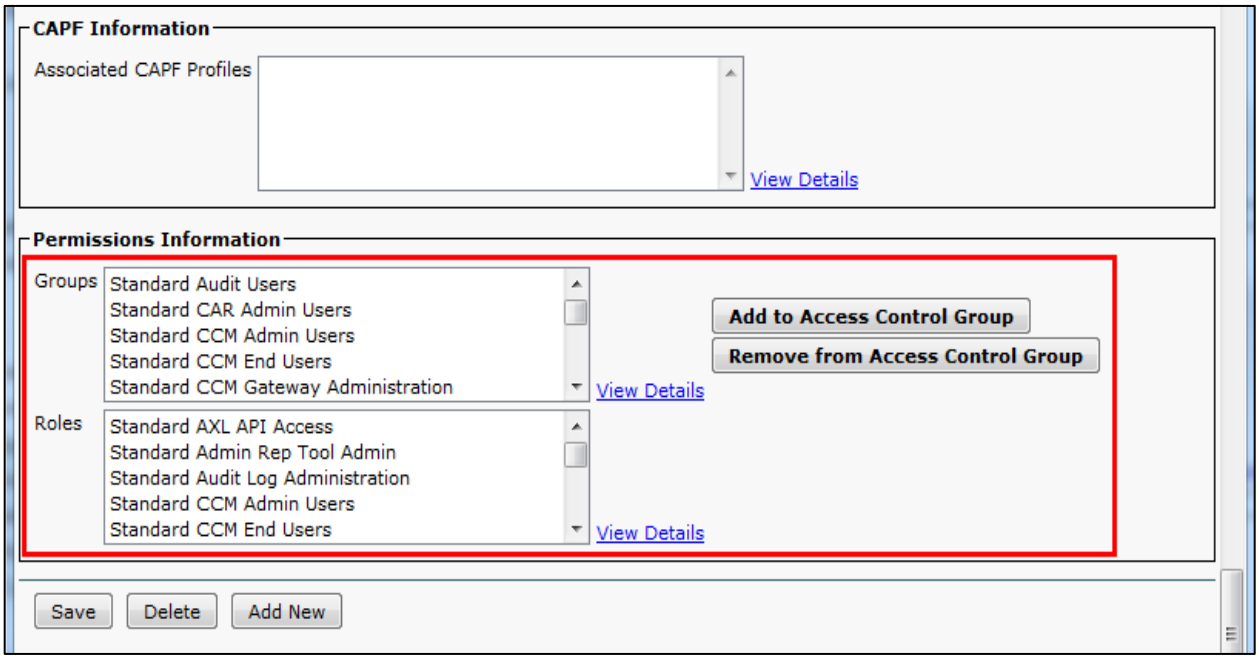

Cisco IP Phone 7965 SCCP Configuration

Set MAC Address* = the below mac is used in this example.
Set Description = Cisco7965_Phone. this text is used to identify this Phone.
Set Device Pool*= G729 pool. This is used in this example.
Set Phone Button Template*= Standard 7965 SCCP. This is used in this example.

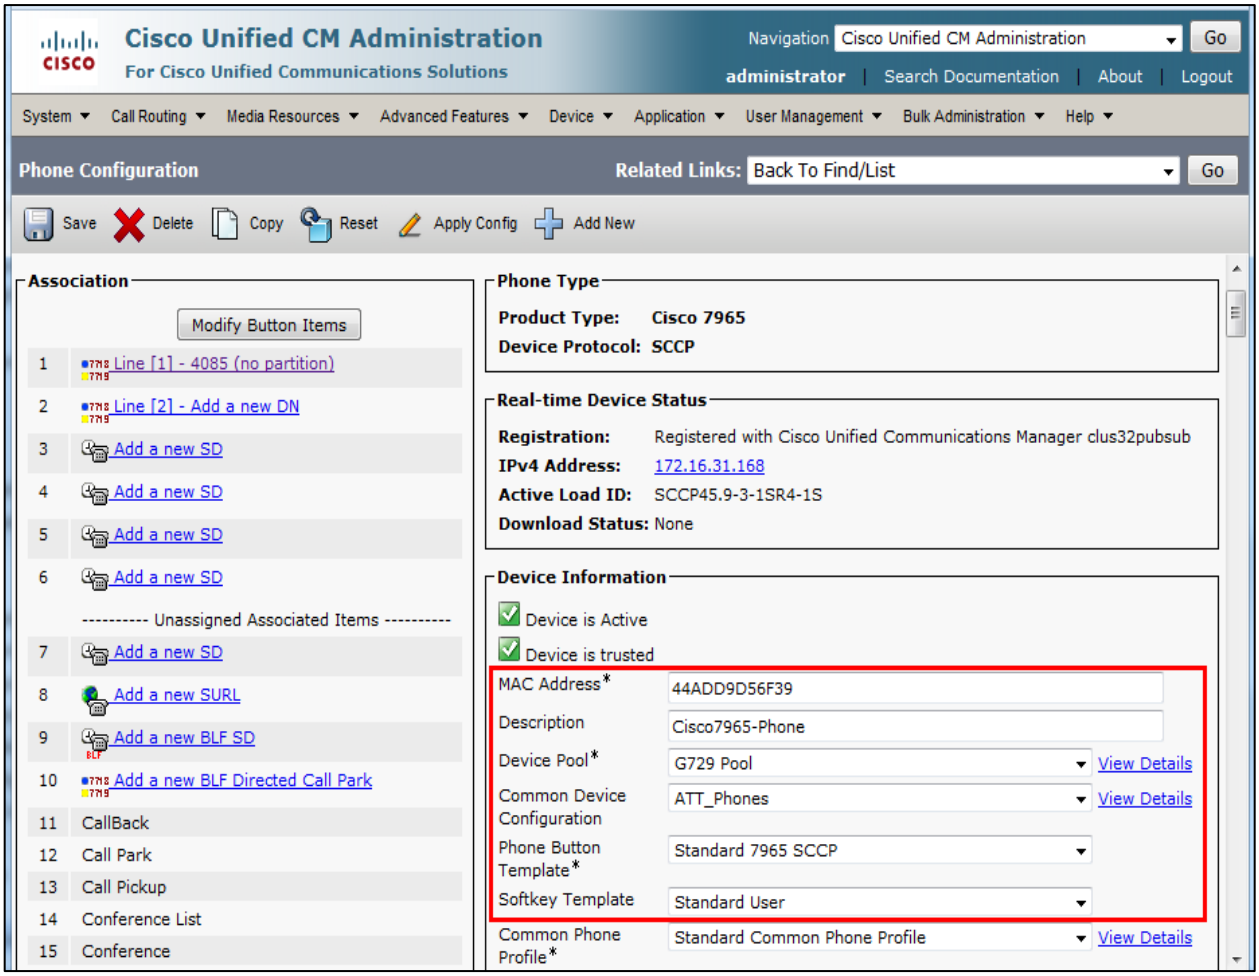

Cisco IP Phone 7965 SCCP Configuration (Continued…)

Set Media Resource Group List = MRGL_MTP. This is used in this example.
Set User Hold MOH Audio Source = 1-SampleAudioSource.
Set Network Hold MOH Audio Source = 1-SampleAudioSource.
Check Owner = Anonymous (Public/Shared Space). This is used in this example.

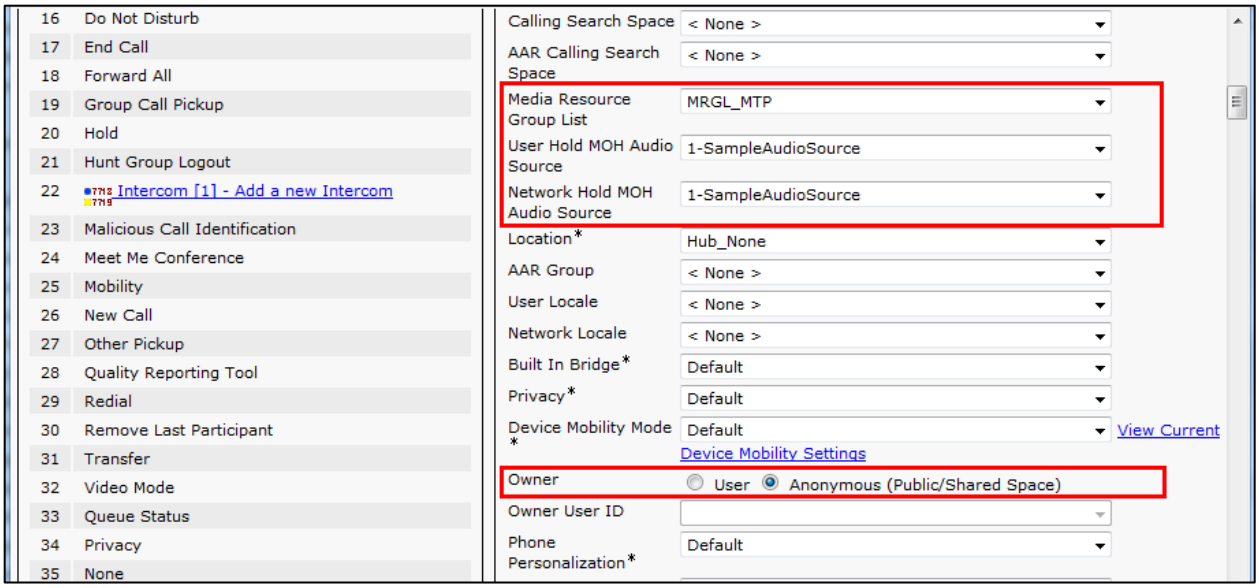

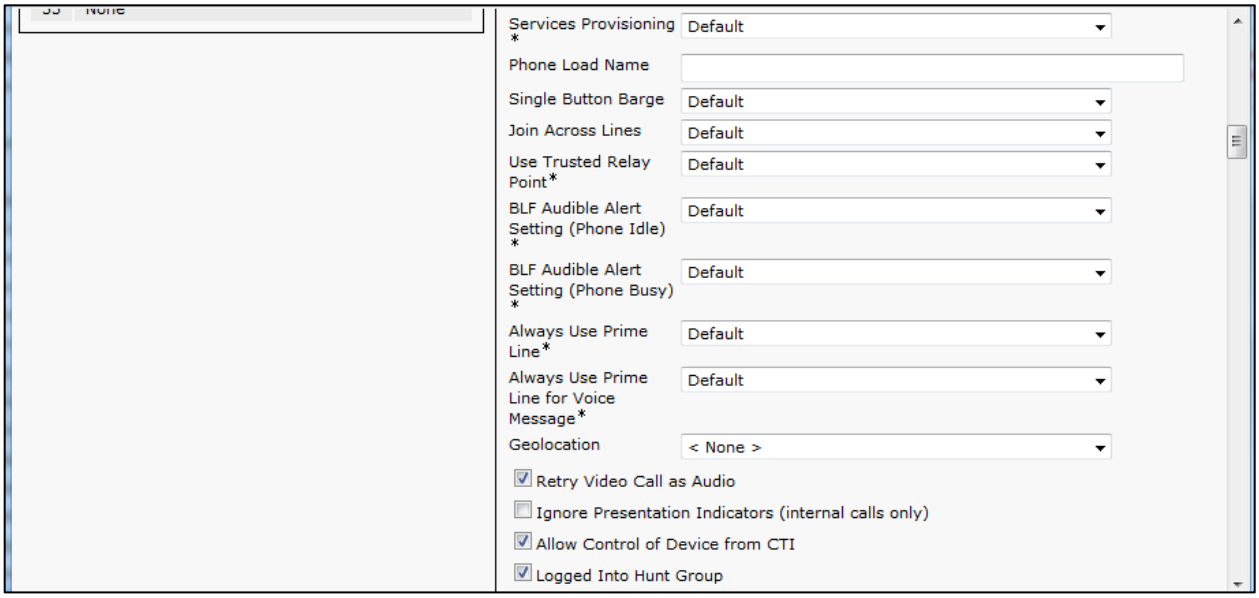

Cisco IP Phone 7965 SCCP Configuration (Continued…)

Remote Device
Protected Device****
Hot line Device*****
Require off-premise location

Number Presentation Transformation

Caller ID For Calls From This Phone

Calling Party Transformation CSS: < None >

☑ Use Device Pool Calling Party Transformation CSS (Caller ID For Calls From This Phone)

Remote Number

Calling Party Transformation CSS: < None >

☑ Use Device Pool Calling Party Transformation CSS (Device Mobility Related Information)

Protocol Specific Information

Packet Capture Mode*	None
Packet Capture Duration	0
BLF Presence Group*	Standard Presence group
Device Security Profile*	Cisco 7965 - Standard SCCP Non-Secure Profile
SUBSCRIBE Calling Search Space	< None >

Unattended Port
Require DTMF Reception
RFC2833 Disabled

Certification Authority Proxy Function (CAPF) Information

Certificate Operation*	No Pending Operation
Authentication Mode*	By Null String
Authentication String	

Generate String

Key Size (Bits)*	2048
Operation Completes By	2015 3 27 12 (YYYY:MM:DD:HH)
Certificate Operation Status:	None

Note: Security Profile Contains Addition CAPF Settings.

Expansion Module Information

Module 1	< None >
Module 1 Load Name	
Module 2	< None >
Module 2 Load Name	

Cisco IP Phone 7965 SCCP Configuration (Continued…)

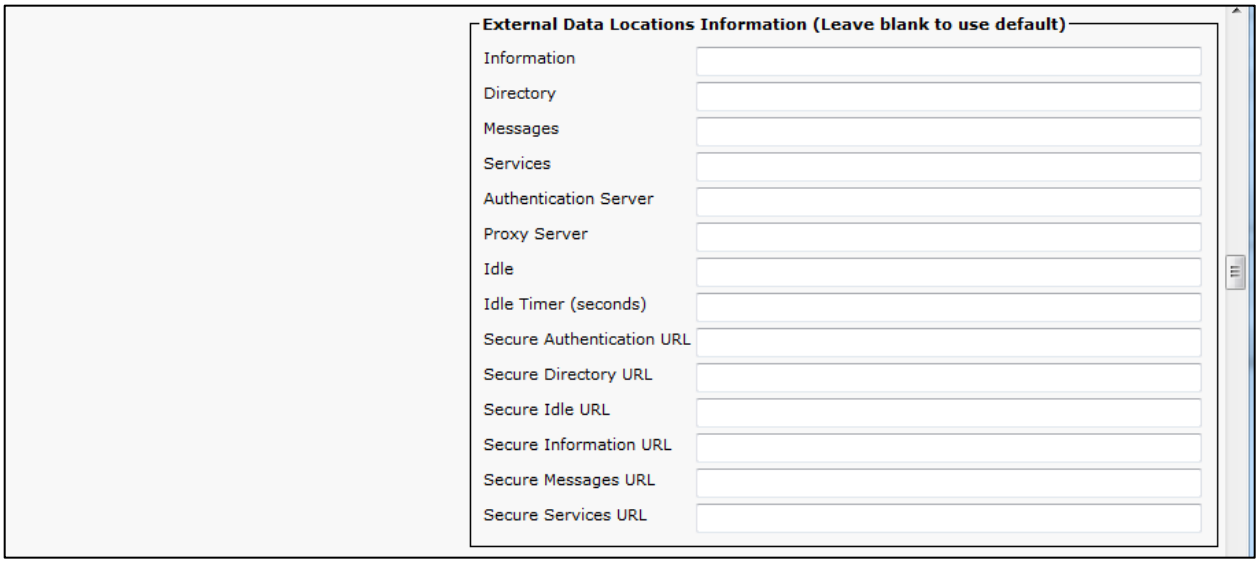

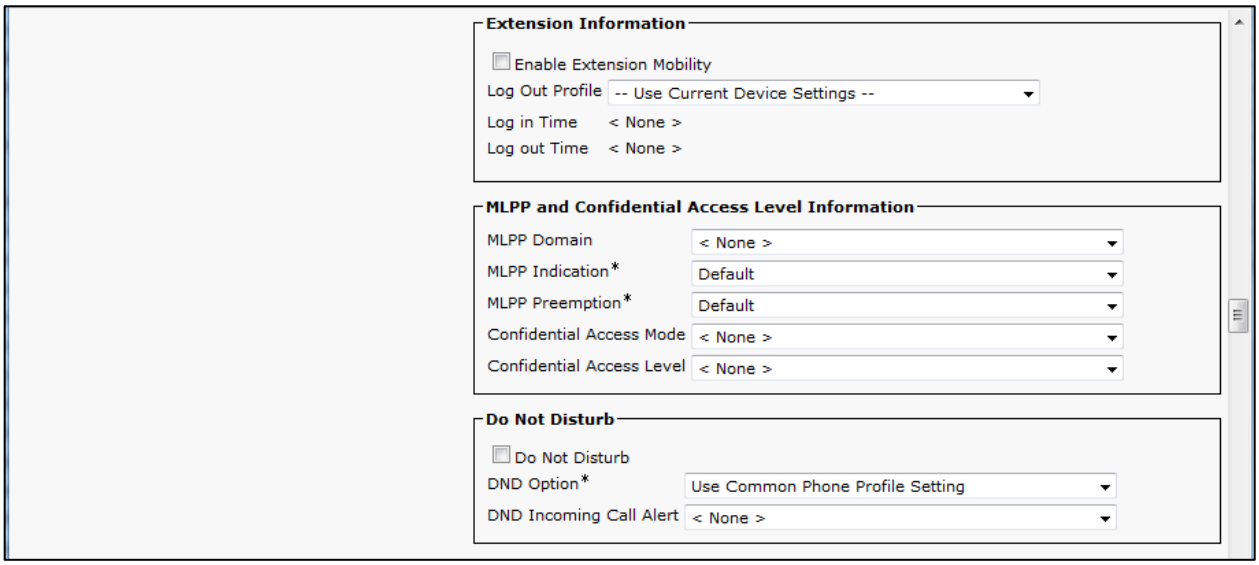

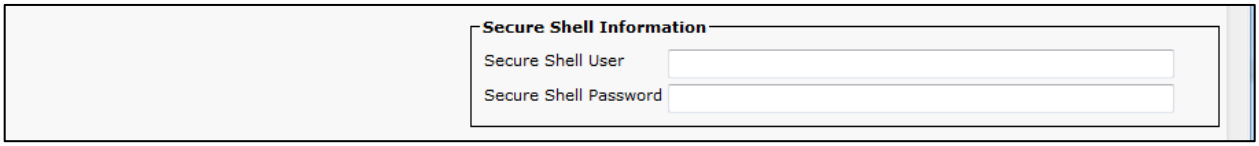

Cisco IP Phone 7965 SCCP Configuration (Continued…)

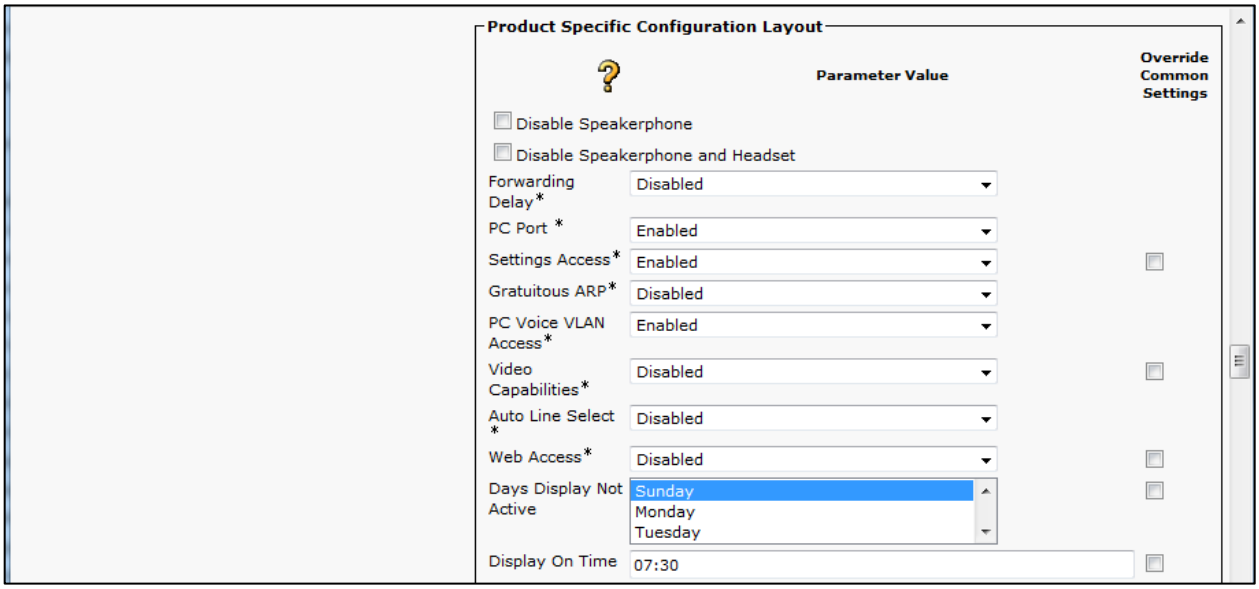

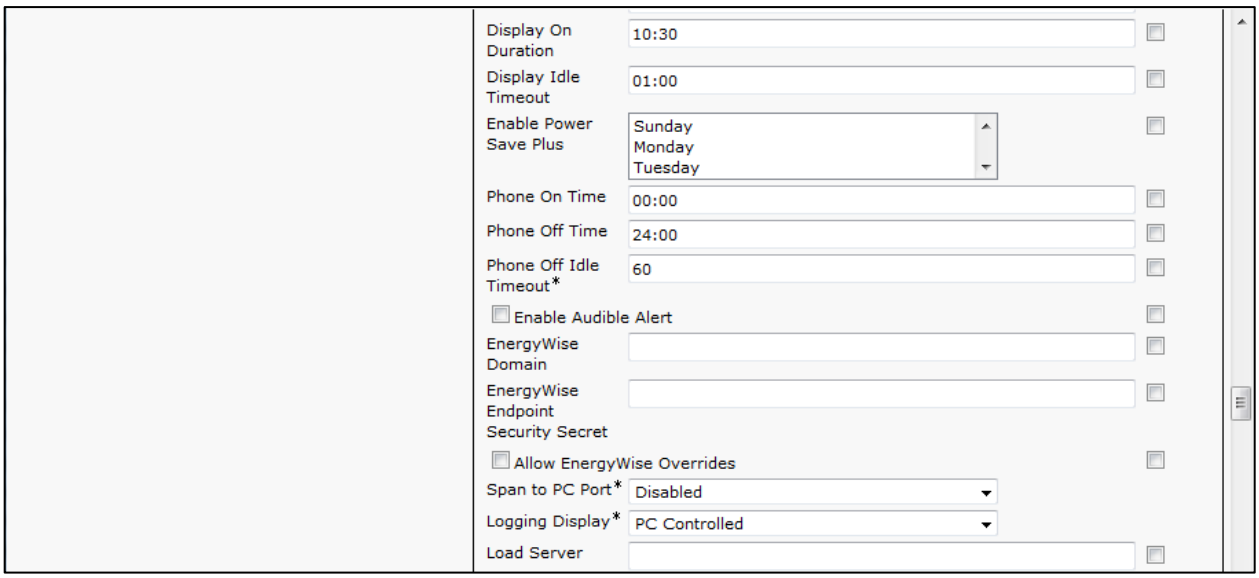

	Recording Tone*	Disabled
	Recording Tone Local Volume*	100
	Recording Tone Remote Volume*	50
	Recording Tone Duration	
	Display On When Incoming Call*	Disabled
	RTCP*	Disabled

Cisco IP Phone 7965 SCCP Configuration (Continued…)

"more" Soft Key Timer	5
Auto Call Select*	Enabled
Log Server	
Advertise G.722 Codec*	Use System Default
Wideband Headset UI Control*	Enabled
Wideband Headset*	Enabled
Peer Firmware Sharing*	Enabled
Cisco Discovery Protocol (CDP): Switch Port*	Enabled
Cisco Discovery Protocol (CDP): PC Port*	Enabled
Link Layer Discovery Protocol - Media Endpoint	Enabled

Discovery Protocol - Media Endpoint Discover (LLDP-MED): Switch Port*	
Link Layer Discovery Protocol (LLDP): PC Port*	Enabled
LLDP Asset ID	
LLDP Power Priority*	Unknown
Wireless Headset Hookswitch Control*	Disabled
IPv6 Load Server	
IPv6 Log Server	
802.1x Authentication*	User Controlled
Detect Unified CM Connection Failure*	Normal
Minimum Ring Volume*	0-Silent

Cisco IP Phone 7965 SCCP Configuration (Continued…)

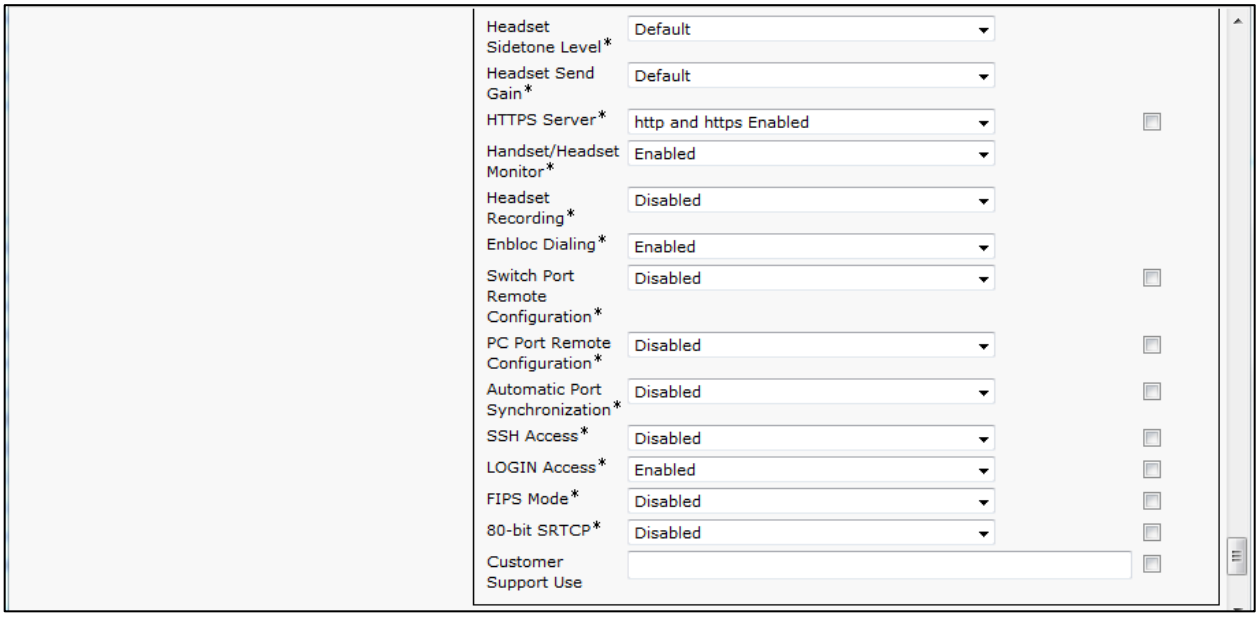

Cisco IP Phone 7965 SCCP Configuration (Continued…)

Set Directory Number* = 4085. This is used in this example.
Set Description = 7323204085. This is used in this example.
Set Alerting Name = Cisco 7965 Phone. This is used in this example.
Set ASCII Alerting Name = Cisco 7965 Phone. This is used in this example.

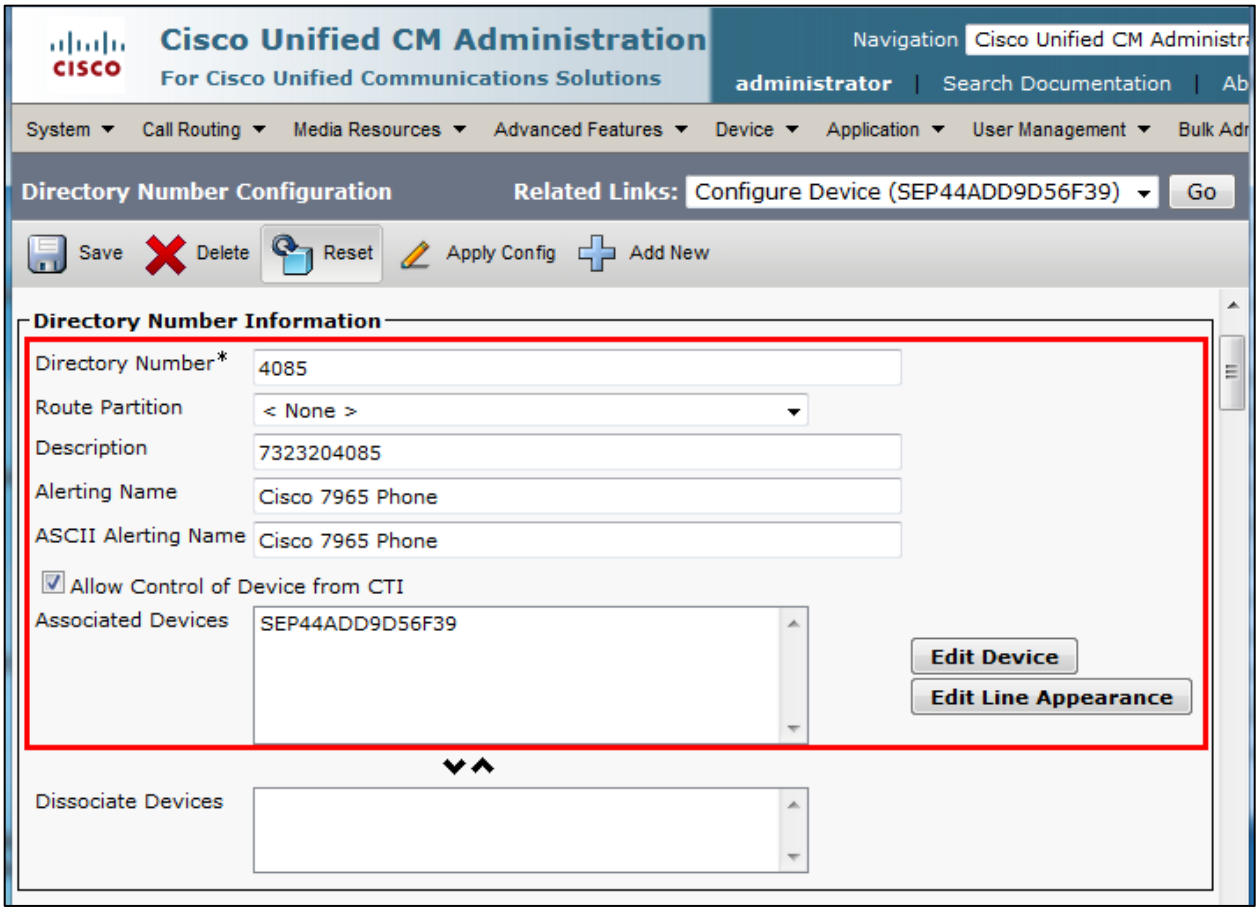

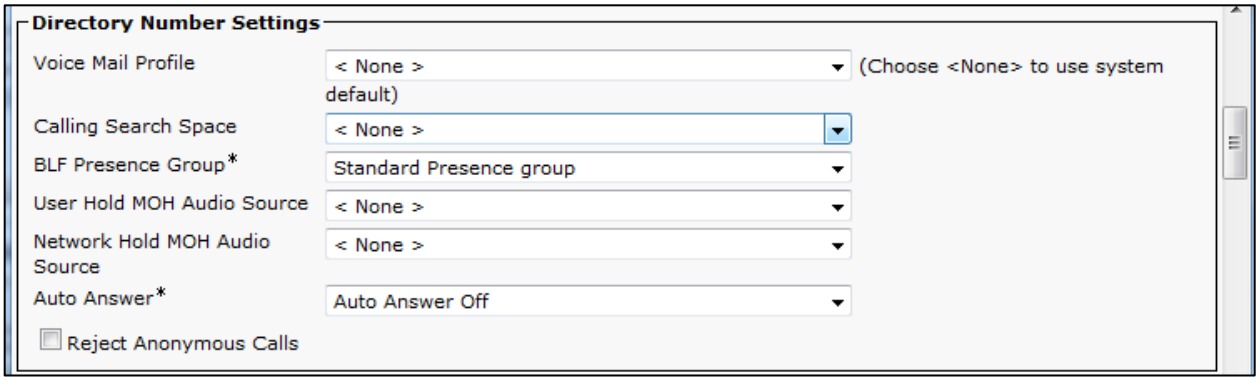

Cisco IP Phone 7965 SCCP Configuration (Continued…)

Enterprise Alternate Number

Add Enterprise Alternate Number

+E.164 Alternate Number

Add +E.164 Alternate Number

Directory URIs

Primary	URI	Partition	Advertise Globally via ILS	Remove
◉		< None >	☑	⊟

Add Row

PSTN Failover for Enterprise Alternate Number, +E.164 Alternate Number, and URI Dialing

Advertised Failover Number < None >

AAR Settings

	Voice Mail	AAR Destination Mask	AAR Group
AAR	☐ or		< None >

☑ Retain this destination in the call forwarding history

Call Forward and Call Pickup Settings

	Voice Mail	Destination	Calling Search Space
Calling Search Space Activation Policy			Use System Default
Forward All	☐ or		< None >
Secondary Calling Search Space for Forward All			< None >
Forward Busy Internal	☐ or		< None >
Forward Busy External	☐ or		< None >
Forward No Answer Internal	☐ or		< None >
Forward No Answer External	☐ or		< None >
Forward No Coverage Internal	☐ or		< None >
Forward No Coverage External	☐ or		< None >

Cisco IP Phone 7965 SCCP Configuration (Continued…)

Forward on CTI Failure	or		< None >
Forward Unregistered Internal	or		< None >
Forward Unregistered External	or		< None >
No Answer Ring Duration (seconds)			
Call Pickup Group		< None >	

Park Monitoring

	Voice Mail	Destination	Calling Search Space
Park Monitoring Forward No Retrieve Destination External	or		< None > A blank value means to call the parker's line.
Park Monitoring Forward No Retrieve Destination Internal	or		< None > A blank value means to call the parker's line.
Park Monitoring Reversion Timer		Reversion Timer service parameter	A blank value will use value set in Park Monitoring

MLPP Alternate Party And Confidential Access Level Settings

Target (Destination)	
MLPP Calling Search Space	< None >
MLPP No Answer Ring Duration (seconds)	
Confidential Access Mode	< None >
Confidential Access Level	< None >
Call Control Agent Profile	< None >

Line Settings for All Devices

Hold Reversion Ring Duration (seconds)		Setting the Hold Reversion Ring Duration to zero will disable the feature
Hold Reversion Notification Interval (seconds)		Setting the Hold Reversion Notification Interval to zero will disable the feature
Party Entrance Tone*	Default	

Cisco IP Phone 7965 SCCP Configuration (Continued…)

Line 1 on Device SEP44ADD9D56F39

Display (Caller ID)	Cisco 7965 Phone — Display text for a line appearance is intended for displaying text such as a name instead of a directory number for calls. If you specify a number, the person receiving a call may not see the proper identity of the caller.
ASCII Display (Caller ID)	Cisco 7965 Phone
Line Text Label	Cisco 7965 Phone
External Phone Number Mask	7323204085
Visual Message Waiting Indicator Policy*	Use System Policy
Audible Message Waiting Indicator Policy*	Default
Ring Setting (Phone Idle)*	Use System Default
Ring Setting (Phone Active)	Use System Default — Applies to this line when any line on the phone has a call in progress.
Call Pickup Group Audio Alert Setting(Phone Idle)	Use System Default

Call Pickup Group Audio Alert Setting(Phone Active)	Use System Default
Recording Option *	Call Recording Disabled
Recording Profile	< None >
Recording Media Source*	Gateway Preferred
Monitoring Calling Search Space	< None >

☑ Log Missed Calls

Cisco IP Phone 7965 SCCP Configuration (Continued…)

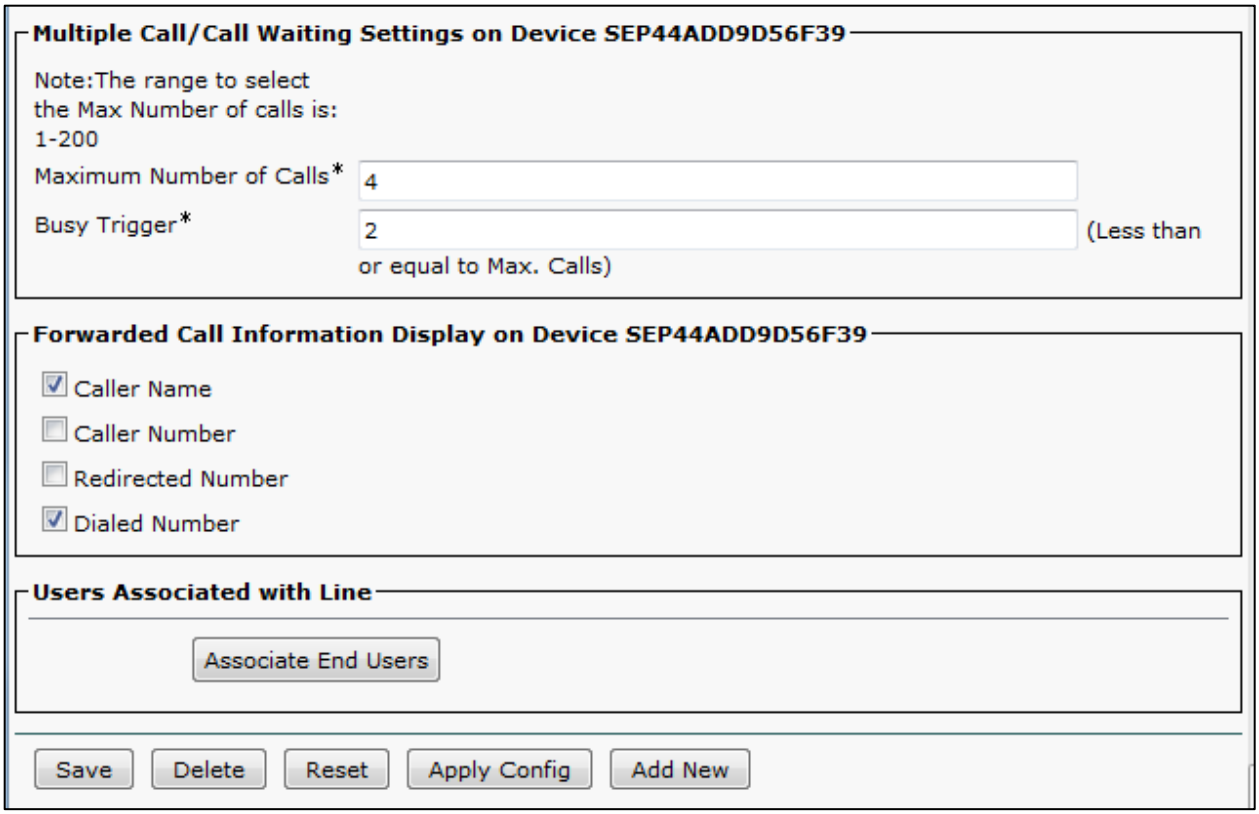

Cisco IP Phone 9971 SIP Configuration

Set MAC Address* = the below mac is used in this example.
Set Description = Cisco 9971 Phone. this text is used to identify this Phone.
Set Device Pool*= G729 Pool. This is used in this example.
Set Phone Button Template*= Standard 9971 SIP. This is used in this example.
Set Media Resource Group List = MRGL_MTP. This is used in this example.
Set User Hold MOH Audio Source = 1-SampleAudioSource.
Set Network Hold MOH Audio Source = 1-SampleAudioSource

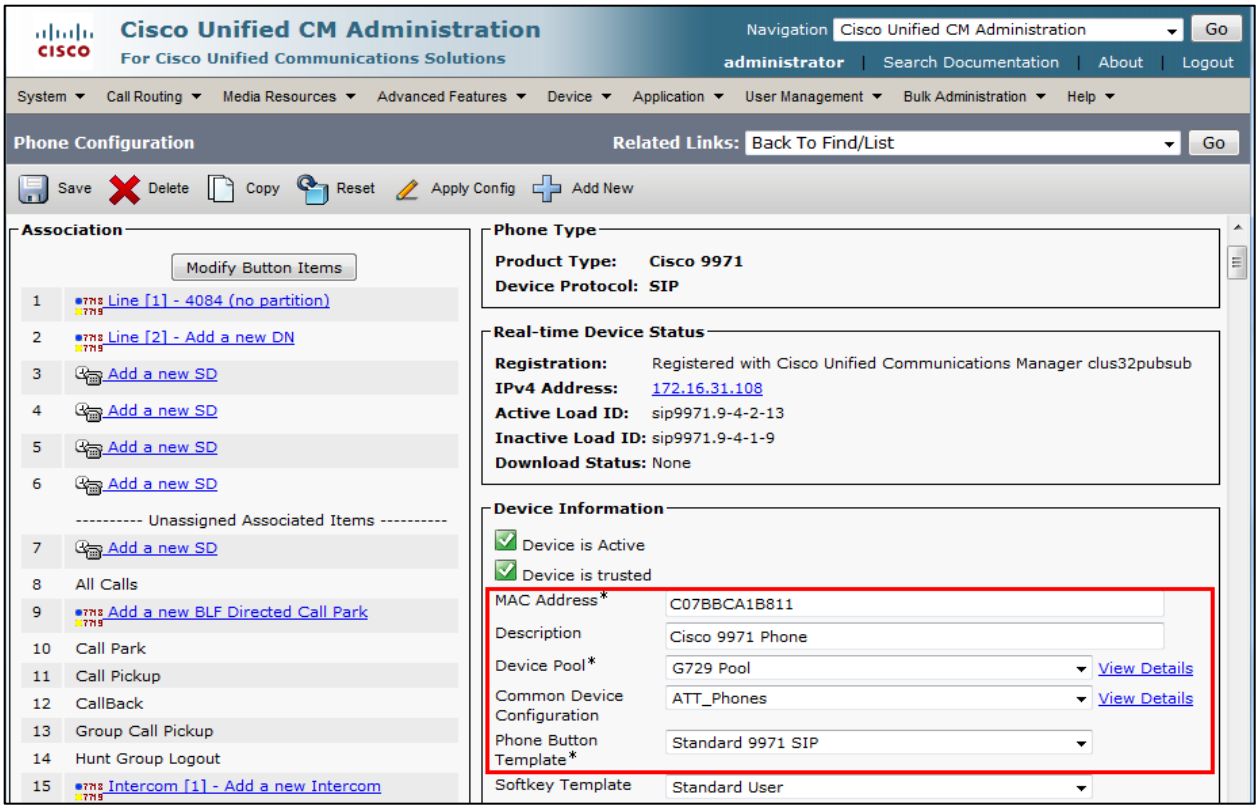

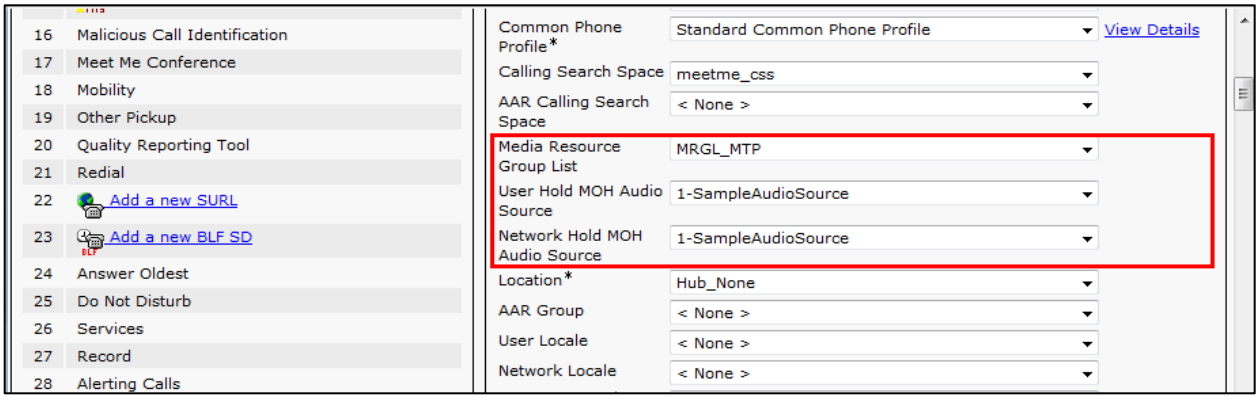

Cisco IP Phone 9971 SIP Configuration(Continued…)

29	Queue Status
30	Privacy
31	None

Built In Bridge*	Default
Privacy*	Default
Device Mobility Mode *	Default — View Current Device Mobility Settings
Owner	User / Anonymous (Public/Shared Space)
Owner User ID*	jabber1
Phone Personalization*	Default
Services Provisioning *	Default
Phone Load Name	
Use Trusted Relay Point*	Default
BLF Audible Alert Setting (Phone Idle) *	Default
BLF Audible Alert Setting (Phone Busy) *	Default
Always Use Prime Line*	Default
Always Use Prime Line for Voice Message*	Default
Geolocation	< None >

Feature Control Policy	< None >

- [ ] Ignore Presentation Indicators (internal calls only)
- [x] Allow Control of Device from CTI
- [x] Logged Into Hunt Group
- [ ] Remote Device
- [ ] Protected Device****
- [ ] Require off-premise location

Number Presentation Transformation

Caller ID For Calls From This Phone

Calling Party Transformation CSS: < None >

- [x] Use Device Pool Calling Party Transformation CSS (Caller ID For Calls From This Phone)

Remote Number

Calling Party Transformation CSS: < None >

- [x] Use Device Pool Calling Party Transformation CSS (Device Mobility Related Information)

Protocol Specific Information

Packet Capture Mode*	None
Packet Capture Duration	0
BLF Presence Group*	Standard Presence group
SIP Dial Rules	< None >
MTP Preferred Originating Codec*	711ulaw
Device Security Profile*	Cisco 9971 - Standard SIP Non-Secure Profile
Rerouting Calling Search Space	< None >
SUBSCRIBE Calling Search Space	< None >
SIP Profile*	Standard SIP Profile w/Early Media Disabled View Details
Digest User	< None >

- [ ] Media Termination Point Required
- [ ] Unattended Port
- [ ] Require DTMF Reception

Certification Authority Proxy Function (CAPF) Information

Certificate Operation*	No Pending Operation
Authentication Mode*	By Null String
Authentication String	
Generate String	
Key Size (Bits)*	2048
Operation Completes By	2015 3 27 12 (YYYY:MM:DD:HH)
Certificate Operation Status:	None

Note: Security Profile Contains Addition CAPF Settings.

Expansion Module Information

Module 1	< None >
Module 1 Load Name	
Module 2	< None >
Module 2 Load Name	
Module 3	< None >
Module 3 Load Name	

Cisco IP Phone 9971 SIP Configuration(Continued…)

External Data Locations Information (Leave blank to use default)

Information	
Directory	
Messages	
Services	
Authentication Server	
Proxy Server	
Idle	
Idle Timer (seconds)	
Secure Authentication URL	
Secure Directory URL	
Secure Idle URL	
Secure Information URL	
Secure Messages URL	
Secure Services URL	

Extension Information

☐ Enable Extension Mobility

Log Out Profile -- Use Current Device Settings --

Log in Time < None >

Log out Time < None >

MLPP and Confidential Access Level Information

MLPP Domain	< None >
MLPP Indication*	Default
MLPP Preemption*	Default
Confidential Access Mode	< None >
Confidential Access Level	< None >

Do Not Disturb

☐ Do Not Disturb

DND Option*	Use Common Phone Profile Setting
DND Incoming Call Alert	< None >

Cisco IP Phone 9971 SIP Configuration(Continued…)

Secure Shell Information

Secure Shell User	administrator
Secure Shell Password	•••

Product Specific Configuration Layout

	Parameter Value	Override Common Settings
Disable Speakerphone		
Disable Speakerphone and Headset		
PC Port *	Enabled	
Back USB Port*	Enabled	☐
Side USB Port*	Enabled	☐
Cisco Camera*	Disabled	☐
Console Access*	Disabled	☐
Video Capabilities*	Disabled	☐
Enable/Disable USB Classes	Mass Storage Human Interface Device Audio Class	☐
SDIO *	Disabled	☐
Bluetooth *	Enabled	☐
Wifi *	Enabled	☐
Bluetooth Profiles*	Handsfree Human Interface Device	☐
Settings Access*	Enabled	☐
Gratuitous ARP*	Disabled	
PC Voice VLAN Access*	Enabled	
Web Access*	Disabled	☐
Show All Calls on Primary Line*	Disabled	
Days Display Not Active	Sunday Monday Tuesday	☐

Cisco IP Phone 9971 SIP Configuration(Continued…)

Display On Time	07:30
Display On Duration	10:30
Display Idle Timeout	01:00
HTTPS Server*	http and https Enabled
Enable Power Save Plus	Sunday Monday Tuesday
Phone On Time	00:00
Phone Off Time	24:00
Phone Off Idle Timeout*	60
Enable Audible Alert	
EnergyWise Domain	
EnergyWise Endpoint Security Secret	
Allow EnergyWise Overrides	
Span to PC Port*	Disabled
Logging Display*	Disabled

Load Server	
IPv6 Load Server	
Recording Tone*	Disabled
Recording Tone Local Volume*	100
Recording Tone Remote Volume*	50
Recording Tone Duration	
Display On When Incoming Call*	Enabled
RTCP*	Enabled
Log Server	
IPv6 Log Server	
Remote Log*	Disabled
Log Profile	Default Preset Telephony

Cisco IP Phone 9971 SIP Configuration(Continued…)

Advertise G.722 and iSAC Codecs *	Use System Default	
Wideband Headset UI Control*	Enabled	
Wideband Headset*	Enabled	
Peer Firmware Sharing*	Enabled	☐
Cisco Discovery Protocol (CDP): Switch Port*	Enabled	☐
Cisco Discovery Protocol (CDP): PC Port*	Enabled	☐
Link Layer Discovery Protocol - Media Endpoint Discover (LLDP-MED): Switch Port*	Enabled	☐
Link Layer Discovery Protocol (LLDP): PC Port*	Enabled	☐

LLDP Asset ID		
LLDP Power Priority*	Unknown	
802.1x Authentication*	User Controlled	☐
FIPS Mode*	Disabled	☐
Detect Unified CM Connection Failure*	Normal	☐
Switch Port Remote Configuration*	Disabled	☐
PC Port Remote Configuration*	Disabled	☐
Automatic Port Synchronization*	Disabled	☐
Power Negotiation*	Enabled	☐
Restrict Data Rates*	Disabled	
SSH Access*	Disabled	☐
Incoming Call Toast Timer*	5	☐
Provide Dial Tone from Release Button*	Disabled	☐

Cisco IP Phone 9971 SIP Configuration(Continued…)

Hide Video By Default*	Disabled
Background Image	
Simplified New Call UI*	Disabled
Enable VXC VPN for MAC	
VXC VPN Option *	Dual Tunnel
VXC Challenge*	Challenge
VXC-M Servers	
Revert to All Calls*	Disabled
RTCP for Video*	Enabled
Record Call Log from Shared Line *	Disabled
Show Remote Private Calls*	Disabled
Record Call Log For Remote Private Calls*	Enabled
Show Call History for Selected Line Only.*	Disabled

Actionable Incoming Call Alert*	Disabled
DF bit*	0
Default Line Filter	
Separate Audio and Video Mute*	Disabled
Softkey Control*	Feature Control Policy
Start Video Port	
Stop Video Port	
Lowest Alerting Line State Priority*	Disabled
TLS Resumption Timer*	3600
Audio EQ*	Default : Default

Save | Delete | Copy | Reset | Apply Config | Add New

Cisco IP Phone 9971 SIP Configuration (Continued…)

Set Directory Number* = 4084. This is used in this example.
Set Description = 7323204084. This is used in this example.
Set Alerting Name = Cisco 9971 Phone. This is used in this example.
Set ASCII Alerting Name = Cisco 9971 Phone. This is used in this example.

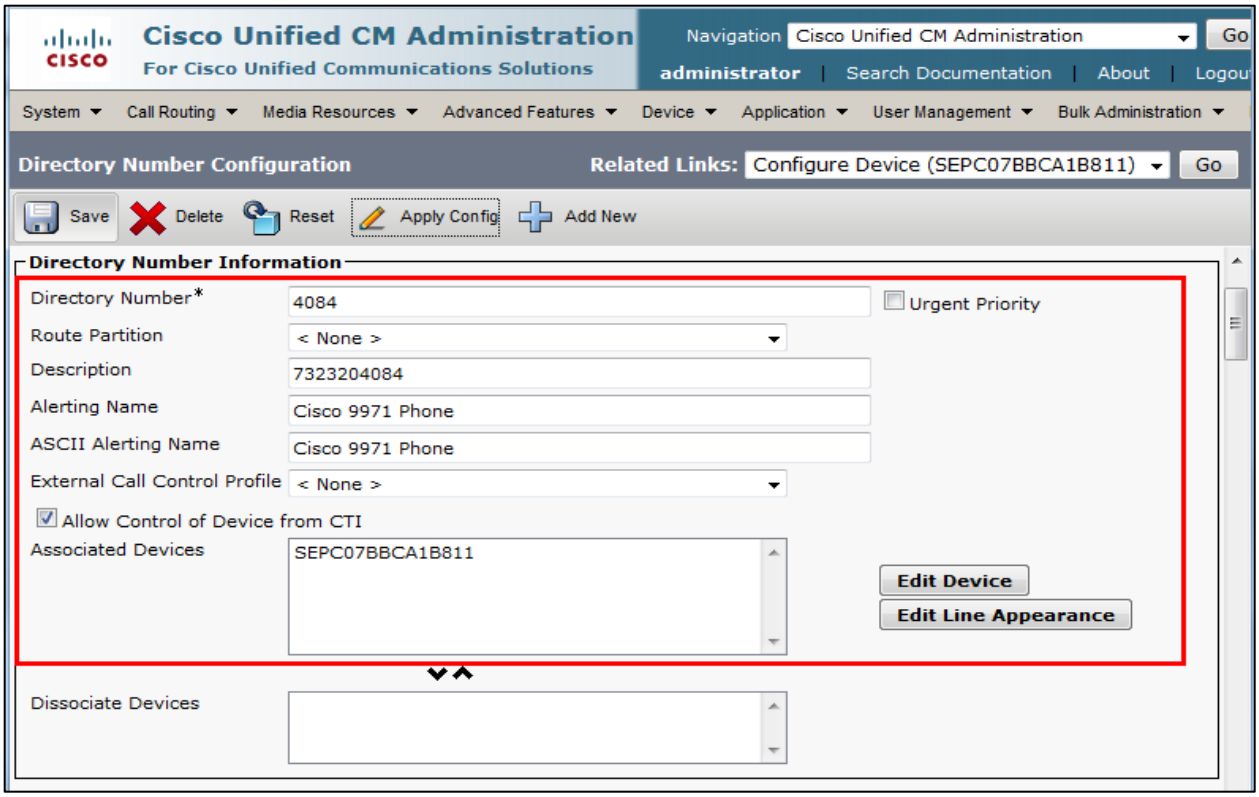

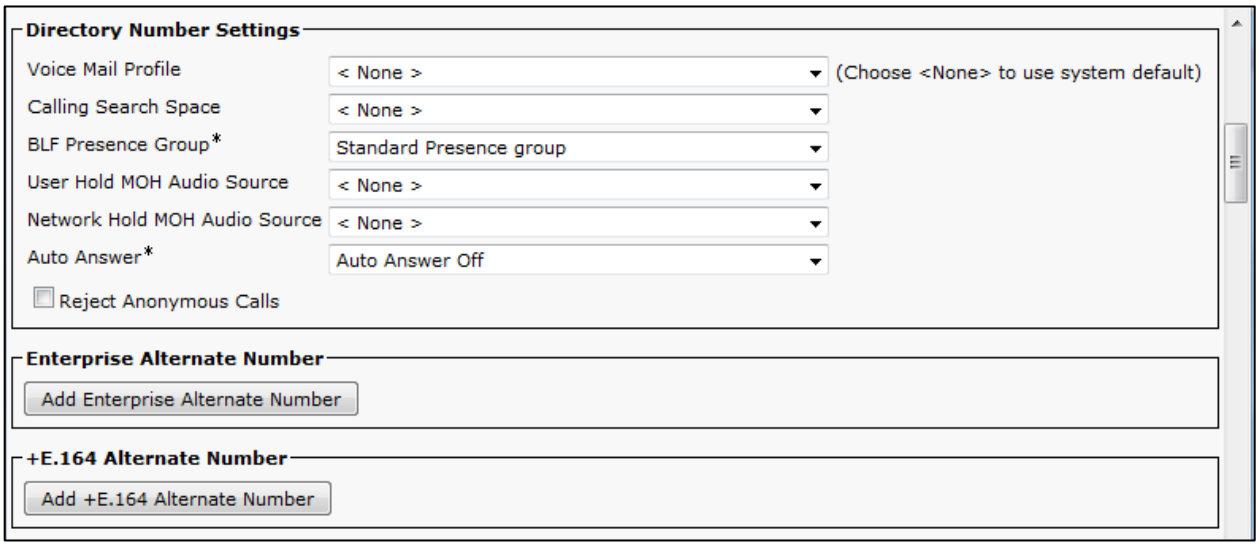

Cisco IP Phone 9971 SIP Configuration (Continued…)

Directory URIs

Primary	URI	Partition	Advertise Globally via ILS	Remove
◉		< None >	☑	⊟

Add Row

PSTN Failover for Enterprise Alternate Number, +E.164 Alternate Number, and URI Dialing

Advertised Failover Number < None >

AAR Settings

	Voice Mail	AAR Destination Mask	AAR Group
AAR	☐ or		< None >

☑ Retain this destination in the call forwarding history

Call Forward and Call Pickup Settings

	Voice Mail	Destination	Calling Search Space
Calling Search Space Activation Policy			Use System Default
Forward All	☐ or		< None >
Secondary Calling Search Space for Forward All			< None >
Forward Busy Internal	☐ or		< None >
Forward Busy External	☐ or		< None >
Forward No Answer Internal	☐ or		< None >
Forward No Answer External	☐ or		< None >
Forward No Coverage Internal	☐ or		< None >
Forward No Coverage External	☐ or		< None >

Cisco IP Phone 9971 SIP Configuration (Continued…)

Forward on CTI Failure	or		< None >
Forward Unregistered Internal	or		< None >
Forward Unregistered External	or		< None >
No Answer Ring Duration (seconds)			
Call Pickup Group		< None >	

Park Monitoring

	Voice Mail	Destination	Calling Search Space
Park Monitoring Forward No Retrieve Destination External	or		< None > A blank value means to call the parker's line.
Park Monitoring Forward No Retrieve Destination Internal	or		< None > A blank value means to call the parker's line.
Park Monitoring Reversion Timer		Reversion Timer service parameter	A blank value will use value set in Park Monitoring

MLPP Alternate Party And Confidential Access Level Settings

Target (Destination)	
MLPP Calling Search Space	< None >
MLPP No Answer Ring Duration (seconds)	
Confidential Access Mode	< None >
Confidential Access Level	< None >
Call Control Agent Profile	< None >

Line Settings for All Devices

Hold Reversion Ring Duration (seconds)		Setting the Hold Reversion Ring Duration to zero will disable the feature
Hold Reversion Notification Interval (seconds)		Setting the Hold Reversion Notification Interval to zero will disable the feature
Party Entrance Tone*	Default	

Cisco IP Phone 9971 SIP Configuration (Continued…)

Set Display (caller ID) = Cisco9971-Phone. This is used in this example.
Set ASCII Display (caller ID) = Cisco9971-Phone. This is used in this example.
Set Line Text Label = Cisco9971-Phone. This is used in this example.
Set External Phone Number Mask = 7323204084. This is used in this example.

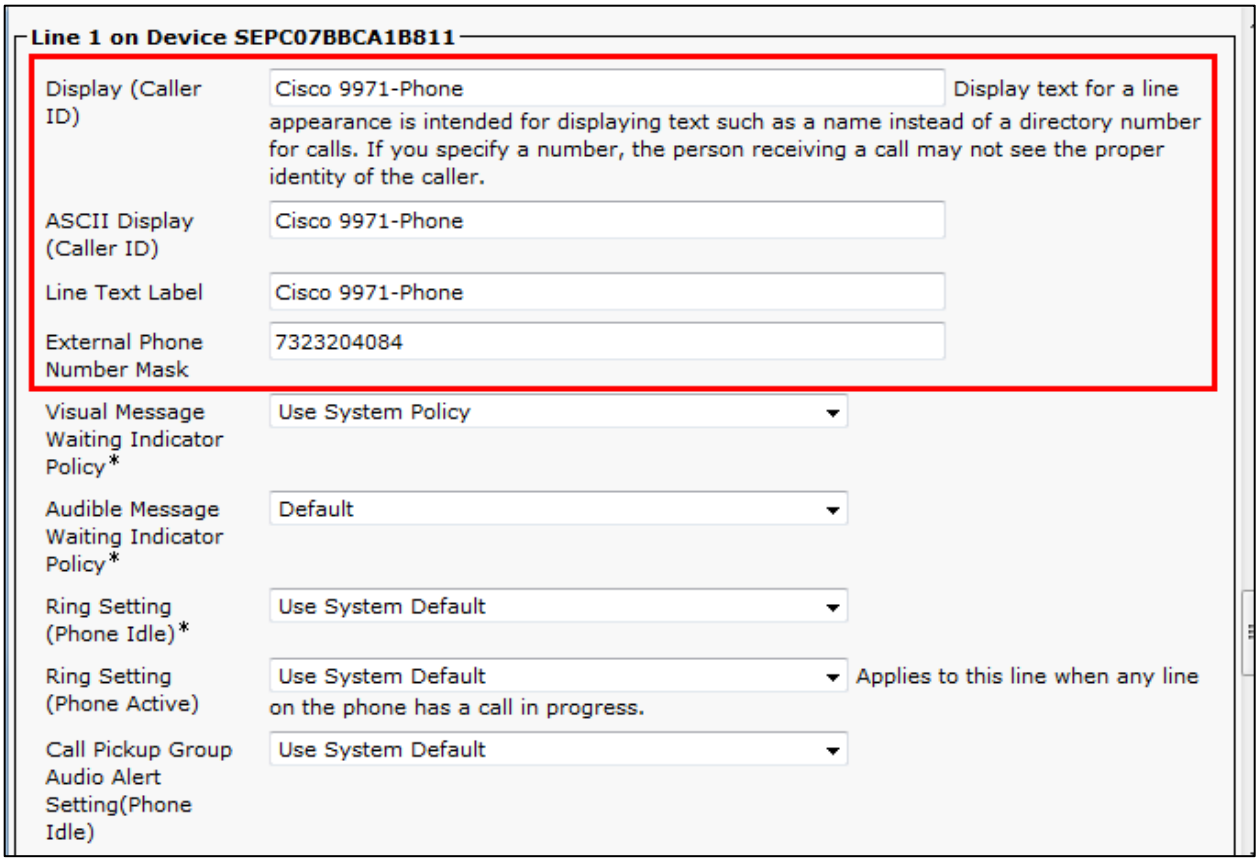

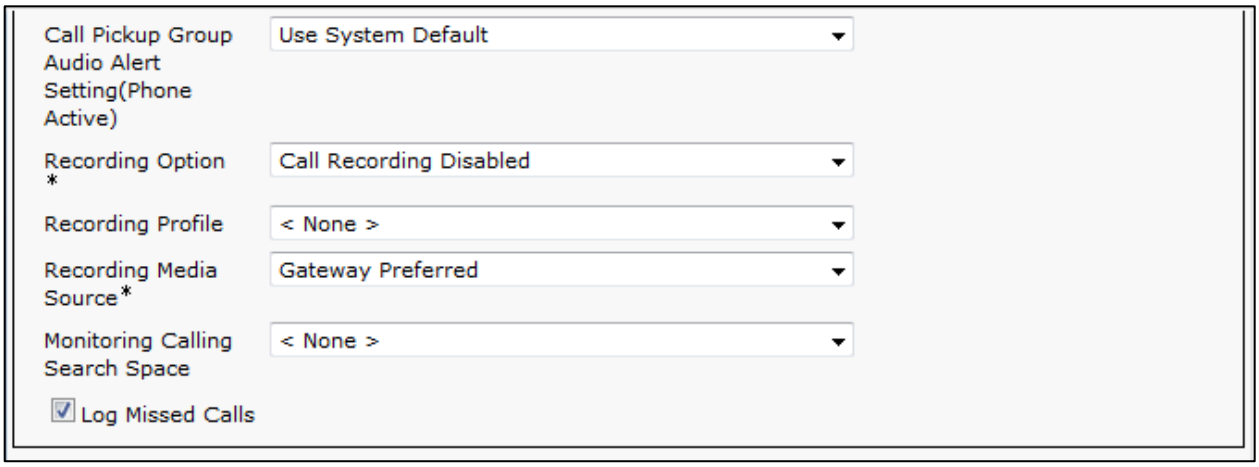

Cisco IP Phone 9971 SIP Configuration (Continued…)

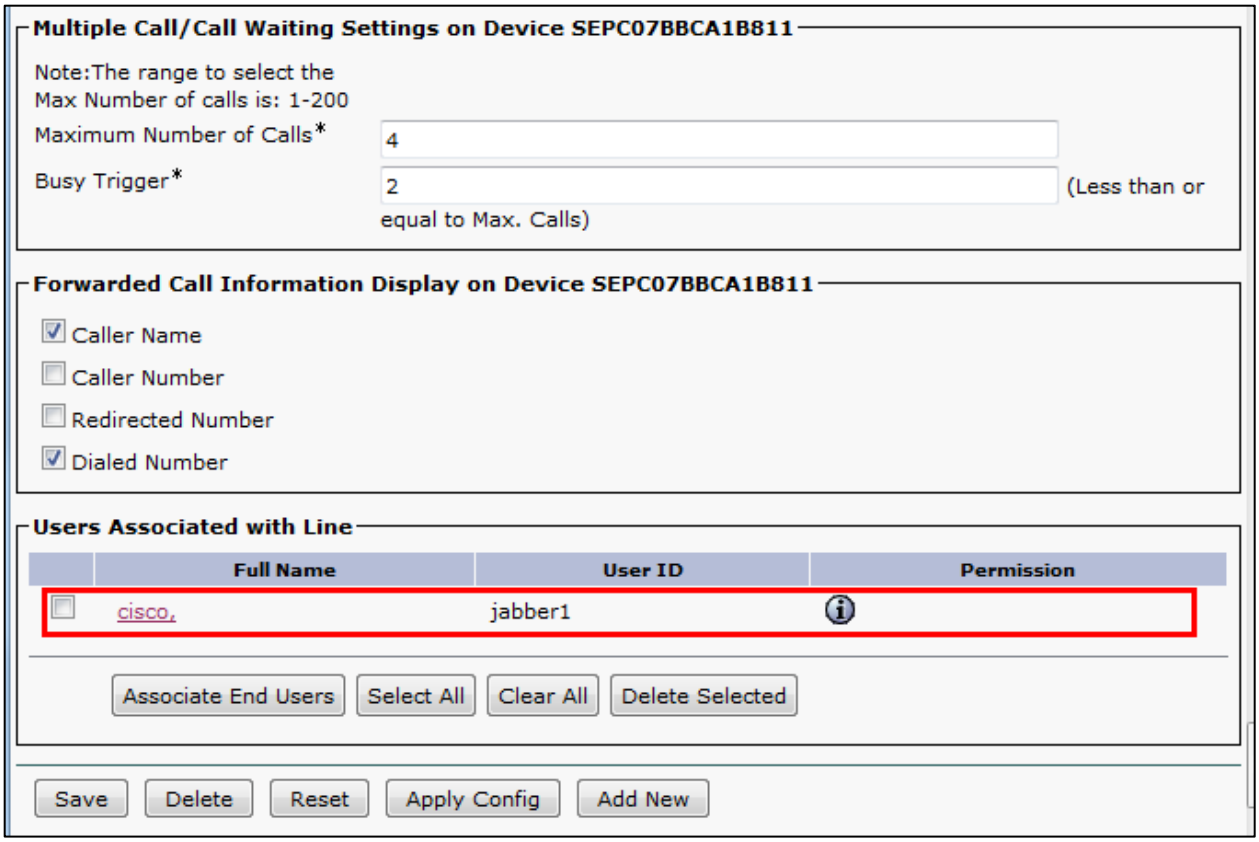

SIP Trunk Security Profile Configuration used by SIP trunk to Cisco UBE

Navigation: System → Security → SIP Trunk Security Profile

Set Name* = ATT Non Secure SIP Trunk Profile. This is used in this example.
Set Description = Non Secure SIP Trunk Profile authenticated by null String. This is used in this example.
Set Device Security Mode = Non Secure.
Set Incoming Transport Type* = TCP+UDP.
Set Outgoing Transport Type = UDP.

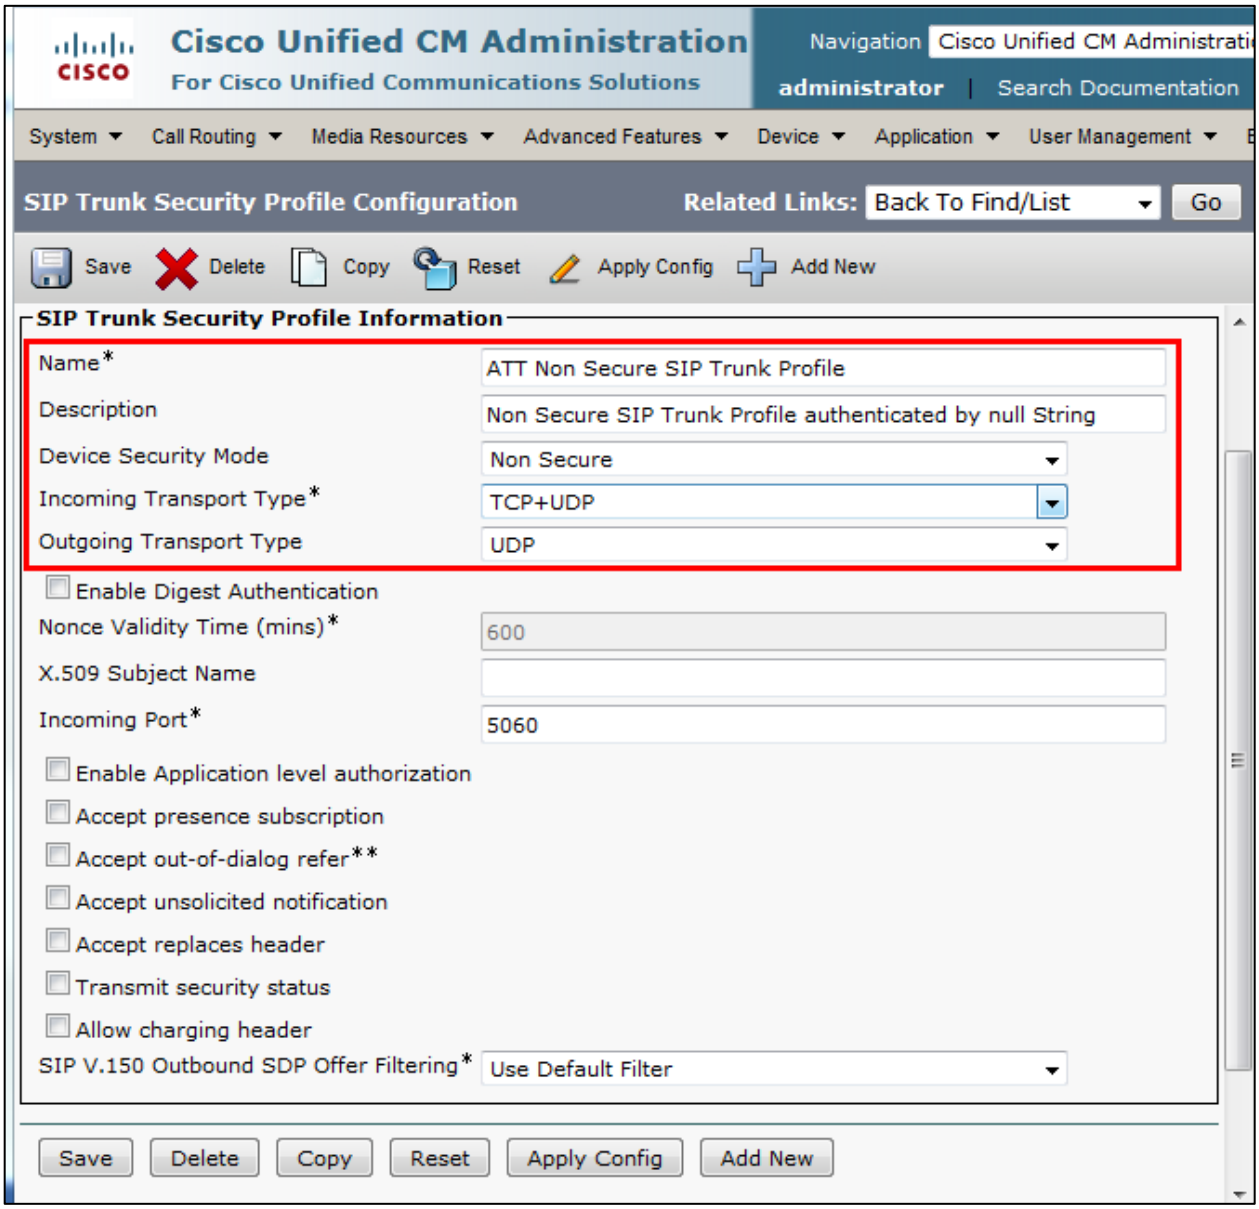

SIP Profile Configuration used by SIP trunk to Cisco UBE

Navigation: Device → Device Settings → SIP Profile

Set SIP profile Name * = Standard SIP Profile w/Early Media Disabled. This is used for this example
Check Disable Early Media on 180
Set SIP Rel1xx Options* = Send PRACK if 1xx contains SDP
Note*= Some PSTN network call prompters utilize early-media cut-through to offer menu options to the caller (DTMF select menu) before the call is connected. In order for Cisco UCM/Cisco UBE solution to achieve successful early-media cut-through, the Cisco UCM to Cisco UBE call leg must be enabled with SIP PRACK. To enable SIP PRACK on the Cisco UCM, the SIP Profile "SIP Rel1XX Options" setting must be set to "Send PRACK".

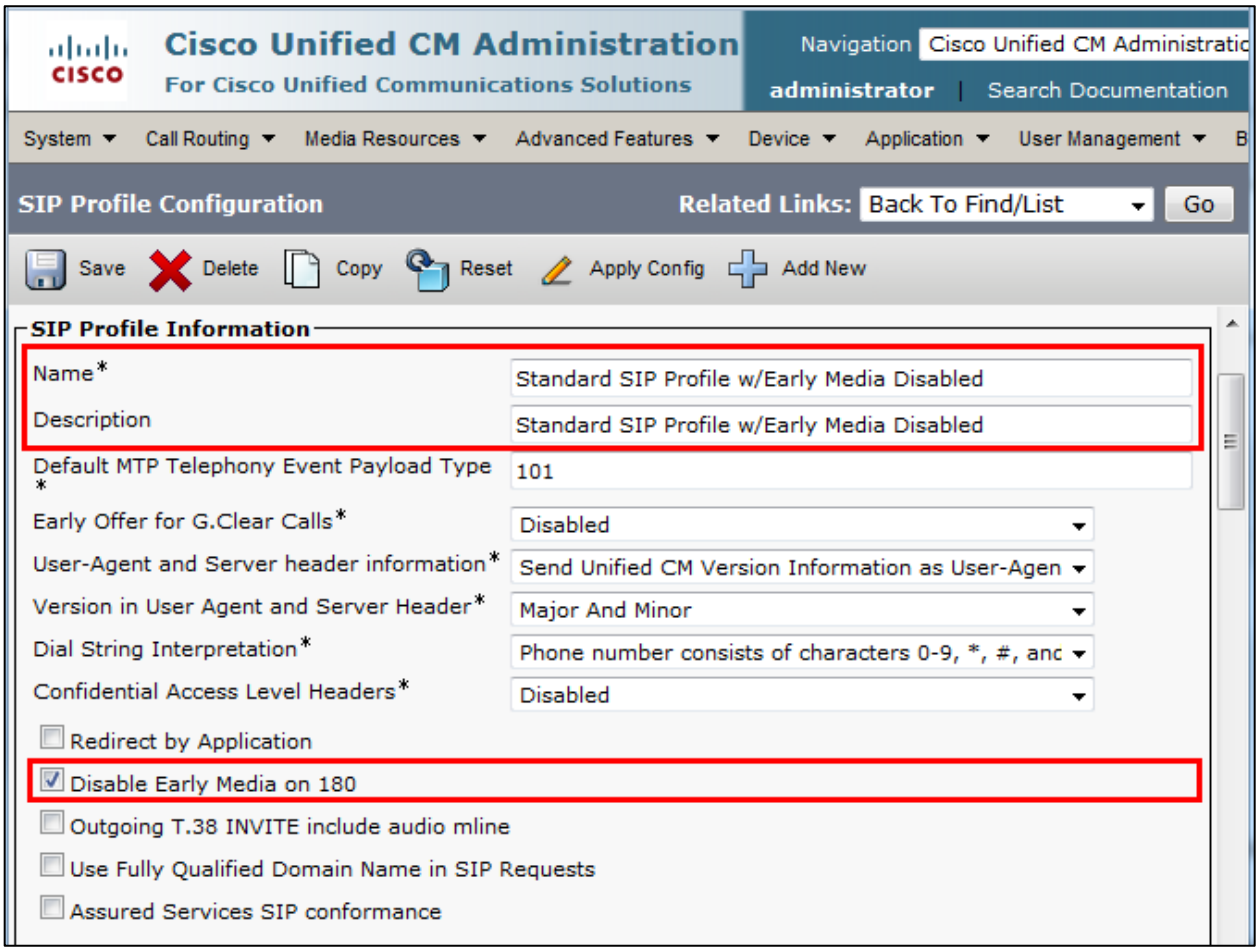

SIP Profile Configuration used by SIP trunk to Cisco UBE (Continued…)

SDP Information

SDP Session-level Bandwidth Modifier for Early Offer and Re-invites*	TIAS and AS
SDP Transparency Profile	Pass all unknown SDP attributes
Accept Audio Codec Preferences in Received Offer *	Default

- [ ] Require SDP Inactive Exchange for Mid-Call Media Change
- [ ] Allow RR/RS bandwidth modifier (RFC 3556)

Parameters used in Phone

Timer Invite Expires (seconds)*	180
Timer Register Delta (seconds)*	5
Timer Register Expires (seconds)*	3600
Timer T1 (msec)*	500
Timer T2 (msec)*	4000
Retry INVITE*	6
Retry Non-INVITE*	10
Start Media Port*	16384
Stop Media Port*	32766
Call Pickup URI*	x-cisco-serviceuri-pickup
Call Pickup Group Other URI*	x-cisco-serviceuri-opickup
Call Pickup Group URI*	x-cisco-serviceuri-gpickup
Meet Me Service URI*	x-cisco-serviceuri-meetme
User Info*	None
DTMF DB Level*	Nominal
Call Hold Ring Back*	Off
Anonymous Call Block*	Off

Caller ID Blocking*	Off
Do Not Disturb Control*	User
Telnet Level for 7940 and 7960*	Disabled
Resource Priority Namespace	< None >
Timer Keep Alive Expires (seconds)*	120
Timer Subscribe Expires (seconds)*	120
Timer Subscribe Delta (seconds)*	5
Maximum Redirections*	70
Off Hook To First Digit Timer (milliseconds)*	15000
Call Forward URI*	x-cisco-serviceuri-cfwdall
Speed Dial (Abbreviated Dial) URI*	x-cisco-serviceuri-abbrdial

SIP Profile Configuration used by SIP trunk to Cisco UBE (Continued…)

- [x] Conference Join Enabled
- [ ] RFC 2543 Hold
- [x] Semi Attended Transfer
- [ ] Enable VAD
- [ ] Stutter Message Waiting
- [ ] MLPP User Authorization

Normalization Script

Normalization Script < None >

Enable Trace

	Parameter Name	Parameter Value
1		

Incoming Requests FROM URI Settings

Caller ID DN

Caller Name

Trunk Specific Configuration

Reroute Incoming Request to new Trunk based on*	Never
RSVP Over SIP*	Local RSVP
Resource Priority Namespace List	< None >
Fall back to local RSVP	
SIP Rel1XX Options*	Send PRACK if 1xx Contains SDP
Video Call Traffic Class*	Mixed
Calling Line Identification Presentation*	Default
Session Refresh Method*	Invite
Early Offer support for voice and video calls*	Disabled (Default value)
Enable ANAT	
Deliver Conference Bridge Identifier	
Allow Passthrough of Configured Line Device Caller Information	
Reject Anonymous Incoming Calls	
Reject Anonymous Outgoing Calls	
Send ILS Learned Destination Route String	

SIP Profile Configuration used by SIP trunk to Cisco UBE (Continued…)

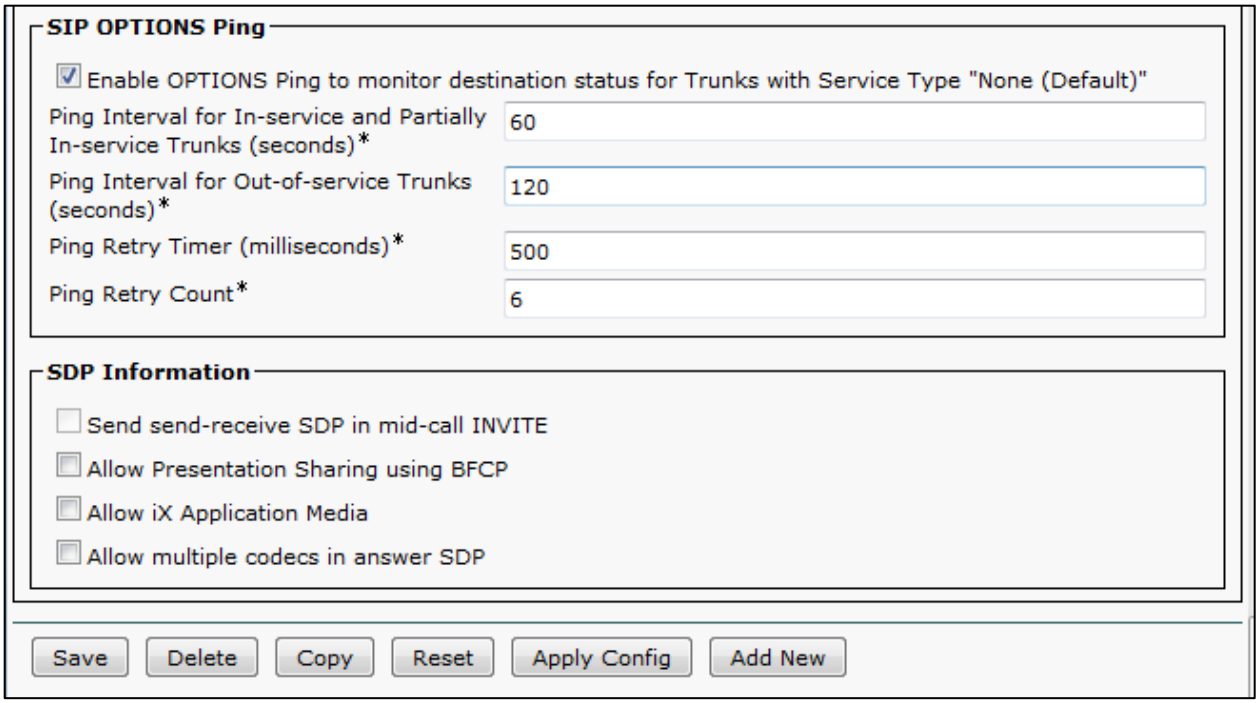

SIP Trunk to Cisco UBE Configuration

Navigation: Device → Trunk

Set Device Name* = ATT_SIP_TRUNK. This is used for this example
Set Description = ATT SIP Trunk to PSTN. This is used for this example
Set Device Pool* = G729_pool. This is used for this example
Set Media Resource Group List = MRGL_MTP.

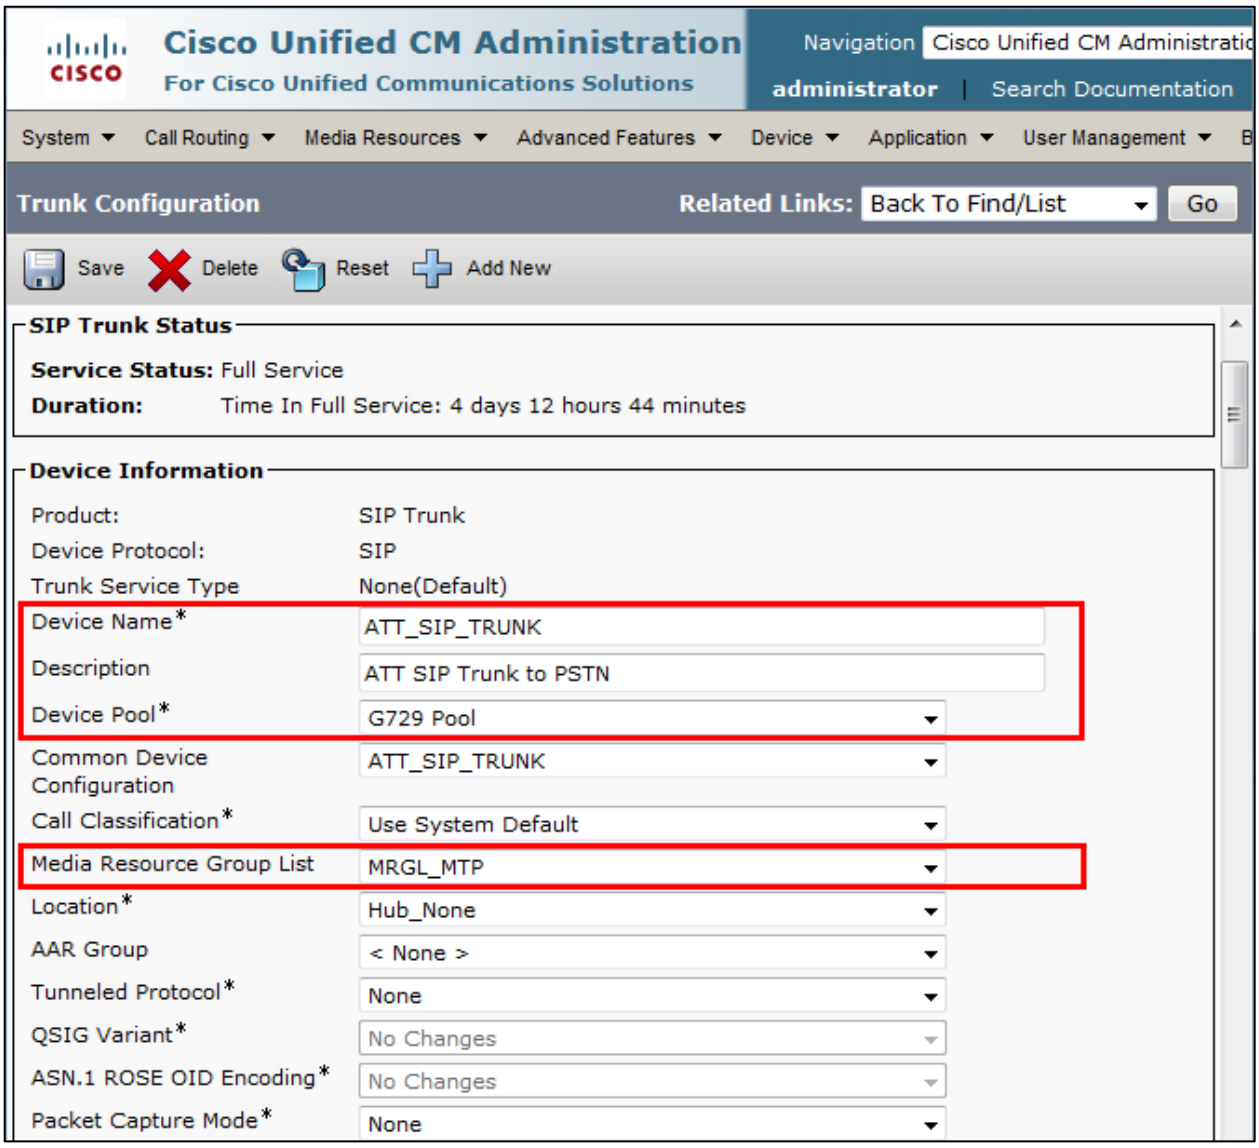

SIP Trunk to Cisco UBE Configuration (Continued…)

Set Significant Digits* = 4. This is used in this example.

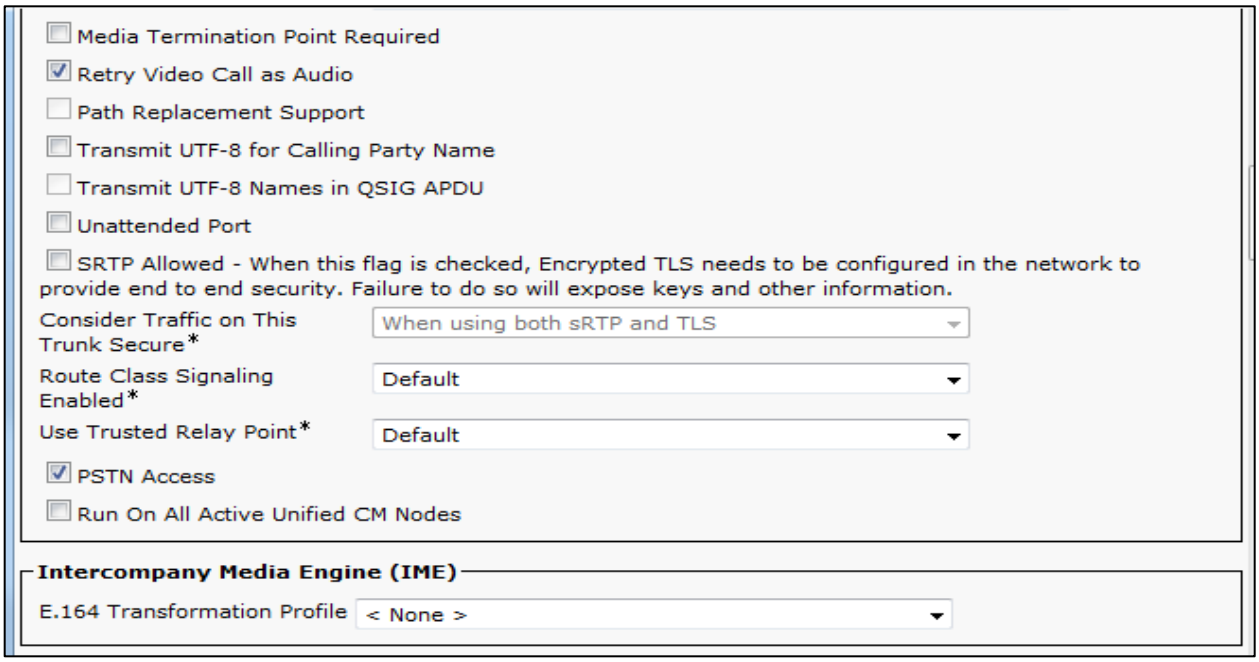

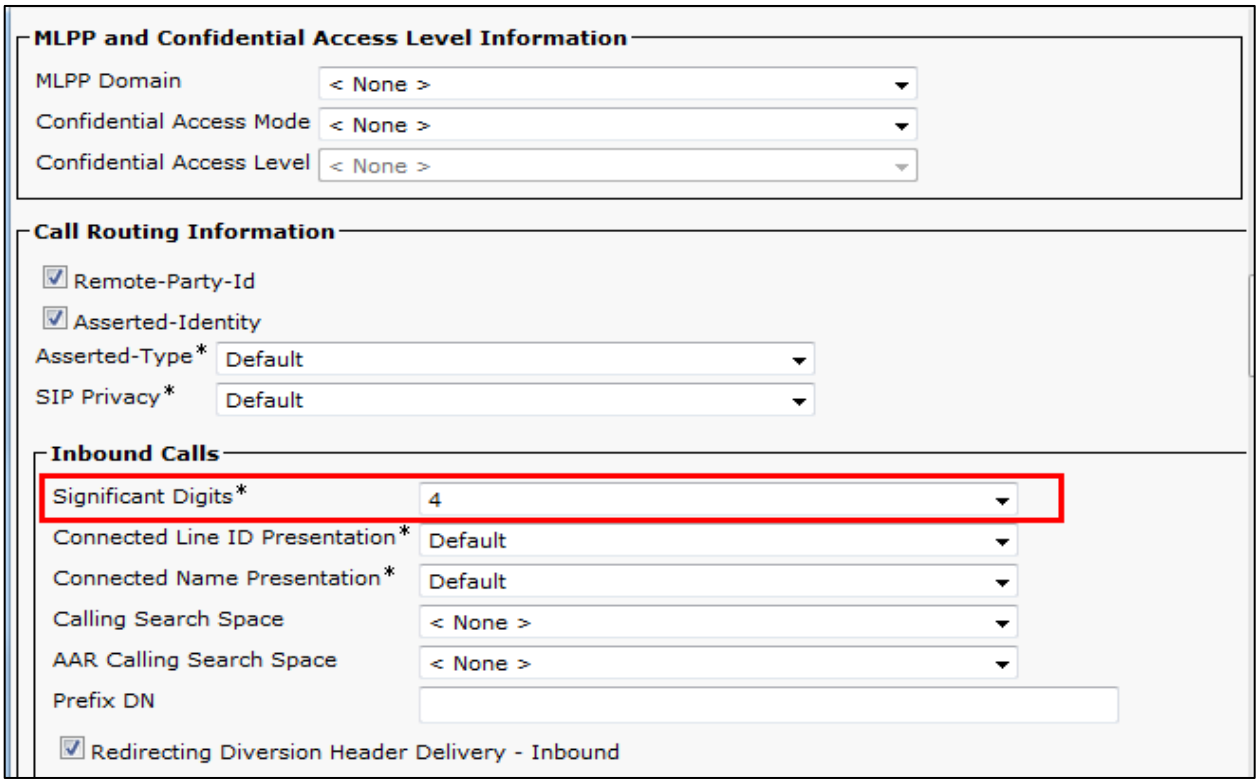

SIP Trunk to Cisco UBE Configuration (Continued…)

Incoming Calling Party Settings

If the administrator sets the prefix to Default this indicates call processing will use prefix at the next level setting (DevicePool/Service Parameter). Otherwise, the value configured is used as the prefix unless the field is empty in which case there is no prefix assigned.

Clear Prefix Settings | Default Prefix Settings

Number Type	Prefix	Strip Digits	Calling Search Space	Use Device Pool CSS
Incoming Number	Default	0	< None >	☑

Incoming Called Party Settings

If the administrator sets the prefix to Default this indicates call processing will use prefix at the next level setting (DevicePool/Service Parameter). Otherwise, the value configured is used as the prefix unless the field is empty in which case there is no prefix assigned.

Clear Prefix Settings | Default Prefix Settings

Number Type	Prefix	Strip Digits	Calling Search Space	Use Device Pool CSS
Incoming Number	Default	0	< None >	☐

Connected Party Settings

Connected Party Transformation CSS < None >

☑ Use Device Pool Connected Party Transformation CSS

Outbound Calls

Called Party Transformation CSS < None >

☑ Use Device Pool Called Party Transformation CSS

Calling Party Transformation CSS < None >

☑ Use Device Pool Calling Party Transformation CSS

Calling Party Selection* Originator

Calling Line ID Presentation* Default

Calling Name Presentation* Default

Calling and Connected Party Info Format* Deliver DN only in connected party

☑ Redirecting Diversion Header Delivery - Outbound

Redirecting Party Transformation CSS < None >

☑ Use Device Pool Redirecting Party Transformation CSS

Caller Information

Caller ID DN

Caller Name

☐ Maintain Original Caller ID DN and Caller Name in Identity Headers

SIP Trunk to Cisco UBE Configuration (Continued…)

Set Destination Address = Set IP address of ISR-Cisco UBE.
Set SIP Trunk Security Profile* = ATT_Non Secure Sip Trunk Profile.
Set SIP Profile* = ATT_SIP_Profile. This is used in this example.

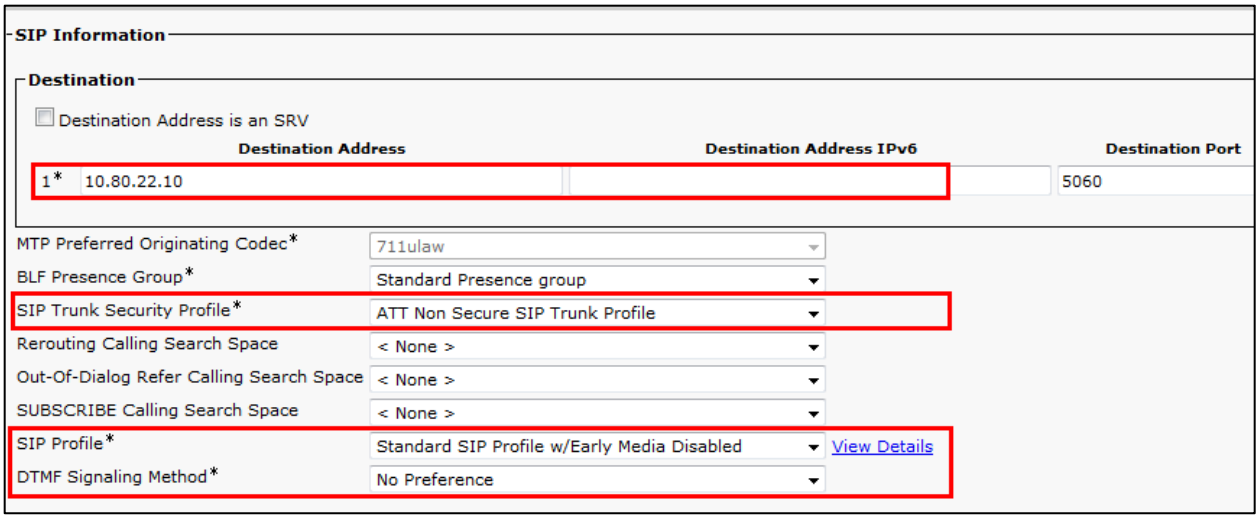

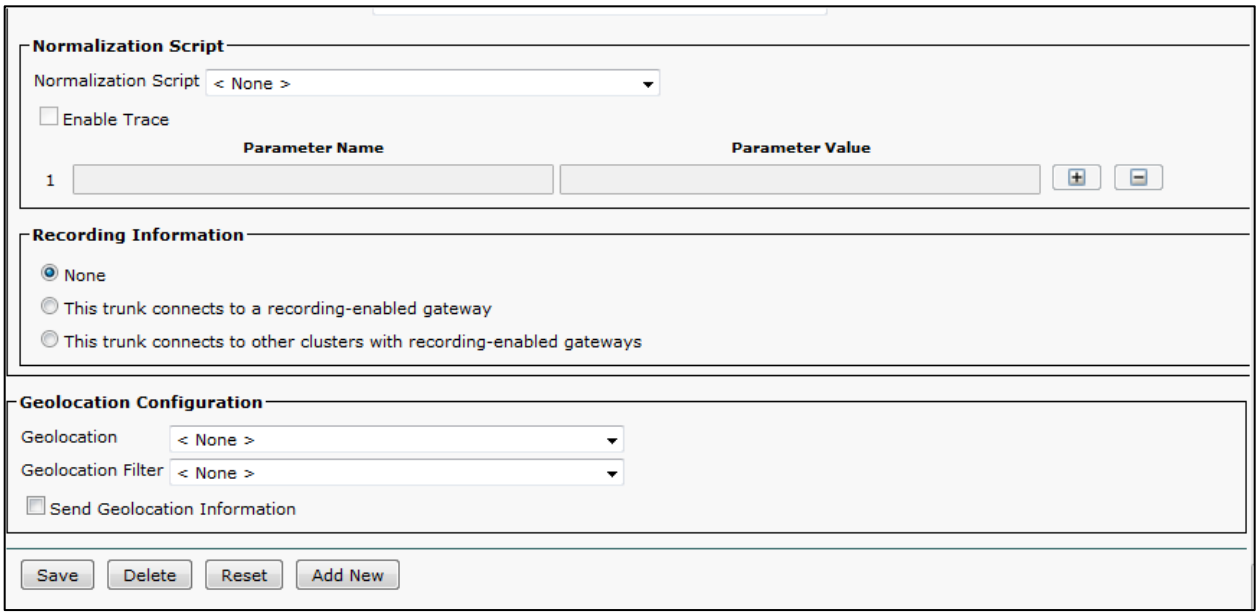

SIP Trunk to Fax Gateway Configuration.

Navigation: Device → Trunk
Set Device Name* = Trunk_SIP_FAX_Gateway. This is used for this example
Set Description = Trunk_SIP_FAX_Gateway. This is used for this example
Set Device Pool* = G729 pool. This is used for this example

Set Media Resource Group List = MRGL_MTP.

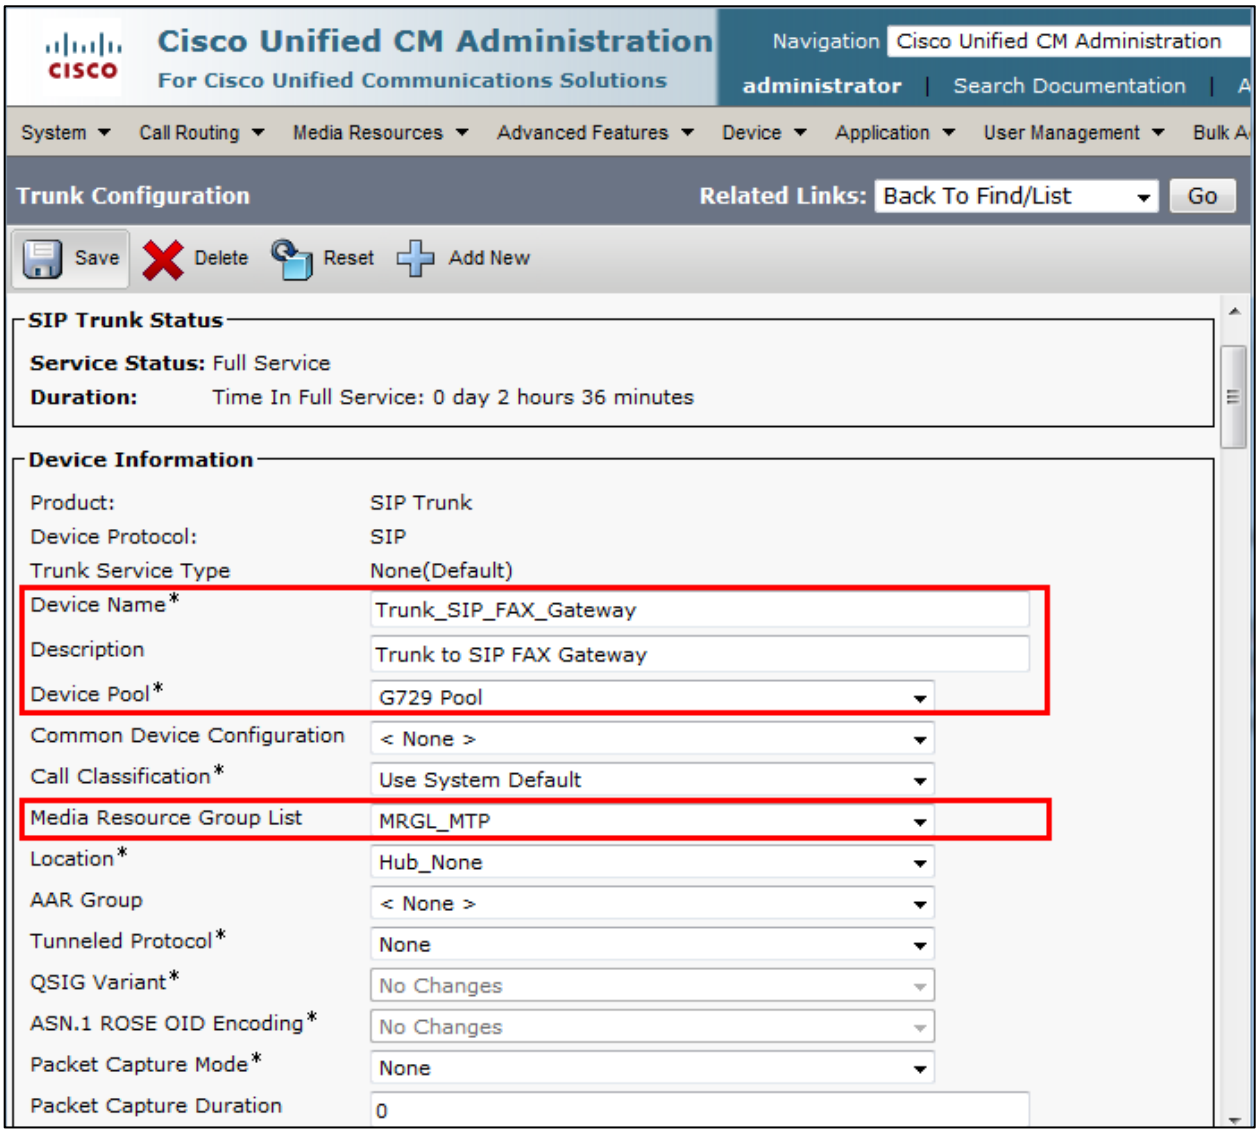

SIP Trunk to Fax Gateway Configuration (Continued…)

Media Termination Point Required

Retry Video Call as Audio

Path Replacement Support

Transmit UTF-8 for Calling Party Name

Transmit UTF-8 Names in QSIG APDU

Unattended Port

SRTP Allowed - When this flag is checked, Encrypted TLS needs to be configured in the network to provide end to end security. Failure to do so will expose keys and other information.

Consider Traffic on This Trunk Secure* When using both sRTP and TLS

Route Class Signaling Enabled* Default

Use Trusted Relay Point* Default

PSTN Access

Run On All Active Unified CM Nodes

Intercompany Media Engine (IME)

E.164 Transformation Profile < None >

MLPP and Confidential Access Level Information

MLPP Domain < None >

Confidential Access Mode < None >

Confidential Access Level < None >

Call Routing Information

Remote-Party-Id

Asserted-Identity

Asserted-Type* Default

SIP Privacy* Default

Inbound Calls

Significant Digits* All

Connected Line ID Presentation* Default

Connected Name Presentation* Default

Calling Search Space < None >

AAR Calling Search Space < None >

Prefix DN

Redirecting Diversion Header Delivery - Inbound

SIP Trunk to Fax Gateway Configuration (Continued…)

Incoming Calling Party Settings

If the administrator sets the prefix to Default this indicates call processing will use prefix at the next level setting (DevicePool/Service Parameter). Otherwise, the value configured is used as the prefix unless the field is empty in which case there is no prefix assigned.

Clear Prefix Settings | Default Prefix Settings

Number Type	Prefix	Strip Digits	Calling Search Space	Use Device Pool CSS
Incoming Number	Default	0	< None >	☑

Incoming Called Party Settings

If the administrator sets the prefix to Default this indicates call processing will use prefix at the next level setting (DevicePool/Service Parameter). Otherwise, the value configured is used as the prefix unless the field is empty in which case there is no prefix assigned.

Clear Prefix Settings | Default Prefix Settings

Number Type	Prefix	Strip Digits	Calling Search Space	Use Device Pool CSS
Incoming Number	Default	0	< None >	☐

Connected Party Settings

Connected Party Transformation CSS < None >

☑ Use Device Pool Connected Party Transformation CSS

Outbound Calls

Called Party Transformation CSS: < None >

☑ Use Device Pool Called Party Transformation CSS

Calling Party Transformation CSS: < None >

☑ Use Device Pool Calling Party Transformation CSS

Calling Party Selection*: Originator

Calling Line ID Presentation*: Default

Calling Name Presentation*: Default

Calling and Connected Party Info Format*: Deliver DN only in connected party

☐ Redirecting Diversion Header Delivery - Outbound

Redirecting Party Transformation CSS: < None >

☑ Use Device Pool Redirecting Party Transformation CSS

Caller Information

Caller ID DN

Caller Name

☐ Maintain Original Caller ID DN and Caller Name in Identity Headers

SIP Trunk to Fax Gateway Configuration (Continued…)

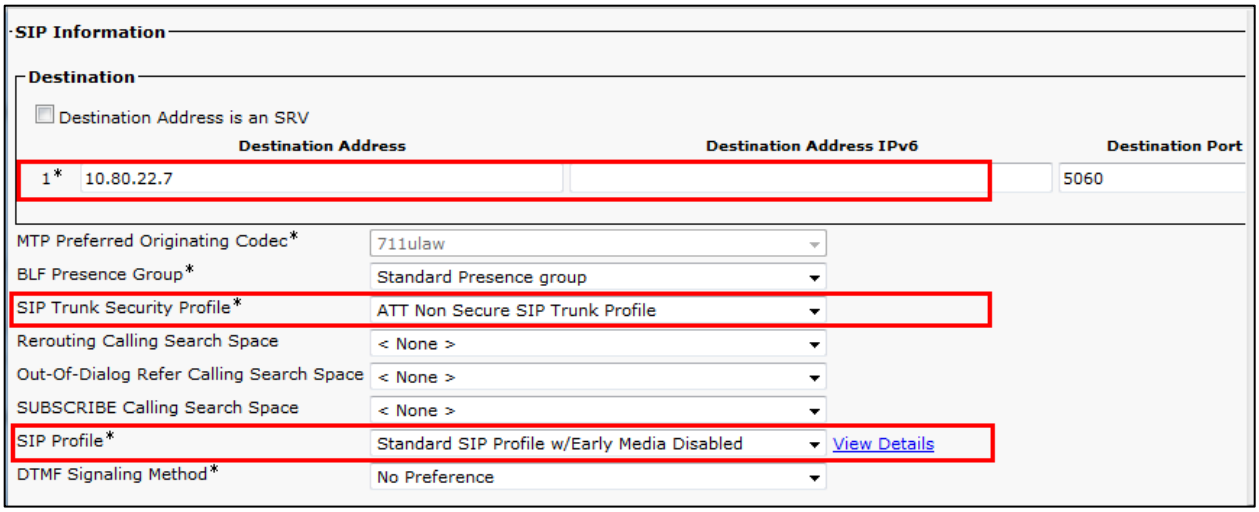

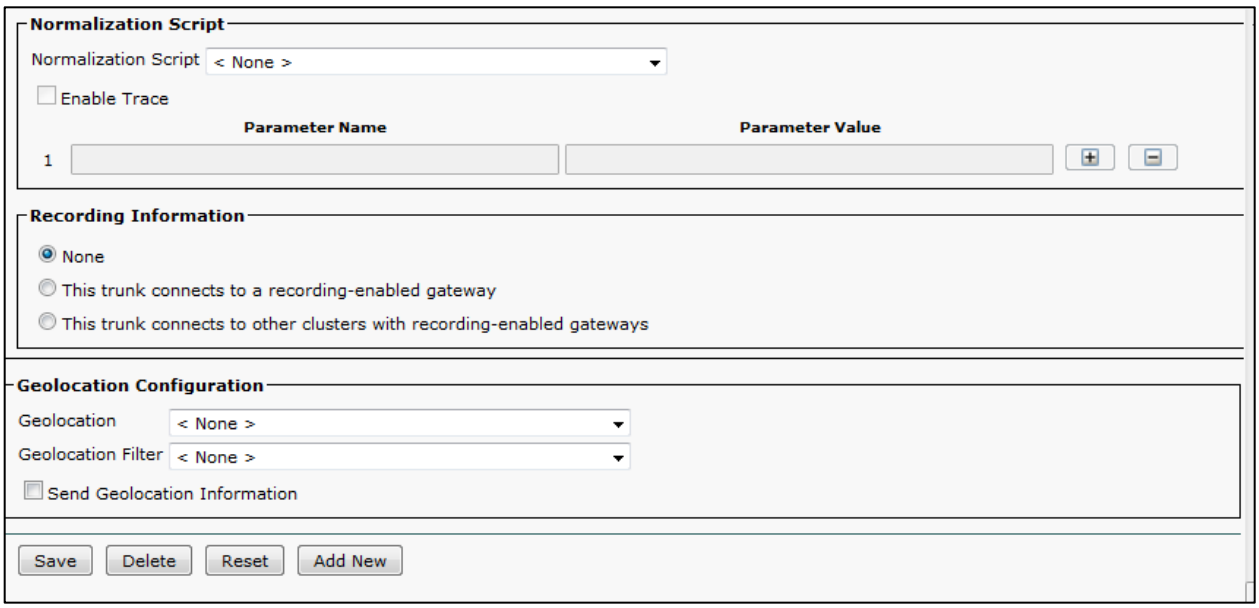

Route Pattern Configuration

Navigation: Call Routing → Route/Hunt → Route Pattern

Set Route Pattern* = 9. @ This is used to route to AT&T via ISR Cisco UBE.
Set Description = To PSTN via ATT SIP Trunk. This text is used to identify this Route Pattern.
Set Gateway/Route List* = ATT_SIP_TRUNK. This is used for this example.
All other values are default

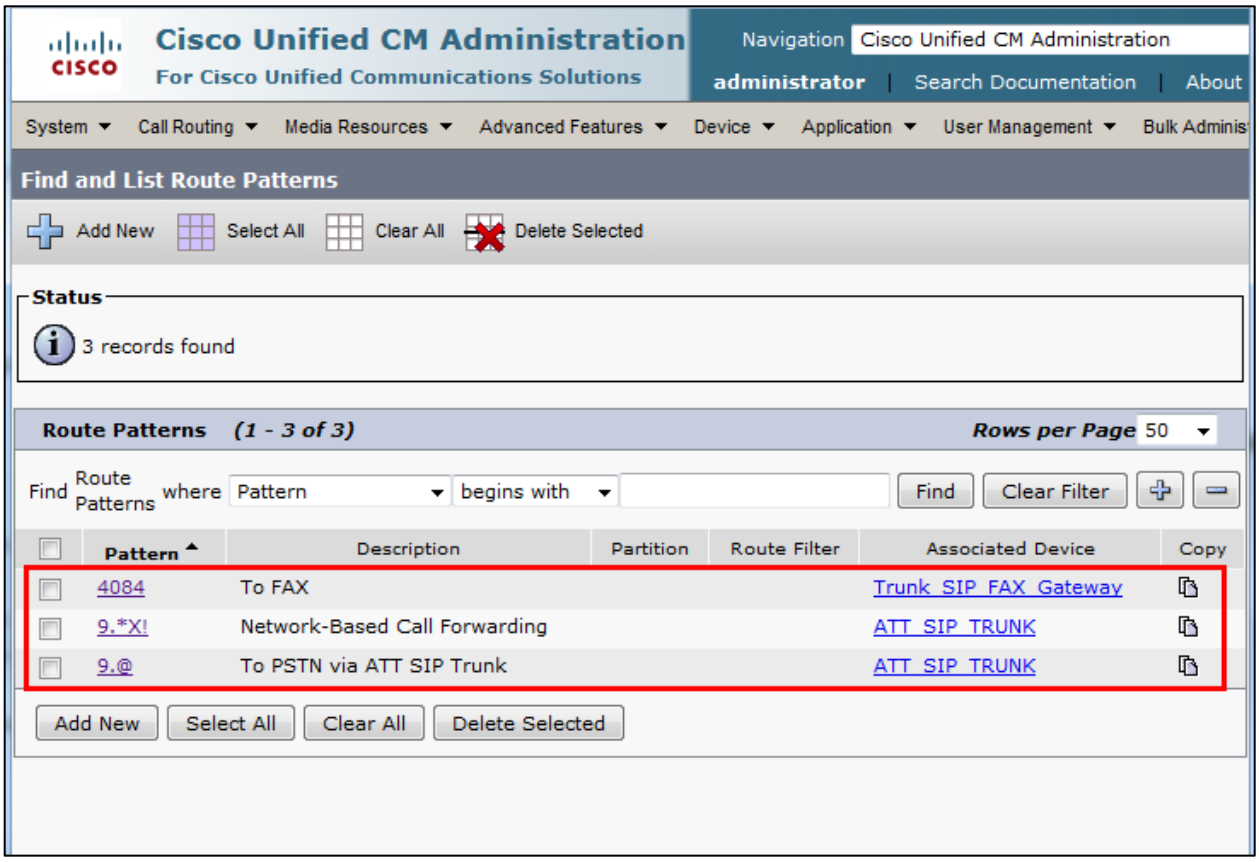

Route Pattern Configuration (Continued…)

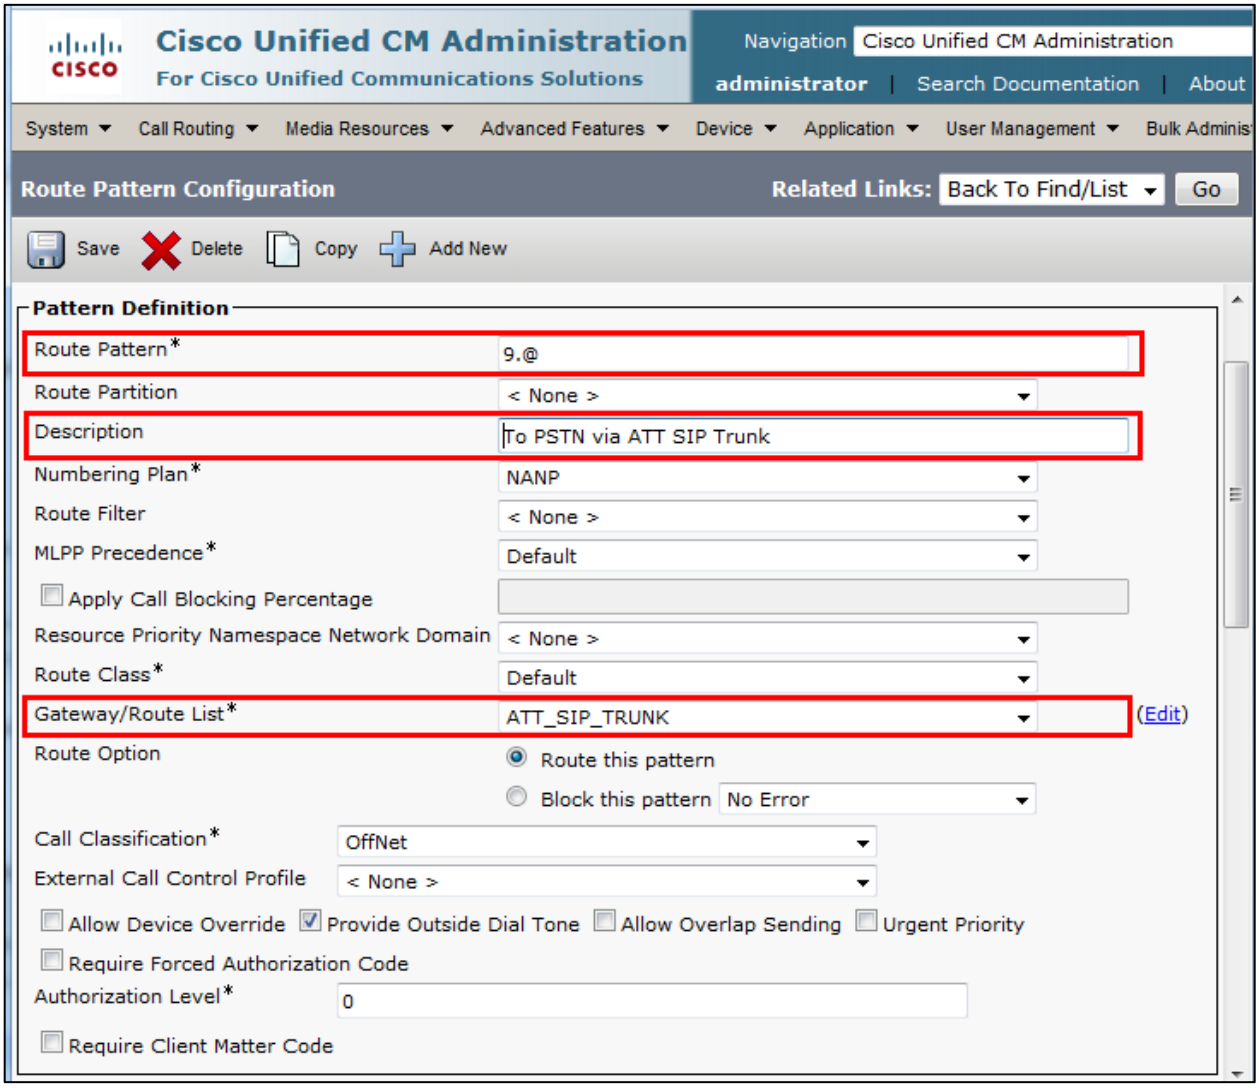

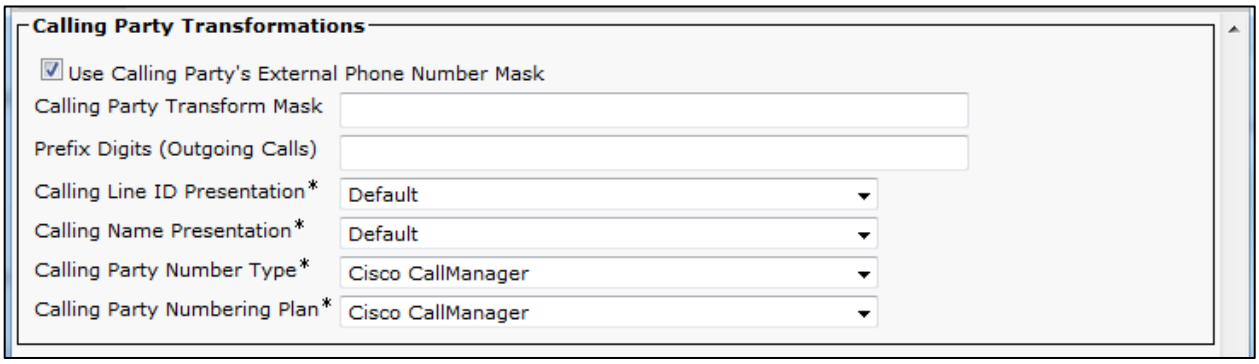

Route Pattern Configuration (Continued…)

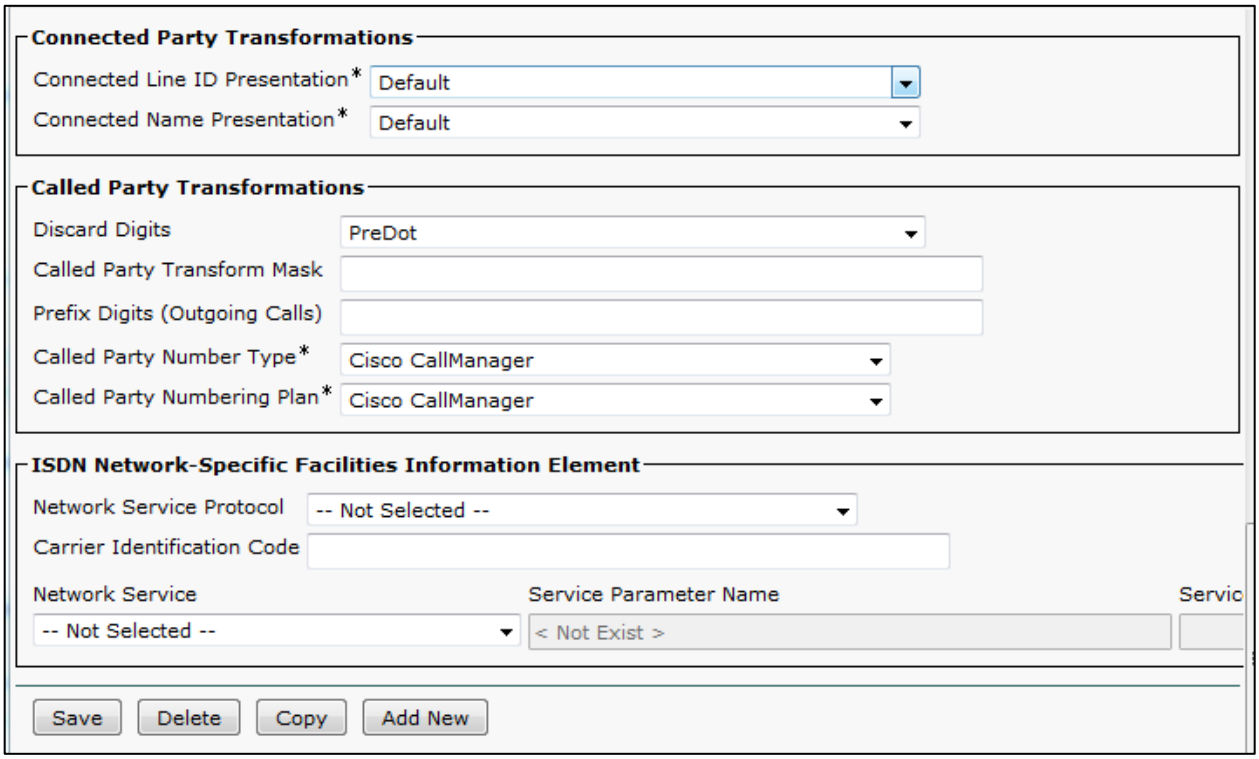

Route Pattern Configuration (Continued…)

Set Route Pattern* = 9.*X! This is used to route to AT&T via ISR Cisco UBE.
Set Description = Network-Based Call Forwarding. This text is used to identify this Route Pattern.
Set Gateway/Route List* = ATT_SIP_TRUNK. This is used for this example.
All other values are default

Note: This Route pattern is used to Activate/De-activate Network Based Call Forwarding Features.

Pattern Definition

Route Pattern*	9.*X!
Route Partition	< None >
Description	Network-Based Call Forwarding
Numbering Plan	-- Not Selected --
Route Filter	< None >
MLPP Precedence*	Default
Apply Call Blocking Percentage	
Resource Priority Namespace Network Domain	< None >
Route Class*	Default
Gateway/Route List*	ATT_SIP_TRUNK (Edit)
Route Option	Route this pattern / Block this pattern No Error
Call Classification*	OffNet
External Call Control Profile	< None >

Allow Device Override ☑ Provide Outside Dial Tone ☐ Allow Overlap Sending ☐ Urgent Priority

Require Forced Authorization Code

Authorization Level* 0

Require Client Matter Code

Calling Party Transformations

☑ Use Calling Party's External Phone Number Mask

Calling Party Transform Mask	
Prefix Digits (Outgoing Calls)	
Calling Line ID Presentation*	Default
Calling Name Presentation*	Default
Calling Party Number Type*	Cisco CallManager
Calling Party Numbering Plan*	Cisco CallManager

Route Pattern Configuration (Continued…)

Connected Party Transformations

Connected Line ID Presentation*	Default
Connected Name Presentation*	Default

Called Party Transformations

Discard Digits	PreDot
Called Party Transform Mask	
Prefix Digits (Outgoing Calls)	
Called Party Number Type*	Cisco CallManager
Called Party Numbering Plan*	Cisco CallManager

ISDN Network-Specific Facilities Information Element

Network Service Protocol	-- Not Selected --
Carrier Identification Code	

Network Service	Service Parameter Name	Servic
-- Not Selected --	< Not Exist >	

Save Delete Copy Add New

Route Pattern Configuration (Continued…)

Set Route Pattern* = 4084 this is used to route to Fax Client via Fax Gateway.
Set Description = To FAX. This text is used to identify this Route Pattern.
Set Gateway/Route List* = Trunk_SIP_FAX_Gateway. This is used for this example.
All other values are default

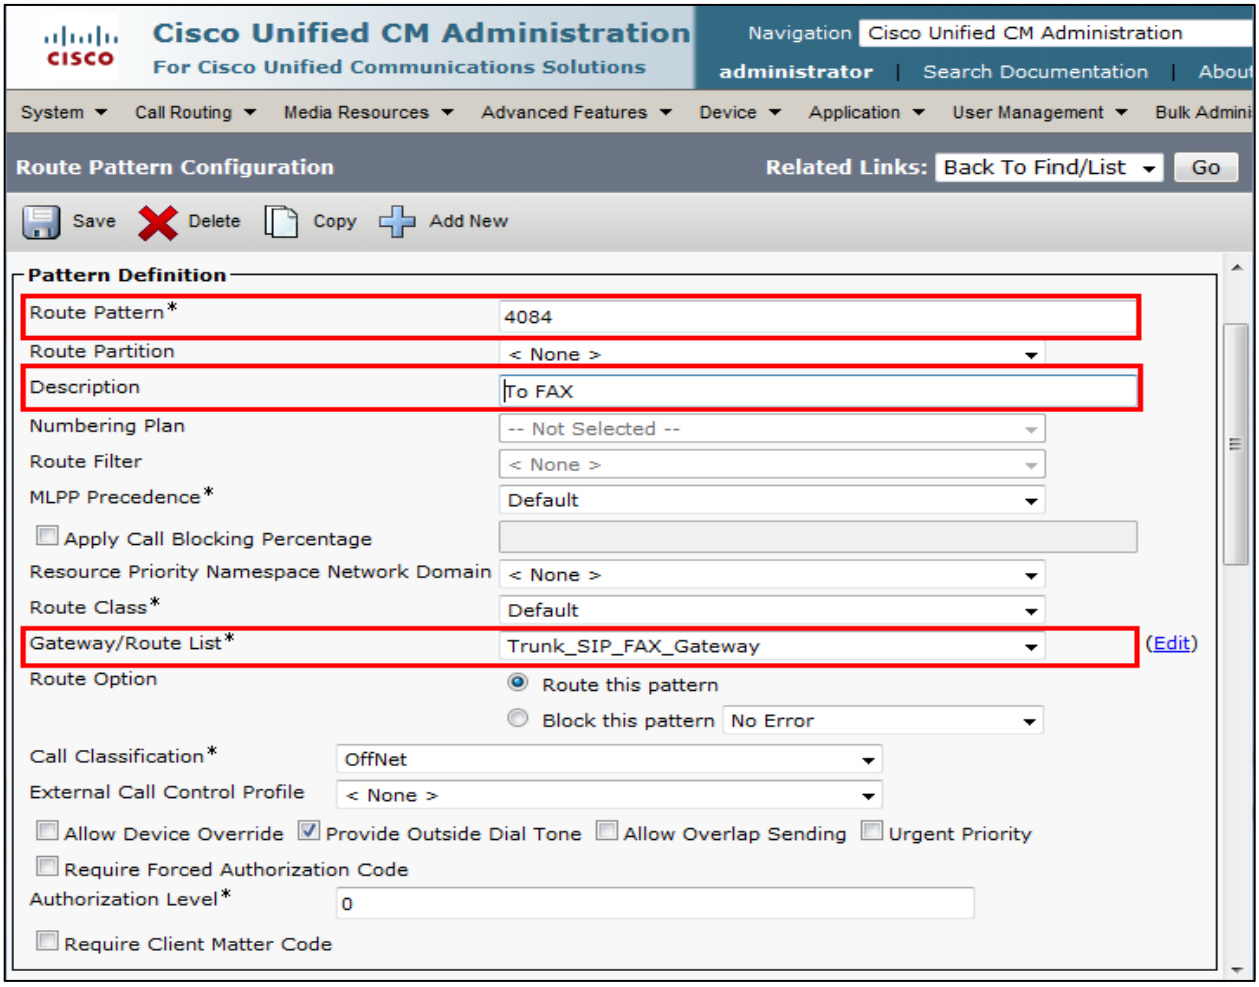

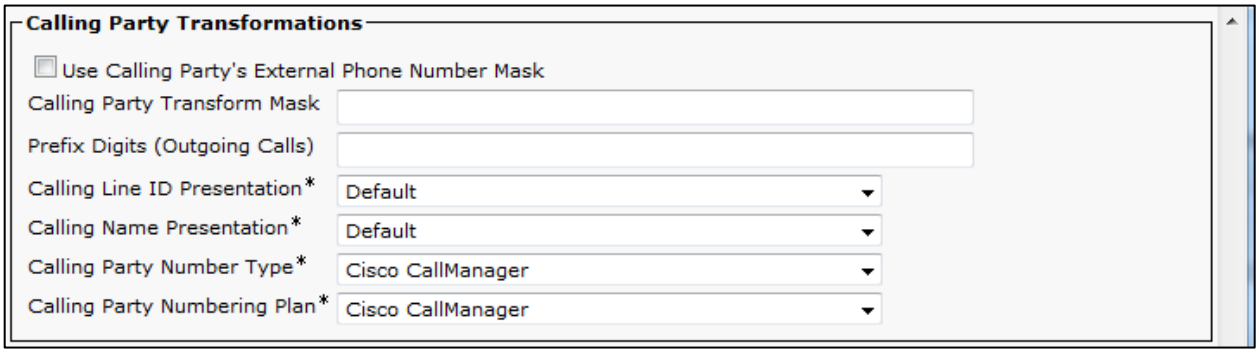

Route Pattern Configuration (Continued…)

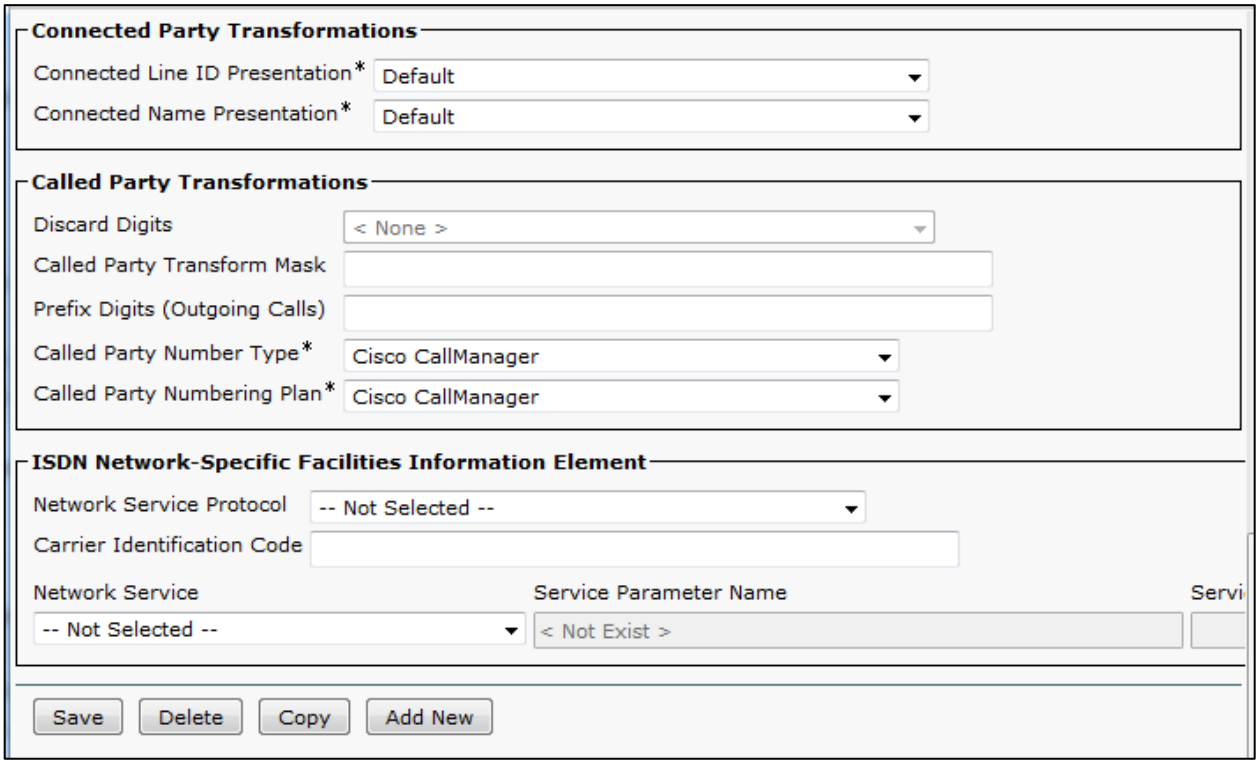

Jabber Client Configuration

Navigation: Device → Phone

Select Phone Type* = Cisco Unified Client services framework
Set Device Name* = CSFUser1. This is used in this example.
Set Description = CSFUser1. This is used in this example.
Select Device Pool = G729 Pool. This is used in this example.
Select Phone Button Template* = Standard Client Services Framework.

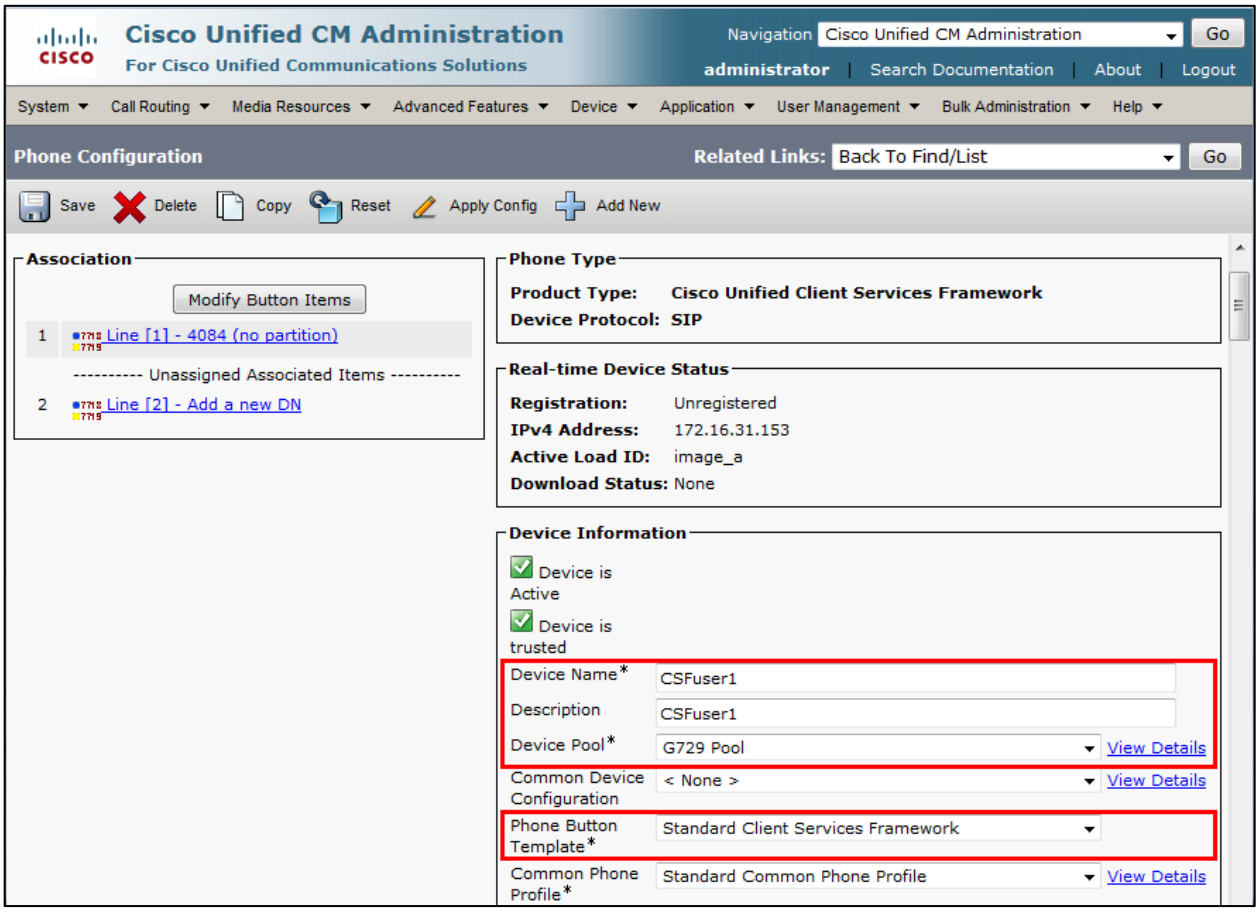

Jabber Client Configuration (Contd…)

Media Resource Group List = MRGL_MTP
Set Owner check box
Set Owner user ID* = jabber1. This is used for this example

Calling Search Space	< None >
AAR Calling Search Space	< None >
Media Resource Group List	MRGL_MTP
User Hold MOH Audio Source	1-SampleAudioSource
Network Hold MOH Audio Source	1-SampleAudioSource
Location*	Hub_None
AAR Group	< None >
User Locale	< None >
Network Locale	< None >
Built In Bridge*	Default
Device Mobility Mode*	Default View Current Device Mobility Settings
Owner	User / Anonymous (Public/Shared Space)
Owner User ID*	jabber1
Mobility User ID	< None >
Primary Phone	< None >
Use Trusted Relay Point*	Default

Always Use Prime Line*	Default
Always Use Prime Line for Voice Message*	Default
Geolocation	< None >

- [ ] Ignore Presentation Indicators (internal calls only)
- [x] Allow Control of Device from CTI
- [x] Logged Into Hunt Group
- [ ] Remote Device
- [ ] Require off-premise location

Jabber Client Configuration (Contd…)

Number Presentation Transformation

Caller ID For Calls From This Phone

Calling Party Transformation CSS: < None >

☑ Use Device Pool Calling Party Transformation CSS (Caller ID For Calls From This Phone)

Remote Number

Calling Party Transformation CSS: < None >

☑ Use Device Pool Calling Party Transformation CSS (Device Mobility Related Information)

Protocol Specific Information

Packet Capture Mode*	None
Packet Capture Duration	0
BLF Presence Group*	Standard Presence group
SIP Dial Rules	< None >
MTP Preferred Originating Codec*	711ulaw
Device Security Profile*	Cisco Unified Client Services Framework - Standarc
Rerouting Calling Search Space	< None >
SUBSCRIBE Calling Search Space	< None >
SIP Profile*	Standard SIP Profile w/Early Media Disabled View Details
Digest User	< None >

☐ Media Termination Point Required

☐ Unattended Port

☐ Require DTMF Reception

Jabber Client Configuration (Contd…)

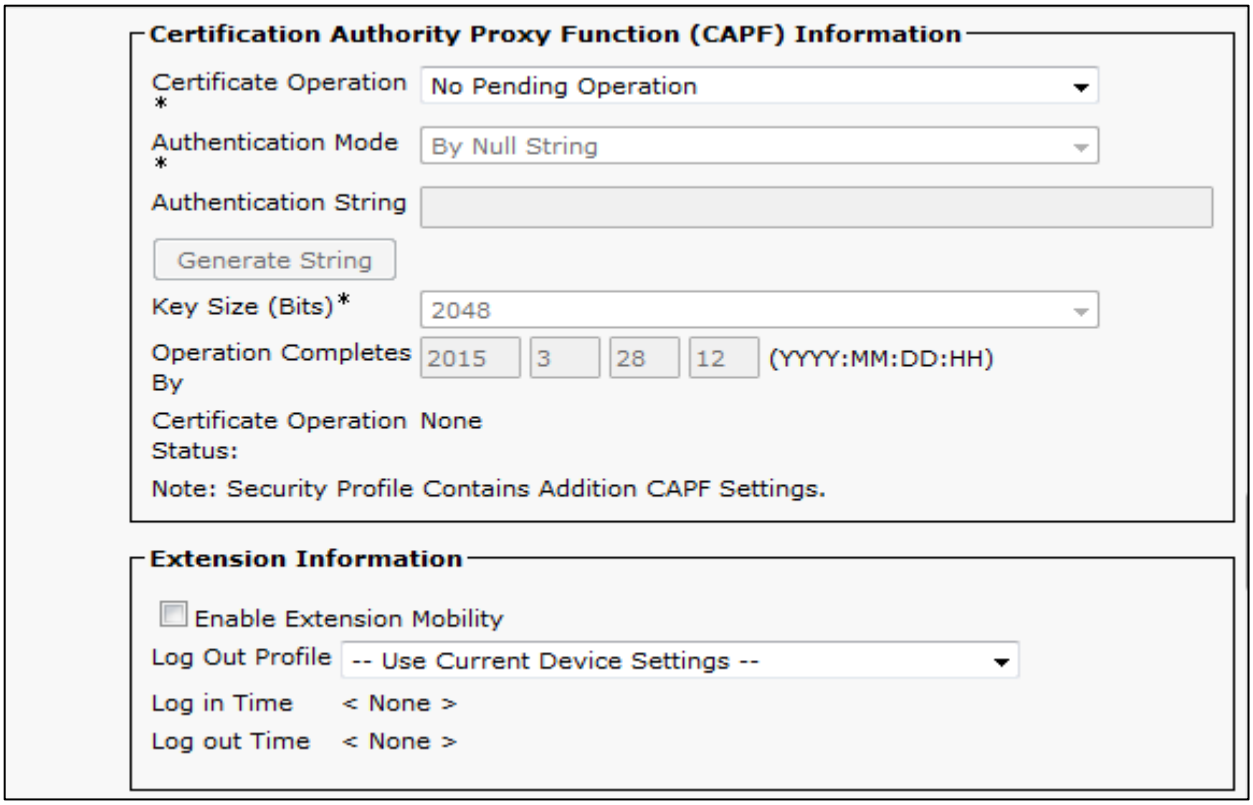

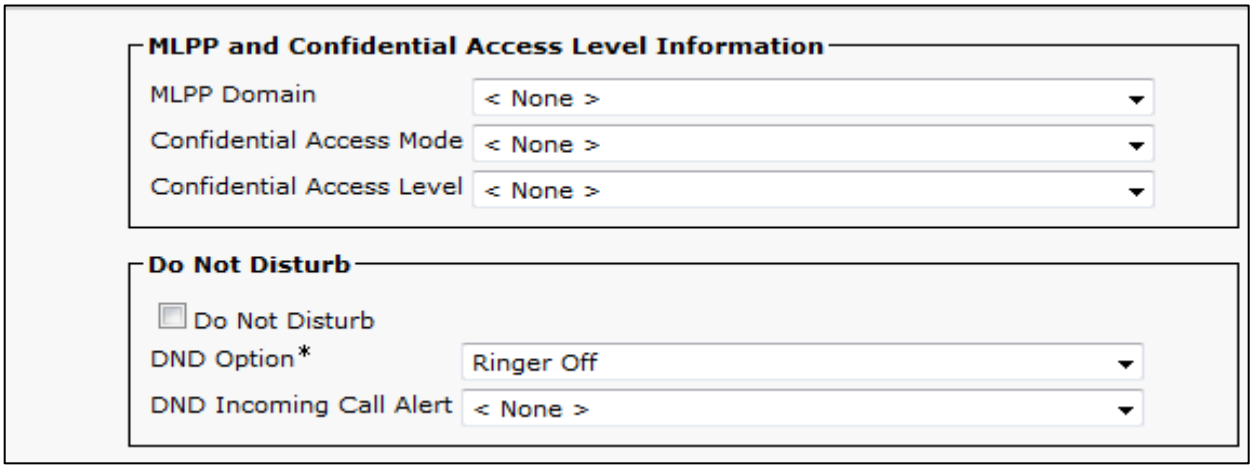

Jabber Client Configuration (Contd…)

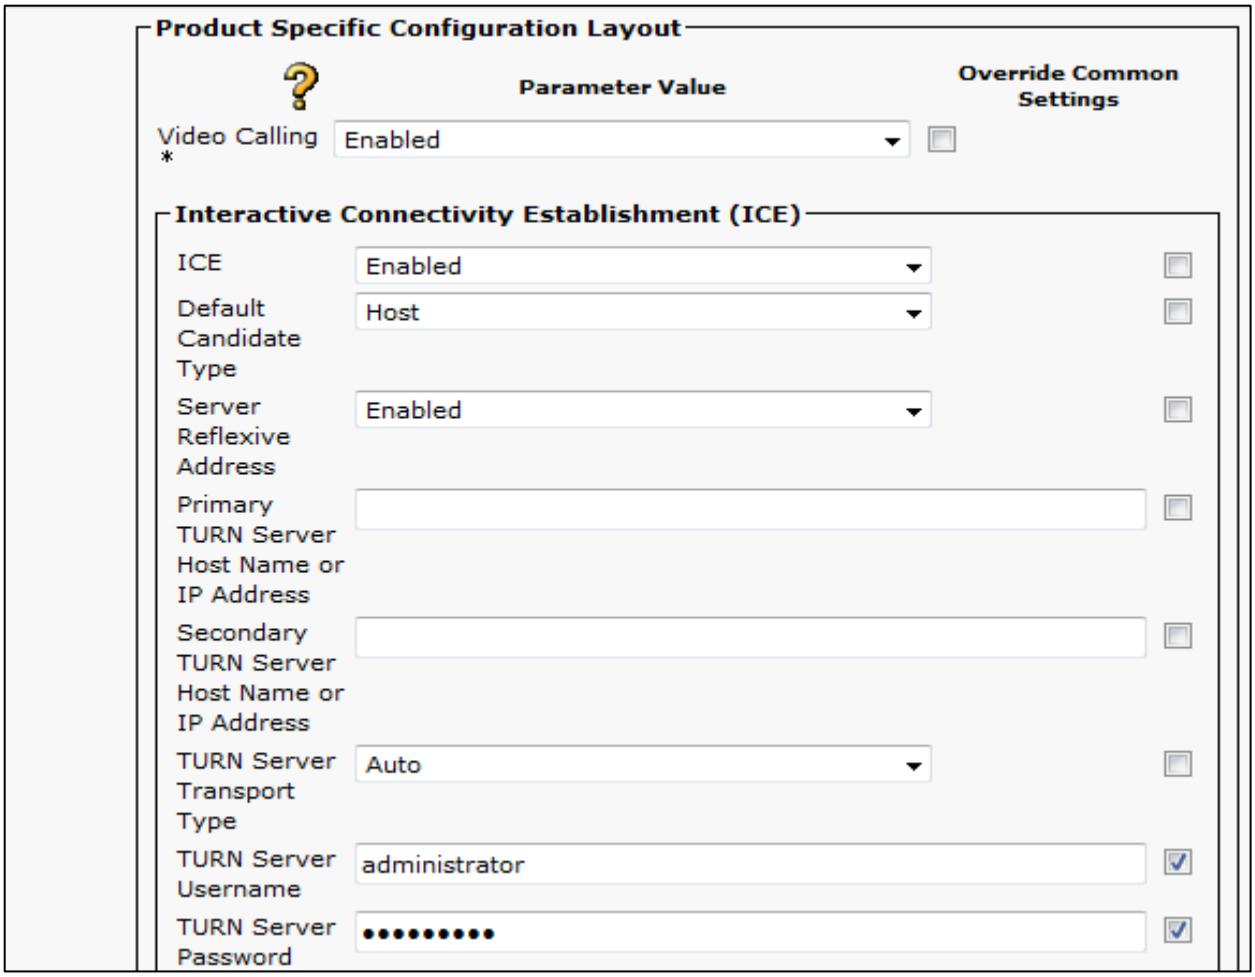

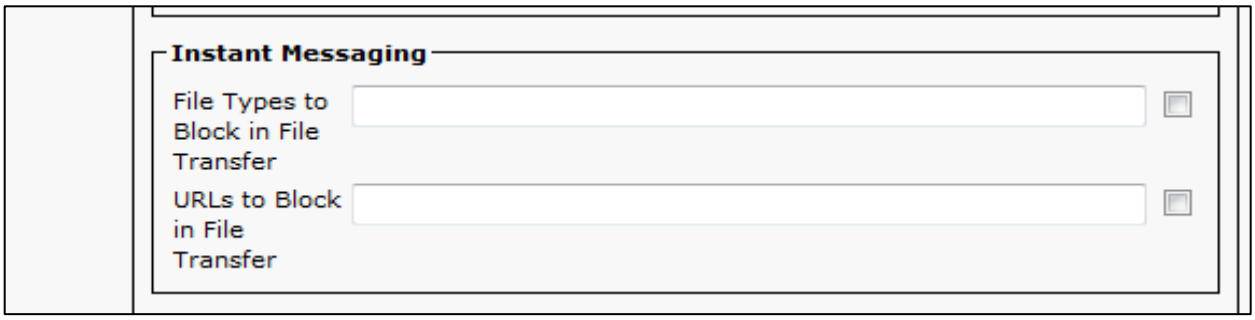

Jabber Client Configuration (Contd…)

Desktop Client Settings

Automatically Start in Phone Control*	Disabled	☐
Automatically Control Tethered Desk Phone*	Disabled	☐
Extend and Connect Capability*	Enabled	☐
Display Contact Photos*	Enabled	☐
Number Lookups on Directory*	Enabled	☐
Jabber For Windows Software Update Server URL	user1@lab.tekvizion.com	☑
Problem Report Server URL		☐
Analytics Collection*	Disabled	☐
Analytics Server URL		☐
Cisco Support Field		☐

Save | Delete | Copy | Reset | Apply Config | Add New

Voicemail Port Configuration

Navigation: Advanced Feature→ Voice Mail → Cisco Voice Mail Port

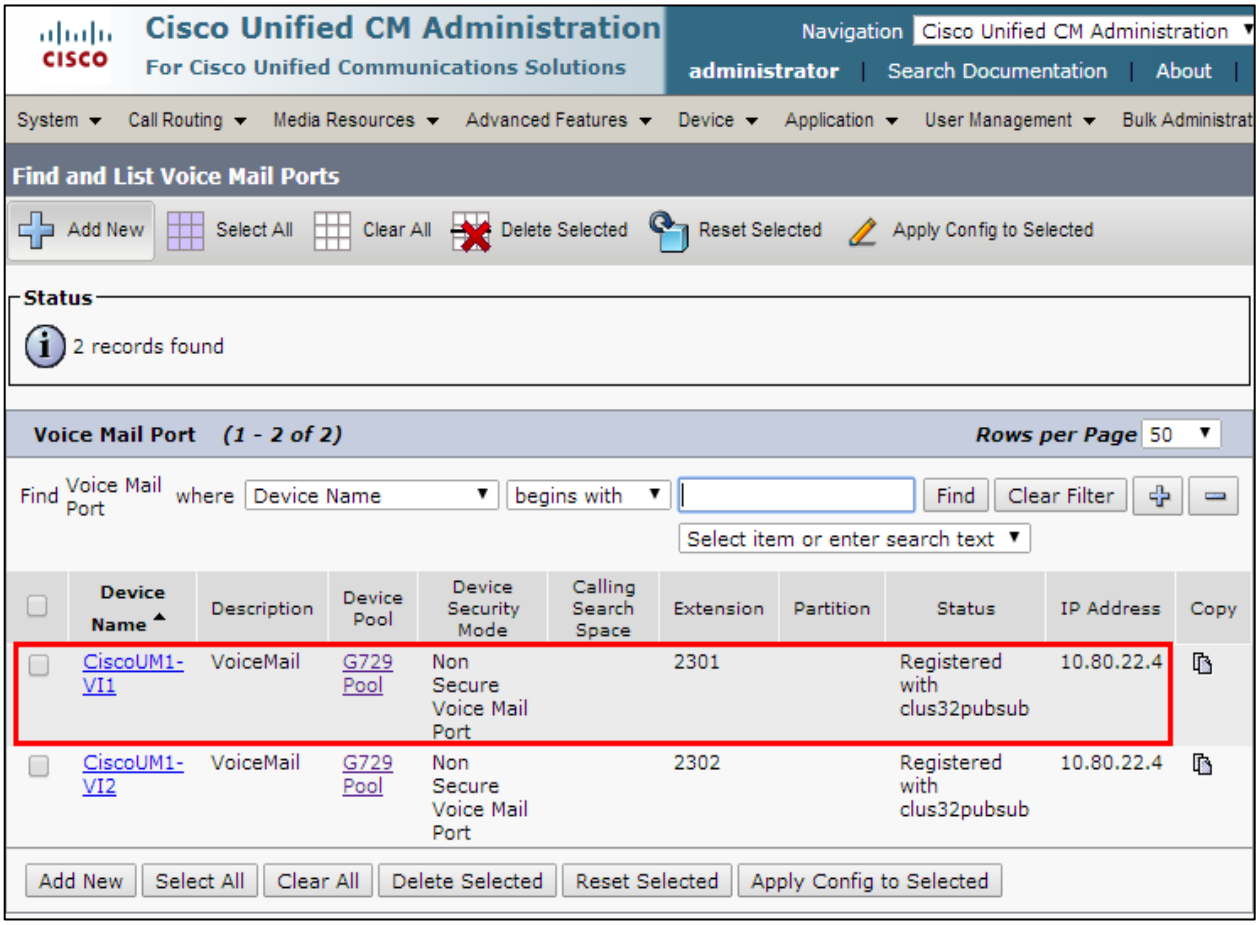

Voicemail Port Configuration (Continued…)

Set Port Name = CiscoUM1-VI1. This is used for this example.
Set Description = VoiceMail. This is used for this example.
Set Device Pool = G729 Pool
Set Directory Number* = 2301. This is used in this example.

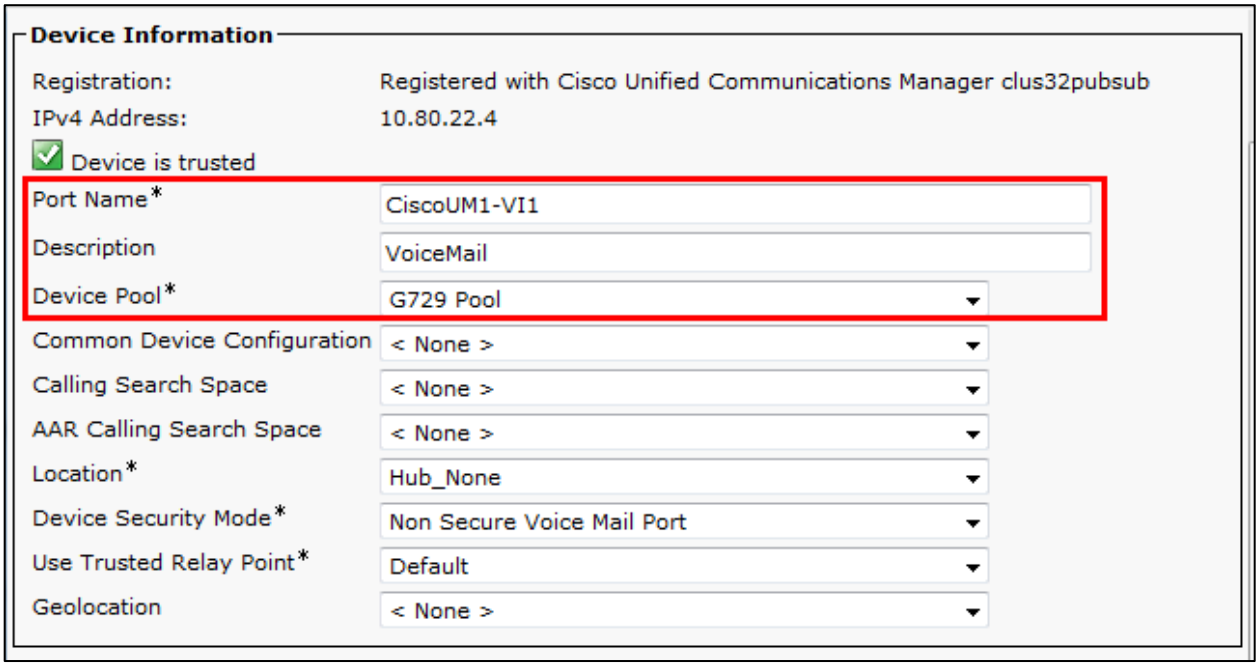

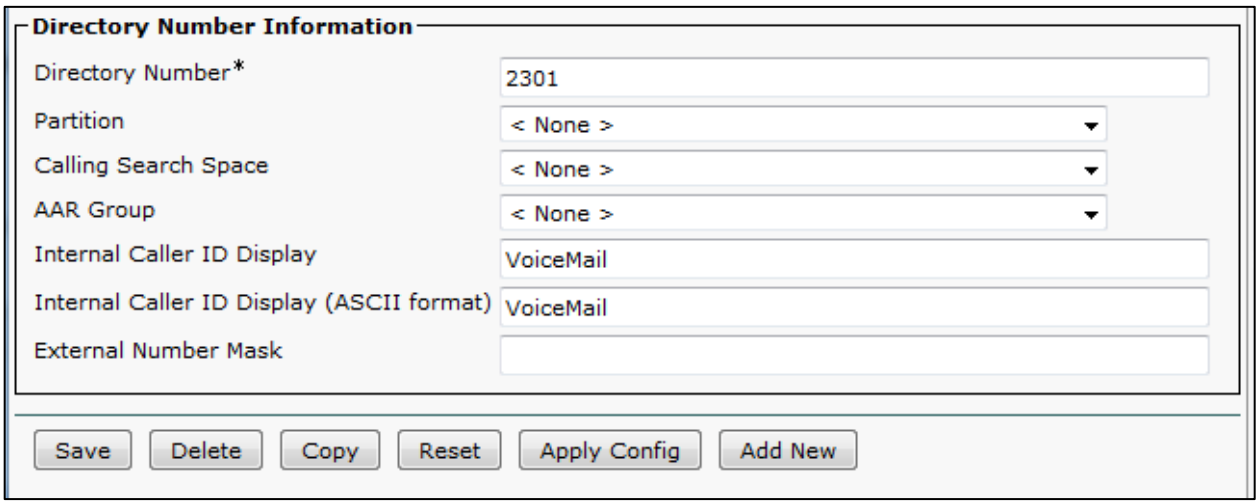

Message Waiting Numbers Configurations

Navigation: Advanced Features → Voice Mail→Message Waiting

Set Message Waiting Number* = 2298
Set Message Waiting Indicator* = On
Set Message Waiting Number* = 2399
Set Message Waiting Indicator* = Off

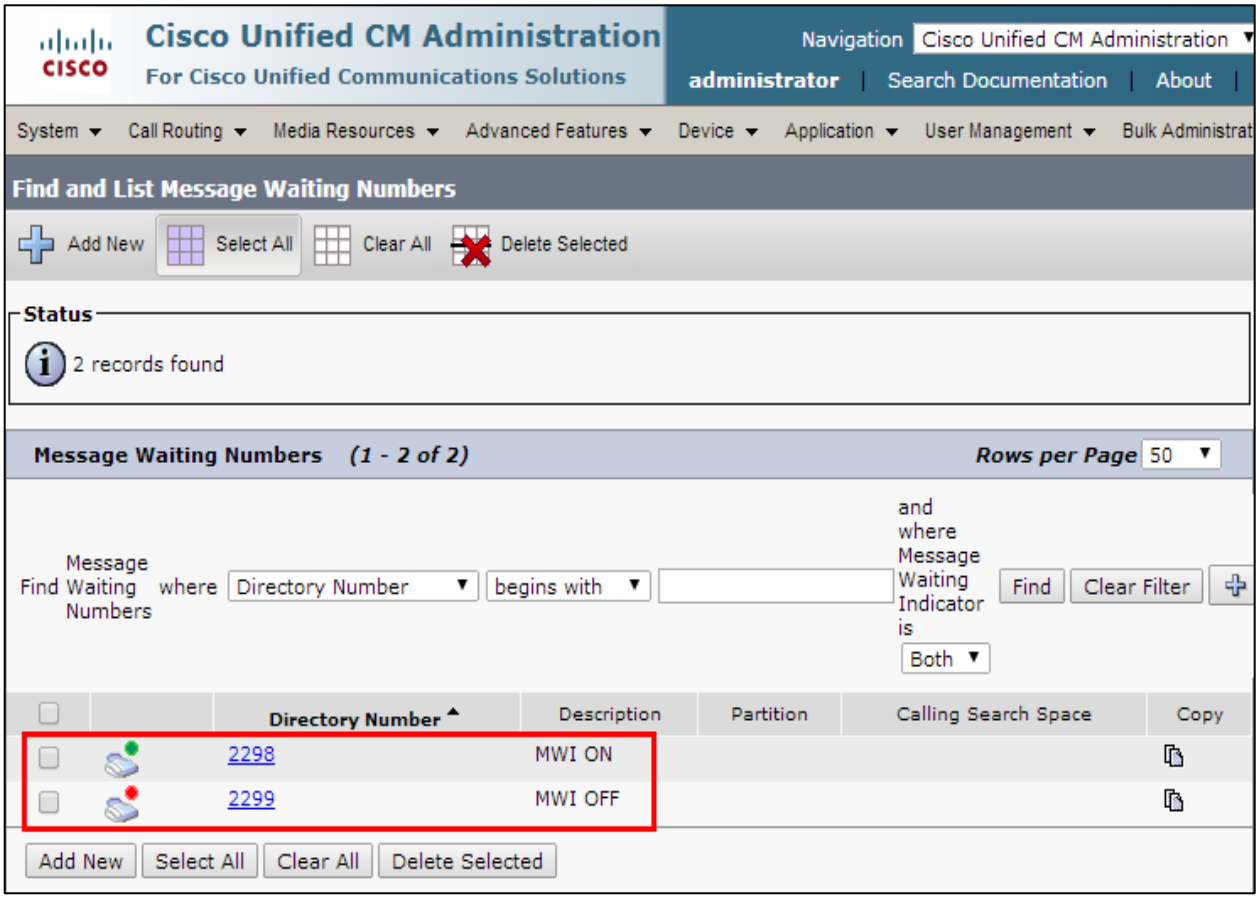

Voicemail Pilot Configuration

Navigation: Advanced Features → Voice Mail → Voice Mail Pilot

Set Voice mail Pilot Number = 2300. This is used for this example
Set Description = VoiceMail Pilot-Default

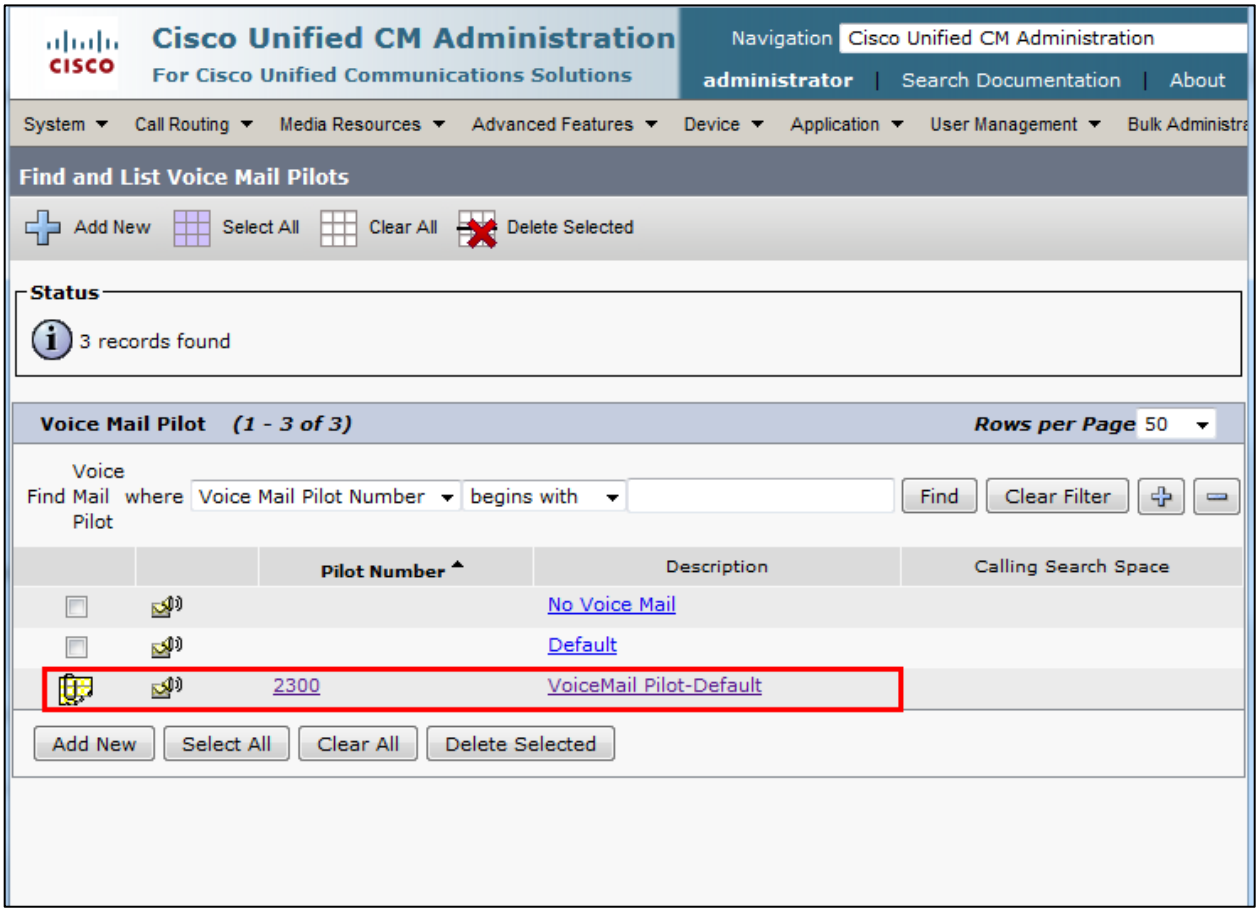

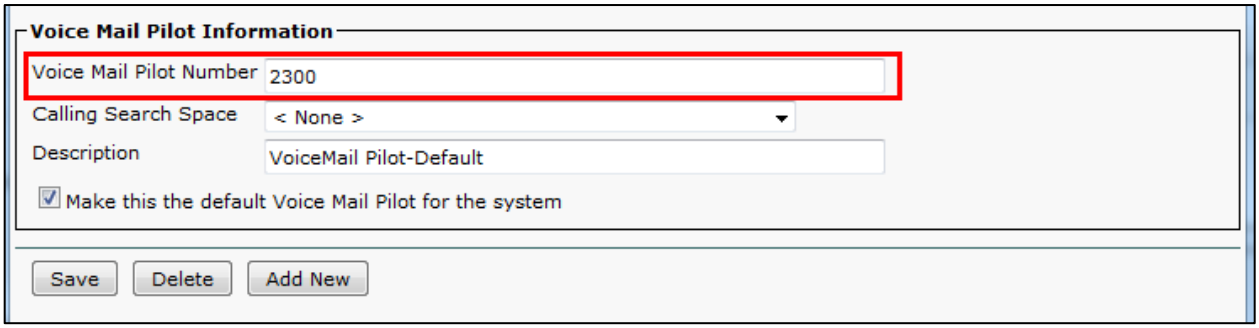

FAX Gateway Configuration

FAX-GATEWAY2#**sh version**

Cisco IOS Software, C2900 Software (C2900-UNIVERSALK9-M), Version 15.4(3)M1, RELEASE SOFTWARE (fc1)

Technical Support: http://www.cisco.com/techsupport

Copyright (c) 1986-2014 by Cisco Systems, Inc.

Compiled Sat 25-Oct-14 03:34 by prod_rel_team

ROM: System Bootstrap, Version 15.0(1r)M16, RELEASE SOFTWARE (fc1)

FAX-GATEWAY2 uptime is 1 week, 16 hours, 39 minutes

System returned to ROM by reload at 14:38:17 UTC Tue Mar 10 2015

System image file is "flash0:c2900-universalk9-mz.SPA.154-3.M1.bin"

Last reload type: Normal Reload

Last reload reason: Reload Command

This product contains cryptographic features and is subject to United

States and local country laws governing import, export, transfer and

use. Delivery of Cisco cryptographic products does not imply

third-party authority to import, export, distribute or use encryption.

Importers, exporters, distributors and users are responsible for

compliance with U.S. and local country laws. By using this product you

agree to comply with applicable laws and regulations. If you are unable

to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:

http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to

export@cisco.com.

Cisco CISCO2901/K9 (revision 1.0) with 483328K/40960K bytes of memory.

Processor board ID FTX174081SJ

2 Gigabit Ethernet interfaces

1 terminal line

2 Voice FXS interfaces

DRAM configuration is 64 bits wide with parity enabled.

255K bytes of non-volatile configuration memory.

250880K bytes of ATA System CompactFlash 0 (Read/Write)

License Info:

License UDI:

Device# PID SN

```
*1          CISCO2901/K9        FTX174081SJ



Technology Package License Information for Module:'c2900'

-----------------------------------------------------------------------
Technology    Technology-package              Technology-package
           Current          Type         Next reboot
-----------------------------------------------------------------------
ipbase       ipbasek9          Permanent     ipbasek9
security     None              None          None
uc           uck9              Permanent     uck9
data         None              None          None
NtwkEss      None              None          None
CollabPro    None              None          None

Configuration register is 0x2102



FAX-GATEWAY2#sh run
Building configuration...
```

```
Current configuration : 7131 bytes
!
! Last configuration change at 14:41:28 UTC Wed Mar 25 2015 by cisco
!
version 15.4
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
!
hostname FAX-GATEWAY2
!
boot-start-marker
boot-end-marker
!
aqm-register-fnf
!
logging queue-limit 1000000000
logging buffered 10000000
logging rate-limit 10000
no logging console
no logging monitor
enable secret 4 iR3uUX3Bo6oYbT6ajhFwJe39FR4g.1QCmm7yYduKGZI
!
no aaa new-model
!
```

```
!
!
!
!
!
!
!
!
!
!
!
!
!
ip domain name lab.tekvizion.com
ip name-server 10.64.1.3
ip cef
no ipv6 cef
multilink bundle-name authenticated
!
!
!
!
stcapp feature access-code
!
stcapp feature speed-dial
!
```

```
!
!
!
!
cts logging verbose
!
crypto pki trustpoint TP-self-signed-2189441908
 enrollment selfsigned
 subject-name cn=IOS-Self-Signed-Certificate-2189441908
 revocation-check none
 rsakeypair TP-self-signed-2189441908
!
!
crypto pki certificate chain TP-self-signed-2189441908
 certificate self-signed 01
  3082022B 30820194 A0030201 02020101 300D0609 2A864886 F70D0101 05050030
  31312F30 2D060355 04031326 494F532D 53656C66 2D536967 6E65642D 43657274
  69666963 6174652D 32313839 34343139 3038301E 170D3133 31303031 32303234
  30325A17 0D323030 31303130 30303030 305A3031 312F302D 06035504 03132649
  4F532D53 656C662D 5369676E 65642D43 65727469 66696361 74652D32 31383934
  34313930 3830819F 300D0609 2A864886 F70D0101 01050003 818D0030 81890281
  810092C7 1982BC36 792DA64E 8FB4D8BC 1DDD4D7A 0882107F B14FCB24 699A35A9
  D521C88A 5B43F4FC D394E945 81A1380A 2E753478 93190ADE 75AA8971 883E9214
  C607CCDF 6FCCDE9C E95CE01A AEE4FCBE 3E91A43C D11C638F FC3E4ED2 57569523
  70A8D7C6 EFAD6688 C6244C79 5B955391 BF75EE61 DC4D0ADE 8D897AE2 CE76A938
  983F0203 010001A3 53305130 0F060355 1D130101 FF040530 030101FF 301F0603
```

```
 551D2304 18301680 14279B59 09E3EB37 0AE0DCE0 F8075BB6 DF93858A 45301D06
 03551D0E 04160414 279B5909 E3EB370A E0DCE0F8 075BB6DF 93858A45 300D0609
 2A864886 F70D0101 05050003 8181006E CF10B11F 9D8B59A9 AEACDEB8 26649CBB
 0F6C9690 12EAEB70 4BF5703D 98D2665A CD1B27D2 9B29351D 3ADF0B97 3C41F59A
 0DD82FF8 66CE4689 2D089FE8 EF3FFE54 5C85608C EE45908F D1160BDE A9185D58
 D3DA8795 428A7CE7 B9522F7C 60796800 485EDA2F B6C86F7A DF66B562 74942705
 C81F1883 7D4E29FC 8E999F7E EAE070
        quit
voice-card 0
 dsp services dspfarm
!
!
!
voice service voip
 allow-connections sip to sip
 no supplementary-service sip handle-replaces
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 sip
  g729 annexb-all
!
voice class codec 1
 codec preference 1 g729r8
 codec preference 2 g711ulaw
!
voice class codec 2
 codec preference 1 g711ulaw
```

```
 codec preference 2 g729r8
!
voice class sip-profiles 1
 response ANY sip-header Allow-Header modify "UPDATE," ""
 request ANY sip-header Allow-Header modify "UPDATE," ""
 response ANY sip-header Allow-Header modify "UPDATE," ""
 response ANY sip-header Allow-Header modify "UPDATE," ""
!
!
!
!
!
!
!
!
license udi pid CISCO2901/K9 sn FTX174081SJ
hw-module pvdm 0/0
!
!
!
username cisco privilege 15 secret 4 tnhtc92DXBhelxjYk8LWJrPV36S2i4ntXrpb4RFmfqY
!
redundancy
!
!
!
```

```
!
!
!
interface Embedded-Service-Engine0/0
 no ip address
 shutdown
!
interface GigabitEthernet0/0
 ip address 10.80.22.7 255.255.255.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 no ip address
 shutdown
 duplex auto
 speed auto
!
ip forward-protocol nd
!
ip http server
ip http authentication local
ip http secure-server
ip http timeout-policy idle 60 life 86400 requests 10000
!
ip route 0.0.0.0 0.0.0.0 10.80.22.1
```

```
ip route 10.64.0.0 255.255.0.0 10.80.22.1
ip route 10.80.0.0 255.255.0.0 10.80.22.1
ip route 172.16.0.0 255.255.0.0 10.80.22.1
!
!
!
!
control-plane
!
!
voice-port 0/0/0
 no vad
 shutdown
!
voice-port 0/0/1
 no echo-cancel enable
 no vad
 station-id name fax test
 station-id number 7323204084
 caller-id enable
 !
 !
 !
 !
!
no mgcp timer receive-rtcp
```

```
mgcp behavior rsip-range tgcp-only
mgcp behavior comedia-role none
mgcp behavior comedia-check-media-src disable
mgcp behavior comedia-sdp-force disable
!
mgcp profile default
!
!
ccm-manager music-on-hold
!
no ccm-manager fax protocol cisco
!
dial-peer voice 110 pots
 service session
 destination-pattern 4084
 port 0/0/1
!
dial-peer voice 200 voip
 description CUCM to Gateway
 service session
 session protocol sipv2
 session transport udp
 incoming called-number 4084
 voice-class codec 1
 voice-class sip profiles 1
 dtmf-relay rtp-nte
```

```
 fax rate 14400
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
!
dial-peer voice 201 voip
 description Gateway to CUCM
 service session
 destination-pattern [2-9]T
 session protocol sipv2
 session target ipv4:10.80.22.2
 session transport udp
 voice-class codec 1
 voice-class sip profiles 1
 dtmf-relay rtp-nte
 fax rate 14400
 fax protocol t38 version 0 ls-redundancy 0 hs-redundancy 0 fallback none
 no vad
!
!
gateway
 timer receive-rtp 1200
!
!
!
gatekeeper
 shutdown
```

```
!
!
banner exec ^C
% Password expiration warning.
----------------------------------------------------------------------

Cisco Configuration Professional (Cisco CP) is installed on this device
and it provides the default username "cisco" for  one-time use. If you have
already used the username "cisco" to login to the router and your IOS image
supports the "one-time" user option, then this username has already expired.
You will not be able to login to the router with this username after you exit
this session.

It is strongly suggested that you create a new username with a privilege level
of 15 using the following command.

username <myuser> privilege 15 secret 0 <mypassword>

Replace <myuser> and <mypassword> with the username and password you want to
use.

----------------------------------------------------------------------
^C
banner login ^C
----------------------------------------------------------------------
Cisco Configuration Professional (Cisco CP) is installed on this device.
```

This feature requires the one-time use of the username "cisco" with the password "cisco". These default credentials have a privilege level of 15.

YOU MUST USE CISCO CP or the CISCO IOS CLI TO CHANGE THESE PUBLICLY-KNOWN CREDENTIALS

Here are the Cisco IOS commands.

```
username <myuser>  privilege 15 secret 0 <mypassword>
no username cisco
```

Replace <myuser> and <mypassword> with the username and password you want to use.

IF YOU DO NOT CHANGE THE PUBLICLY-KNOWN CREDENTIALS, YOU WILL NOT BE ABLE TO LOG INTO THE DEVICE AGAIN AFTER YOU HAVE LOGGED OFF.

For more information about Cisco CP please follow the instructions in the QUICK START GUIDE for your router or go to http://www.cisco.com/go/ciscocp

```
-----------------------------------------------------------------------
^C
!
line con 0
 login local
line aux 0
line 2
```

```
 no activation-character
 no exec
 transport preferred none
 transport output pad telnet rlogin lapb-ta mop udptn v120 ssh
 stopbits 1
line vty 0 4
 exec-timeout 0 0
 login local
 transport input telnet ssh
line vty 5 15
 login local
 transport input telnet ssh
!
scheduler allocate 20000 1000
!
end
```

Cisco UCM SCCP Integration with Cisco Unity Connection (CUC)

CUC Version

CUC Telephony Integration with Cisco UCM

Navigation: Telephony Integrations → Phone system

Set Phone System Name* = CUCM. This is used for this example

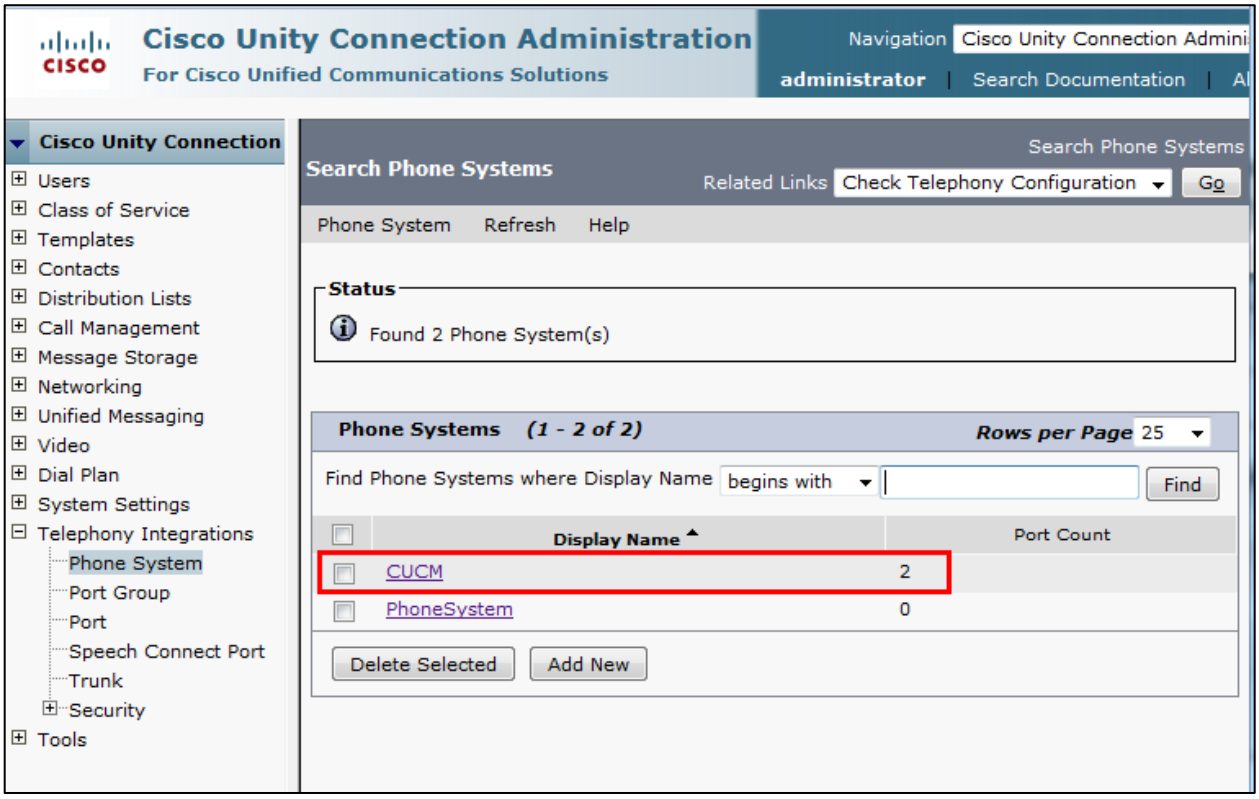

CUC Port Group

Navigation: Telephony Integration → Port Group

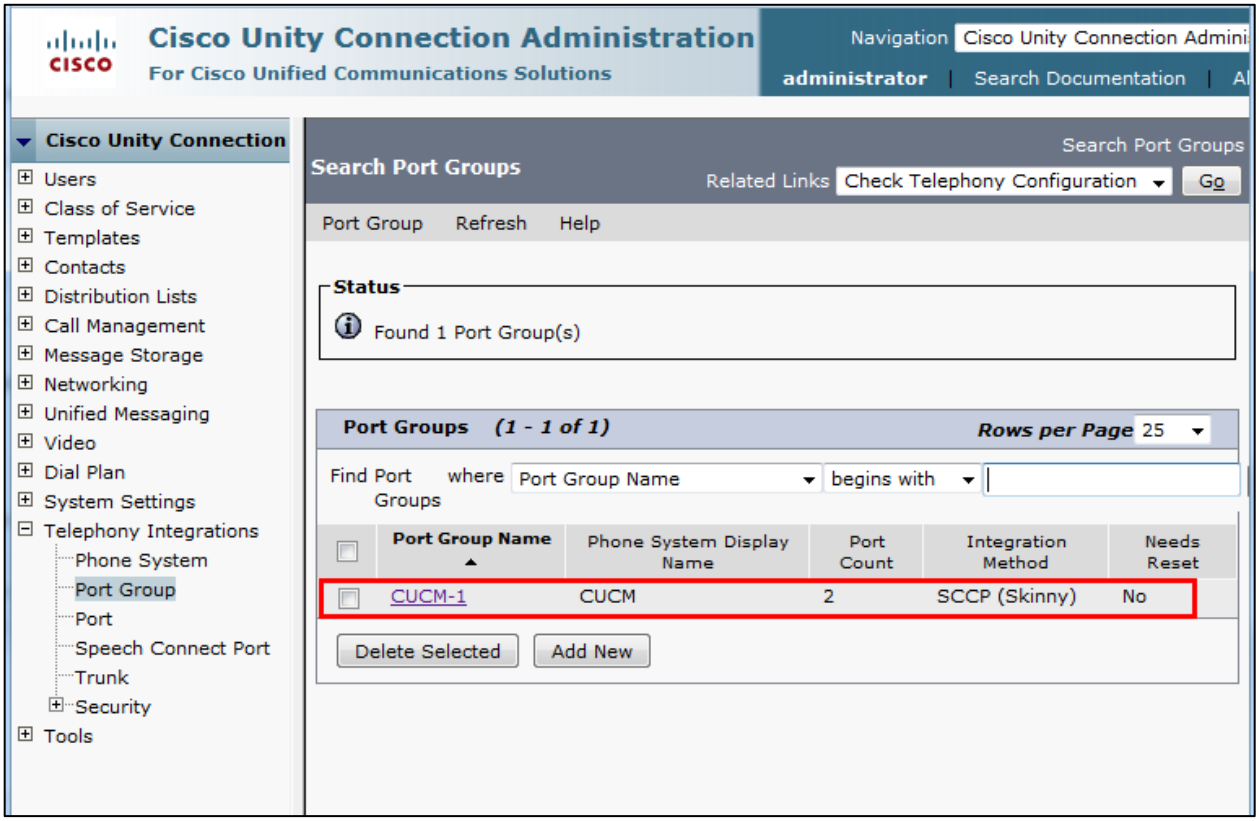

CUC Port Group(continued…)

Set Display Name* = CUCM-1. This is used in this example.
Check Enable Message waiting indicators.
Set MWI on Extension = 2298. This is used in this example.
Set MWI off Extension= 299. This is used in this example.

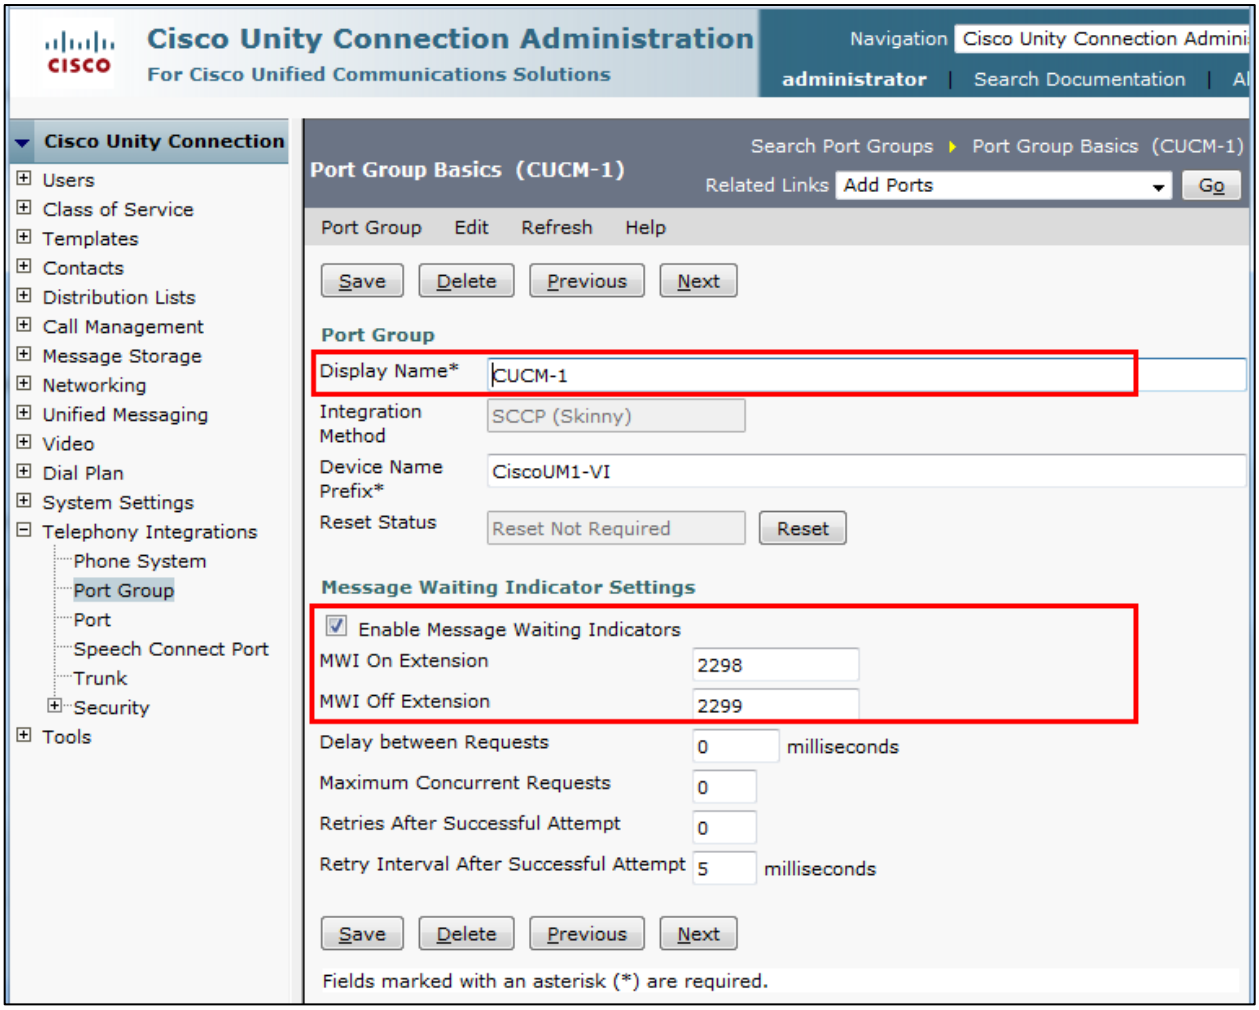

CUC Port Settings

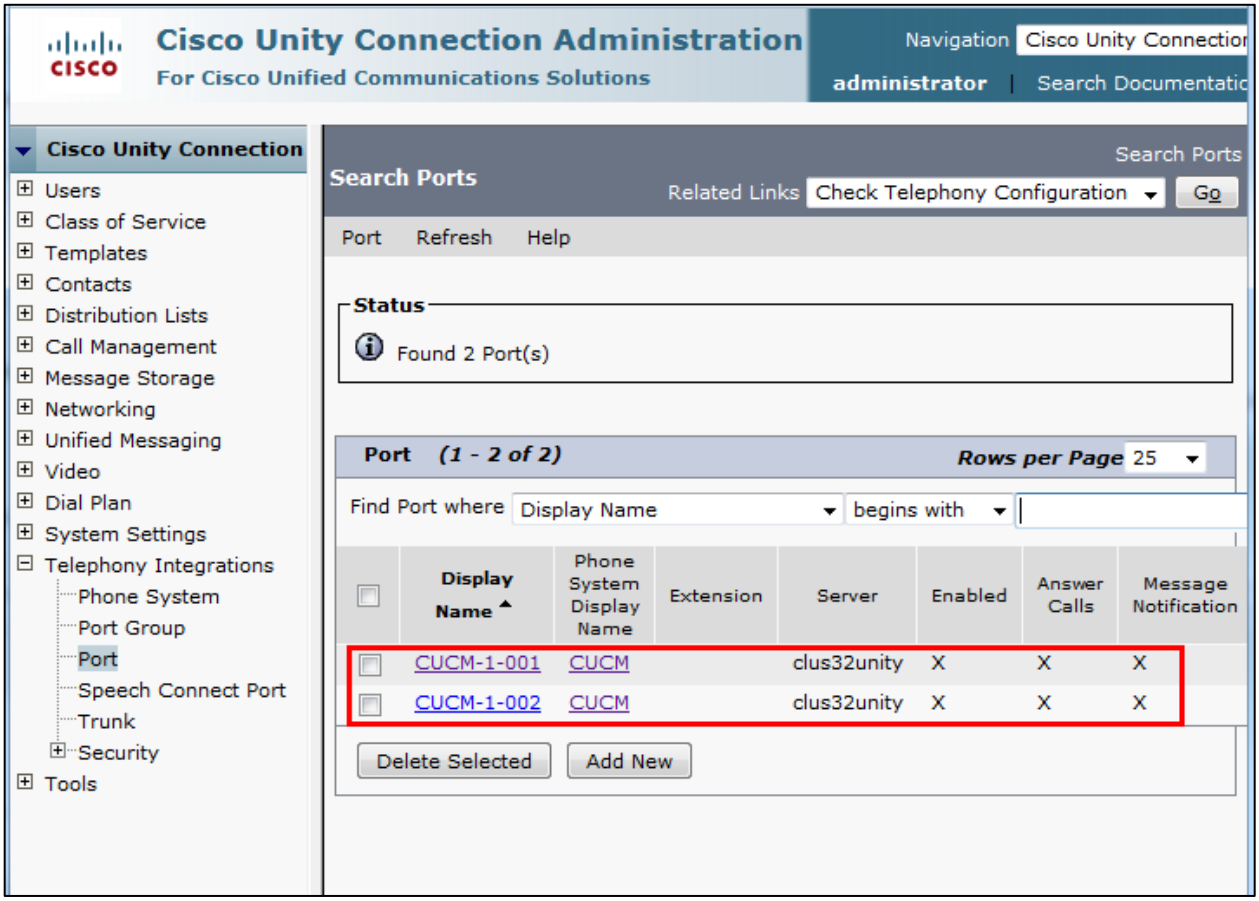

CUC Sample User Basic Settings

Navigation: Cisco Unity connection → Users → Users

Set Alias = 4084.This is one of the extension used for this testing.
Set Extension = 4084. This is used for this example.

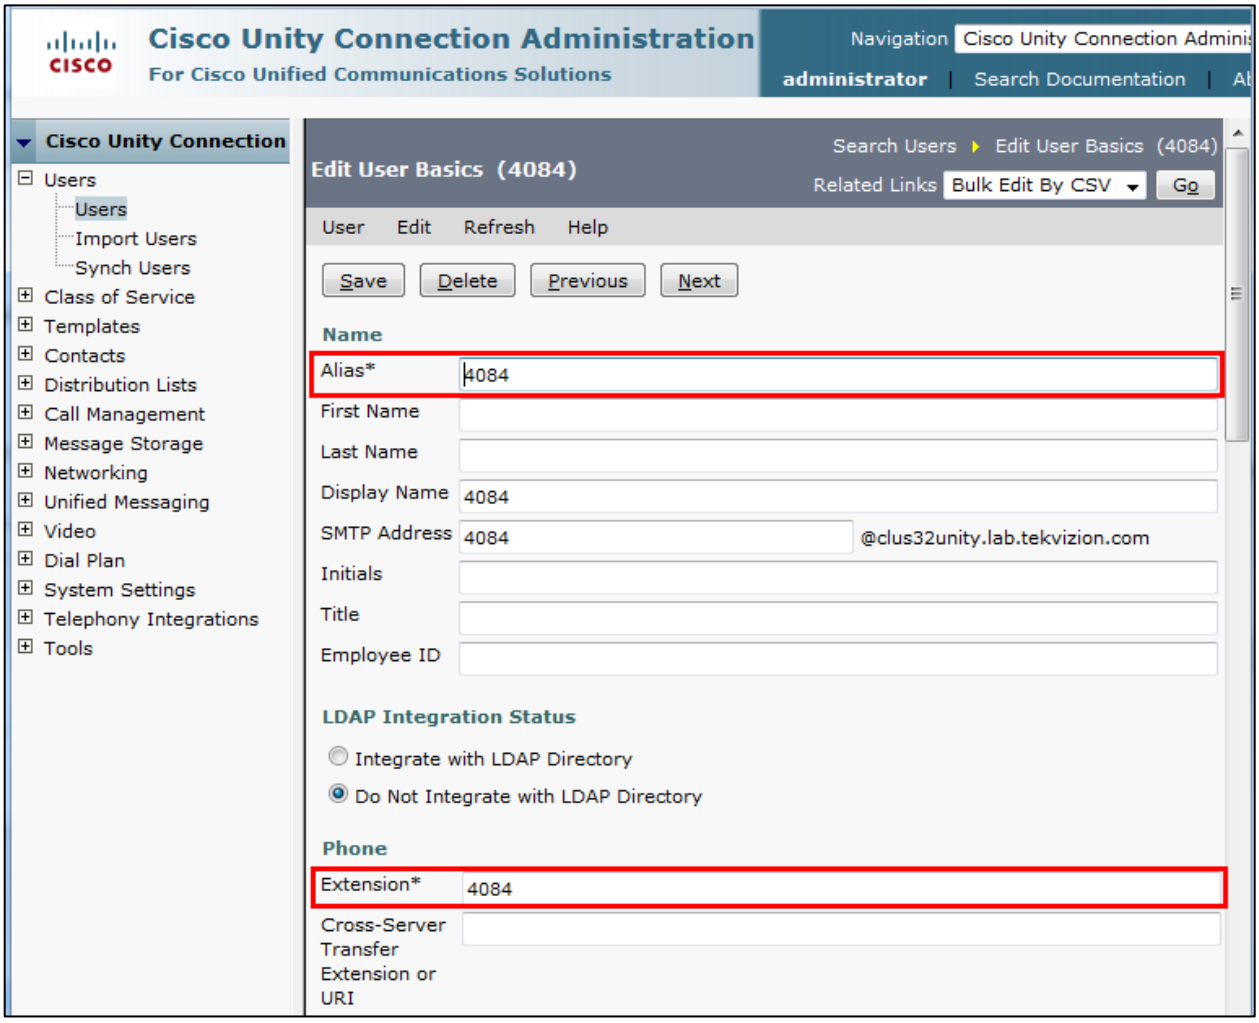

CUC Sample User Basic Settings (Continued…)

Set Partition = clus32unity partition. This is used for this example.
Select Search Scope = clus32unity Search Scope.
Select Phone System = CUCM.

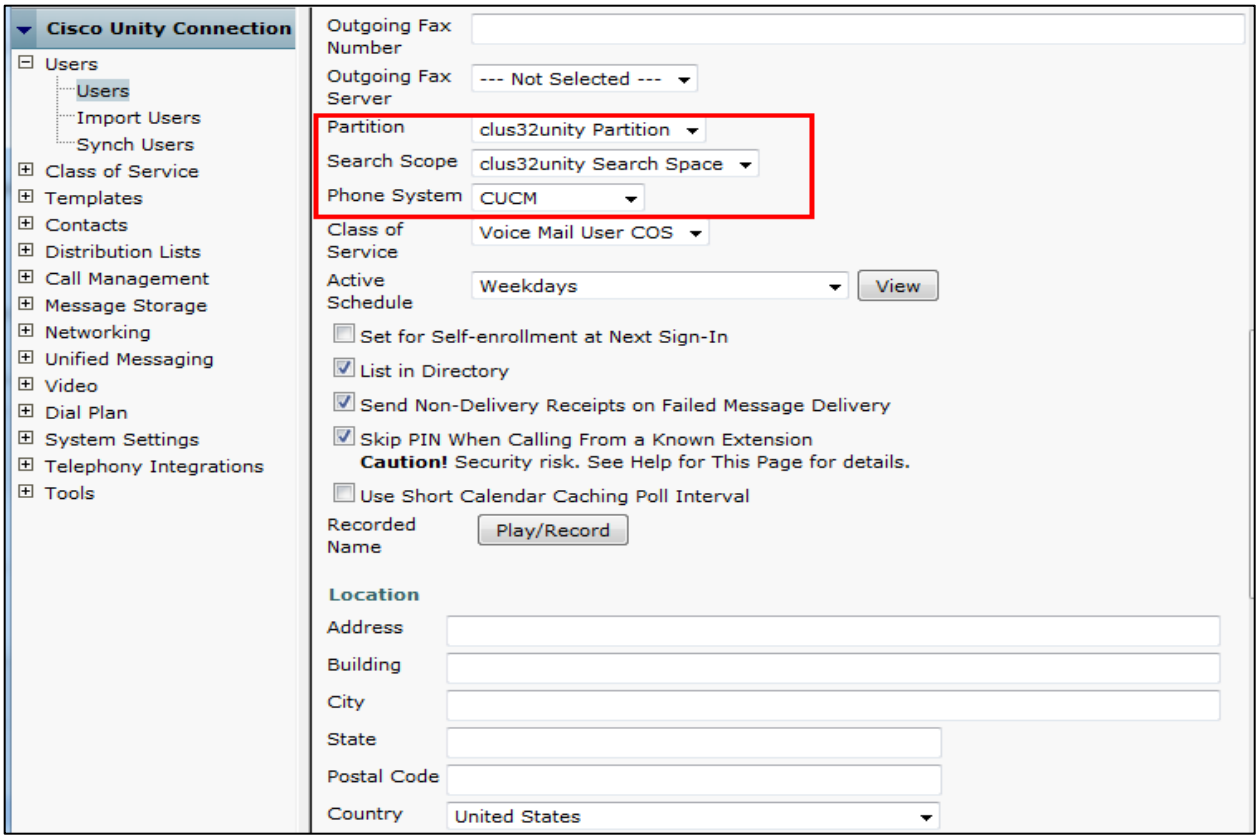

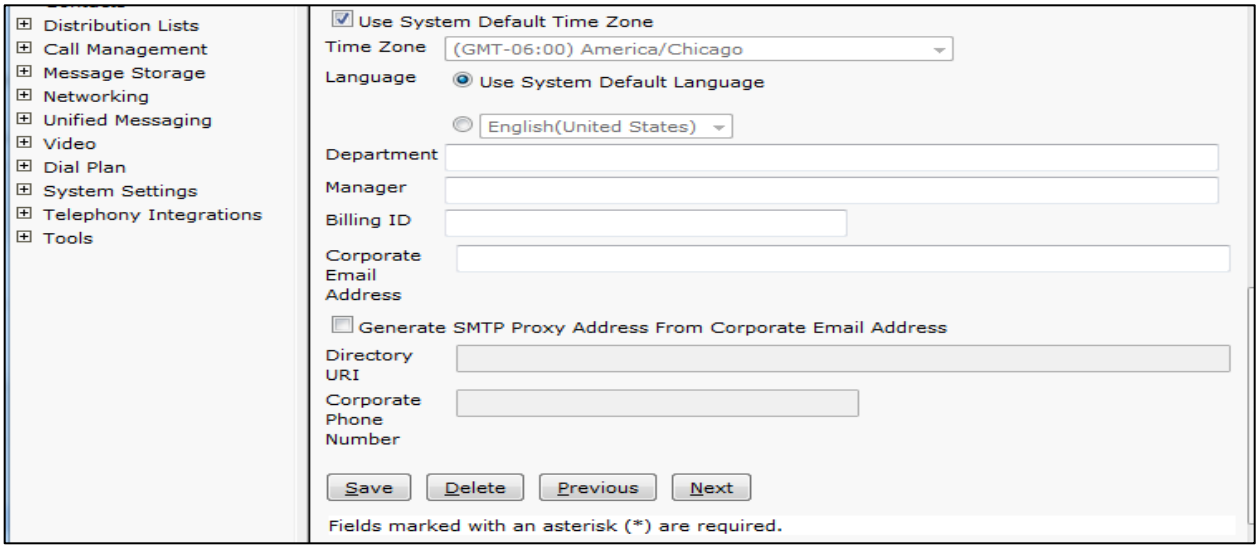

Auto Attendant

Navigation: Call Management → System Call Handlers

Set Display Name = Demo auto attend. This is used for this example.
Set Phone System = CUCM
Set Extension=2999. This number is used as Auto attendant on this set up.
Set Partition = Clus32unity Partition. This is used for this example.

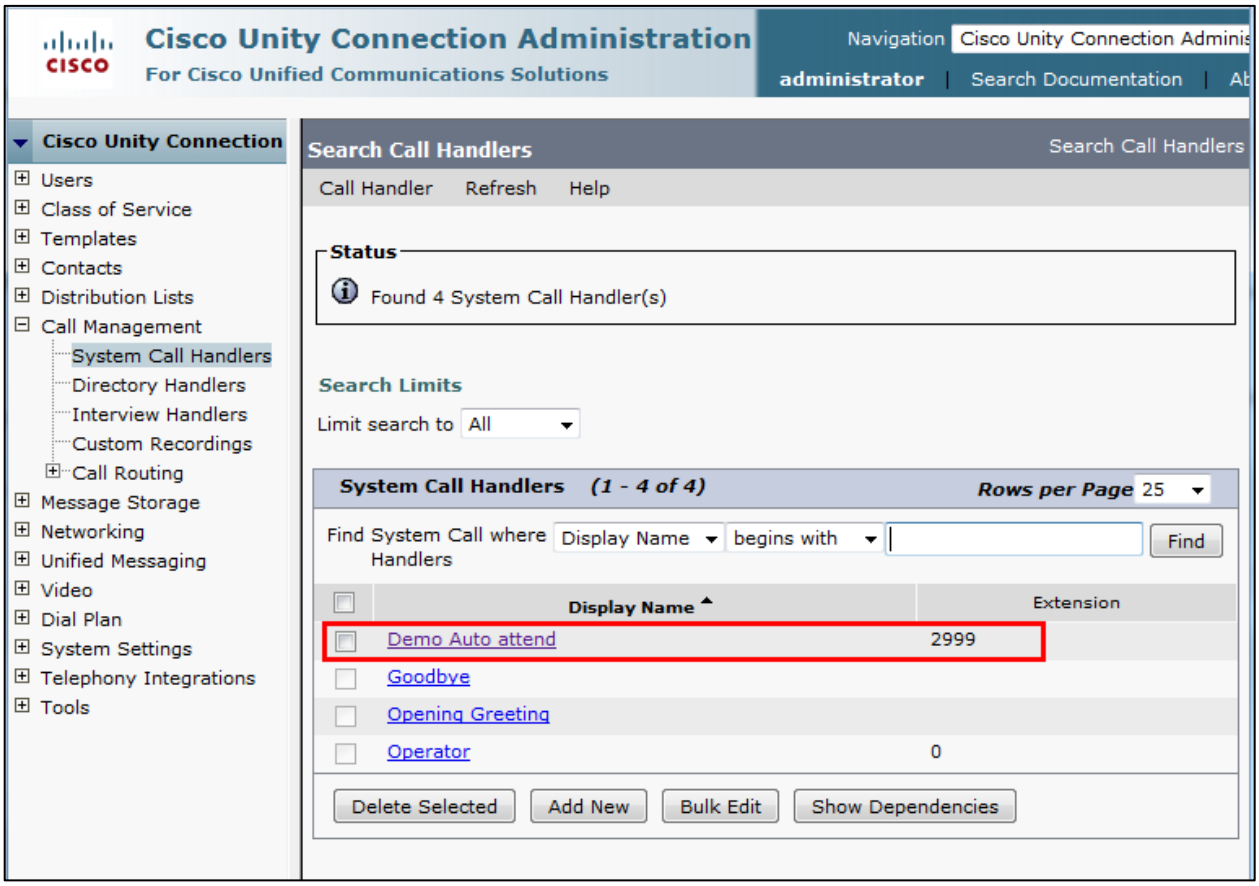

Auto Attendant (Continued…)

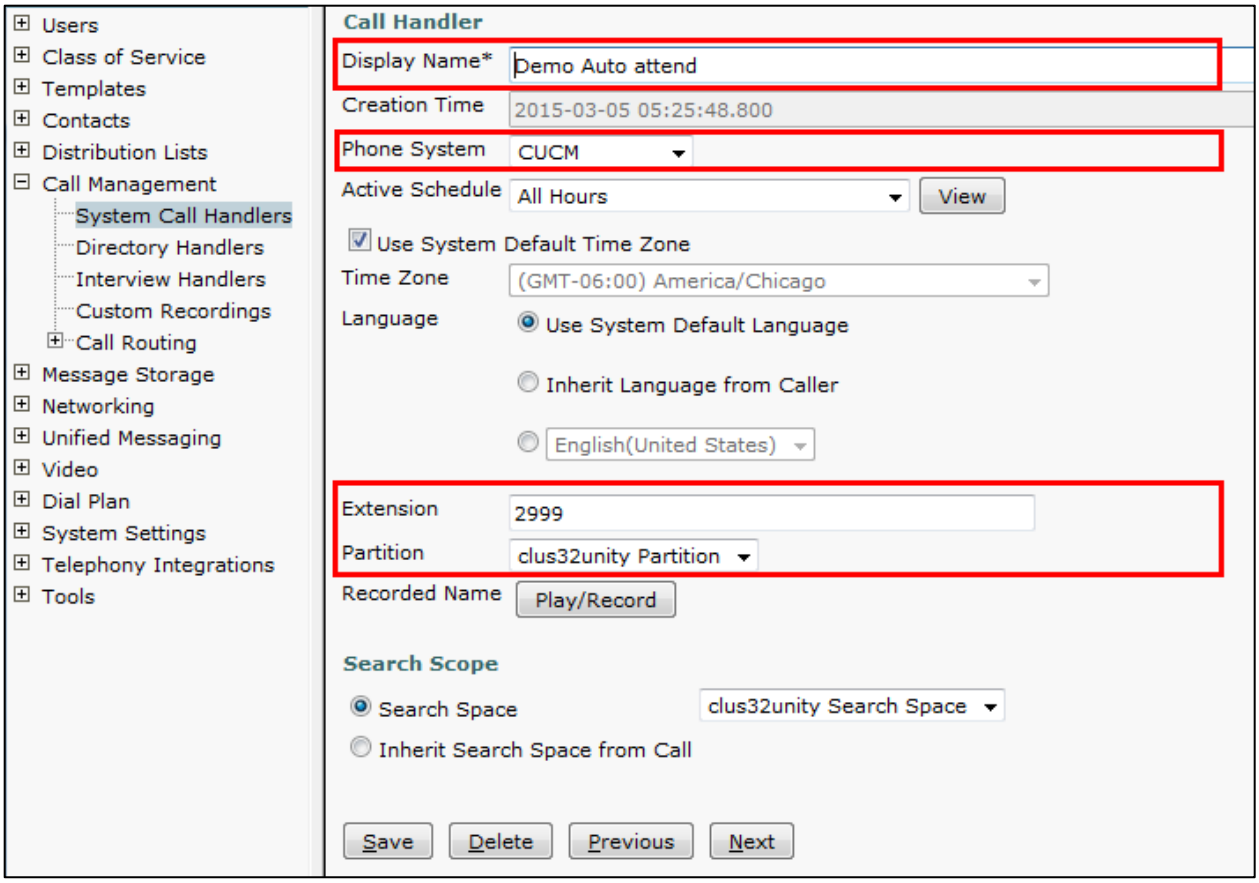

Cisco UCM Integration with Cisco Unified CM IM and Presence (CUP/IMP)

CUP/IMP Version

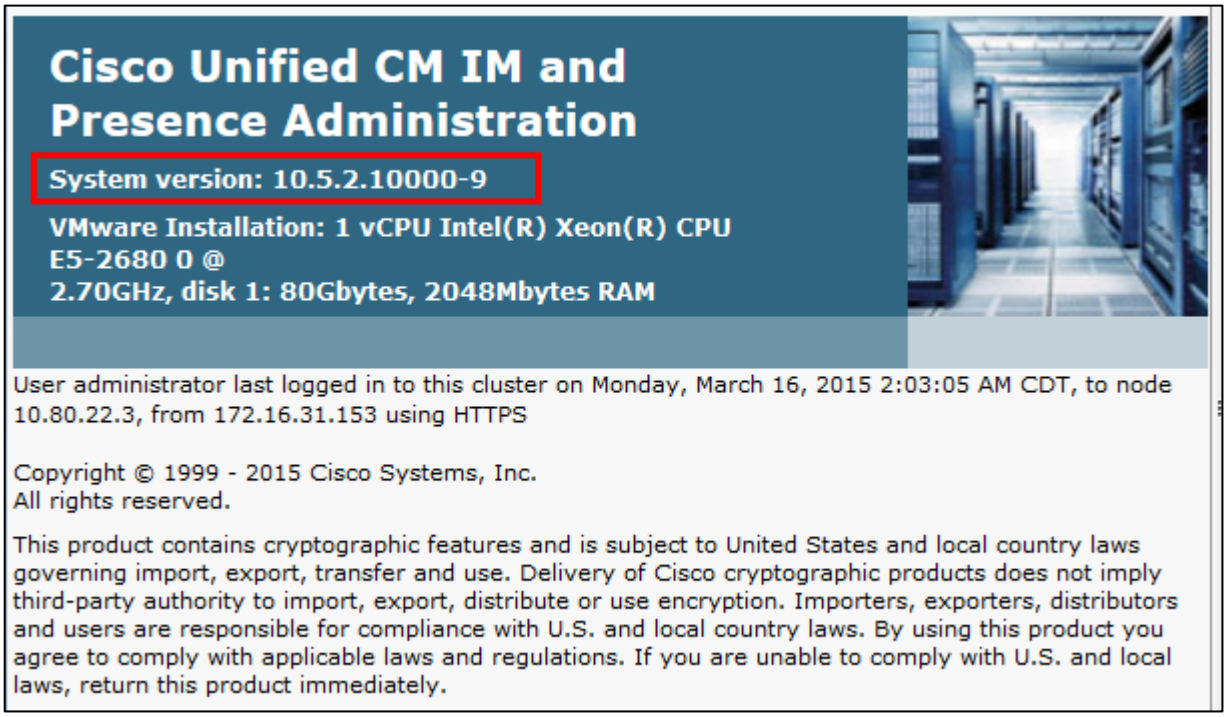

Presence Topology

Navigation: System → Presence Topology

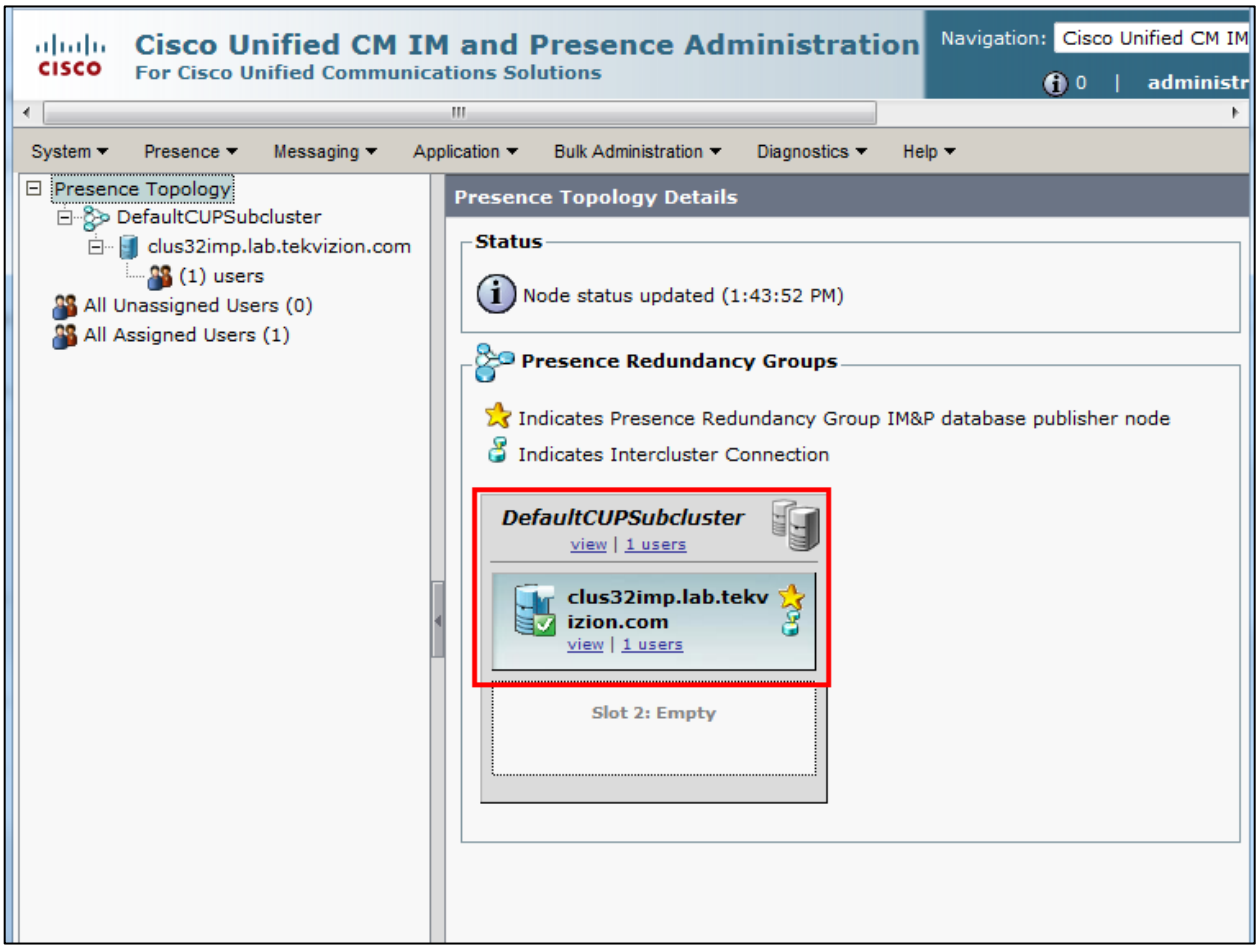

Node Configuration

Navigation: System → Cluster Topology → Fully Qualified Domain Name

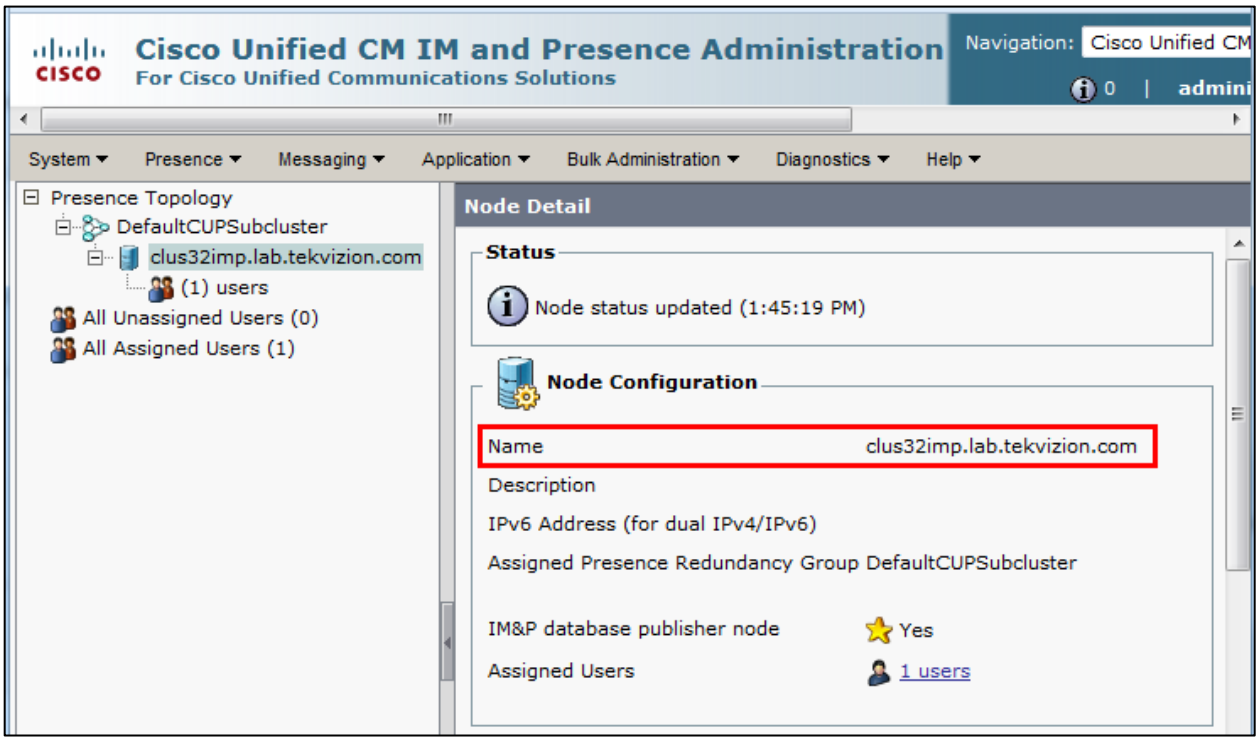

Users

Navigation: System → Cluster Topology → clus32imp.lab.tekvizion.com → Users

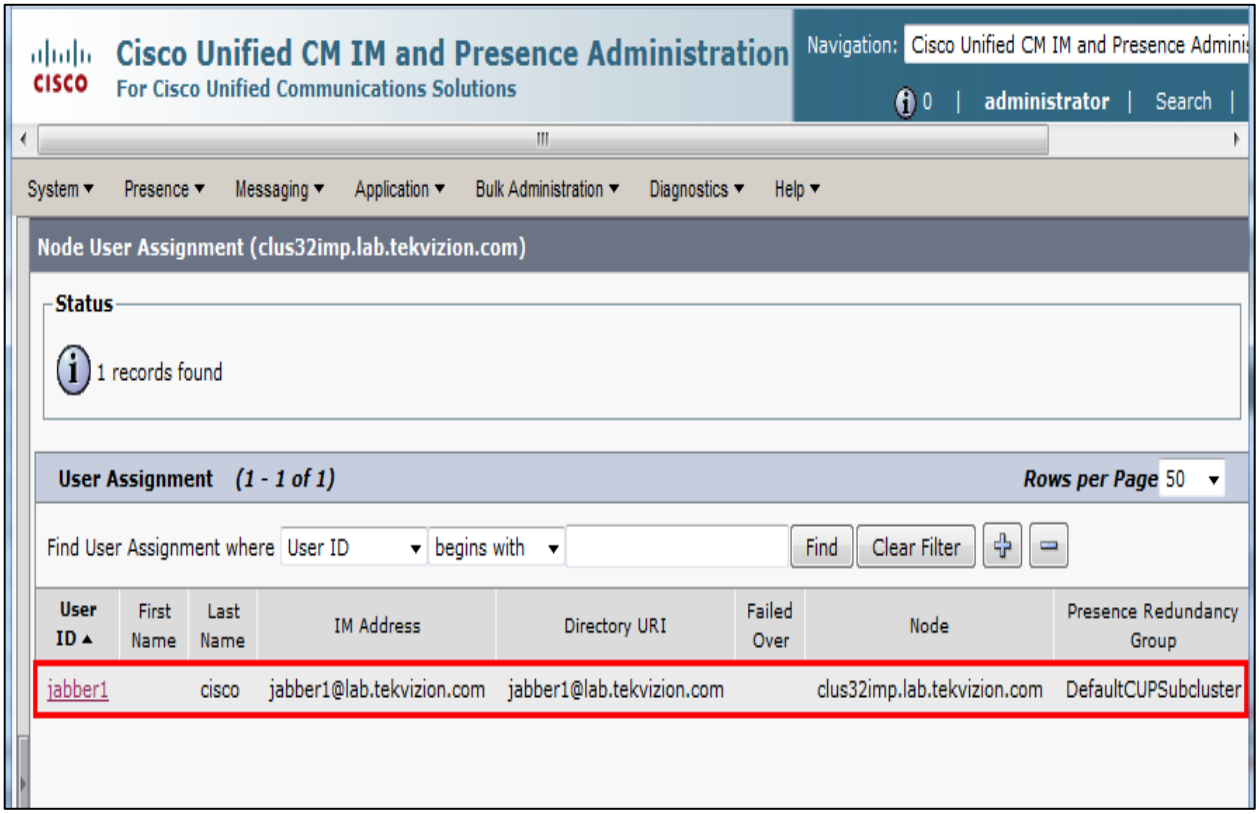

Presence gateway configuration

Navigation: Presence → Gateways

Set Presence Gateway Type *= CUCM
Set Description *= Cluster 32 9.1.2. This is used for this example.
Presence Gateway * =clus23pubsub.lab.tekvizion.com

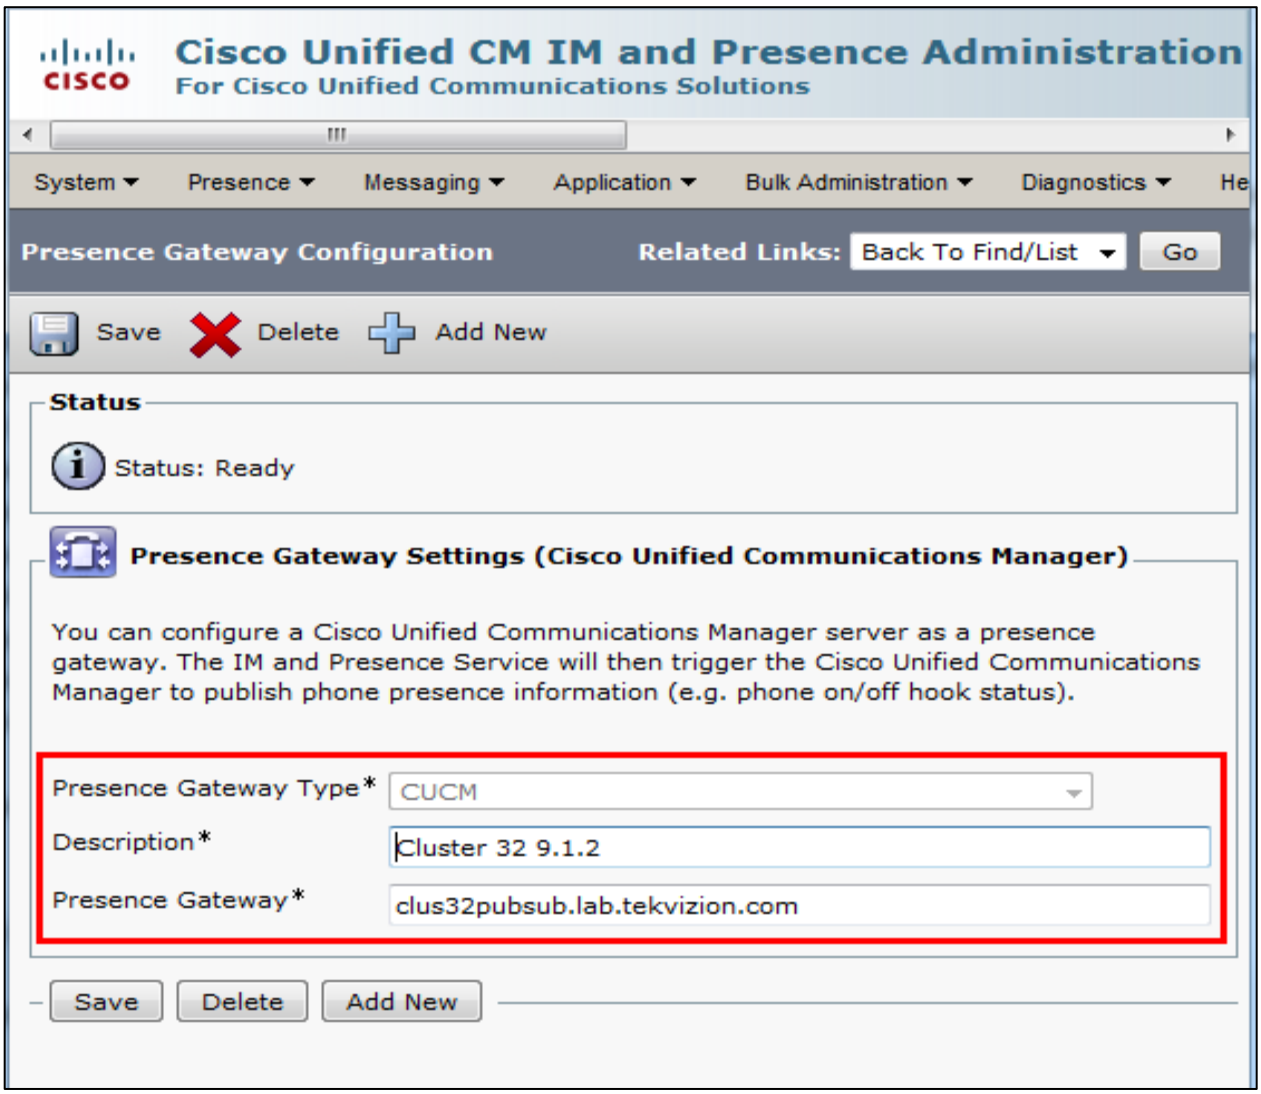

Acronyms

AVPN	AT&T Virtual Private Network
CODEC	Coder-Decoder (in this document a device used to digitize and undigitize voice signals)
Cisco UBE	Cisco Unified Border Element
Cisco UCM	Cisco Unified Communications Manager
IP	Internet Protocol
ISR	Integrated Services Router
MGCP	Media Gateway Control Protocol
MIS	Managed Internet Services
PNT	Private Network Transport
PSTN	Public switched telephone network
SCCP	Skinny Client Control Protocol
SIP	Session Initiation Protocol
SP	Service Provider
TDM	Time-division multiplexing

Important Information

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS. IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Corporate Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters
CiscoSystems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: 31 0 20 357 1000
Fax: 31 0 20 357 1100

Americas Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-7660
Fax: 408 527-0883

AsiaPacific Headquarters
Cisco Systems, Inc.
Capital Tower
168 Robinson Road
#22-01 to #29-01
Singapore 068912
www.cisco.com
Tel: +65 317 7777
Fax: +65 317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on the Cisco Web site at http://www.cisco.com/go/offices.

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia • Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland • Israel • Italy • Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal • Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan • Thailand • Turkey Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

Printed in the USA