



STEALTHWATCH® FLOW COLLECTOR™ 4010


First Ship Date: 03/2015
Final Ship Date: Currently Shipping

The Stealthwatch Flow Collector 4010 has the following general configuration. Your model may look slightly different.

Front



Back

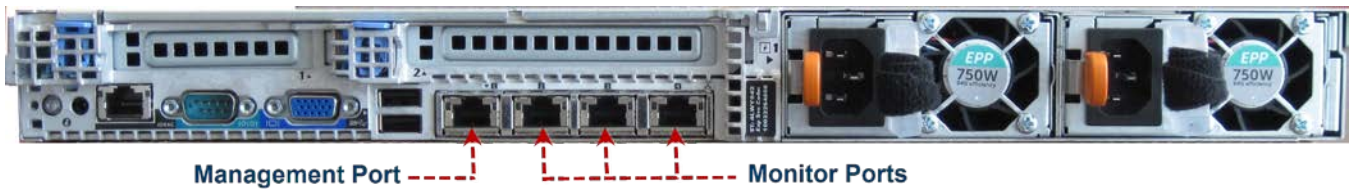

Specifications

| | |
|--|---------------------|
| Maximum Flows Per Second (fps) | Maximum Exporters |
| 120,000* fps | 2,000 |
| Flow Storage | Addressable Storage |
| 4 TB, RAID-6, Redundant | 6 TB |
| Rack Units (Mountable) | Weight |
| 1U Sliding Ready Rails | 41 pounds (18.6 kg) |
| Hardware Platform | Hardware Generation |
| R630 | 13G |
| Shipping Dimensions | Shipping Weight |
| Height: 11 inches (27.9 cm) Width: 25 inches (63.5 cm) Depth: 36 inches (91.4 cm) | 65 pounds (29.5 kg) |
| - continued - | |



| | |
|--|---|
| Dimensions | Network |
| Height: 1.68 (4.3 cm) Width: 19 inches (48.2 cm) with rack latches 17.08 inches (43.4 cm) without rack latches Depth: 29.25 inches (74.3 cm) with power supply and bezel 27.25 inches (69.2 cm) without power supplies and bezel | Management Port: 1; 10/100/1000 copper Monitoring/Listening Ports: 3 |
| Humidity (Relative) | Altitude |
| Operating: 10% to 80% (non-condensing) with 78.8° F (26° C) maximum dew point Storage: 5% to 95% (non-condensing) with 91° F (33° C) maximum dew point | Operating: -50 feet to 10,000 feet (-15.2 meters to 3,048 meters) Storage: -50 feet to 39,370 feet (-15.2 meters to 12,000 meters) |
| Power | Heat Dissipation |
| Redundant 750 W AC, 50/60 Hz Auto Ranging (100V to 240V) | 2,891 BTU per hour maximum |
| Temperature | Vibration |
| Operating: 50° F to 95° F (10° C to 35° C) at 10% to 80% relative humidity, with 78.8° F (26° C) maximum dew point Note: For altitudes above 2,952 feet, the maximum allowable dry bulb temperature is derated at 1° F (0.55° C) per 550 feet (167 m). Storage: -40° F to 149° F (-40° C to 65° C) with a maximum temperature gradation of 68°F (20°C) per hour | Operating Maximum: 0.26 Grms at 5-350 Hz in all orientations Storage Maximum: 1.87 Grms at 10-500 Hz for 15 minutes (all six sides tested) |
| Shock | Regulatory |
| Operating Maximum: One shock pulse in the positive z-axis of 31 G for 2.6 ms in all operation orientations Storage Maximum: Six consecutively executed shock pulse in the positive and negative x, y, and z axes (one pulse on each side of the system of 71 G for up to 2 minutes. | FCC (U.S. only) Class A VCCI Class A DOC (Canada) Class A UL 1950 CE Mark (EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3, EN 60950) CSA 950 Please call for a complete list. |

*The maximum fps can change depending on network conditions. Please contact a Lancope representative for details.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)