


Cisco VG200 - PBX Interoperability: Nortel Meridian Opt11C Rel24 PBX with Cisco CallManager using T1 CAS as an MGCP Gateway

Introduction

This is an application note for connectivity of the Nortel Meridian Option11C Release 24 PBX with Cisco CallManager using the Cisco VG200-T1-CAS as an MGCP Gateway. This application supports E&M Wink-Start signaling and E&M Delay-Dial signaling.

Network Topology

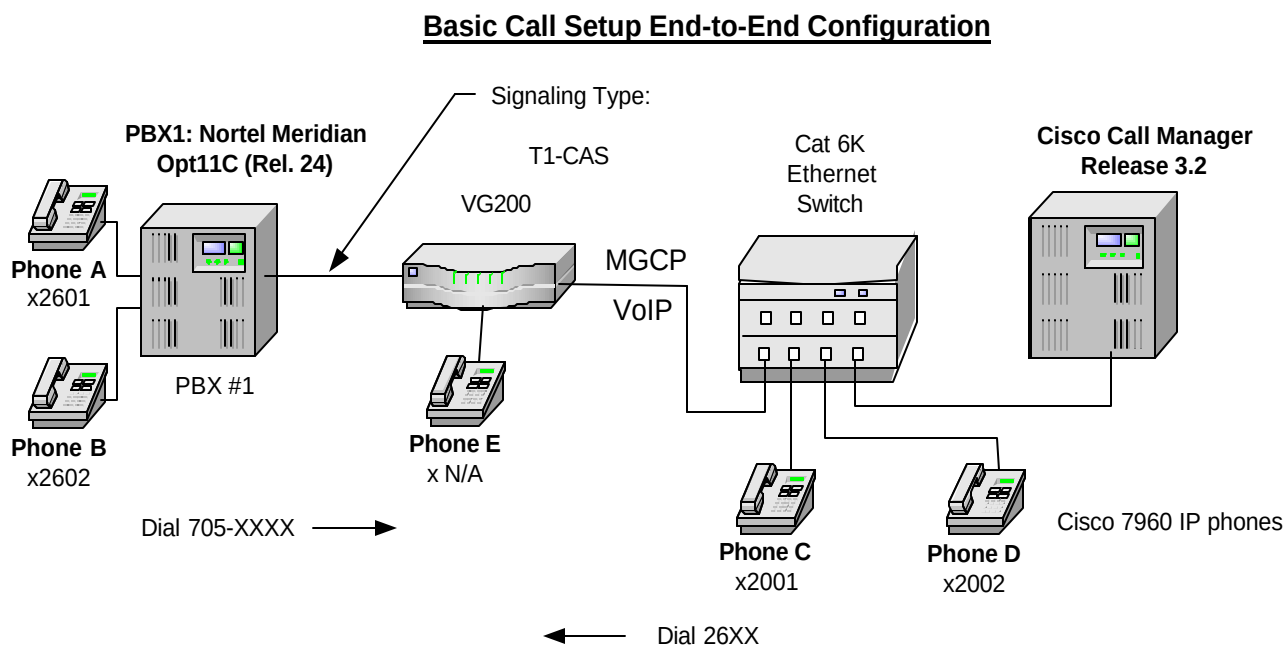

As shown in the diagram above, a Nortel Meridian Opt 11C PBX was connected via a T1-CAS link to a Cisco VG200 Gateway, which in turn, was connected to an Ethernet switch. The interoperability testing involved basic call setup functionality between the Cisco CallManager and the Nortel PBX.

Limitations

E&M-Immediate-start signaling is not supported on the Cisco CallManager Gateway configuration GUI.



System Components

Hardware Requirements

- Cisco VG200 Gateway with 2MFT T1 Port
- Cisco Catalyst 6000 switch
- Nortel Meridian Option 11C, NTAK09BA, 1.5 Mb DTI/PRI

Software Requirements

- Cisco IOS Software Release 12.2(2)XN
- Nortel Meridian Option 11C, Release 24
- Cisco CallManager Release 3.2

Configuration

Configuring the Nortel Meridian Opt11C PBX

Configure in the following sequence:

- Configure the common equipment.
- Configure the route data block.
- Configure the trunk.

Configuring Common Equipment

LD 22

PT2000

MARP NOT ACTIVATED

REQ PRT

TYPE CEQU

CEQU

MPED 8D

SUPL 000 004 008 012

016 032 036 040

044 048 064 068



072

XCT 000

CONF 029 030 031 062

094 095

DLOP NUM DCH FRM LCMT YALM T1TE TRSH

PRI 003 24 ESF B8S FDL - 00

004 24 ESF B8S FDL - 00

005 24 ESF B8S FDL - 00

006 24 ESF B8S FDL - 00

PRI2 07

DTI2

MISP

REQ *****

>

Configuring the Route Data Block

>LD 21

PT1000

REQ: PRT

TYPE: RDB

CUST 0

ROUT 105



TYPE RDB
CUST 00
DMOD
ROUT 105
DES T1_CAS
TKTP TIE
ESN NO
CNVT NO
SAT NO
RCLS EXT
DTRK YES
BRIP NO
DGTP DTI
ISDN NO
DSEL VCE
PTYP DTT
AUTO NO
DNIS NO
ICOG IA0
SRCH RRB
TRMB YES
STEP
ACOD 705
TARG 01
CLEN 1
BILN NO
OABS
INST
ANTK
SIGO STD



STYP SDAT

TIMR ICF 512

OGF 512

EOD 13952

DSI 34944

NRD 10112

DDL 70

ODT 4096

RGV 640

GRD 896

SFB 3

TFD 0

SST 5 0

NEDC **ETH**

FEDC **ETH**

CPDC NO

DLTN NO

HOLD 02 02 40

SEIZ 02 02

SVFL 02 02

DRNG NO

CDR NO

MUS NO

MANO NO

EQAR NO

OHQ NO

OHQT 00

CBQ NO

AUTH NO

TTBL 0

OHTD NO



PLEV 2

ALRM NO

ART 0

SGRP 0

AACR NO

REQ: *****

>

Configuring the Trunk (Wink-Start)

>ld 20

PT0000

MARP NOT ACTIVATED

REQ: PRT

TYPE: TNB

TN 5 1

DATE

PAGE

DES

TN 005 01

TYPE TIE

CUST 0



TRK DTI
PDCA 1
PCML MU
NCOS 0
RTMB 105 1
A/B BIT SIGNALING
TGAR 1
SIGL **EM4**
STRI/STRO **WNK WNK**
SUPN YES
AST NO
IAPG 0
CLS UNR DTN CND ECD WTA LPR APN THFD HKD
P10 VNL
TKID
DATE 4 APR 2002

NACT *****

>

Configuring the Trunk (Delay-Dial)

>ld 20

PT0000

MARP NOT ACTIVATED

REQ: PRT

TYPE: TNB



TN 5 1

DATE

PAGE

DES

TN 005 01

TYPE TIE

CUST 0

TRK DTI

PDCA 1

PCML MU

NCOS 0

RTMB 105 1

A/B BIT SIGNALING

TGAR 1

SIGL **EM4**

STRI/STRO **DDL DDL**

SUPN YES

AST NO

IAPG 0

CLS UNR DTN CND ECD WTA LPR APN THFD HKD

P10 VNL

TKID

DATE 4 APR 2002

NACT ****

>



Configuring Cisco CallManager

Vg200-MGCP Gateway Configuration

Cisco CallManager 3.2 Administration - MGCP Configuration - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites History Address -4FCC-9C88-72254C1BF9CB Go Links

System Route Plan Service Feature Device User Application Help

Cisco CallManager Administration
For Cisco IP Telephony Solutions

MGCP Configuration

[Back to Find/List Gateways](#)

Product: Cisco VG200
MGCP : VG200_MGCP

Status: Ready

Update Delete Reset Gateway Cancel Changes

MGCP Domain Name* VG200_MGCP

Description VG200 MGCP GATEWAY

Cisco CallManager Group* Default

Installed Voice Interface Cards

Module in Slot 1	Sub-Unit 0	Endpoint Identifiers
NM-HDV	VVIC-2MFT-T1	(1/0) T1GNS (1/1) T1GNS

Product Specific Configuration

Global ISDN Switch Type NI2

Switchback Timing* Graceful

Switchback uptime-delay (min) 10

Switchback schedule (hh:mm) 12:00

* indicates required item

[Back to Find/List Gateways](#)

Local intranet



Digital Access T1-CAS Configuration

Cisco CallManager 3.2 Administration - Gateway Configuration - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites History Address -4FCC-9C88-72254C1BF9CB Go Links

System Route Plan Service Feature Device User Application Help

Cisco CallManager Administration
For Cisco IP Telephony Solutions

Gateway Configuration

[Back to MGCP Configuration](#)
[Back to Find/List Gateways](#)

Ports

[Add a New Port](#)

Port 1
Port 2
Port 3
Port 4
Port 5
Port 6
Port 7
Port 8
Port 9
Port 10
Port 11
Port 12
Port 13
Port 14
Port 15
Port 16
Port 17
Port 18
Port 19
Port 20

Product : Cisco VG200
Gateway : S1/DS1-0@VG200_MGCP
Device Protocol: Digital Access T1
Registration: Registered with Cisco CallManager 10.1.1.2
IP Address: 10.1.1.210

Status: Ready

Update Delete Reset Gateway Cancel Changes

End-Point Name* S1/DS1-0@VG200_MGCP

Description S1/DS1-0@VG200_MGCP

Device Pool* Default

Media Resource Group List < None >

Network Hold Audio Source < None >

User Hold Audio Source < None >

Calling Search Space < None >

Location < None >

Load Information

Port Selection Order* Top Down

Digit Sending* DTMF

Network Locale United States

Product Specific Configuration

Done Local intranet



Cisco CallManager 3.2 Administration - Gateway Configuration - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites History Address -4FCC-9C88-72254C1BF9CB Go Links

Product Specific Configuration

Line Coding* B8ZS

framing* ESF

Clock* External

* indicates required item

[Back to MGCP Configuration](#)

[Back to Find/List Gateways](#)

Local intranet



T1-CAS Port Configuration

Cisco CallManager 3.2 Administration - Port Configuration - Microsoft Internet Explo...

Port Configuration

S1/DS1-0@VG200_MGCP Port Type: E&M Port Number: 1

Status: Ready

Port Details

Port Direction*	Bothways
Calling Party Selection*	Originator
Caller ID Type*	ANI
Caller ID DN	
Prefix DN	
Num Digits*	4
Expected Digits*	4

Product Specific Configuration

Signaling Type*	Delay Dial
-----------------	------------

* indicates required item

Done Local intranet



Route Pattern Configuration

Cisco CallManager 3.2 Administration - Route Pattern Configuration - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites History Address -470C-A769-7B3BCEF417E3 Go Links >>

System Route Plan Service Feature Device User Application Help

Cisco CallManager Administration
For Cisco IP Telephony Solutions

Route Pattern Configuration

[Add a New Route Pattern](#)
[Back to Find/List Route Patterns](#)

Route Pattern: 26XX

Status: Ready
Note: Any update to this route pattern automatically resets the associated gateway/route list

Copy Update Delete Cancel Changes

Pattern Definition

Route Pattern* 26XX

Partition <None>

Numbering Plan* North American Numbering Plan

Route Filter <None>

Gateway/Route List* S1/DS1-0@VG200_MGCP (Edit)

Route Option
☒ Route this pattern ☐ Block this pattern

☒ Provide Outside Dial Tone ☐ Urgent Priority

Calling Party Transformations

☐ Use Calling Party's External Phone Number Mask

Calling Party Transform Mask

Prefix Digits (Outgoing Calls)

Called Party Transformations

Discard Digits <None>

Called Party Transform Mask

Prefix Digits (Outgoing Calls)

* indicates required item.

Done Local intranet



Configuring the Cisco VG200

```
VG200_MGCP# show running config
```

Building configuration...

Current configuration : 1301 bytes

```
!  
version 12.2  
no parser cache  
no service single-slot-reload-enable  
no service pad  
service timestamps debug uptime  
service timestamps log uptime  
no service password-encryption  
!  
hostname VG200_MGCP  
!  
logging rate-limit console 10 except errors  
!  
voice-card 1  
!  
ip subnet-zero  
!  
no ip dhcp-client network-discovery  
mgcp  
mgcp call-agent 10.1.1.2 2427 service-type mgcp version 0.1  
mgcp dtmf-relay voip codec all mode out-of-band  
mgcp rtp unreachable timeout 1000 action notify  
mgcp modem passthrough voip mode cisco  
mgcp sdp simple
```



```
mgcp package-capability rtp-package
mgcp package-capability sst-package
no mgcp timer receive-rtcp
no mgcp explicit hookstate
call rsvp-sync
!
!
!
!
!
ccm-manager mgcp
ccm-manager music-on-hold
ccm-manager config server 10.1.1.2
ccm-manager config
!
controller T1 1/0
    framing esf
    linecode b8zs
    ds0-group 1 timeslots 1-24 type e&m-delay-dial
!
controller T1 1/1
    framing esf
    linecode b8zs
!
!
interface FastEthernet0/0
    ip address 10.1.1.210 255.255.255.0
    duplex auto
    speed auto
!
ip classless
```



```
no ip http server
!
!
voice-port 1/0:1
!
dial-peer voice 100 pots
  application mgcpapp
!
dial-peer voice 200 pots
  application mgcpapp
!
dial-peer voice 999101 pots
  application mgcpapp
  port 1/0:1
!
!
line con 0
line aux 0
line vty 0 4
  login
line vty 5 15
  login
!
end
```

VG200_MGCP#



Important Information

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.



Corporate Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters

Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: 31 0 20 357 1000
Fax: 31 0 20 357 1100

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-7660
Fax: 408 527-0883

Asia Pacific Headquarters

Cisco Systems, Inc.
Capital Tower
168 Robinson Road
#22-01 to #29-01
Singapore 068912
www.cisco.com
Tel: +65 317 7777
Fax: +65 317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on the Cisco Web site at www.cisco.com/go/offices.

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia • Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland • Israel • Italy • Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal • Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan • Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

Copyright 2003 Cisco Systems, Inc. All rights reserved. Cisco, Cisco Systems, and the Cisco Systems logo are registered trademarks or trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries. All other trademarks mentioned in this document or Web site are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0301R)