Meeting
7 People

Dual display

Gather the team together in an everyday workspace and bring in remote participants for extended collaboration.

© 2015 Cisco and/or its affiliates. All rights reserved.



	Product ID	Product
1	CTS-MX300-K9*	Cisco TelePresence MX300 G2
2	Included in CTS-MX300-K9	Cisco MIC20
3	Included in CTS-MX300-K9	Cisco TelePresence Touch 10
4	CTS-MON-55-WW **	Samsung 55” Content Screen

*Select MX300 G2 wall mount kit, CTS-MX300-WMK, when ordering the endpoint
**Example of possible content screen from Cisco price-list

© 2015 Cisco and/or its affiliates. All rights reserved.





Cisco MIC20

This table-top microphone designed by Cisco offers a 360-degree pickup for scenarios where people may be situated around a table or throughout a space.



Cisco TelePresence Touch 10

Cisco TelePresence Touch enables easy control of your meeting, from making a call to sharing content.

Cisco TelePresence MX300 G2

Enjoy telepresence in a small- to medium-sized multipurpose meeting room. The 55-inch display and wide-angle camera help everyone see and be seen, whether in a video meeting or for inroom presentations. Add a second display to increase visual possibilities, or use the embedded four-way multisite to bring more locations together in one meeting.

© 2015 Cisco and/or its affiliates. All rights reserved.

Best Practice

The system is wall-mounted to fit well with the content screen above. The distance from the system to the table is defined by the camera's field of view (70 degrees). At this distance, the camera captures everyone at the table. The system is placed on the wall adjacent to the window to avoid direct sunlight into the camera. A trapezoid shaped table is preferred to give all seven people a good viewing angle, with the widest end closest to the system. The table should be slightly wider than the system.


Acoustic panels are placed behind the system, which is on the adjacent wall to the window to avoid flutter echo. Curtains on the windowed walls works great as sound absorption, too. The carpeting of the floor is a positive contribution to the absorption, as wellas reducing noise from shuffling of chairs.

The Cisco omnidirectional microphones are placed on the center of table, 1.2 meters apart. Two microphones are needed to cover 7 people at the table.

The whiteboard is placed on the wall opposite of the endpoint, in order to keep it in the camera overview and to facilitate easy use of camera presets to zoom when necessary. The camera allows for high quality capture of content, as well as participants (both seated and standing). Swirling chairs are chosen to reduce the effort of shifting focus from system to whiteboard.

This setup is optimal for dynamic meetings where participants interact, use the whiteboard, and share content. It also works well for narrow rooms. A dedicated content screen on top makes it easy for everyone to see. The dedicated video screen underneath gives the illusion that remote participants appear to be sitting at the table with you.

This is a representation of a physical setup built and tested by Cisco R&D. Other setups are possible and might be equally good. Room dimensions should always adhere to local rules and regulations. Further detailing and development will occur with future versions of Project Workspace.

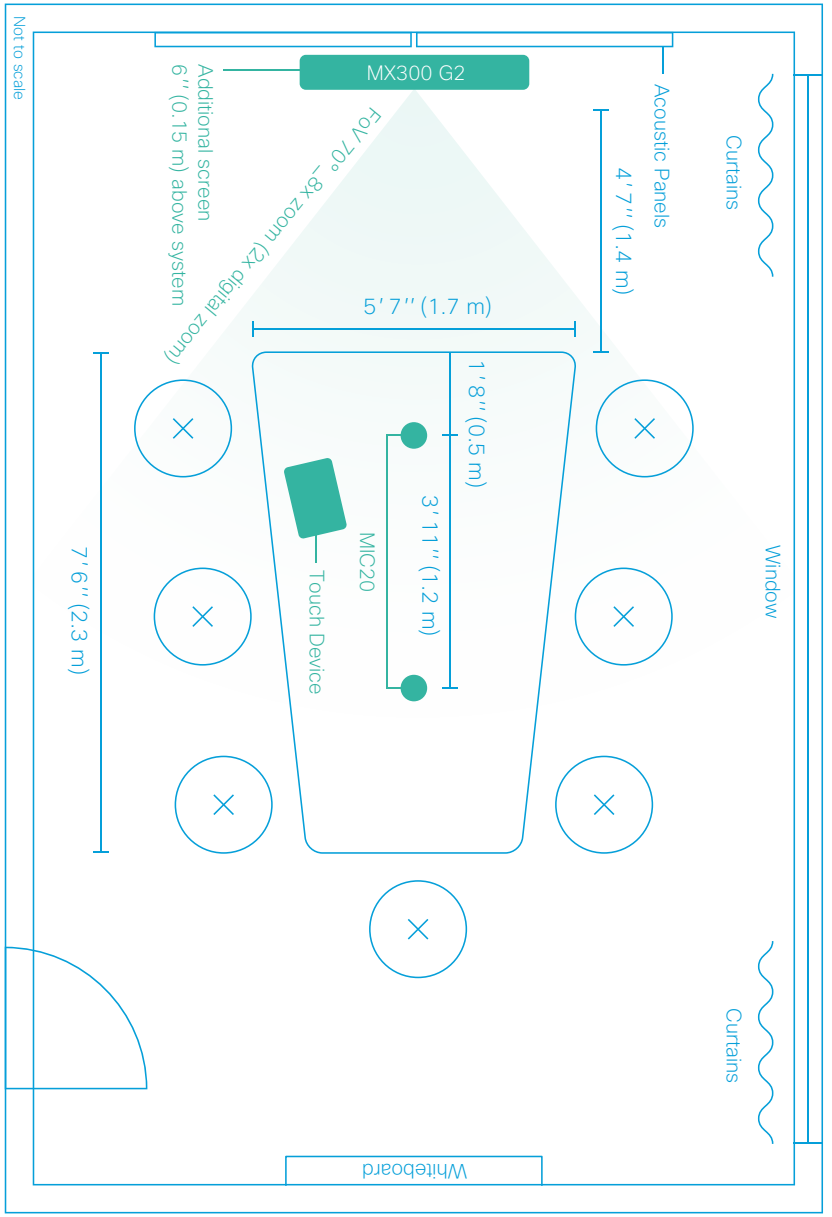

© 2015 Cisco and/or its affiliates. All rights reserved.

For more information about scenarios and setup, please visit:

www.cisco.com/web/telepresence/projectworkplace.html

© 2015 Cisco and/or its affiliates. All rights reserved.