· **· | · · · | · ·** CISCO.

Release Notes for the StarOS[™] Software Version 2024.04.g1

First Published: December 7, 2024

Introduction

This Release Notes identifies changes and issues related to the Classic Gateway, and Control and User Plane Separation (CUPS) software releases.

Products Qualified and Released in this Release

Products	Qualified Yes/No	
cups-cp	Yes	
cups-up	Yes	
mme	No	
ePDG	No	
pdn-gw	Yes	
saegw	Yes	
sgsn	No	
Platforms		
ASR 5500	No	
VPC-DI	Yes	
VPC-SI	Yes	

Products Qualified and Released in this Release

Release Lifecycle Milestones

Release Lifecycle Milestone	Milestone	Date
First Customer Ship	FCS	30-Oct-2024
End of Life	EoL	30-Oct-2024
End of Software Maintenance	EoSM	30-Apr-2026
End of Vulnerability and Security Support	EoVSS	30-Apr-2026
Last Date of Support	LDoS	30-Apr-2027

Release Package Version Information

Software Packages	Version	Build Number
StarOS Package	2024.04.g1	21.28.m31.96091

Descriptions for the various packages provided with this release are available in the <u>Release</u> Package Descriptions section.

Verified Compatibility

Products	Version
ADC P2P Plugin	2.74.h3.2541

Note: Use only the compatible version of P2P.

What's New in this Release

What's New in this Release

This version of Release Notes includes a new section titled **What's New in this Release** comprising all new features, enhancements, and behavior changes applicable for the release.

Features and Enhancements

This section covers a brief description of the features and enhancements introduced in this release.

Feature ID	Feature Name	Product
FEAT-33025: CUPS: PRA Functionality	This feature aims to address the support of 3GPP-Charging-Characteristics AVP in the r8-gx-standard dictionary, which is critical for differential charging particularly for telecommunication operators seeking to leverage advanced 5G functionalities. A new CLI command " encode-cc-in-r8-gx-dict " is introduced to enable the inclusion of 3GPP-Charging-Characteristics AVP in CCR-I messages when using the r8-gx-standard dictionary. Default Setting : Disabled- Configuration Required to Enable	cups

Related Documentation

For a complete list of documentation available for this release, go to:

http://www.cisco.com/c/en/us/support/wireless/asr-5000-series/products-installation-and-configuration-guideslist.html

Installation and Upgrade Notes

This Release Note does not contain general installation and upgrade instructions. Refer to the existing installation documentation for specific installation and upgrade considerations.

Synchronizing Boot File for Service Function Cards

To synchronize the boot file for all the Service Function (SF) VPC-DI non-management cards, use the following:

CLI executable command:

[local] host_name# system synchronize boot

This assures that the changes in boot file are identically maintained across the SF cards.

Ensure that you execute this command before reload for version upgrade from any version less than mh14 to

mh14 or later.

Installation and Upgrade Notes

Firmware Updates

There are no firmware upgrades required for this release.

Software Integrity Verification

To verify the integrity of the software image you have from Cisco, you can validate the SHA512 checksum information against the checksum identified by Cisco for the software.

Image checksum information is available through <u>Cisco.com Software Download Details</u>. Click Linux, and then choose the Software Image Release Version.

To find the checksum, hover the mouse pointer over the software image you have downloaded.

At the bottom you find the SHA512 checksum, if you do not see the whole checksum you can expand it by pressing the "..." at the end.

To validate the information, calculate a SHA512 checksum using the information in Table 1 and verify that it matches either the one provided on the software download page.

To calculate a SHA512 checksum on your local desktop see Table 1

Operating System	SHA512 checksum calculation command examples	
Microsoft Windows	Open a command line window and type the following command	
	> certutil.exe -hashfile <filename>.<extension> SHA512</extension></filename>	
Apple MAC	Open a terminal window and type the following command	
	\$ shasum -a 512 <i><filename>. <extension></extension></filename></i>	
Linux	Open a terminal window and type the following command	
	\$ sha512sum <i><filename>. <extension></extension></filename></i>	
	Or	
	\$ shasum -a 512 <i><filename>. <extension></extension></filename></i>	
NOTES:		
<filename> is the name</filename>	e of the file.	
<extension> is the file extension (e.gzip or .tgz).</extension>		

Table 1 - Checksum Calculations per Operating System

If the SHA512 checksum matches, you can be sure that no one has tampered with the software image or the image has not been corrupted during download.

If the SHA512 checksum does not match, we advise you to not attempt upgrading any systems with the corrupted software image. Download the software again and verify the SHA512 checksum again. If there is a constant mismatch, please open a case with the Cisco Technical Assistance Center.

Open Bugs for this Release

Certificate Validation

In 2024.01 and later releases, software images for StarOS, VPC-DI, and VPC-SI, and the companion software packages for StarOS and VPC are signed via x509 certificates.

USP ISO images are signed with a GPG key.

For more information and instructions on how to validate the certificates, refer to the README file available with the respective software packages.

Open Bugs for this Release

The following table lists the open bugs in this specific software release.

NOTE: This software release may contain open bugs first identified in other releases. Additional information for all open bugs for this release are available in the <u>Cisco Bug Search Tool</u>.

Bug ID	Headline	Product Found
CSCwn06583	While performing SGW Relocation getting error as EGTP_CAUSE_PEER_NOT_RESPONDING	cups-cp
CSCwm74110	[CUPS 21.28] Reboot SF Demux leads to BFD sessions DOWN on Standby Card	cups-cp
CSCwk67137	[CUPS / LIVE / CP / 21.28.h7] Di-Net Heartbeat drop > 1% - Health status = Bad	cups-cp
CSCwk79042	[CUPS-UP] SX path failure is not leading to SRP switchover with sx monitor enabled	cups-up
CSCwm51816	sessmgr task restarted on UP, when LI and S8hr interception call is getting cleared	cups-up
CSCwk65512	ipsecmgr cpu warn/over during make-break sessions with 4096 keysize device certificate	epdg

Table 2 - Open Bugs in this Release

Resolved Bugs for this Release

The following table lists the resolved bugs in this specific software release.

NOTE: This software release may contain bug fixes first introduced in other releases. Additional information for all resolved bugs for this release are available in the <u>Cisco Bug Search Tool</u>.

Bug ID	Headline	Product Found
CSCwn15127	SGW is not assigning dual S1-u IP post X2 HO with SGW change	cups-cp
CSCwn11056	DNS-MME is not handling DNS response with CNAME format properly	mme

Table 3 - Resolved Bugs in this Release

Operator Notes

Bug ID	Headline	Product Found
CSCwm47392	Sessmgr restarts after enabling VoLTE for specific in roamer IMSIs ranges	pdn-gw
<u>CSCwn02384</u>	Multiple sessmgr ,aaamgr, vpnmgr, hatsystem restarts with evlogd at 100% cpu leading to call loss	staros

Operator Notes

StarOS Version Numbering System

The output of the **show version** command displays detailed information about the version of StarOS currently running on the ASR 5500 or Cisco Virtualized Packet Core platform.

NOTE: Starting 2024.01.0 release (January 2024), Cisco is transitioning to a new release versioning scheme. The release version is based on the current year and product. Refer to **Figure** <u>1</u> for more details.

During the transition phase, some file names will reflect the new versioning whereas others will refer to the 21.28.xbased naming convention. With the next release, StarOS-related packages will be completely migrated to the new versioning scheme.

Version Numbering for FCS, Emergency, and Maintenance Releases

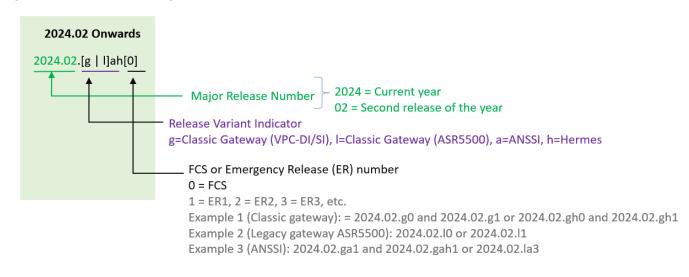


Figure 1 - Version Numbering

Note: For any clarification, contact your Cisco account representative.

Release Package Descriptions

 Table 4 provides examples of packages according to the release. For more information about the release packages up to 21.28.x releases, refer to the corresponding releases of the release note.

Operator Notes

Software Package	Description
ASR 5500	
asr5500- <release>.zip</release>	Contains the signed ASR 5500 software image, the signature file, a verification script, the x509 certificate, and a README file containing information on how to use the script to validate the certificate.
asr5500_T- <release>.zip</release>	Contains the signed, trusted ASR 5500 software image, the signature file, a verification script, the x509 certificate, and a README file containing information on how to use the script to validate the certificate.
VPC Companion Package	
companion-vpc- <release>.zip</release>	Contains numerous files pertaining to this version of the VPC including
For example, companion-vpc- 2024.02.gh2.i4.zip	SNMP MIBs, RADIUS dictionaries, ORBEM clients. These files pertain to both VPC-DI and VPC-SI, and for trusted and non-trusted build variants.
VPC-DI	
qvpc-di- <release>.bin.zip</release>	Contains the VPC-DI binary software image that is used to replace a previously deployed image on the flash disk in existing installations.
qvpc-di_T- <release>.bin.zip</release>	Contains the trusted VPC-DI binary software image that is used to replace a previously deployed image on the flash disk in existing installations.
qvpc-di- <release>.iso.zip</release>	Contains the VPC-DI ISO used for new deployments, a new virtual machine is manually created and configured to boot from a CD image.
qvpc-di_T- <release>.iso.zip</release>	Contains the trusted VPC-DI ISO used for new deployments, a new virtual machine is manually created and configured to boot from a CD image.
qvpc-di-template-vmware- <release>.zip</release>	Contains the VPC-DI binary software image that is used to on-board the software directly into VMware.
qvpc-di-template-vmware_T- <release>.zip</release>	Contains the trusted VPC-DI binary software image that is used to on- board the software directly into VMware.
qvpc-di-template-libvirt-kvm- <release>.zip</release>	Contains the same VPC-DI ISO identified above and additional installation files for using it on KVM.
qvpc-di-template-libvirt-kvm_T- <release>.zip</release>	Contains the same trusted VPC-DI ISO identified above and additional installation files for using it on KVM.
qvpc-di- <release>.qcow2.zip</release>	Contains the VPC-DI binary software image in a format that can be loaded directly with KVM using an XML definition file, or with OpenStack.
qvpc-di_T- <release>.qcow2.zip</release>	Contains the trusted VPC-DI binary software image in a format that can be loaded directly with KVM using an XML definition file, or with OpenStack.
VPC-SI	
intelligent_onboarding- <release>.zip</release>	Contains the VPC-SI onboarding signature package that is used to replace a previously deployed image on the flash disk in existing installations.

Operator Notes

qvpc-si- <release>.bin.zip</release>	Contains the VPC-SI binary software image that is used to replace a previously deployed image on the flash disk in existing installations.
qvpc-si_T- <release>.bin.zip</release>	Contains the trusted VPC-SI binary software image that is used to replace a previously deployed image on the flash disk in existing installations.
qvpc-si- <release>.iso.zip</release>	Contains the VPC-SI ISO used for new deployments, a new virtual machine is manually created and configured to boot from a CD image.
qvpc-si_T- <release>.iso.zip</release>	Contains the trusted VPC-SI ISO used for new deployments a new virtual machine is manually created and configured to boot from a CD image.
qvpc-si-template-vmware- <release>.zip</release>	Contains the VPC-SI binary software image that is used to on-board the software directly into VMware.
qvpc-si-template-vmware_T- <release>.zip</release>	Contains the trusted VPC-SI binary software image that is used to on-board the software directly into VMware.
qvpc-si-template-libvirt-kvm- <release>.zip</release>	Contains the same VPC-SI ISO identified above and additional installation files for using it on KVM.
qvpc-si-template-libvirt-kvm_T- <release>.zip</release>	Contains the same trusted VPC-SI ISO identified above and additional installation files for using it on KVM.
qvpc-si- <release>.qcow2.zip</release>	Contains the VPC-SI binary software image in a format that can be loaded directly with KVM using an XML definition file, or with OpenStack.
qvpc-si_T- <release>.qcow2.zip</release>	Contains the trusted VPC-SI binary software image in a format that can be loaded directly with KVM using an XML definition file, or with OpenStack.
RCM	
rcm-vm-airgap- <release>.ova.zip</release>	Contains the RCM software image that is used to on-board the software directly into VMware.
rcm-vm-airgap- <release>.qcow2.zip</release>	Contains the RCM software image in a format that can be loaded directly with KVM using an XML definition file, or with OpenStack.
rcm-vm-airgap- <release>.vmdk.zip</release>	Contains the RCM virtual machine disk image software for use with VMware deployments.
Ultra Services Platform	
	The USP software package containing component RPMs (bundles).
usp- <version>.iso</version>	Refer to the_Table 5_for descriptions of the specific bundles.
usp_T- <version>.iso</version>	The USP software package containing component RPMs (bundles). This bundle contains trusted images.
	Refer to the Table 5 for descriptions of the specific bundles.
usp_rpm_verify_utils- <version>.tar</version>	Contains information and utilities for verifying USP RPM integrity.

Obtaining Documentation and Submitting a Service Request

Obtaining Documentation and Submitting a Service Request

For information on obtaining documentation, using the Cisco Bug Search Tool (BST), submitting a service request, and gathering additional information, refer to <u>https://www.cisco.com/c/en/us/support/index.html</u>.

Obtaining Documentation and Submitting a Service Request

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANYKIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITHTHE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSEOR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright ©1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: http://www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2024 Cisco Systems, Inc. All rights reserved.