



T1/E1 CEM Interface Module Configuration Guide, Cisco IOS XE 17 (Cisco ASR 900 Series)

First Published: 2024-09-03

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2024 Cisco Systems, Inc. All rights reserved.



CONTENTS

CHAPTER 1

Preface 1

Document Organization 1

Related Documentation 2

CHAPTER 2

Feature History 3

CHAPTER 3

Overview of the T1 or E1 Interface Module 5

Restrictions for Configuring T1 or E1 Interfaces 6

Circuit Emulation 7

Overview of CEM Pseudowire 7

Configuring Pseudowire 7

Framed Structure-Agnostic TDM over Packet (SAToP) 7

Circuit Emulation Service over Packet-Switched Network 9

Restrictions for CESoPSN on T1 Interface 9

CHAPTER 4

Configuring T1 or E1 Interfaces 11

Setting the Card Type 11

Configuring the Controller 11

Verifying the Controller Configuration 13

Configuring Structure-Agnostic TDM over Packet - T1/E1 Interfaces 14

Verifying CEM Configuration for SAToP 14

Configuring Framed SAToP 14

Verifying Framed SAToP Configuration 15

Verifying CEM Statistics for Framed SAToP 15

Verifying CEM Statistics for SAToP 16

Configuring CEM Group for SAToP for T1 Interfaces 17

Configuring CEM Group for CESoPSN on T1 Interface	18
Verifying CEM for CESoPSN on T1 Interface	18
Configuring DS1 Local Connet	19
Verifying DS1 Local Connect	20

CHAPTER 5	Monitoring the T1 or E1 Interface Module	21
	Performance Monitoring	21
	Clearing the PMON Data	32

CHAPTER 6	Troubleshooting the T1 or E1 Interface Module	35
	Overview of BERT	35
	BERT Restrictions	36
	BERT for SAToP	36
	Configuring BERT for SAToP	37
	Verifying BERT Configuration for SAToP	37
	Framed SAToP System BERT	38
	Restrictions for Framed SAToP System BERT	38
	Configuring Framed SAToP System BERT	38
	Verifying Framed SAToP System BERT	40
	BERT for CESoPSN	41
	Configuring BERT for CESoPSN	41
	Verifying BERT Configuration for CESoPSN	42
	Loopback on T1 or E1 Interfaces	43
	Configuring Loopback	43
	Loopback Remote on T1 Interfaces	44
	Restrictions for Loopback Remote	44
	Configuring Loopback Remote on a T1 Interface Module	45
	Verifying the Loopback Remote Configuration	45
	User-defined Remote Loopback on T1 Interfaces	46
	Configuring User-defined Remote Loopback on T1 Interfaces	47
	Verifying User-defined Remote Loopback on T1 Interfaces	47

CHAPTER 7	Card Protection for T1 or E1	49
	Card Protection	49

Y Cable	50
Card Protection Switchover	50
Alarm Based Switchover	51
Restrictions	52
Supported Features on Interface Module	52
How to Configure Card Protection for T1 or E1	53
Configuring T1/E1 Card Protection	53
Configuring Revertive Mode	54
Verification of T1/E1 Card Protection Configuration	54
Configuring Maintenance Commands	54
Priority Table	55
Associated Commands	55

CHAPTER 8**Additional References** 57

Linecode Configuration and Supported Patterns	57
-----------------------------------------------	----



CHAPTER 1

Preface

This guide provides an overview and explains how to configure the various features for the T1 or E1 CEM Interface Module.

This document is applicable for the following interface modules:

Table 1: Supported Interface Module

Interface Module	Part Number	Mode
48-port T1/E1 Interface module	• A900-IMA48D-C	T1/E1
1-port OC48/ STM-16 or 4-port OC-12/OC-3 / STM-1/STM-4 + 12-Port T1/E1 + 4-Port T3/E3 CEM Interface Module	• A900-IMA3G-MSG	

Circuit Emulation (CEM) is a technology that provides a protocol-independent transport over IP/MPLS networks. It enables proprietary or legacy applications to be carried transparently to the destination, similar to a leased line.

- [Document Organization, on page 1](#)
- [Related Documentation, on page 2](#)

Document Organization

Chapter	Description
Overview of the T1/E1 Interface Module	Provides a high-level overview of the interface module. Also provides additional information such as restrictions, benefits etc..
Configuring the T1/E1 Interface Module	Provides information about how to configure the interface module.
Monitoring the Interface Module	Provides information on monitoring features for the interface module.

Chapter	Description
Troubleshooting the Interface Module	Describes features that you can use to troubleshoot the operation of interface module.
Additional References	Provides information on additional features, technical details.

Related Documentation

- Alarm Configuring and Monitoring Guide
- CEM Generic Guide
- T3 or E3 CEM Interface Module Configuration Guide



CHAPTER 2

Feature History

The following table lists the new and modified features supported in the 48-Port T1/E1 CEM Interface Module Configuration Guide in Cisco IOS XE 17 releases.

Feature	Description
Cisco IOS XE Bengaluru 17.5.1	
GR-820-CORE Performance Monitoring	The show controller tabular command enables you to view the performance monitoring details in tabular form as per GR-820-Core standards.
Cisco IOS XE Bengaluru 17.4.1	
Support for all 0s and 1s BERT Patterns	Support for all 0s and 1s BERT patterns on T1 or E1 interfaces.



CHAPTER 3

Overview of the T1 or E1 Interface Module

Table 2: Feature History

Feature Name	Release Information	Description
	Cisco IOS XE Cupertino 17.8.1	<p>The router supports the following features for the 48-Port T1/E1 Circuit Emulation (CEM) interface module:</p> <ul style="list-style-type: none"> • Basic mode, and T1 or E1 controller required configurations • CEM clocking, ACR, and DCR • CEM pseudowires such as Structure-Agnostic TDM over Packet (SATOP) and Circuit Emulation over Packet-Switched Network (CESoPSN) • BERT, loopback, and alarms • Performance monitoring <p>The support for the interface module provides cost-effective delivery of CEM over a packet-based network (MPLS).</p>

The T1 or E1 interface module delivers T1 or E1 connectivity on the router with the RSP3 module. The module can be software configured as either T1 mode or E1 mode per interface module. The module provides physical connectivity using a single high-density connector and requires a breakout cable and patch panel for individual port connections.

The T1 or E1 interface module supports the following modes:

- T1

- E1



Note Mixing T1 and E1 ports on the same interface module is not supported.

CEM configurations are supported on different modes on the interface module. The troubleshooting, monitoring, and redundancy features are supported on the module. The module can be clocked from a line or from an internal clock source. The table describes the configurations and features for the modes that are supported on the T1 or E1 interface module.

Table 3: Configurations on T1 or E1 Interface Module

	T1	E1
Required Configurations		
Mode	Yes	Yes
Internal/Line Clock Source	Yes	Yes
ACR/DCR Clock	Yes	Yes
CEM Configurations		
Structure-Agnostic TDM over Packet (SATOP) (Framed/Unframed)	Yes	Yes
Circuit Emulation over Packet-Switched Network (CESoPSN)	Yes	Yes
Troubleshooting Features		
Bit Error Rate Testing (BERT)	Yes	Yes
Loopback	Yes	Yes
Monitoring Features		
Performance Monitoring	Yes	Yes

- [Restrictions for Configuring T1 or E1 Interfaces](#), on page 6
- [Circuit Emulation](#), on page 7
- [Overview of CEM Pseudowire](#), on page 7
- [Framed Structure-Agnostic TDM over Packet \(SAToP\)](#), on page 7
- [Circuit Emulation Service over Packet-Switched Network](#), on page 9

Restrictions for Configuring T1 or E1 Interfaces

- You can configure CEM to support serial interface configuration.
- The card can be configured either in the T1 or E1 mode. A combination of T1 and E1 ports is not supported.

Circuit Emulation

Circuit Emulation (CEM) is a technology that provides a protocol-independent transport over IP/MPLS networks. It enables proprietary or legacy applications to be carried transparently to the destination, similar to a leased line.

CEM provides a bridge between a Time-Division Multiplexing (TDM) network and a Multiprotocol Label Switching (MPLS) network. The router encapsulates the TDM data in the MPLS packets and sends the data over a CEM pseudowire to the remote Provider Edge (PE) router. As a result, CEM functions as a physical communication link across the packet network.

The router supports the pseudowire type that utilizes CEM transport: Structure-Agnostic TDM over Packet (SAToP) and Circuit Emulation Service over Packet-Switched Network (CESoPSN).

L2VPN over IP/MPLS is supported on the interface modules.



Note We recommend that you configure the controller in the administratively up mode. Configuration under the administratively down mode is not recommended and it might cause configuration errors.



Note The default behaviour of the CEM pseudowire is always UP irrespective of the controller alarms.

Overview of CEM Pseudowire

Pseudowires manage encapsulation, timing, order, and other operations in order to make it transparent to users. The pseudowire tunnel acts as an unshared link or circuit of the emulated service. CEM is a way to carry TDM circuits over packet switched network. CEM embeds the TDM circuits into packets, encapsulates them into an appropriate header, and then sends that through Packet Switched Network. The receiver side of CEM restores the TDM circuits from packets.

Configuring Pseudowire

Cisco Pseudowire Emulation Edge-to-Edge (PWE3) allows you to transport traffic by using traditional services such as T1/E1 over a packet-based backhaul technology such as MPLS or IP. A pseudowire (PW) consists of a connection between two provider edge (PE) chassis that connects two attachment circuits (ACs), such as T1/E1 or T3 /E3 links.

Framed Structure-Agnostic TDM over Packet (SAToP)

Framed Structure-Agnostic TDM over Packet (SAToP) is required to detect an incoming AIS alarm in the DS1 SAToP mode. An AIS alarm indicates a problem with the line that is upstream from the DS1 network element connected to the interface. Framed SAToP further helps in the detection of a packet drop.

In case of unframed mode of SAToP, data received from the Customer Edge (CE) device is transported over the pseudowire. If the Provider Edge (PE) device receives a Loss of Frame (LOF) signal or Remote Alarm Indication (RAI) signal from a CE, the PE can only transmit the signal that is detected by the CE device. With the introduction of Framed SAToP, when the PE device receives the LOF or RAI signal, the PE device can detect the alarm for SAToP. Thus, the alarm can be detected earlier in the network. This helps in enhanced performance.



Note Framing type should be maintained same in all routers end to end.

Difference between Framed and Unframed SAToP:

1. For unframed SAToP, the incoming signal is transmitted to the far end. This signal is not analyzed by the PE device. Hence, no alarm is reported.
2. For framed SAToP, the incoming signal is analyzed but is not terminated. If a LOF or RAI signal is detected, the remote PE detects the signals and transmits towards the remote CE.

Difference between Framed SAToP and CESoP:

Table 4: Behaviour Difference between Unframed SAToP, Framed SAToP, and CESoP on LOF Alarm

Modes	Alarm Detected at PE	Controller Status at PE	Alarm Detected at CE (Remote)	Framing Bits Generation at PE (Remote)	Framing Bits Terminated at PE (Remote)
Unframed SAToP	None	Up	LOF	No	No
Framed SAToP	LOF	Down (Data path remains up)	AIS ^{1,2}	Yes	No
CESOP	LOF	Down (Data path remains up)	AIS	Yes	Yes

¹ AIS—Cisco IOS XE Amsterdam 17.3.1 to later releases

² LOF—Support until Cisco IOS XE Amsterdam 17.2.1

Table 5: Behaviour Difference between Unframed SAToP, Framed SAToP, and CESoP on RDI Alarm

Modes	Alarm Detected at PE	Controller Status at PE	Alarm Detected at CE (Remote)	Framing Bits Generation at PE (Remote)	Framing Bits Terminated at PE (Remote)
Unframed SAToP	None	Up	RDI	No	No
Framed SAToP	RDI	Down (data path remains up)	RDI	No	No
CESOP	RDI	Down (data path remains up)	RDI	M-bit is set into control word	Yes

Table 6: Behaviour Difference between Unframed SAToP, Framed SAToP, and CESoP on AIS alarm

Modes	Alarm Detected at PE	Controller Status at PE	Alarm Detected at CE (Remote)	Framing Bits Generation at PE (Remote)	Framing Bits Terminated at PE (Remote)
Unframed SAToP	AIS	Down (data path remains up)	AIS	No	No
Framed SAToP	AIS	Down (data path remains up)	AIS	No	No
CESOP	AIS	Down (data path remains up)	AIS	L-bit is set into control word	Yes

Remote Loopback from CE to PE Detection:

Framed SAToP does not detect any loopback.

	Loopback Detected at PE	Controller Status at PE (Remote)	Controller Status at CE (Remote)
Unframed SAToP	No	Not in Loopback	Loopback
Framed SAToP	No	Not in Loopback	Loopback
CESOP	Yes	Loopback	Not in loopback

Circuit Emulation Service over Packet-Switched Network

CESoPSN is a method for encapsulating structured (NxDS0) TDM signals as pseudowires over packet switching networks.

Restrictions for CESoPSN on T1 Interface

- The maximum number of CEM interface supported is 192.
- DS0 loopback is not supported on the T1 interface.
- Alarm forwarding is not supported on the T1 interface.
- Card protection is not supported on the T1 interface.



CHAPTER 4

Configuring T1 or E1 Interfaces

This chapter provides the information about how to configure a T1 or E1 interface.

- [Setting the Card Type, on page 11](#)
- [Configuring the Controller, on page 11](#)
- [Configuring Structure-Agnostic TDM over Packet - T1/E1 Interfaces, on page 14](#)
- [Configuring CEM Group for CESoPSN on T1 Interface, on page 18](#)
- [Configuring DS1 Local Connet, on page 19](#)

Setting the Card Type

To set the card type for the T1/E1 interfaces, complete these steps:

```
enable
configure terminal
card type t1 0 1
exit
```

Configuring the Controller

To configure T1 interface, use the following commands:

```
enable
configure terminal
controller t1 0/1/0
clock source internal
framing esf
cablelength short 110
linecode b8zs
no shut
exit
```



Note For T1 interface, the default frame mode is Extended Super Frame (ESF).

To configure E1 interface, use the following commands:

```

enable
configure terminal
controller e1 0/1/0
clock source internal
framing crc4
linecode hdb3
no shut
exit

```



Note For E1 interface, the default frame mode is Cyclic Redundancy Check 4 (CRC4).

Starting with Cisco IOS XE Cupertino 17.7.1, the cable length short values are modified for the following interface modules:

- A900-IMA48D-C
-

Table 7: Cable Length Short Values

Cable Length Short (in ft)	Range (in ft)
110	0–133
220	134–266
330	267–399
440	400–533
550	534–655

For the following interface modules, the cable length short values remain the same:

Table 8: IM Port Support - Cable Length Short

Port Supported	IM
T1 Port	<ul style="list-style-type: none"> • A900-IMA8D • A900-IMA16D • A900-IMA32D

Table 9: Cable Length Short Values - IMs

Cable Length Short (in ft)	Range (in ft)
110	0–110
220	111–220
330	221–330

Cable Length Short (in ft)	Range (in ft)
440	331–440
550	441–550

Verifying the Controller Configuration

Use the **show controllers** command to verify the controller configuration:

```
Router# show controller e1 0/2/0
E1 0/2/0 is up.
Applique type is ASR903-48T1E1-CE

Cablelength is short 110
No alarms detected.
alarm-trigger is not set
Soaking time: 3, Clearance time: 10
AIS State:Clear LOS State:Clear LOF State:Clear
Framing is ESF, FDL is ansi, Line Code is B8ZS, Clock Source is Line.
BER thresholds: SF = 10e-3 SD = 10e-6
Data in current interval (230 seconds elapsed):
Near End
  0 Line Code Violations, 0 Path Code Violations
  0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
  0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
  0 Path Failures, 0 SEF/AIS Secs
Far End
  0 Line Code Violations, 0 Path Code Violations
  0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
  0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
  0 Path Failures
Data in Interval 1:
Near End
  0 Line Code Violations, 0 Path Code Violations
  0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins
  0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
  1 Path Failures, 0 SEF/AIS Secs
Far End Data
  0 Line Code Violations, 0 Path Code Violations
  0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins
  4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
  0 Path Failures
Total Data (last 1 15 minute intervals):
Near End
  0 Line Code Violations, 0 Path Code Violations,
  0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins,
  0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
  1 Path Failures, 0 SEF/AIS Secs
Far End
  0 Line Code Violations, 0 Path Code Violations,
  0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins,
  4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
  0 Path Failures
```

Use the **show platform** command to verify the router information:

Configuring Structure-Agnostic TDM over Packet - T1/E1 Interfaces

To configure Structure-Agnostic TDM over Packet (SAToP), use the following commands:

```
enable
configure terminal
controller t10/1/0
cem-group 0 unframed
exit
```



Note To configure SAToP, the framing mode for the port is set to unframed.

Verifying CEM Configuration for SAToP

Use the following command to verify the CEM configuration for T1/E1 interfaces:

```
Router# show cem circuit interface CEM 0/1/0

CEM0/1/0, ID: 0, Line: UP, Admin: UP, Ckt: ACTIVE
Controller state: up, T1 state: up
Idle Pattern: 0xFF, Idle CAS: 0x8
Dejitter: 5 (In use: 0)
Payload Size: 192
Framing: Unframed
CEM Defects Set
None

Signalling: No CAS
RTP: No RTP

Ingress Pkts:    475471          Dropped:          0
Egress Pkts:    475471          Dropped:          0

CEM Counter Details
Input Errors:    0                Output Errors:    0
Pkts Missing:   0                Pkts Reordered:  0
Misorder Drops: 0                JitterBuf Underrun: 0
Error Sec:      0                Severly Errored Sec: 0
Unavailable Sec: 0                Failure Counts:   0
Pkts Malformed: 0                JitterBuf Overrun: 0
```

Configuring Framed SAToP



Note Framing type should be maintained same in all routers end to end.

To configure framed SAToP:

```

enable
configure terminal
controller t1 0/1/0
framing esf
cem-group 0 framed
exit

```

Verifying Framed SAToP Configuration

Use the following command to verify the CEM configuration for T1/E1 interfaces:

```

Router# show cem circuit interface cem 0/1/0

CEM0/1/0, ID: 0, Line: UP, Admin: UP, Ckt: ACTIVE
Mode :T1, CEM Mode: T1-SAToP
Controller state: up, T1 state: up
Idle Pattern: 0xFF, Idle CAS: 0x8
Dejitter: 5 (In use: 0)
Payload Size: 192
Framing: Framed SAToP
CEM Defects Set
None

Signalling: No CAS
RTP: No RTP

Ingress Pkts: 7836 Dropped: 0
Egress Pkts: 7836 Dropped: 0

CEM Counter Details
Input Errors: 0 Output Errors: 0
Pkts Missing: 0 Pkts Reordered: 0
Misorder Drops: 0 JitterBuf Underrun: 0
Error Sec: 0 Severly Errored Sec: 0
Unavailable Sec: 0 Failure Counts: 0
Pkts Malformed: 0 JitterBuf Overrun: 0
Generated Lbits: 0 Received Lbits: 0
Generated Rbits: 0 Received Rbits: 0

```

Verifying CEM Statistics for Framed SAToP

Use the following commands to verify the pseudowire configuration for SAToP:

- **show cem circuit**—Displays information about the circuit state, administrative state, the CEM ID of the circuit, and the interface on which it is configured. If cross connect is configured under the circuit, the command output also includes information about the attachment circuit status.

```

Router# show cem circuit

<0-4294967295>      CEM ID
detail             Detailed information of cem ckt(s)
interface          CEM Interface
summary           Display summary of CEM ckts
|                 Output modifiers
Router# show cem circuit

CEM Int. ID Ctrlr Admin Circuit AC
-----
CEM0/1/0 1  UP    UP    Active UP
CEM0/1/1 2  UP    UP    Active UP
CEM0/1/2 3  UP    UP    Active UP

```

```
CEM0/1/3 4   UP   UP   Active UP
CEM0/1/4 5   UP   UP   Active UP
```

- **show cem circuit *cem-id*** — Displays the detailed information about that particular circuit.

```
Router# show cem circuit 0
CEM0/1/2, ID: 0, Line: UP, Admin: UP, Ckt: ACTIVE
Mode :T1, CEM Mode: T1-SAToP
Controller state: up, T1 state: up
Idle Pattern: 0xFF, Idle CAS: 0x8
Dejitter: 5 (In use: 0)
Payload Size: 192
Framing: Framed SAToP
CEM Defects Set
None

Signalling: No CAS
RTP: No RTP

Ingress Pkts: 167027103 Dropped: 0
Egress Pkts: 167027102 Dropped: 0
```

```
CEM Counter Details
Input Errors: 0 Output Errors: 0
Pkts Missing: 0 Pkts Reordered: 0
Misorder Drops: 0 JitterBuf Underrun: 0
Error Sec: 0 Severly Errored Sec: 0
Unavailable Sec: 0 Failure Counts: 0
Pkts Malformed: 0 JitterBuf Overrun: 0
Generated Lbits: 0 Received Lbits: 0
Generated Rbits: 0 Received Rbits: 0
```

- **show cem circuit summary** — Displays the number of circuits which are up or down per interface basis.

```
Router# show cem circuit summary

CEM Int. Total Active Inactive
-----
CEM0/1/0  1    1    0
CEM0/1/1  1    1    0
CEM0/1/2  1    1    0
CEM0/1/3  1    1    0
CEM0/1/4  1    1    0
```

Verifying CEM Statistics for SAToP

Use the following commands to verify the pseudowire configuration for SAToP:

- **show cem circuit**—Displays information about the circuit state, administrative state, the CEM ID of the circuit, and the interface on which it is configured. If cross connect is configured under the circuit, the command output also includes information about the attachment circuit status.

```
Router# show cem circuit

<0-32000>   CEM ID
detail     Detailed information of cem ckt(s)
interface  CEM Interface
summary    Display summary of CEM ckts
|          Output modifiers
```

```
Router# show cem circuit
```

CEM Int.	ID	Line	Admin	Circuit	AC
CEM0/1/0	1	UP	UP	ACTIVE	--/--
CEM0/1/0	2	UP	UP	ACTIVE	--/--
CEM0/1/0	3	UP	UP	ACTIVE	--/--
CEM0/1/0	4	UP	UP	ACTIVE	--/--
CEM0/1/0	5	UP	UP	ACTIVE	--/--

- **show cem circuit *cem-id*** — Displays the detailed information about that particular circuit.

```
Router# show cem circuit 0
```

```
CEM0/1/2, ID: 0, Line: UP, Admin: UP, Ckt: ACTIVE
Controller state: up, T1 state: up
Idle Pattern: 0xFF, Idle CAS: 0x8
Dejitter: 5 (In use: 0)
Payload Size: 192
Framing: Unframed
CEM Defects Set
None

Signalling: No CAS
RTP: No RTP

Ingress Pkts:    11060          Dropped:          0
Egress Pkts:    11061          Dropped:          0

CEM Counter Details
Input Errors:    0              Output Errors:    0
Pkts Missing:   0              Pkts Reordered:  0
Misorder Drops: 0              JitterBuf Underrun: 0
Error Sec:      0              Severly Errored Sec: 0
Unavailable Sec: 0              Failure Counts:   0
Pkts Malformed: 0              JitterBuf Overrun: 0
```

- **show cem circuit summary** — Displays the number of circuits which are up or down per interface basis.

```
Router# show cem circuit summary
```

CEM Int.	Total	Active	Inactive
CEM0/1/0	1	1	0

Configuring CEM Group for SAToP for T1 Interfaces

To configure a CEM group for SAToP.

```
enable
configure terminal
controller t1 0/1/0
cem-group 0 unframed
end
```



Note You need metroaggrservice license to configure CEM group on the Interface Module.

Configuring CEM Group for CESoPSN on T1 Interface

The following section describes how to configure a CEM group for CESoPSN.

To configure xconnect over MPLS, use the following commands:

```
enable
configure terminal
controller t1 0/1/32
cem-group 0 timeslots 1-10
```

Configure cross-connect:

```
enable
configure terminal
interface cem 0/1/32
cem 0
xconnect 10.2.2.2 10 encapsulation mpls
```

Perform a similar configuration on the other end of the pseudowire.

```
show running-config | sec 0/1/16
controller t1 0/1/16
 framing esf
 linecode b8zs
 cablelength short 110
  cem-group 0 timeslots 1-10
interface CEM0/1/16
 no ip address
 cem 0
  xconnect 10.2.2.2 10 encapsulation mpls
```

Check for cross-connect configuration using the following command:

```
Router#show xconnect all | i 0/1/32
UP pri ac CE0/1/32:0(CESoPSN Basic) UP mpls 10.2.2.2:10 UP

Router#sh controllers t1 0/1/32
T1 0/1/32 is up
Applique type is NCS4200-48T1E1-CE
Cablelength is short 110
No alarms detected.
alarm-trigger is not set
Soaking time: 3, Clearance time: 10
AIS State:Clear LOS State:Clear LOF State:Clear
Framing is ESF, Line Code is B8ZS, Clock Source is Line.
```

Verifying CEM for CESoPSN on T1 Interface

Use the following commands to verify the pseudowire configuration for CESoPSN:

- `show cem circuit`—Displays information about the circuit state, administrative state, the CEM ID of the circuit, and the interface on which it is configured. If cross connect is configured under the circuit, the command output also includes information about the attachment circuit status.

- show mpls l2 vc—Displays information about the MPLS VC.
- show mpls l2 vc detail—Displays detailed information about the MPLS VC.

```

PE1#show mpls l2 vc 10

Local intf      Local circuit          Dest address      VC ID      Status
-----
CE0/1/32        CESoPSN Basic 0       10.2.2.2         10         UP

PE1#sh mpls l2 vc 10 detail
Local interface: CE0/1/32 up, line protocol up, CESoPSN Basic 0 up
  Destination address: 10.2.2.2, VC ID: 10, VC status: up
  Output interface: Te0/0/0, imposed label stack {650}
  Preferred path: not configured
  Default path: active
  Next hop: 209.165.202.129
  Create time: 00:21:25, last status change time: 00:21:25
  Last label FSM state change time: 00:21:25
  Signaling protocol: LDP, peer 10.2.2.2:0 up
  Targeted Hello: 10.1.1.1(LDP Id) -> 10.2.2.2, LDP is UP
  Graceful restart: configured and not enabled
  Non stop routing: not configured and not enabled
  Status TLV support (local/remote) : enabled/supported
    LDP route watch                  : enabled
    Label/status state machine       : established, LruRru
  Last local dataplane status rcvd: No fault
  Last BFD dataplane status rcvd: Not sent
  Last BFD peer monitor status rcvd: No fault
  Last local AC circuit status rcvd: No fault
  Last local AC circuit status sent: No fault
  Last local PW i/f circ status rcvd: No fault
  Last local LDP TLV status sent: No fault
  Last remote LDP TLV status rcvd: No fault
  Last remote LDP ADJ status rcvd: No fault
  MPLS VC labels: local 577, remote 650
  Group ID: local 238, remote 276
  MTU: local 0, remote 0
  Remote interface description:
  Sequencing: receive disabled, send disabled
  Control Word: On (configured: autosense)
  SSO Descriptor: 10.2.2.2/10, local label: 577
  Dataplane:
    SSM segment/switch IDs: 6893171/4140658 (used), PWID: 674
  VC statistics:
    transit packet totals: receive 0, send 0
    transit byte totals: receive 0, send 0
    transit packet drops: receive 0, seq error 0, send 0

```

Configuring DS1 Local Connet

The following section describes how to configure first segment for DS1 local connection:

```

enable
configure terminal
controller T1 0/1/0
framing unframed
clock source internal
linecode b8zs

```

```
cablelength short 110
cem-group 0 unframed
description TO_CEM0/1/0
```

The following section describes how to configure second segment for DS1 local connection:

```
enable
configure terminal
controller T1 0/1/3
framing unframed
clock source recovered 0
linecode b8zs
cablelength short 110
cem-group 0 unframed
description TO_CEM0/1/1
```

The following section describes how to create a DS1 local connection:

```
enable
configure terminal
connect dsl_connect CEM0/1/0 0 CEM0/1/3 0
```

Verifying DS1 Local Connect

Use the following commands to verify the DS1 local connection:

- `show connection name`—Displays information about the connection state and segment state.

```
Router#show connection name dsl_connect

Connection: 673 - dsl_connect
Current State: UP
Segment 1: CEM0/1/0 SATOP T1 0 up
Segment 2: CEM0/1/3 SATOP T1 0 up
```



CHAPTER 5

Monitoring the T1 or E1 Interface Module

This chapter provides information on monitoring the T1 or E1 interface module. Some of monitoring tools available are:

- Performance Monitoring
- [Performance Monitoring, on page 21](#)
- [Clearing the PMON Data, on page 32](#)

Performance Monitoring

Table 10: Feature History Table

Feature Name	Release Information	Description
GR-820-CORE Performance Monitoring	Cisco IOS XE Bengaluru 17.5.1	The show controller tabular command enables you to view the performance monitoring details in tabular form as per GR-820-Core standards.

The performance monitoring result displays the statistics or error count generated on the TDM lines for DS1.

To view the performance monitoring details, use the **show controller** command:

```
Router# show controllers t1 0/1/1

T1 0/1/1 is down.
  Applique type is -48T1E1-CE
  Cablelength is short 110
  No alarms detected.
  alarm-trigger is not set
  Soaking time: 3, Clearance time: 10
  AIS State:Clear  LOS State:Clear  LOF State:Clear
  Framing is ESF, FDL is ansi, Line Code is B8ZS, Clock Source is Line.
  BER thresholds:  SF = 10e-3  SD = 10e-6
  Data in current interval (230 seconds elapsed):
    Near End
      0 Line Code Violations, 0 Path Code Violations
      0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
      0 Errorred Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
      0 Path Failures, 0 SEF/AIS Secs
    Far End
      0 Line Code Violations, 0 Path Code Violations
```

```

    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
    0 Path Failures
Data in Interval 1:
Near End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
    1 Path Failures, 0 SEF/AIS Secs
Far End Data
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins
    4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
    0 Path Failures
Total Data (last 1 15 minute intervals):
Near End
    0 Line Code Violations, 0 Path Code Violations,
    0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins,
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
    1 Path Failures, 0 SEF/AIS Secs
Far End
    0 Line Code Violations, 0 Path Code Violations,
    0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins,
    4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
    0 Path Failures

```

Router# **show controllers e1 0/1/1**

```

E1 0/1/1 is down.
Applique type is -48T1E1-CE
Cablelength is short 110
No alarms detected.
alarm-trigger is not set
Soaking time: 3, Clearance time: 10
AIS State:Clear  LOS State:Clear  LOF State:Clear
Framing is ESF, FDL is ansi, Line Code is B8ZS, Clock Source is Line.
BER thresholds:  SF = 10e-3  SD = 10e-6
Data in current interval (230 seconds elapsed):
Near End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
    0 Path Failures, 0 SEF/AIS Secs
Far End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
    0 Path Failures
Data in Interval 1:
Near End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
    1 Path Failures, 0 SEF/AIS Secs
Far End Data
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins
    4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
    0 Path Failures
Total Data (last 1 15 minute intervals):
Near End
    0 Line Code Violations, 0 Path Code Violations,
    0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins,
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
    1 Path Failures, 0 SEF/AIS Secs

```

```

Far End
  0 Line Code Violations, 0 Path Code Violations,
  0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins,
  4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
  0 Path Failures

```

To view the performance monitoring details on T1 controller, use the **show controller t1 tabular** command:

```
Router#show controllers t1 0/1/0 tabular
```

```

T1 0/1/0 is up
  Applique type is -48T1E1-CE
  Cablelength is short 110
  No alarms detected.
  alarm-trigger is not set
  Soaking time: 3, Clearance time: 10
  Framing is ESF, Line Code is B8ZS, Clock Source is Line.
  BER thresholds: SF = 10e-3 SD = 10e-6
  Near End Data
  INTERVAL      CV-L   ES-L   CV-P   ES-P   SES-P   CSS-P   SAS-P   UAS-P   FC-P
  09:49-10:01   0      0      0      0      0      0      0      0      0
  Far End Data
  INTERVAL      ES-LFE  ES-PFE  SES-PFE  SEFS-PFE  CSS-PFE  UAS-PFE  FC-PFE
  09:49-10:01   0        0        0        0        0        0        0

```

Starting with Cisco IOS XE 17.11.1, you can view the previous day performance monitoring details using the following **show controller** commands for the T1 or E1 controllers.

- show controllers { t1 | e1 }
- show controllers { t1 | e1 } tabular
- show controllers { t1 | e1 } remote performance
- show controllers { t1 | e1 } remote performance tabular

```

router#show controllers t1 0/5/0
T1 0/5/0 is down
  Applique type is A900-IMA48D-C
  Cablelength is short 110
  Receiver has loss of signal.
  alarm-trigger is not set
  Soaking time: 3, Clearance time: 10
  Framing is ESF, Line Code is B8ZS, Clock Source is Line.
  BER thresholds: SF = 10e-3 SD = 10e-6
  Data in current interval (800 seconds elapsed):
  Near End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 799 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 799 Unavail Secs
    0 Path Failures, 0 SEF/AIS Secs
  Far End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
    0 Path Failures
  Data in Interval 1:
  .....
  Total Data (last 24 hours)
  Near End
    0 Line Code Violations, 0 Path Code Violations,
    0 Slip Secs, 0 Fr Loss Secs, 86423 Line Err Secs, 0 Degraded Mins,

```

```

    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 86423 Unavail Secs
    0 Path Failures, 0 SEF/AIS Secs
Far End
    0 Line Code Violations, 0 Path Code Violations,
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
    0 Path Failures
Total (Previous Day)
Near End
    0 Line Code Violations, 0 Path Code Violations,
    0 Slip Secs, 0 Fr Loss Secs, 86438 Line Err Secs, 0 Degraded Mins,
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 86438 Unavail Secs
    2 Path Failures, 0 SEF/AIS Secs
Far End
    0 Line Code Violations, 0 Path Code Violations,
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
    0 Path Failures

```

router#show controllers t1 0/5/0 tabular

T1 0/5/0 is down

```

Applique type is A900-IMA48D-C
Cablelength is short 110
Receiver has loss of signal.
alarm-trigger is not set
Soaking time: 3, Clearance time: 10
Framing is ESF, Line Code is B8ZS, Clock Source is Line.
BER thresholds: SF = 10e-3 SD = 10e-6
Near End Data

```

INTERVAL	CV-L	ES-L	CV-P	ES-P	SES-P	CSS-P	SAS-P	UAS-P	FC-P
05:56-05:58	0	119	0	0	0	0	0	119	0
05:41-05:56	0	900	0	0	0	0	0	900	0
.....									
06:11-06:26	0	900	0	0	0	0	0	900	0
05:56-06:11	0	901	0	0	0	0	0	901	0
Total	0	86423	0	0	0	0	0	86423	0
Total (Previous Day)									
05:26-05:26	0	86438	0	0	0	0	0	86438	2

Router#show controllers T1 0/3/0 remote performance

T1 0/3/0 is down.

```

Applique type is A900-IMA48D-C
Receiver has loss of signal.
Cablelength is short 110
Framing is ESF, FDL is ansi & att, Line Code is B8ZS, Clock Source is Line.
Far End Data in current interval (590 seconds elapsed):
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 1:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 2:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 3:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 4:

```



```

    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 85:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 86:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 87:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 88:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 89:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 90:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 91:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 92:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 93:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 94:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 95:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Far End Data in Interval 96:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Total Far End Data (last 24 hours)
    0 Line Code Violations, 0 Path Code Violations,
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Total (Previous Day)
    0 Line Code Violations, 0 Path Code Violations,
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs

```

```
Router#show controllers T1 0/3/0 remote performance tabular
```

```
T1 0/3/0 is down.
```

```
Applique type is A900-IMA48D-C
```

```
Receiver has loss of signal.
```

Cablelength is short 110
 Framing is ESF, FDL is ansi & att, Line Code is B8ZS, Clock Source is Line.
 Far End Data

INTERVAL	ES-LFE	ES-PFE	SES-PFE	SEFS-PFE	CSS-PFE	UAS-PFE	FC-PFE
04:33-04:44	0	0	0	0	0	0	0
04:18-04:33	0	0	0	0	0	0	0
04:03-04:18	0	0	0	0	0	0	0
03:48-04:03	0	0	0	0	0	0	0
03:33-03:48	0	0	0	0	0	0	0
03:18-03:33	0	0	0	0	0	0	0
03:03-03:18	0	0	0	0	0	0	0
02:48-03:03	0	0	0	0	0	0	0
02:33-02:48	0	0	0	0	0	0	0
02:18-02:33	0	0	0	0	0	0	0
02:03-02:18	0	0	0	0	0	0	0
01:48-02:03	0	0	0	0	0	0	0
01:33-01:48	0	0	0	0	0	0	0
01:18-01:33	0	0	0	0	0	0	0
01:03-01:18	0	0	0	0	0	0	0
00:48-01:03	0	0	0	0	0	0	0
00:33-00:48	0	0	0	0	0	0	0
00:18-00:33	0	0	0	0	0	0	0
00:03-00:18	0	0	0	0	0	0	0
23:48-00:03	0	0	0	0	0	0	0
23:33-23:48	0	0	0	0	0	0	0
23:18-23:33	0	0	0	0	0	0	0
23:03-23:18	0	0	0	0	0	0	0
22:48-23:03	0	0	0	0	0	0	0
22:33-22:48	0	0	0	0	0	0	0
22:18-22:33	0	0	0	0	0	0	0
22:03-22:18	0	0	0	0	0	0	0
21:48-22:03	0	0	0	0	0	0	0
21:33-21:48	0	0	0	0	0	0	0
21:18-21:33	0	0	0	0	0	0	0
21:03-21:18	0	0	0	0	0	0	0
20:48-21:03	0	0	0	0	0	0	0
20:33-20:48	0	0	0	0	0	0	0
20:18-20:33	0	0	0	0	0	0	0
20:03-20:18	0	0	0	0	0	0	0
19:48-20:03	0	0	0	0	0	0	0
19:33-19:48	0	0	0	0	0	0	0
19:18-19:33	0	0	0	0	0	0	0
19:03-19:18	0	0	0	0	0	0	0
18:48-19:03	0	0	0	0	0	0	0
18:33-18:48	0	0	0	0	0	0	0
18:18-18:33	0	0	0	0	0	0	0
18:03-18:18	0	0	0	0	0	0	0
17:48-18:03	0	0	0	0	0	0	0
17:33-17:48	0	0	0	0	0	0	0
17:18-17:33	0	0	0	0	0	0	0
17:03-17:18	0	0	0	0	0	0	0
16:48-17:03	0	0	0	0	0	0	0
16:33-16:48	0	0	0	0	0	0	0
16:18-16:33	0	0	0	0	0	0	0
16:03-16:18	0	0	0	0	0	0	0
15:48-16:03	0	0	0	0	0	0	0
15:33-15:48	0	0	0	0	0	0	0
15:18-15:33	0	0	0	0	0	0	0
15:03-15:18	0	0	0	0	0	0	0
14:48-15:03	0	0	0	0	0	0	0
14:33-14:48	0	0	0	0	0	0	0
14:18-14:33	0	0	0	0	0	0	0
14:03-14:18	0	0	0	0	0	0	0
13:48-14:03	0	0	0	0	0	0	0

13:33-13:48	0	0	0	0	0	0	0
13:18-13:33	0	0	0	0	0	0	0
13:03-13:18	0	0	0	0	0	0	0
12:48-13:03	0	0	0	0	0	0	0
12:33-12:48	0	0	0	0	0	0	0
12:18-12:33	0	0	0	0	0	0	0
12:03-12:18	0	0	0	0	0	0	0
11:48-12:03	0	0	0	0	0	0	0
11:33-11:48	0	0	0	0	0	0	0
11:18-11:33	0	0	0	0	0	0	0
11:03-11:18	0	0	0	0	0	0	0
10:48-11:03	0	0	0	0	0	0	0
10:33-10:48	0	0	0	0	0	0	0
10:18-10:33	0	0	0	0	0	0	0
10:03-10:18	0	0	0	0	0	0	0
09:48-10:03	0	0	0	0	0	0	0
09:33-09:48	0	0	0	0	0	0	0
09:18-09:33	0	0	0	0	0	0	0
09:03-09:18	0	0	0	0	0	0	0
08:48-09:03	0	0	0	0	0	0	0
08:33-08:48	0	0	0	0	0	0	0
08:18-08:33	0	0	0	0	0	0	0
08:03-08:18	0	0	0	0	0	0	0
07:48-08:03	0	0	0	0	0	0	0
07:33-07:48	0	0	0	0	0	0	0
07:18-07:33	0	0	0	0	0	0	0
07:03-07:18	0	0	0	0	0	0	0
06:48-07:03	0	0	0	0	0	0	0
06:33-06:48	0	0	0	0	0	0	0
06:18-06:33	0	0	0	0	0	0	0
06:03-06:18	0	0	0	0	0	0	0
05:48-06:03	0	0	0	0	0	0	0
05:33-05:48	0	0	0	0	0	0	0
05:18-05:33	0	0	0	0	0	0	0
05:03-05:18	0	0	0	0	0	0	0
04:48-05:03	0	0	0	0	0	0	0
04:33-04:48	0	0	0	0	0	0	0
Total	0	0	0	0	0	0	0
Total (Previous Day)							
17:48-17:48	0	0	0	0	0	0	0

Clearing the PMON Data

The PMON data for the device is collected and stored every 15 minutes. A total of 96 PMON datasets are collected for a day (24 hours). You can view the PMON data by using the **show controller** command. However, if required, the dataset can be reset using the **clear counters** command.

Table 11: Feature History

Feature Name	Release Information	Description
Clear Counters command	Cisco IOS XE 17.15.1	<ul style="list-style-type: none"> • Unlike the previous release, where the clear counters command reset the old dataset, from this release onwards, the command resets all the PMON datasets, including the current dataset. • You can clear the PMON data for a specific interface module on the device using the clear controller hw-module command



Note The **clear counters** command erases all the PMON data that can't be retrieved. Use the command carefully and only if necessary.

Following are the different **clear counters** command:

- Use the following command if you want to clear the PMON data for all interface modules on the device:

```
clear counters
```

- Use the following command if you want to clear the PMON data for a specific interface module:

```
clear controller hw-module <slot>
```

The command is useful in the following scenarios:

The command is useful when there is a need for a fresh set of data, like troubleshooting any network issues or monitoring the performance of a new configuration. After clearing, you can then monitor and analyze the new data that gets collected.



CHAPTER 6

Troubleshooting the T1 or E1 Interface Module

You can use the following methods to troubleshoot the T1 or E1 interface modules:

- Bit Error Rate Testing (BERT)
- Loopback
- [Overview of BERT, on page 35](#)
- [Loopback on T1 or E1 Interfaces, on page 43](#)
- [User-defined Remote Loopback on T1 Interfaces, on page 46](#)

Overview of BERT

Bit Error Rate Testing (BERT) is used to test the integrity of the physical line.

The interface contains on board BERT circuitry. With this circuitry, the interface software can send and detect a programmable pattern that is compliant with CCITT/ITU O.151, O.152, O.153 pseudo-random, and repetitive test patterns. BERTs allow you to test cables and signal problems in the field.

The bit error rate (BER) is determined by comparing the erroneous bits received with the total number of bits received. You can display and analyze the total number of error bits transmitted and the total number of bits received on the link. You can retrieve error statistics anytime during the BERT.

Both the total number of bits and the error bits received are available for analysis. You can select the testing period from 1 minute to 24 hours and you can also retrieve the error statistics anytime during the BERT test.

Running a BERT Test

When running a BERT test, the system expects to receive the same pattern that it transmits. To help ensure this, two common options are available:

- Use a loopback somewhere in the link or network
- Configure remote testing equipment to transmit the same BERT test pattern at the same time.

The BERT runtime engine can be kept running until the interval completes or can be stopped by unconfiguring it anytime.

Types of BERT

BERT is supported in two directions:

- Line - supports BERT in TDM direction

- System - supports BERT in PSN direction

BERT engines uses different BERT patterns for transmission for each mode. The supported BERT patterns on each card is described.

BERT Restrictions

- BERT is not supported on the following modes:
 - T3—Framing M-13, non-channelized
 - E3—Framing G832, channelized
- When the BERT is initiated with pattern 0s and 1s from the local end and the loopback local is applied from the far end, then the BERT syncing does not happen. Since the BERT process is asserted as LOS alarms for all 0s and AIS alarms for all 1s BERT patterns. Whereas the BERT syncing behaves properly when the BERT is initiated from both the local and the far end.

For all 1s on T3 or E3, the BERT behaviour is not asserted as AIS and the BERT syncing happens as usual.

- In the unframed mode, BERT sync is not stable and may generate alarms until Cisco IOS XE Fuji 16.9.4.



Note Framing type should be similar in all routers end to end.

- System BERT is not supported for any pattern in framed SATOP for releases earlier to Cisco IOS XE 17.13.1.

Starting with Cisco IOS XE 17.13.1, system BERT is supported for any pattern in the framed SATOP on T1/E1 interface module.

- System BERT is not configurable, without cem-group configuration.
- Path modes, unframed modes, and concatenation modes are not supported.
- The default BERT pattern supported is PRBS. The QRSS pattern is supported only on T1 or E1 level and the STS-1E path level for pattern 2^20-O151.

BERT Restrictions for Cisco IOS XE Bengaluru 17.4.1 release

- When the BERT is initiated from the local end and the loopback local is applied from the far end, then BERT syncing does not happen. Since the BERT process is asserted as LOS alarms for all 0s and AIS alarms for all 1s BERT patterns. Whereas the BERT syncing behaves properly when the BERT is initiated from both the local and the far end.

BERT for SAToP

BERT is supported for both unframed and framed modes.

Configuring BERT for SAToP

Before You Begin

Before you run BERT test, you must configure card type and controller.

To run a BERT on T1/E1 interface, perform the following tasks in global configuration mode.

```
enable
configure terminal
controller t10/1/1
bert pattern 2^11 interval 5 direction line/system
exit
```



Note To terminate a BERT test during the specified test period, use the **no bert** command.

Verifying BERT Configuration for SAToP

Use the following command to verify the BERT configuration for T1/E1 interfaces:

```
Router# show controllers t1 0/1/1

T1 0/1/1 is up.
  Applique type is -48T1E1-CE
  Cablelength is short 110
  DSX1 BERT pattern      : 2^11
  DSX1 BERT direction   : Line
  DSX1 BERT sync        : no sync
  DSX1 BERT sync count  : 0
  DSX1 BERT interval    : 5
  DSX1 BERT time remain : 2
  DSX1 BERT total errs  : 0
  DSX1 BERT total k bits: 0
  DSX1 BERT errors (last): 0
  DSX1 BERT k bits (last): 0
  Last clearing of BERT counters never
  No alarms detected.
  alarm-trigger is not set
  Soaking time: 3, Clearance time: 10
  AIS State:Clear  LOS State:Clear  LOF State:Clear
  Framing is ESF, FDL is ansi, Line Code is B8ZS, Clock Source is Line.
  BER thresholds:  SF = 10e-3  SD = 10e-6
  Data in current interval (230 seconds elapsed):
    Near End
      0 Line Code Violations, 0 Path Code Violations
      0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
      0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
      0 Path Failures, 0 SEF/AIS Secs
    Far End
      0 Line Code Violations, 0 Path Code Violations
      0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
      0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
      0 Path Failures
  Data in Interval 1:
    Near End
      0 Line Code Violations, 0 Path Code Violations
      0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins
```

```

0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
1 Path Failures, 0 SEF/AIS Secs
Far End Data
0 Line Code Violations, 0 Path Code Violations
0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins
4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
0 Path Failures
Total Data (last 1 15 minute intervals):
Near End
0 Line Code Violations, 0 Path Code Violations,
0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins,
0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
1 Path Failures, 0 SEF/AIS Secs
Far End
0 Line Code Violations, 0 Path Code Violations,
0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins,
4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
0 Path Failures
    
```

You can view the results of a BERT test at the following times:

- After you terminate the test using the **no bert** command
- After the test runs completely
- Anytime during the test (in real time)

Framed SAToP System BERT

Table 12: Feature History

Feature Name	Release Information	Description
Framed SAToP System BERT	Cisco IOS XE 17.13.1	You can configure SATOP system BERT with framing under CEM circuits on T1 or E1 interfaces and verify if the BERT is stable and transmitted end-to-end.

System BERT is used between PEs on the core side. This feature is supported only on the 48-port T1/E1 Interface module. You can run a maximum of 16 BERTs at a time.

Restrictions for Framed SAToP System BERT

- Framing change is not allowed while bert is running

Configuring Framed SAToP System BERT

You can configure the framed SAToP system BERT in the following scenarios:

- **Scenario 1: PE1—core—PE2**
CEM system BERT is configured on both PE1 and PE2.
- **Scenario 2: PE1—core—PE2**
CEM system BERT is configured on PE1 and loopback local is configured on PE2.

Scenario 1: PE1—CORE—PE2

1. Configure system BERT on PE1.
2. Configure system BERT on PE2.
3. Configure cross-connect on core.

Configure System BERT on PE1

```
PE1#config terminal
PE1(config)#controller T1 0/4/35
PE1(config-controller)#bert pattern 3-in-24 interval 40 direction system
PE1(config)#end
```

Configure System BERT on PE2

```
PE1#config terminal
PE1(config)#controller T1 0/3/17
PE1(config-controller)#bert pattern 3-in-24 interval 40 direction system
PE1(config)#end
```

Configure Cross Connect on Core

Ensure that the cross connection is UP before configuring BERT.

Scenario 2: PE1—core—PE2

1. Configure system BERT on T1 at the PE1 side.
2. Apply loopback local on PE2.
3. Configure cross-connect on core.

```
PE1#show run | s 0/4/35
controller T1 0/4/35
  threshold sd-ber 6
  threshold sf-ber 3
  framing esf
  linecode b8zs
  cablelength short 110
  no snmp trap link-status
  cem-group 0 framed
interface CEM0/4/35
  no ip address
  cem 0
```

Configure System BERT on PE1

```
PE1#config terminal
PE1(config)#controller T1 0/4/35
PE1(config-controller)#bert pattern 3-in-24 interval 40 direction system
PE1(config)#end
```

Apply Loopback Local on PE2

```
PE2(config-controller)#controller T1 0/4/0
PE2(config-controller)#loopback local
PE2(config-controller)#end
```

Configure Cross Connect on Core

Ensure that the cross connection is UP before configuring BERT.

Verifying Framed SAToP System BERT

Use the following **show** commands to verify the framed SAToP system BERT configuration:

Scenario 1: PE1—CORE—PE2

Verify the configuration on PE1

```
PE1#show xconnect all
Legend:  XC ST=Xconnect State  S1=Segment1 State  S2=Segment2 State
         UP=Up                DN=Down                AD=Admin Down    IA=Inactive
         SB=Standby          HS=Hot Standby      RV=Recovering   NH=No Hardware

XC ST Segment 1                               S1 Segment 2                               S2
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
UP pri mpls 2.2.2.2:500                        UP   ac CE0/4/35:0 (SATOP T1)  UP
```

```
PE1#show controller T1 0/4/35 | sec BERT
DSX1 BERT test result: (running)
DSX1 BERT pattern      : 3-in-24
DSX1 BERT direction   : System
DSX1 BERT sync       : sync
DSX1 BERT sync count  : 1
DSX1 BERT interval    : 100
DSX1 BERT time remain : 01:39:52
DSX1 BERT total errs  : 0
DSX1 BERT total k bits: 10759
DSX1 BERT errors (last): 0
DSX1 BERT k bits (last): 10759
Last clearing of BERT counters never
```

Verify the configuration on PE2

```
PE1#show xconnect all
Legend:  XC ST=Xconnect State  S1=Segment1 State  S2=Segment2 State
         UP=Up                DN=Down                AD=Admin Down    IA=Inactive
         SB=Standby          HS=Hot Standby      RV=Recovering   NH=No Hardware

XC ST Segment 1                               S1 Segment 2                               S2
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
UP pri mpls 3.3.3.3:500                        UP   ac CE0/3/17:0 (SATOP T1)  UP
```

```
PE1#show controller T1 0/3/17 | sec BERT
DSX1 BERT test result: (running)
DSX1 BERT pattern      : 3-in-24
DSX1 BERT direction   : System
DSX1 BERT sync       : sync
DSX1 BERT sync count  : 1
DSX1 BERT interval    : 100
DSX1 BERT time remain : 01:39:52
DSX1 BERT total errs  : 0
DSX1 BERT total k bits: 10759
DSX1 BERT errors (last): 0
DSX1 BERT k bits (last): 10759
Last clearing of BERT counters never
```

Scenario 2: PE1—CORE—PE2

Verify the configuration on PE1

```

PE1#show xconnect all
Legend:      XC ST=Xconnect State  S1=Segment1 State  S2=Segment2 State
             UP=Up                DN=Down            AD=Admin Down      IA=Inactive
             SB=Standby           HS=Hot Standby    RV=Recovering      NH=No Hardware

XC ST  Segment 1                               S1 Segment 2                               S2
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
UP pri mpls 2.2.2.2:500                        UP   ac CE0/4/35:0 (SATOP T1)  UP

PE1#show controller T1 0/4/35 | sec BERT
DSX1 BERT test result: (running)
DSX1 BERT pattern      : 3-in-24
DSX1 BERT direction   : System
DSX1 BERT sync        : sync
DSX1 BERT sync count  : 1
DSX1 BERT interval    : 100
DSX1 BERT time remain : 01:39:52
DSX1 BERT total errs  : 0
DSX1 BERT total k bits: 10759
DSX1 BERT errors (last): 0
DSX1 BERT k bits (last): 10759
Last clearing of BERT counters never
    
```

BERT for CESoPSN

BERT is supported at the TDM side and pseudowire side. BERT can be used either at NxDS0 or DS1 but not together.

BERT is supported on following controllers:

- T1—NxDS0, DS1
- T3—NxDS0, DS1 (channelised), clear channel DS3.
- OCX—NxDS0, DS1 (channelised), DS3(channelised), clear channel DS3, STS1, STS-nc, VT-1.5, VT1.5 T1

Configuring BERT for CESoPSN

Before You Begin

Before you run BERT test, you must configure card type and controller.

To run a BERT on T1/E1 interface for CESoPSN, perform the following tasks in global configuration mode.

```

enable
configure terminal
controller t10/1/1
bert pattern 2^11 interval 5 direction line/system timeslots value speed
exit
    
```



Note To terminate a BERT test during the specified test period, use the **no bert** command.

Verifying BERT Configuration for CESoPSN

Use the following command to verify the BERT configuration for CESoPSN on T1 interfaces:

```
Router# show controllers t1 0/1/32
T1 0/1/32 is up
  Applique type is NCS4200-48T1E1-CE
  Cablelength is short 110
  DS0 Bert enabled on the following timeslots : 1-2
  Speed : 64 kpbs
  DSX1 BERT test result: (running)
  DSX1 BERT pattern      : 2^15
  DSX1 BERT direction   : Line
  DSX1 BERT sync        : sync
  DSX1 BERT sync count  : 1
  DSX1 BERT interval    : 1
  DSX1 BERT time remain : 00:00:55
  DSX1 BERT total errs  : 0
  DSX1 BERT total k bits: 512
  DSX1 BERT errors (last): 0
  DSX1 BERT k bits (last): 512
  Last clearing of BERT counters never
No alarms detected.
alarm-trigger is not set
Soaking time: 3, Clearance time: 10
AIS State:Clear  LOS State:Clear  LOF State:Clear
Framing is ESF, FDL is ansi, Line Code is B8ZS, Clock Source is Line.
BER thresholds: SF = 10e-3 SD = 10e-6
Data in current interval (230 seconds elapsed):
  Near End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
    0 Path Failures, 0 SEF/AIS Secs
  Far End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
    0 Path Failures
Data in Interval 1:
  Near End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
    1 Path Failures, 0 SEF/AIS Secs
  Far End Data
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins
    4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
    0 Path Failures
Total Data (last 1 15 minute intervals):
  Near End
    0 Line Code Violations, 0 Path Code Violations,
    0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins,
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
    1 Path Failures, 0 SEF/AIS Secs
  Far End
    0 Line Code Violations, 0 Path Code Violations,
    0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins,
    4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
    0 Path Failures
```

You can view the results of a BERT test at the following times:

- After you terminate the test using the **no bert** command
- After the test runs completely
- Anytime during the test (in real time)

Loopback on T1 or E1 Interfaces

You can use the following loopback on the T1 or E1 interfaces. Loopback is supported on both unframed and framed modes.

Restrictions

- Framing type should be maintained same in all routers end to end .
- AIS alarm is not transmitted to the connected peer port with **loopback local line** configuration until Cisco IOS XE 16.9.4 Fuji Release.

Loopback	Description
loopback local line	Loops the outgoing transmit signal back to the receive signal. This is done using the diagnostic loopback feature in the interface module’s framer. Set the clock source command to internal for this loopback mode.
loopback network line	Loops the incoming signal back in the interface module using the line loopback mode of the framer. The framer does not reclock or reframe the incoming data. All incoming data is received by the interface module driver. Loopback network line is supported on E1 interface.



Note Starting Cisco IOS Release 16.8.1, the following loopback commands are not supported.

- loopback diag
- loopback local
- loopback local payload

Configuring Loopback

Before You Begin

Before you configure loopback, you must configure the controller and the CEM.

To set a loopback local on the T1 interface, perform the following tasks in global configuration mode:

```
enable
configure terminal
controller t1 0/1/1
loopback local line
exit
```

To set a loopback diag on the T1 interface, perform the following tasks in global configuration mode:

```
enable
configure terminal
controller t1 0/1/1
loopback diag
exit
```

To set a loopback local on the E1 interface, perform the following tasks in global configuration mode:

```
enable
configure terminal
controller e1 0/1/1
loopback local
exit
```

To set a loopback network on the E1 interface, perform the following tasks in global configuration mode:

```
enable
configure terminal
controller e1 0/1/1
loopback network line
exit
```



Note To remove a loopback, use the **no loopback** command.



Note Network payload configuration is not supported on the port configured with SAToP. To configure loopback network payload when SAToP is configured, you need to remove the CEM configuration and then configure the loopback.

Loopback Remote on T1 Interfaces

The remote loopback configuration attempts to put the far-end T1 into a loopback.

The remote loopback setting loops back the far-end at line or payload, using IBOC (in-band bit-orientated CDE) or the ESF loopback codes to communicate the request to the far-end.

For releases later than Cisco IOS XE Fuji 16.8.x, we recommend that you use ESF loopback codes with ESF framing and IBOC loopback codes with SF framing.

Restrictions for Loopback Remote

- E1 loopback remote is not supported until Cisco IOS XE 16.9.4 Fuji Release. Starting from Cisco IOS XE Fuji 16.9.5 release, E1 loopback remote is supported.

- Loopback remote is not supported when cem-group is configured under T1 until Cisco IOS XE 16.9.4 Fuji Release.
- IBOC loopcode configuration is not supported when CESoP or SATOP (framed or unframed) is configured.
- ESF loopcode configuration is not supported when SAToP is configured.

Configuring Loopback Remote on a T1 Interface Module

To set T1 loopback remote iboc fac1/fac2/csu for DS1, perform the following tasks in global configuration mode:

```
enable
configure terminal
controller t1 0/1/1
loopback remote iboc {fac1 | fac2 | csu}
exit
```

To set T1 loopback remote esf line csu/payload on the DS1 interface, perform the following tasks in global configuration mode:

```
enable
configure terminal
controller t1 0/1/1
loopback remote esf {line csu | payload}
exit
```



Note loopback remote esf line niu is not supported.

Verifying the Loopback Remote Configuration

Use the following command to check the loopback remote configuration:

```
router# show running-config | sec 0/1/1
controller T1 0/1/10
threshold sd-ber 6
threshold sf-ber 3
framing sf
linecode b8zs
cablelength short 110
loopback remote iboc fac1
```

Use the following command to verify the loopback remote configuration:

```
router# show controller t1 0/1/1
T1 0/1/1 is up (NIU FAC1 Line Loopback with IBOC)
  Currently in Inband Remotely Line Looped
  Applique type is
  Cablelength is short 110
  Receiver has no alarms.
  alarm-trigger is not set
  Soaking time: 3, Clearance time: 10
  AIS State:Clear  LOS State:Clear  LOF State:Clear
  Framing is ESF, FDL is ansi, Line Code is B8ZS, Clock Source is Line.
  BER thresholds:  SF = 10e-3  SD = 10e-6
  Data in current interval (230 seconds elapsed):
  Near End
```

```

0 Line Code Violations, 0 Path Code Violations
0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
0 Path Failures, 0 SEF/AIS Secs
Far End
0 Line Code Violations, 0 Path Code Violations
0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
0 Path Failures
Data in Interval 1:
Near End
0 Line Code Violations, 0 Path Code Violations
0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins
0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
1 Path Failures, 0 SEF/AIS Secs
Far End Data
0 Line Code Violations, 0 Path Code Violations
0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins
4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
0 Path Failures
Total Data (last 1 15 minute intervals):
Near End
0 Line Code Violations, 0 Path Code Violations,
0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins,
0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
1 Path Failures, 0 SEF/AIS Secs
Far End
0 Line Code Violations, 0 Path Code Violations,
0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins,
4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
0 Path Failures
    
```

User-defined Remote Loopback on T1 Interfaces

Table 13: Feature History

Feature Name	Release Information	Description
User-defined Remote Loopback on T1 Interfaces	Cisco IOS XE 17.13.1	You can customize the loopback codes on T1 in a 16-bit format in contrast to the standard 6-bit loop code on the 48-port T1 interface module.

For this release, you can configure the custom code only in the transmit direction (Tx) with ESF framing. The user-defined loop codes are supported only on the T1 controllers of 48-port T1/E1 Interface module .

The list of supported loop codes are:

- 0xFF48, 0xFF24, 0xD3D3, 0x3F02, 0x9393, 0xD5D5, 0xD5D6, and 0x6767
- 0xDBDB, 0xC741, 0xC754, 0xC743, 0xC742, 0xFF1E, 0xC541, and 0x12FF
- 0x5F5F, 0x56D7, 0x56D8, 0x56DF, 0x56FB, 0xD5D6, 0xD5D5, and 0x5688
- 0x5687, 0xC564, 0x9393, 0x24FF, 0xC741, 0xC742, 0xC743, and 0xC744
- 0xC745, 0xC746, 0xC747, 0xC748, 0xC749, 0xC74A, 0xC74B, and 0xC74C
- 0xC74D, 0xC74E, 0xC74F, 0xC750, 0xC751, 0xC752, 0xC753, and 0xC754

Configuring User-defined Remote Loopback on T1 Interfaces

You can configure a T1 remote loopback with ESF framing and 16-bit custom code on PE router.

```
PE1#config terminal
PE1(config)#controller T1 0/4/47
PE1(config-controller)#loopback remote esf line custom_code 0x9393
PE1(config-controller)#end
```

You can verify the remote loopback configuration using the following **show** command:

```
PE1#show run | sec 0/4/47
controller T1 0/4/47
threshold sd-ber 6
threshold sf-ber 3
framing esf
linecode b8zs
cablelength short 110
loopback remote esf line custom_code 0x9393
no snmp trap link-status
```

Verifying User-defined Remote Loopback on T1 Interfaces

Use the following **show** commands to verify the user-defined remote loopback:

```
PE1#show controller T1 0/4/47
T1 0/4/47 is up (Far End Line Loopback with ESF BOC Custom Code)
Currently in FDL Custom Code Remotely Line Looped
Applique type is A900-IMA48D-C
Cablelength is short 110
Receiver has no alarms.
alarm-trigger is not set
Soaking time: 3, Clearance time: 10
Framing is ESF, Line Code is B8ZS, Clock Source is Line.
BER thresholds: SF = 10e-3 SD = 10e-6
Data in current interval (870 seconds elapsed):
Near End
```

```
PE1#show facility-alarm status | i 0/4/47
T1 0/4/47 May 10 2023 14:13:54 MINOR LOOPBACK_REMOTE_FDL_CUSTOM_COD
Loopback Remote Line FDL Custom Code Alarm [22]
```




CHAPTER 7

Card Protection for T1 or E1

The card protection feature is supported on the following interface module:

Table 14: Supported Interface Module

Interface Module	Part Number
48-port T1/E1 Interface module	• A900-IMA48D-C

In this feature, the interface module bay is protected by another interface module of the same type.

- [Card Protection, on page 49](#)
- [Restrictions, on page 52](#)
- [Supported Features on Interface Module, on page 52](#)
- [How to Configure Card Protection for T1 or E1 , on page 53](#)
- [Associated Commands, on page 55](#)

Card Protection


The Card Protection feature is required to protect traffic flow either when an interface module is out of service, when the software fails or a hardware component has issues. Because card protection is supported only on redundant interface modules, traffic is switched to the protect interface module when the active interface module does not respond, and vice-versa.



Note This feature does not require any change in the patch panel of the interface modules.

In card protection, a Y Cable is used to multiplex the signal from the patch panel to both the ports of active and protect interface modules. Both ports receive the signal, but only the active interface module transmits the signal from its port.


Figure 1: Y Cable

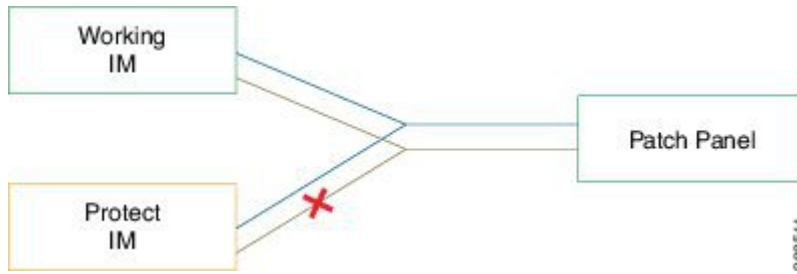

To support the Card Protection feature, the configuration on the active and protect interface module must be same. To achieve this, a virtual interface module is created with the same interface module type as the active interface module. A virtual controller is also created, which broadcasts the configuration to both the interface modules. The configuration on the physical controllers is then blocked and you can make configuration changes only on the virtual controller. The user configuration can only be performed on the virtual controller.

The virtual controller supports CEM level configuration and all other configurations. These configurations are blocked on physical controllers.

Figure 2: Card Protection Topology

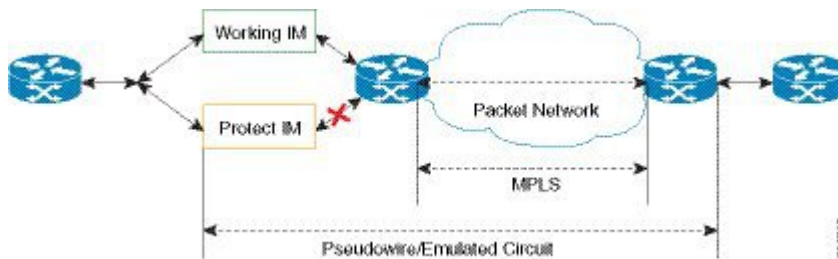

Note DS3 (T3) channelized into T1 and E3 channelized into E1s are supported in card protection. For more information on configuration, see the [Configuring the Controller of Channelized T3/T1 Interfaces](#) section.

Y Cable

In card protection, a Y cable is used to multiplex the signal from the patch panel to both the ports of active and standby interface modules. Both the active and protect ports receive the signal, but only the active port transmits the signal from its port. Protect port transmitter is disabled.

Card Protection Switchover

The following table shows the card protection switchover trigger and time to complete the switchover between the working and protect interface module.

Trigger	Time
Interface Module Reload with CLI OIR	Less than 50 millisecond

Trigger	Time
Non-responsive Interface Module Process (interface module reloads on its own, the reload is initiated due to software error)	100 millisecond to 200 millisecond
Interface Module shuts down due to high temperature	Less than 50 millisecond
Interface Module shuts down using CLI	Less than 50 millisecond
Interface Module stops using CLI	Less than 50 millisecond
Serializer/Deserializer (SerDes) Failures	250 millisecond to 1 second
Alarm Based Switchover	Based on Hold Over Time or Soak Time
Card Protection Commands	20 millisecond to 30 millisecond
Non-responsive Interface Module Process (interface module reloads on its own, the reload is initiated due to software error)	200 millisecond to 1 second
Card Physical Jackout	200 millisecond to 1 second

Alarm Based Switchover

Alarm based switchover is only applicable for Loss Of Signal (LOS) alarm. Switchover happens only when the number of ports with LOS alarm in working interface module is greater than that on the protect interface module.

Each card protection group maintains a weight for each working and protect interface module. This weight is updated when the LOS alarms are asserted or cleared. The switchover happens only if the weight of working interface module and protect interface module stays same for a certain amount of time called soak time.

When there is any issue with the Patch Panel, both working interface module and protect interface module have the same number of LOS alarms (weights are same). Hence, switchover does not happen.

Guidelines on Alarm Based Switchover Scenarios

Considerations for Hold-Off Timer

- With card-protection where Y-cable is used for connecting the protected cards, if Signal Failure (SF) or Signal Degrade (SD) is observed on any of the ports of these protected cards, LOS alarms will be raised on those respective ports. In rare scenarios, these SF/SD notifications across the ports could vary in duration for reporting the LOS alarms due to environment conditions. Hence, to avoid multiple switching between the protected IMs in these scenarios, hold-off timer is introduced to hold the switchover notification till the LOS alarm notification is synchronized on both the IMs.
- Hold-ff timer can be configured using the **hold-off timer** *seconds* CLI command. By Default, (and recommended value for) the hold-off timer value is enabled for 5 seconds.
- When LOS alarms are detected on the ports of the protected IMs, the number of alarm occurrence is compared between the active and standby IM. If the active card has more LOS Alarms, then the hold-off timer gets initiated. After the hold-off timer expiry (5 sec in default case), a protection switch will be triggered to the card having lesser number of alarm notifications.

- If the hold-off timer is set to zero, then the switchover is triggered immediately when the weightage of alarm occurrence in active is more than the standby. Note that in this scenario, it could also lead to multiple protection switching between the IMs till the LOS alarms are settled on all the failed ports of both the IMs.

Considerations for Router Bring up or IM OIR

- During the router bring up or reboot or with Reboot and IM Online Insertion and Removal (OIR), once the IMs are online, there will be alarms flooded to software for all the ports from both the active and standby cards.
- NO operational events or switchover events to be performed during this time, and to allow the alarms on both the IM to be settled. (The approximate recommended duration is 1 minute).

Restrictions

- Card physical jack out convergence time for card protection switchover is more than 50 milliseconds.
- The time taken to restart the interface module due to any software error is more than 50 milliseconds.
- Alarm toggle on active or backup card causes at least one card protection switch.
- When BERT is started from the virtual controllers, the syslog displays the physical controllers instead of the virtual controller port.

Supported Features on Interface Module

The supported features are:

- Switching Mode
 - Non-revertive mode
 - Revertive mode
- Alarm Based Switchover
- SerDes Based Switchover
- Adaptive Clock Recovery (ACR) on virtual CEM
- Differential Clock Recovery (DCR) on virtual CEM
- Maintenance Commands
 - Lockout
 - Force
 - Manual



Note All controller configurations are performed on the virtual controller.

You can create card protection with one slot (either primary or backup) and the remaining slots can be added later.

How to Configure Card Protection for T1 or E1

Configuring T1/E1 Card Protection

Configuring Card Protection Group:

```
enable
configure terminal
card type t1 0 2
card type t1 0 1
card-protection [1-16]
primary slot 0 bay 1
backup slot 0 bay 2
end
```



Note The card protection number 1 to 16 refers to CPGN.

Configuring Virtual Card and Virtual Controller:

When card protection group is configured, it creates virtual card for card protection object, denoted by 8/x/port. Slot 8 is a fixed slot number for all card protection created virtual card. Bay number 'x' for virtual card is x = CPGN - 1 = 15. Virtual controllers can be configured from 8/15/0 to 8/15/47.

Physical Card Configuration:

- No configuration is required for traffic.

Virtual Card Configuration:

- Configures CEM on virtual controller (8/x/port).
- Configures xconnect and local connect on CEM interface.

```
enable
configure terminal
controller t1 8/15/0
cem 0 unframed
interface cem 8/15/0
cem 0
xconnect 10.1.1.1 212 encapsulation mpls
end

enable
configure terminal
controller t1 8/15/11
cem 0 unframed
```

```
interface cem 8/15/11
cem 0
connect testLC cem 8/15/0 0 cem 8/15/11 0
end
```



Note To un-configure a CEM group under a virtual controller, first perform shutdown of the virtual controller and then un-configure the CEM group.

Configuring Revertive Mode

To configure revertive mode:

```
enable
configure terminal
card-protection 4
primary slot 0 bay 0
backup slot 0 bay 5
end
card-protection 4
revertive time [30-720]
end
```



Note The revertive time ranges from 30 to 720 seconds.

Verification of T1/E1 Card Protection Configuration

Use **show card-protection** command to verify card protection group configuration.

```
#show card-protection 2 detail
Working(0/1:A900-IMA48T-C ):
  Number of LOS Alarms:7
  ok,Active
  1:1, Revertive

Protect(0/2:A900-IMA48T-C ):
  Number of LOS Alarms:7
  ok,Inactive
  1:1, Revertive
```

```
Revert Timer : (Not Started)
Last switchover reason :None
```

Use **show xconnect all** command to verify xconnect configuration.

```
#show xconnect all | I CE8/15/
UP   pri   ac CE8/15/0:0(SATOP T1)          UP mpls 10.1.1.1:212          UP
#

#show xconnect all | i CE8/15/
72   testLC          CE8/15/11 SAT1 0          CE8/15/12 SAT1 0          UP
#
```

Configuring Maintenance Commands

To configure maintenance commands:

```

enable
configure terminal
card-protection 4
primary slot 0 bay 0
backup slot 0 bay 5
end
card-protection 4
card-protection [manual {backup|primary} | force {backup|primary} | lockout]
end

```



Note Maintenance commands are not synced in the standby environment. After Redundancy Force Switchover (SSO), maintenance commands must be executed again on the new active environment.

Priority Table

The following table shows the priority of the actions:

Priority	Configurations
1	Lockout
2	Force
3	Alarm or Card Failure
4	Manual Switch
5	Revert

Associated Commands

The following table shows the commands for the IM configuration:

Command	Link
Card Protection Creation Commands: card-protection <i>CPGN</i> card-protection { <i>primary</i> <i>backup</i> } card-protection <i>revertive time</i> Card Protection Maintenance Commands: card-protection <i>CPGN</i> [manual { <i>primary</i> <i>backup</i> } force { <i>primary</i> <i>backup</i> } lockout]	https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-c1.html#wp1208639895
show card-protection <i>CPGN</i> detail	https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-s2.html#wp1628614402



CHAPTER 8

Additional References

This appendix describes additional CEM features that are used on the router. This appendix describes the following topics:

- [Linecode Configuration and Supported Patterns, on page 57](#)

Linecode Configuration and Supported Patterns

The following pattern for linecode configuration is supported for T1 or E1.

Table 15: Linecode Configuration and Pattern Supported on T1 or E1 Controllers

Part Number	Linecode Configuration	T1 or E1	Random Pattern
XRT83VSH316 LIU	B8ZS/AMI	T1	QRSS
	HDB3/AMI	E1	PRBS15

Configuration Using AMI Linecodes at Both Ends (UUT (AMI) and TESTER (AMI))

When both sides are configured as AMI, the linecodes match and the T1 or E1 controller is always UP with a smooth traffic flow.

Configuration Using Different Linecodes at Both Ends (UUT (AMI) and TESTER (B8ZS or HDB3))

- The line codes do not match when one side is configured with AMI and other side is configured with non-AMI codes such as B8ZS or HDB3. Based on the pattern that is inserted, there is change in the behavior.
- For 511 QRSS pattern, although the line codes do not match, the controller is UP. The controllers go DOWN for other patterns.
- Each pattern is unique and contains a combination of ones and zeros. Only the pattern 511 QRSS is supported. If patterns other than 511 QRSS are used, then LOS is generated, and controller goes to the DOWN state.

The following table details the configuration using same and different linecodes at both ends and the pattern that is supported on T1 (UUT mode) controller:

Table 16: Configuration Using Linecodes for T1 Controllers

Pattern Mode (ANSI)	Pattern with UUT (AMI) and TESTER (B8zS)	UUT(AMI) and TESTER (AMI)
511 QRSS	Controller is UP. Linecodes do not match.	T1 controller is UP on UUT. Linecodes match.
QRSS	UUT controller is DOWN.	T1 controller is UP on UUT. Linecodes match.
2047 QRSS	UUT controller is DOWN.	T1 controller is UP on UUT. Linecodes match.

The following table details configuration using same and different linecodes at both ends and the pattern that is supported on E1 (UUT mode) controller:

Table 17: Configuration Using Linecodes for E1 Controllers

Pattern Mode (ANSI)	Pattern with UUT (AMI) and TESTER (B8zS)	UUT(AMI) and TESTER (AMI)
2^15- 1	Controller is DOWN.	E1 controller is UP on UUT. Linecodes match.
2^15- 1 INV	Controller is DOWN.	E1 controller is UP on UUT. Linecodes match.