



Installing EMI Gaskets and RF Absorber Material on the Cisco uBR10012 Universal Broadband Router

Part Number: UBR10-PRE2-EMI, UBR10-PRE2-EMI=

The following information is provided to help you install EMI gaskets and RF absorber material on the Cisco uBR10012 universal broadband router before you install the PRE2 modules.



Note

EMI gaskets and RF absorber material are only required if you are replacing PRE1 modules with PRE2 modules in a Cisco uBR10012 universal broadband router.



Caution

The EMI gaskets and RF absorber material are not required for Cisco ESR10000 routers. Do not install these gaskets or the RF absorber material in a Cisco ESR10000 chassis.

Contents

- [Introduction, page 2](#)
- [Before You Begin, page 2](#)
- [Preparing the Chassis, page 3](#)
- [Installing the EMI Gaskets, page 3](#)
- [Installing the RF Absorber Material, page 5](#)
- [Part Numbers, page 8](#)
- [Related Documentation, page 8](#)
- [Obtaining Documentation, page 8](#)
- [Documentation Feedback, page 9](#)
- [Obtaining Technical Assistance, page 9](#)
- [Obtaining Additional Publications and Information, page 11](#)



Corporate Headquarters:

Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134-1706 USA

Copyright © 2004 Cisco Systems, Inc. All rights reserved.


Introduction

Upgrading to a Cisco ESR-PRE2 (PRE2) in the Cisco uBR10012 router results in unacceptable Cisco manufacturing EMI emission margins. By installing EMI gaskets and RF absorber material in the locations specified, an acceptable margin is met.


Note

This condition is not harmful to the PRE2 or the Cisco uBR10012 router.

Figure 1 *Locations of EMI Gaskets and RF Absorber Material*

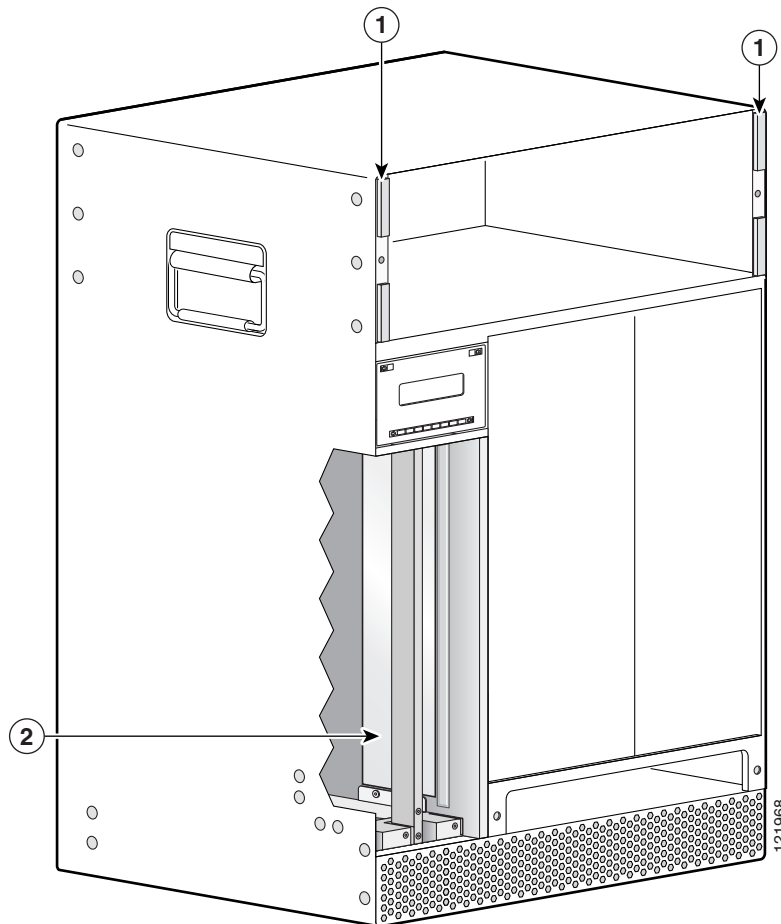

1	EMI gaskets (4)	2	RF absorber material
----------	-----------------	----------	----------------------

Before You Begin

Verify that you need this upgrade. Check the locations in [Figure 1](#) for installed EMI gaskets and RF absorber material. If you already have the EMI gaskets and RF absorber material installed, you do not need to continue with this procedure and you can continue with the installation of the Cisco ESR-PRE2 modules.

Preparing the Chassis

Have the following equipment available:

- ESD-preventive wrist strap, antistatic bags, and an antistatic surface
- EMI gaskets and RF absorber material kit
- PRE2 modules to replace the PRE1 modules
- Lint-free wipes


To prepare the chassis for installation of the EMI gaskets and RF absorber material, do the following:

-
- Step 1** Make sure you are properly grounded.
- Step 2** Power down the router.
- Step 3** Remove the PRE1 modules from the chassis and place them on an antistatic surface.
- Loosen the captive screws and pivot the ejector levers away from the modules.
 - Slide the PRE1 modules out of the chassis and place them in antistatic bags.
-

Installing the EMI Gaskets

The EMI gaskets are installed on the chassis on either side of the fan module. See [Figure 2](#). This procedure should take 2 to 3 minutes.

Figure 2 Installation Location of the EMI Gaskets

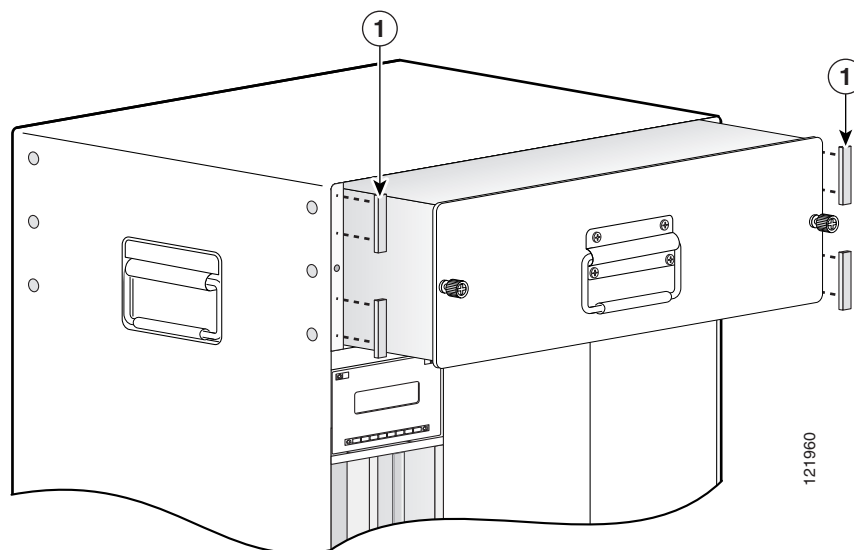


1	EMI gaskets (4)
----------	-----------------

To install the EMI gaskets, perform the following steps:

- Step 1** Loosen the captive screws on the fan module and pull the fan module out of the chassis far enough so that you can install the EMI gaskets. You do not need to remove the fan module from the chassis.
- Step 2** With a clean wipe, wipe off the left and right flanges where the four EMI gaskets will be installed.
- Step 3** Peel the backing off the gasket (only prepare one gasket at a time).
- Step 4** Align the sticky side of the gasket with the flange so that the end of the gasket is level with the top of the flange, see [Figure 3](#).

Figure 3 *Aligning the EMI Gasket*

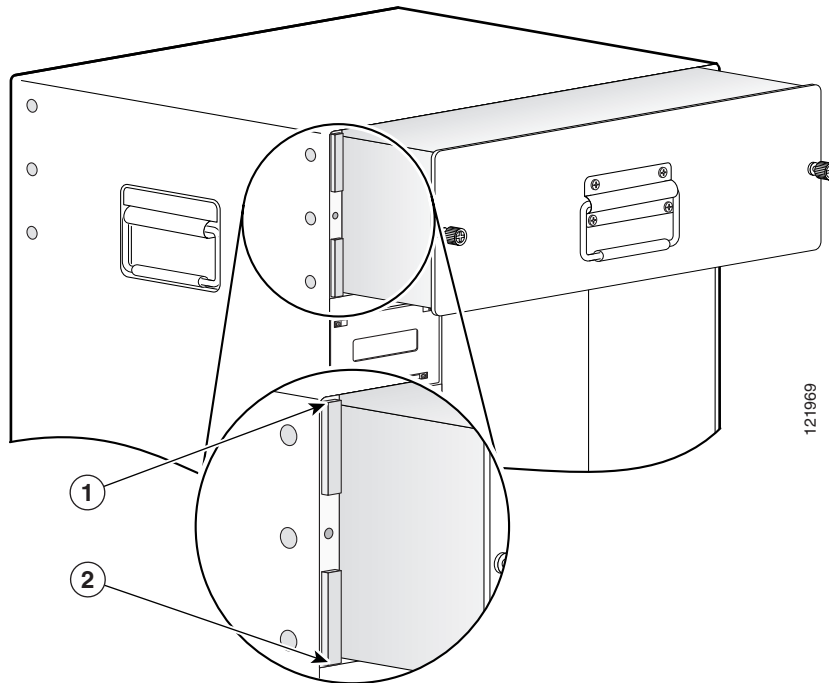


1	Top of flange	2	Bottom of flange
----------	---------------	----------	------------------

- Step 5** Carefully place the EMI gasket on the flange and press down to secure the gasket in place.



Caution Do not let the gasket slip to either side of the flange. Maintain a distance of at least one-half inch around the captive screw hole in the flange. See [Figure 3](#).

- Step 6** Peel the backing off the bottom EMI gasket and align the end of the gasket with the bottom of the flange. See [Figure 3](#).
- Step 7** Carefully place the gasket on the flange and press down to secure the gasket in place.
- Step 8** Repeat [Step 3](#) through [Step 7](#) for the other side of the chassis.

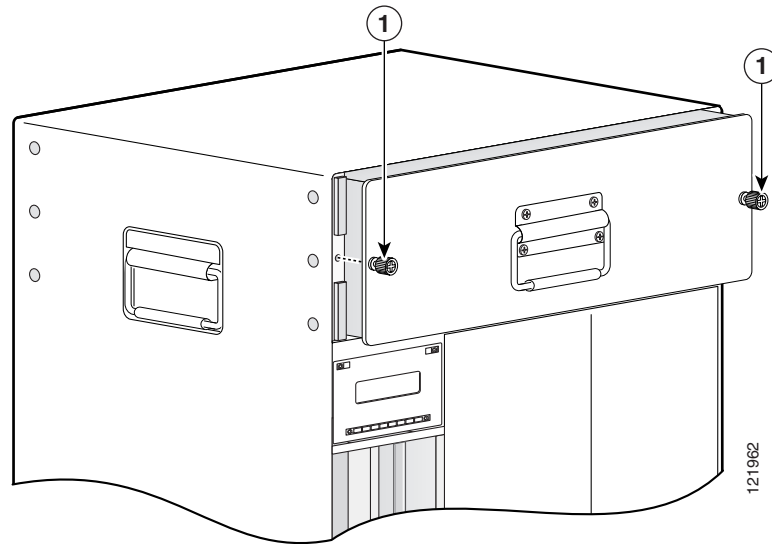Figure 4 Installed EMI Gaskets

1	Captive screws
----------	----------------

- Step 9** Push the fan module back into the chassis and use the captive screws to secure the fan module in place. Note that the EMI gaskets are compressed when securing the fan to the chassis. See [Figure 4](#)

Installing the RF Absorber Material

RF absorber material is required when you are installing PRE2 modules in your Cisco uBR10012 router. The absorber material is placed on the inside panel of PRE slot B. This procedure should take 4 to 5 minutes.

To install the RF absorber material, use the following procedure:


- Step 1** Make sure you are properly grounded.
- Step 2** Remove both PRE1 modules from the chassis, if you have not already done so.
- Step 3** Using a clean lint-free wipe, wipe the inside panel of the PRE module slot B (panel next to the power supplies). Make sure that the edge of the lip and the edge along the raised channel are free of any dust or debris. See [Figure 5](#).



Caution

If the RF absorber material is bubbled or marred by debris left on the surface of the panel or on the lip at the bottom, the PRE2 module may catch on the RF absorber material and not fit properly into the slot.

Figure 5 *Aligning the RF Absorber Material with the Raised Channel and Lip*

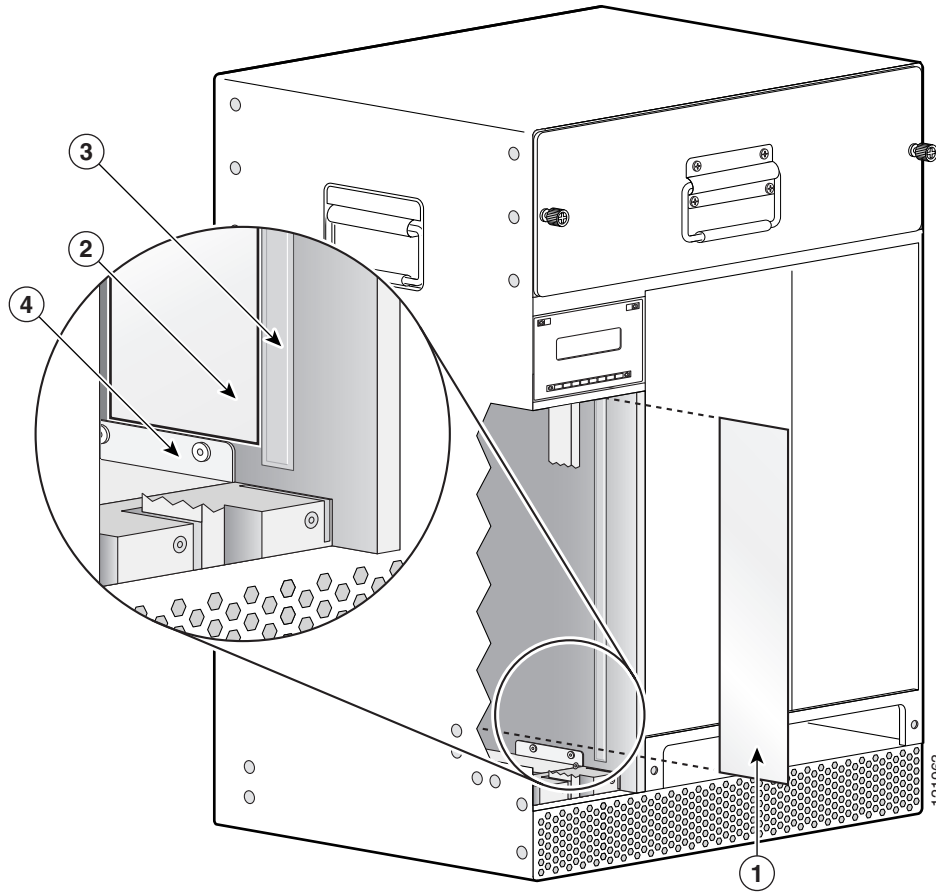

1	RF absorber material	3	Raised channel
2	Align the RF absorber material here	4	Lip

Step 4 Peel the backing from the 2.7 x14.2 inch sheet of RF absorber material. Be very careful not to let any two adhesive covered sections of the material stick together, it is very difficult to unstick.

Step 5 Carefully align the material in the area shown in [Figure 5](#). When you are aligning the material, align it with both the edge of the raised channel and the edge of the lip.


Caution


Take special care to properly align this material before securing it in place, the material is difficult to remove once it is securely in place.
Do not allow the RF absorber material to over lap the raised channel or the lip as it can interfere with the PRE2 installation.

Step 6 Lightly press the RF absorber material into place along the raised channel, making sure that there are no bubbles or wrinkles in the material.


Note

You can lift the RF absorber material from the panel to reposition it, but each time you do, the adhesive backing loses some of its integrity.

Figure 6 **Aligning the RF Absorber Material**

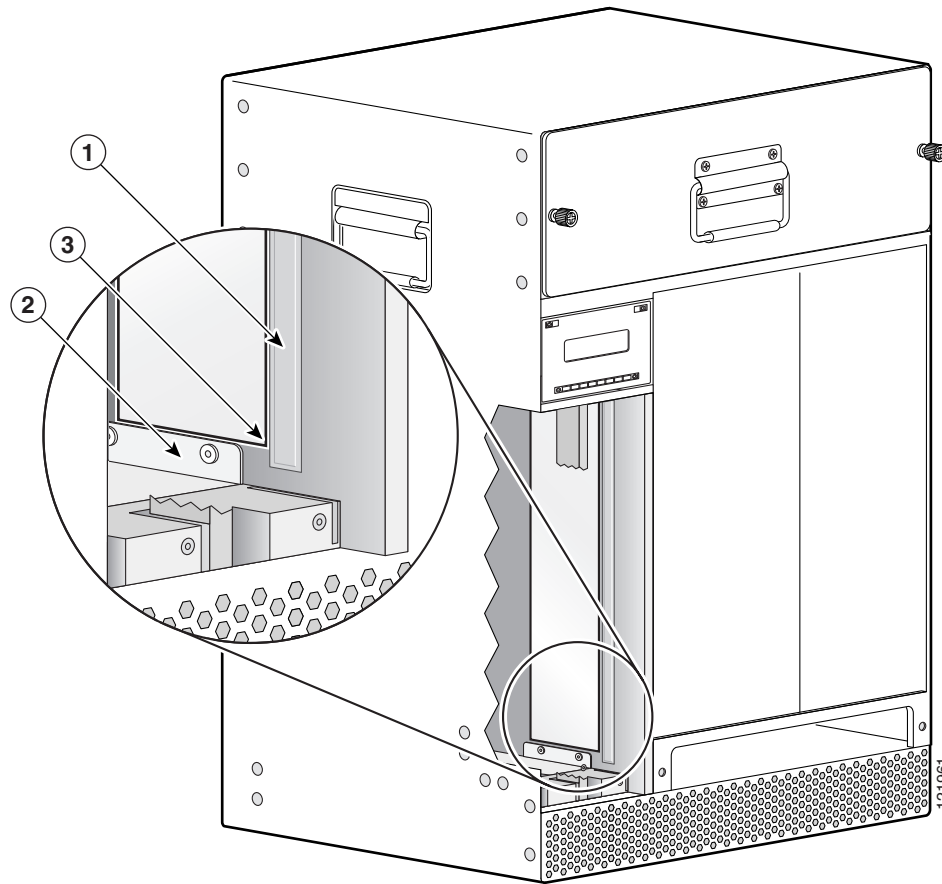

1	Raised channel	3	Aligned RF absorber material
2	Lip		

Step 7 When the material is properly aligned and laying flat against the surface of the panel, gently press down on the material, starting from the side nearest the raised channel and moving toward the back of the chassis.

Make sure that you don't cause the material to slip out of place and check for any wrinkles or bubbles. Reset the RF absorber material, if necessary.

Installing the PRE2 Modules

After the installation of the RF absorber material is complete, install the PRE2 modules in the chassis. Refer to *Performance Routing Engine Module for the Cisco uBR10012 Universal Broadband Router* at the following URL:

<http://www.cisco.com/univercd/cc/td/doc/product/cable/ubr10k/ubr10012/frus/ub10pre.htm>

Part Numbers

Table 1 **Part Numbers**

Description	Part Number
PRE2 module	ESR-PRE2, ESR-PRE2/R
UBR-PRE2-EMI uBR10012 chassis EMI emission kit for use with the PRE2	UBR10-PRE2-EMI, UBR10-PRE2-EMI= The kit includes: 4-EMI gaskets, 0.25 x 2 in. (6.35 x 50.80 mm) 1-RF absorber material, 2.7 x 14.2 in. (68.55 x 360.68 mm) Installation documentation

Related Documentation

- *Performance Routing Engine Module for the Cisco uBR10012 Universal Broadband Router* at the following URL:
<http://www.cisco.com/univercd/cc/td/doc/product/cable/ubr10k/ubr10012/frus/ub10pre.htm>
- *Cisco uBR10012 Universal Broadband Router Hardware Installation Guide* at the following URL:
<http://www.cisco.com/univercd/cc/td/doc/product/cable/ubr10k/ubr10012/hig/index.htm>

Obtaining Documentation

Cisco documentation and additional literature are available on Cisco.com. Cisco also provides several ways to obtain technical assistance and other technical resources. These sections explain how to obtain technical information from Cisco Systems.

Cisco.com

You can access the most current Cisco documentation at this URL:

<http://www.cisco.com/univercd/home/home.htm>

You can access the Cisco website at this URL:

<http://www.cisco.com>

You can access international Cisco websites at this URL:

http://www.cisco.com/public/countries_languages.shtml

Ordering Documentation

You can find instructions for ordering documentation at this URL:

http://www.cisco.com/univercd/cc/td/doc/es_inpck/pdi.htm

You can order Cisco documentation in these ways:

- Registered Cisco.com users (Cisco direct customers) can order Cisco product documentation from the Ordering tool:

<http://www.cisco.com/en/US/partner/ordering/index.shtml>

- Nonregistered Cisco.com users can order documentation through a local account representative by calling Cisco Systems Corporate Headquarters (California, USA) at 408 526-7208 or, elsewhere in North America, by calling 1 800 553-NETS (6387).

Documentation Feedback

You can send comments about technical documentation to bug-doc@cisco.com.

You can submit comments by using the response card (if present) behind the front cover of your document or by writing to the following address:

Cisco Systems
Attn: Customer Document Ordering
170 West Tasman Drive
San Jose, CA 95134-9883

We appreciate your comments.

Obtaining Technical Assistance

For all customers, partners, resellers, and distributors who hold valid Cisco service contracts, Cisco Technical Support provides 24-hour-a-day, award-winning technical assistance. The Cisco Technical Support Website on Cisco.com features extensive online support resources. In addition, Cisco Technical Assistance Center (TAC) engineers provide telephone support. If you do not hold a valid Cisco service contract, contact your reseller.

Cisco Technical Support Website

The Cisco Technical Support Website provides online documents and tools for troubleshooting and resolving technical issues with Cisco products and technologies. The website is available 24 hours a day, 365 days a year, at this URL:

<http://www.cisco.com/techsupport>

Access to all tools on the Cisco Technical Support Website requires a Cisco.com user ID and password. If you have a valid service contract but do not have a user ID or password, you can register at this URL:

<http://tools.cisco.com/RPF/register/register.do>

**Note**

Use the Cisco Product Identification (CPI) tool to locate your product serial number before submitting a web or phone request for service. You can access the CPI tool from the Cisco Technical Support Website by clicking the **Tools & Resources** link under Documentation & Tools. Choose **Cisco Product Identification Tool** from the Alphabetical Index drop-down list, or click the **Cisco Product Identification Tool** link under Alerts & RMAs. The CPI tool offers three search options: by product ID or model name; by tree view; or for certain products, by copying and pasting **show** command output. Search results show an illustration of your product with the serial number label location highlighted. Locate the serial number label on your product and record the information before placing a service call.

Submitting a Service Request

Using the online TAC Service Request Tool is the fastest way to open S3 and S4 service requests. (S3 and S4 service requests are those in which your network is minimally impaired or for which you require product information.) After you describe your situation, the TAC Service Request Tool provides recommended solutions. If your issue is not resolved using the recommended resources, your service request is assigned to a Cisco TAC engineer. The TAC Service Request Tool is located at this URL:

<http://www.cisco.com/techsupport/servicerequest>

For S1 or S2 service requests or if you do not have Internet access, contact the Cisco TAC by telephone. (S1 or S2 service requests are those in which your production network is down or severely degraded.) Cisco TAC engineers are assigned immediately to S1 and S2 service requests to help keep your business operations running smoothly.

To open a service request by telephone, use one of the following numbers:

Asia-Pacific: +61 2 8446 7411 (Australia: 1 800 805 227)

EMEA: +32 2 704 55 55

USA: 1 800 553-2447

For a complete list of Cisco TAC contacts, go to this URL:

<http://www.cisco.com/techsupport/contacts>

Definitions of Service Request Severity

To ensure that all service requests are reported in a standard format, Cisco has established severity definitions.

Severity 1 (S1)—Your network is “down,” or there is a critical impact to your business operations. You and Cisco will commit all necessary resources around the clock to resolve the situation.

Severity 2 (S2)—Operation of an existing network is severely degraded, or significant aspects of your business operation are negatively affected by inadequate performance of Cisco products. You and Cisco will commit full-time resources during normal business hours to resolve the situation.

Severity 3 (S3)—Operational performance of your network is impaired, but most business operations remain functional. You and Cisco will commit resources during normal business hours to restore service to satisfactory levels.

Severity 4 (S4)—You require information or assistance with Cisco product capabilities, installation, or configuration. There is little or no effect on your business operations.

Obtaining Additional Publications and Information

Information about Cisco products, technologies, and network solutions is available from various online and printed sources.


- Cisco Marketplace provides a variety of Cisco books, reference guides, and logo merchandise. Visit Cisco Marketplace, the company store, at this URL:
<http://www.cisco.com/go/marketplace/>
- The Cisco *Product Catalog* describes the networking products offered by Cisco Systems, as well as ordering and customer support services. Access the Cisco Product Catalog at this URL:
<http://cisco.com/univercd/cc/td/doc/pcat/>
- *Cisco Press* publishes a wide range of general networking, training and certification titles. Both new and experienced users will benefit from these publications. For current Cisco Press titles and other information, go to Cisco Press at this URL:
<http://www.ciscopress.com>
- *Packet* magazine is the Cisco Systems technical user magazine for maximizing Internet and networking investments. Each quarter, Packet delivers coverage of the latest industry trends, technology breakthroughs, and Cisco products and solutions, as well as network deployment and troubleshooting tips, configuration examples, customer case studies, certification and training information, and links to scores of in-depth online resources. You can access Packet magazine at this URL:
<http://www.cisco.com/packet>
- *iQ Magazine* is the quarterly publication from Cisco Systems designed to help growing companies learn how they can use technology to increase revenue, streamline their business, and expand services. The publication identifies the challenges facing these companies and the technologies to help solve them, using real-world case studies and business strategies to help readers make sound technology investment decisions. You can access iQ Magazine at this URL:
<http://www.cisco.com/go/iqmagazine>
- *Internet Protocol Journal* is a quarterly journal published by Cisco Systems for engineering professionals involved in designing, developing, and operating public and private internets and intranets. You can access the Internet Protocol Journal at this URL:
<http://www.cisco.com/ipj>
- World-class networking training is available from Cisco. You can view current offerings at this URL:
<http://www.cisco.com/en/US/learning/index.html>

This document is to be used in conjunction with the documents listed in the [“Related Documentation”](#) section.

CCVP, the Cisco logo, and Welcome to the Human Network are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn is a service mark of Cisco Systems, Inc.; and Access Registrar, Aironet, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, LightStream, Linksys, MeetingPlace, MGX, Networkers, Networking Academy, Network Registrar, PIX, ProConnect, ScriptShare, SMARTnet, StackWise, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0711R)

Copyright © 2004 Cisco Systems, Inc. All rights reserved.

 Printed in the USA on recycled paper containing 10% postconsumer waste.