





MPP زاهج نم ايودي PRT تالچس ليزنت ةيفيك فرعت نأ

## MPP فتاهل بيوي لول لوصول ني كمت

Control Hub في اقحتلم زاهجلا نوكي ام دنع Webex ربع لاصتالا في، يضارتفا لكش بي زاهجلا Control Hub > Devices لول لقتنا، اهني كمت لجأ نم. بيوي لول لوصول لي طعت مت دق نوكي زاهجلا اذخرتخا Web Access نم هني كمت ديرت يذلا


Device Settings قوف رونا، زاهجلا رايتخا درجمب

9 of 10 total lines available

 Configure Lines	Manage >
 Configure Layout	Manage >
 Device Settings	Manage >

1 زاهجلا تادادع


ةصصخملا تادادعلا مادختسال زاهجلا تادادع رايتغت بجي، الوأ. عقوملا تادادع زاهجلا مدختسي، يضارتفا لكش بي

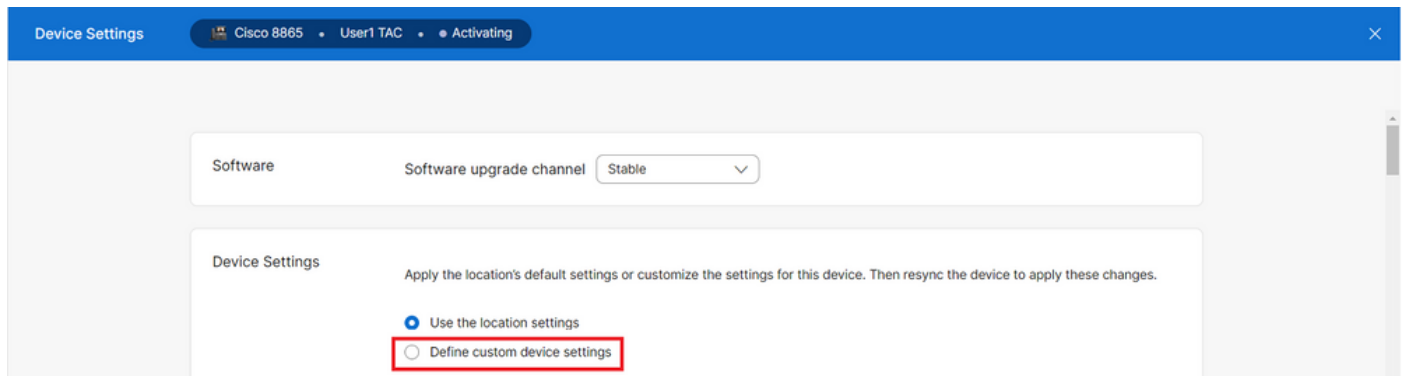

2 زاهجلا تادادع

اهرايتخا دعب ةصصخملا تادادعلا نألا رفوتت

Save: رقناو، ليدب تال ني كمت ب مقو، MPP Web Access (User) رايتخا لنع شحبا، ةحفصلا لفسال ريرمتلاب مق

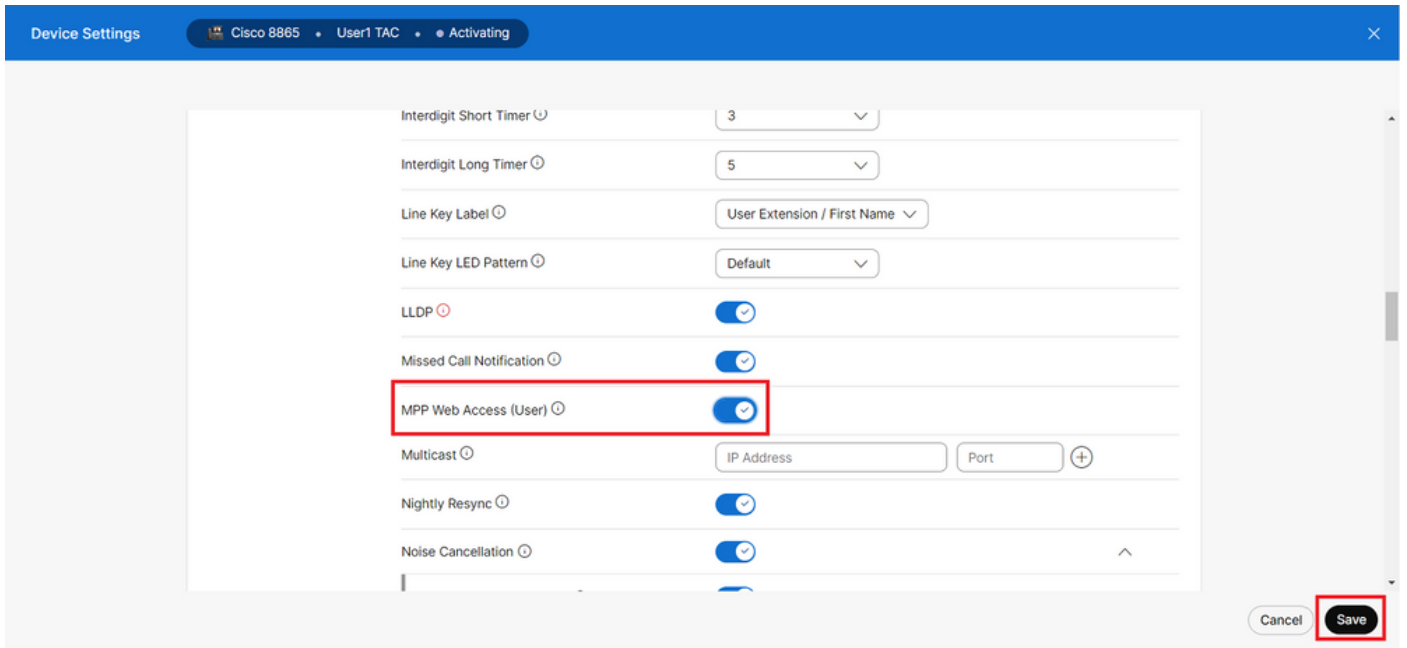


MPP Web Access (مدخست سم)

ديجل نيوكتال ذخال زاهجال ديهمت دواع بحج.

زاهجال نم ءانبال دواع قيرف ءاشن

رزلا قوف رقنا، زاهجال لىع 1. ةوطخال

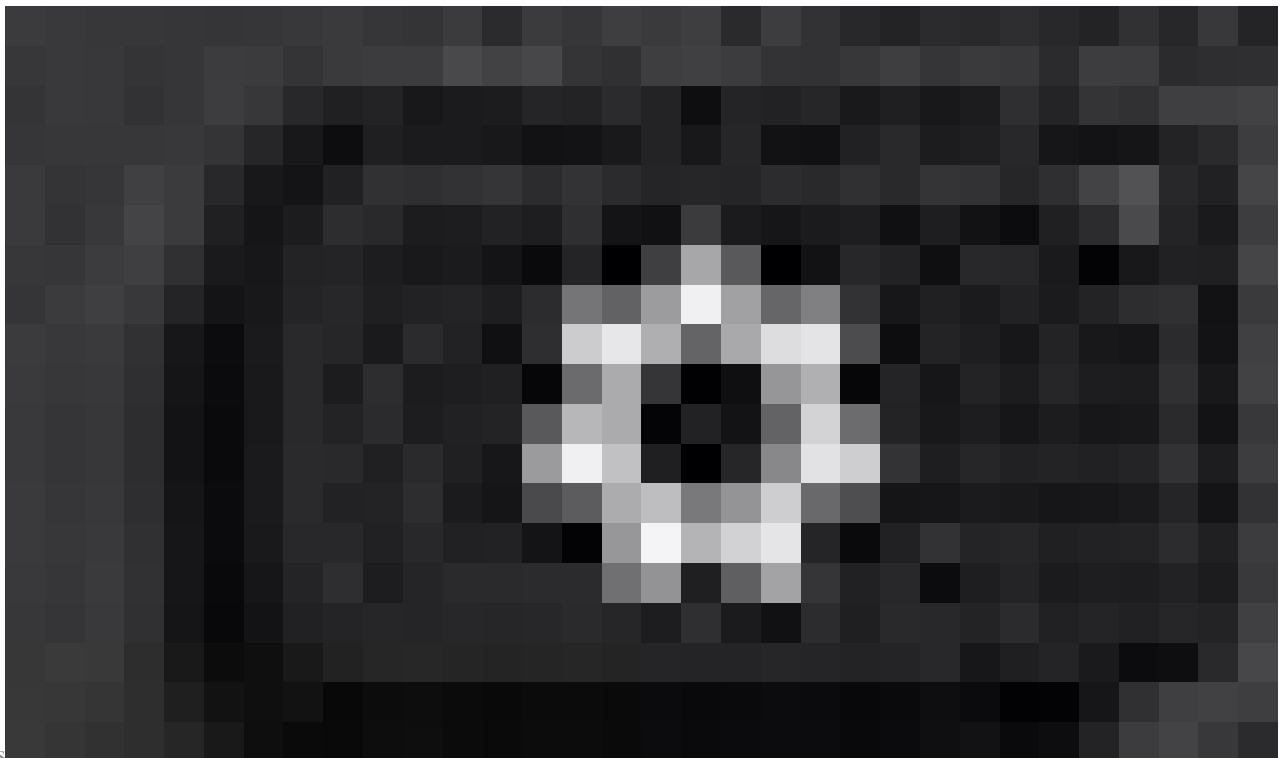

Applications  
تاقىبطت

Status > Report Problem | لقتنا 2. ةوطخل

اهتقوو ةلكشملا خيرات لخدأ. 3. ةوطخل

ةمئاقلا نم افصورتخأ. 4. ةوطخل


Submit قوف رقتنا. 5. ةوطخل

بيولا ربع (GUI) ةيموسرلا مدختسما ةهجاو نم يميلىقإ رامعإ ةداعإ قيرف لجس لوصحلا

للى لودلا لجس 1. ةوطخل [https://IP\\_ADDRESS\\_PHONE/](https://IP_ADDRESS_PHONE/)

---

---

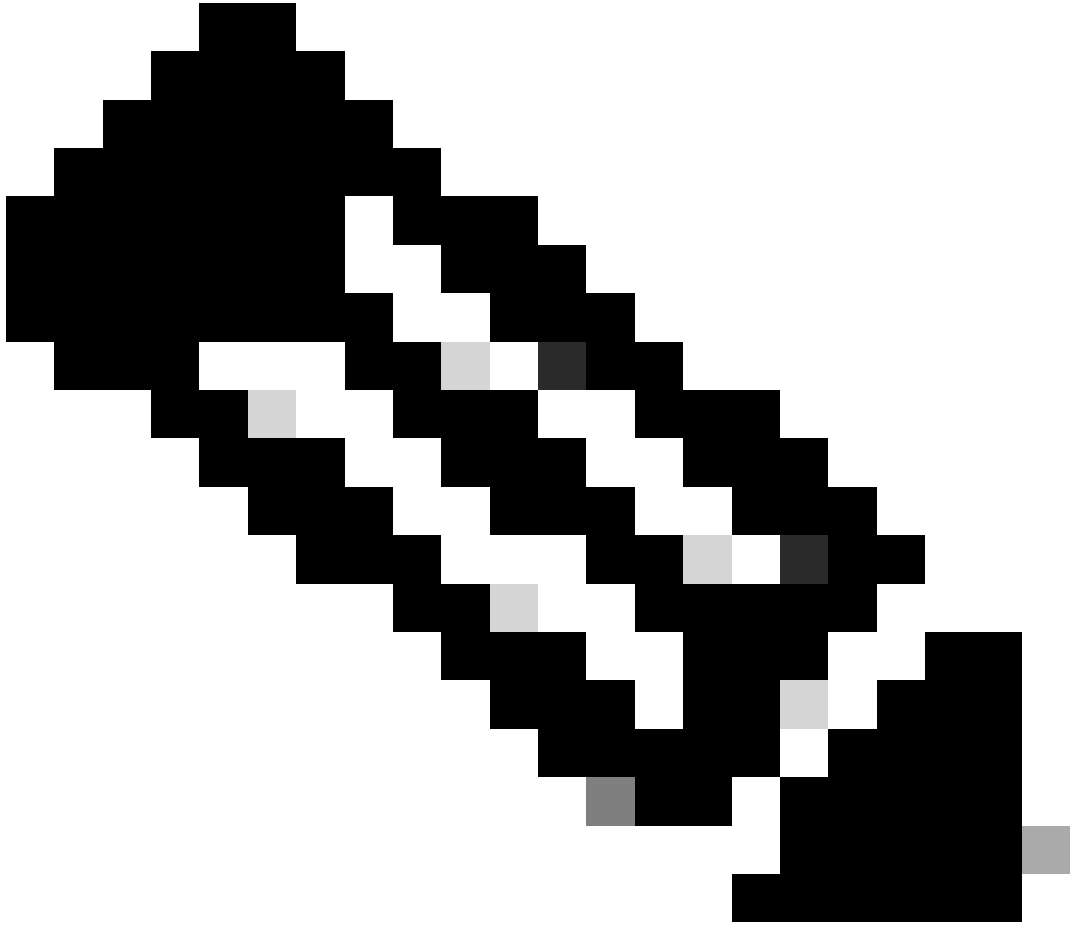

Settings > Status > Network Status > IPv4 Status. نم هيلع لوصحلا نكمي ،فورعم ريغ IP ناونع ناك اذا :تظالم

---

Advanced. رتخأ ،ريذحتة لاسرعة حفصلا اهي ف رهطتة رم لوأ 2. ةوطخلا



## Your connection is not private

Attackers might be trying to steal your information from **10.152.212.70** (for example, passwords, messages, or credit cards). [Learn more](#)

NET::ERR\_CERT\_AUTHORITY\_INVALID



To get Chrome's highest level of security, [turn on enhanced protection](#)

Advanced

Back to safety

1 ريدحت ةلاسر

Proceed to 10.152.212.70 (unsafe). رقنا مٹ



## Your connection is not private

Attackers might be trying to steal your information from **10.152.212.70** (for example, passwords, messages, or credit cards). [Learn more](#)

NET::ERR\_CERT\_AUTHORITY\_INVALID

Hide advanced

Back to safety

This server could not prove that it is **10.152.212.70**; its security certificate is not trusted by your computer's operating system. This may be caused by a misconfiguration or an attacker intercepting your connection.

[Proceed to 10.152.212.70 \(unsafe\)](#)

2 ريدحت ةلاس

Save link as... رتخاو طابترال قوف نميألا سواملا رزب رقنا. رامعالا ةداعل لفس ليذنتب مق. Info > Debug Info ليلى لقتنا. 3 ةوطخلال تالفسال ليذنتل as...

The screenshot shows the Cisco CP-8841-3PCC Configuration Utility web interface. The 'Debug Info' tab is active, displaying a 'Console Logs' section with eight debug messages. A context menu is open over the 'Prt File' link, with 'Save link as...' highlighted. The interface includes a navigation bar with 'Info', 'Voice', 'Call History', and 'Personal Directory' tabs. The 'Debug Info' tab is selected, showing a 'Console Logs' section with eight debug messages. A 'Problem Reports' section is also visible, with a 'Report Problem' button and a 'Mini Prt File' link. The 'Prt File' link is highlighted, and a context menu is open over it, with 'Save link as...' selected.

Web Gui

رتوېېمكلال ىل نآل ېمېلقالاءانېلاداعا قېرف لچس لېزنت م ت



ةمچرتل هذه ل و ح

ةلأل تاي نقتل ن م ة و مچ م ادخت ساب دن تسم ل ا ذه Cisco ت مچرت  
م ل ا ل ا ل ا ن ا ع مچ م ف ن م دخت س م ل م عد و ت م م م دقت ل ة يرش ب ل و  
م ك ة ق ي ق د ن و ك ت ن ل ة ل ا ة مچرت ل ض ف ا ن ا ة ظ ح ا ل م ي ج ر ي . ة ص ا خ ل م ه ت غ ل ب  
Cisco ي ل خ ت . ف ر ت م م مچرت م ا ه م د ق ي ي ت ل ا ة ي ف ا ر ت ح ا ل ا ة مچرت ل ا م ل ا ح ل ا و ه  
ل ا ل ا م ا د ا د و ج ر ل ا ب ي ص و ت و ت ا مچرت ل ا ه ذه ة ق د ن ع ا ه ت ي ل و ئ س م Cisco  
Systems (ر ف و ت م ط ب ا ر ل ا) ي ل ص ا ل ا ي ز ي ل ج ن ا ل ا دن ت س م ل ا