



Cisco WPAN Dipole Antenna (ANT-WPAN-OD-OUT-N)

This chapter describes the technical specifications and installation instructions for the Cisco WPAN dipole antenna. The antenna is a single-port antenna designed to cover the 902 - 928 MHz ISM band.

The antenna supports the following Cisco Industrial Integrated Services Routers:

- IR509
- IIR529WP-915S/K9, IR529UBP-915S/K9



Caution

Read the information in [Safety Warnings, page 13-5](#) before installing or replacing antennas.

This chapter covers the following topics:

- [Antenna Overview, page 13-1](#)
- [Technical Specifications, page 13-2](#)
- [Installing the Antenna, page 13-5](#)
- [Obtaining Documentation and Submitting a Service Request, page 13-8](#)


Antenna Overview

The Cisco WPAN Dipole antenna (ANT-WPAN-OD-OUT-N) has the following features:

- 863 - 928 MHz support
- Omni-directional, vertically polarized
- Indoor or outdoor location
- Direct chassis-mount installation
- Type N male connector

Figure 13-1 shows the Antenna Assembly.

Figure 13-1 Cisco ANT-WPAN-OD-OUT-N Antenna

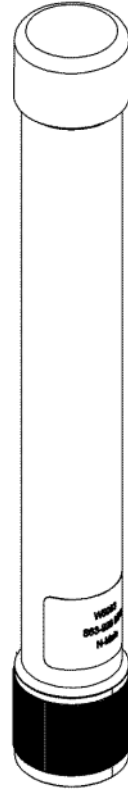

Technical Specifications

This section contains the following:

- [RF Specifications, page 13-2](#)
- [Radiation Patterns, page 13-3](#)
- [Environmental and Mechanical Specifications, page 13-4](#)

RF Specifications

The following are the Radio Frequency (RF) antenna specifications for the Cisco ANT-WPAN-OD-OUT-N Antenna:

Specification	Description
Antenna Type	Dipole
Operating frequency range	863 to 928 MHz

Specification	Description
Nominal impedance	50 ohms
VSWR	2.0:1 maximum
Gain	1.5 dBi maximum
3 dB beamwidth (vertical plane)	84 degrees
3 dB beamwidth (horizontal plane)	360 degrees
Polarization	Linear, vertical
Radiation Pattern	Omni-directional
Maximum input power	20 Watts

Radiation Patterns

The following diagrams illustrate the radiation patterns for the Cisco ANT-WPAN-OD-OUT-N Antenna:

Figure 13-2 Radiation Pattern — Vertical Plane


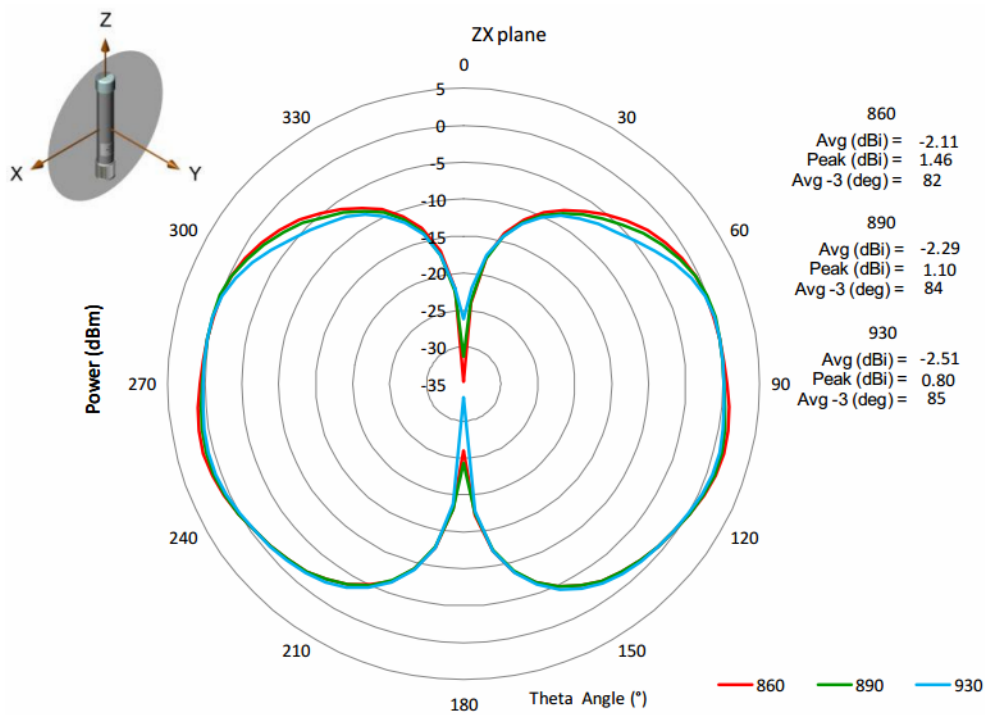


Figure 13-3 Radiation Pattern — Horizontal Plane

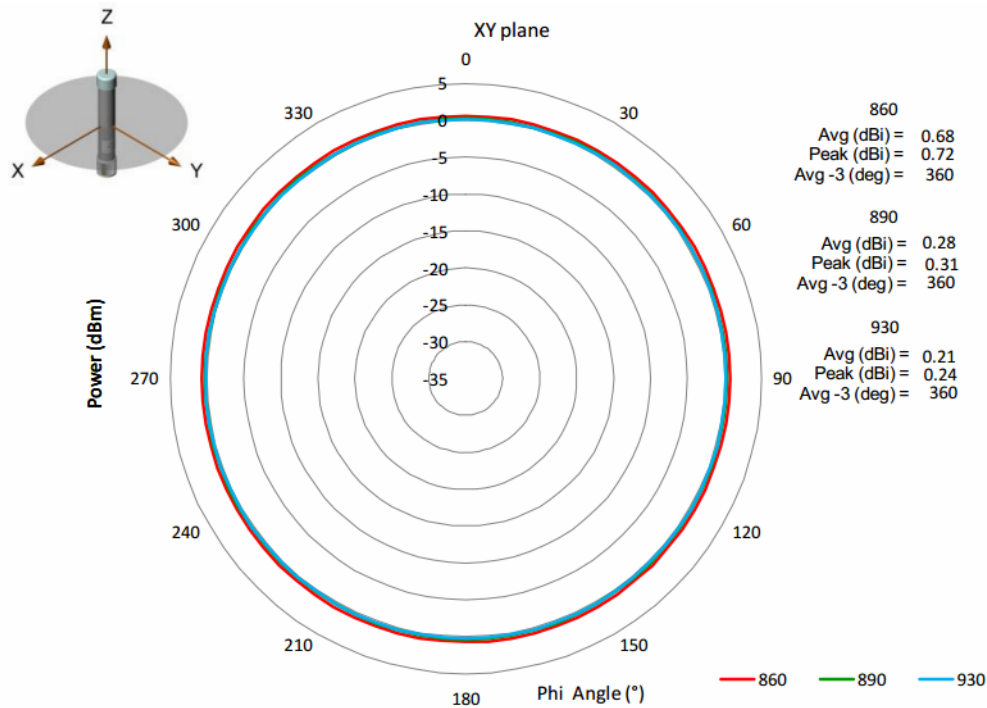

Environmental and Mechanical Specifications

The following are the Environmental and Mechanical Specifications for the Cisco ANT-WPAN-OD-OUT-N Antenna:

Specification	Description
Operating temperature range	-40 to 185°F (-40 to 85°C)
Mount style	Direct chassis or bulkhead mount
Location	Outdoor
Connector	Type N male
Dimensions	7.70 in. length x 1.02 in. diameter (19.56 cm length x 2.60 cm diameter)
Weight	0.26 lbs (120 g)
Wind rating	265 km/hr (165 mph)
IP rating	IP67
Radome	Polyester/Fiberglass, UV resistant, white
Material substance compliance	RoHS compliant

Installing the Antenna

This section contains the following:

- [Contents of the Antenna Kit, page 13-5](#)
- [Safety Warnings, page 13-5](#)
- [Safety Instructions, page 13-6](#)
- [Tools and Equipment Required, page 13-7](#)
- [Mounting the Antenna, page 13-7](#)

Contents of the Antenna Kit

The antenna kit contains:

- 1 x Cisco ANT-WPAN-OD-OUT-N Antenna

Safety Warnings



Avoid using or servicing any equipment that has outdoor connections during an electrical storm. There may be a risk of electric shock from lightning. Statement 1088



Do not work on the system, or connect or disconnect cables, during periods of lightning activity. Statement 1001



Do not locate the outdoor antenna near overhead power lines or other electric light or power circuits, or where it can come into contact with such circuits. When installing the antenna, take extreme care not to come into contact with such circuits, as they may cause serious injury or death. For proper installation and grounding of the antenna, please refer to national and local codes (for example, U.S.:NFPA 70, National Electrical Code, Article 810, Canada:Canadian Electrical Code, Section 54). Statement 1052



This equipment must be grounded. Never defeat the ground conductor or operate the equipment in the absence of a suitably installed ground conductor. Contact the appropriate electrical inspection authority or an electrician if you are uncertain that suitable grounding is available. Statement 1024



Only trained and qualified personnel should be allowed to install, replace, or service this equipment. Statement 1030



To report a gas leak, do not use a telephone in the vicinity of the leak. Statement 1039

**Warning**

This warning symbol means danger. You are in a situation that could cause bodily injury. Before you work on any equipment, be aware of the hazards involved with electrical circuitry and be familiar with standard practices for preventing accidents. Use the statement number provided at the end of each warning to locate its translation in the translated safety warnings that accompanied this device. Statement 1071. SAVE THESE INSTRUCTIONS.

**Warning**

This product is not intended to be directly connected to the Cable Distribution System. Additional regulatory compliance and legal requirements may apply for direct connection to the Cable Distribution System. This product may connect to the Cable Distribution System ONLY through a device that is approved for direct connection. Statement 1078

Safety Instructions

**Warning**

Installation of this antenna near power lines is dangerous. For your safety, follow the installation directions.

Each year hundreds of people are killed or injured when attempting to install an antenna. In many of these cases, the victim was aware of the danger of electrocution, but did not take adequate steps to avoid the hazard.

For your safety, and to help you achieve a good installation, please read and follow these safety precautions. **They may save your life!**

For your safety, read and follow these safety precautions.

- If you are installing an antenna for the first time, for your own safety as well as others, seek professional assistance. Your Cisco sales representative can explain which mounting method to use for the size and type antenna you are about to install.
- Plan your installation procedure carefully and completely before you begin.
- Choose your installation site with safety performance in mind. Remember that electric power cables and telephone lines look alike. For your safety, assume that any line is an electric power line until determined otherwise.
- Call your local power company or building maintenance organization if you are unsure about cables close to your mounting location.
- When installing your antenna, do not use a metal ladder. Dress in rubber soled shoes and heels, rubber gloves, and a long-sleeved shirt or jacket.
- If an accident or emergency occurs with the power lines, call for qualified emergency help immediately.
- Before you install an antenna, contact your Cisco account representative to explain which mounting method to use for the size and type of antenna that you are about to install.
- Find someone to help you—installing an antenna is often a two-person job.
- Select your installation site with safety, as well as performance, in mind. Remember that electric power lines and phone lines look alike. For your safety, assume that any overhead line can kill you.
- Contact your electric power company. Tell them your plans and ask them to come look at your proposed installation.

- Each person involved in an installation should be assigned to a specific task, and should know what to do and when to do it. One person should be in charge of the operation to issue instructions and watch for signs of trouble.
- If the assembly starts to drop, move away from it and let it fall. Because the antenna, mast, cable, and metal guy wires are all excellent conductors of electrical current, even the slightest touch of any of these parts to a power line completes an electrical path through the antenna and the installer.
- If any part of the antenna system should come in contact with a power line, do not touch it or try to remove it yourself. Call your local power company to have it removed safely.
- If an accident occurs with the power lines, call for qualified emergency help immediately.

Tools and Equipment Required

No tools are required to install the antenna. This does not include the tools and equipment required to install the router or to assemble the tower, mast, or other structure you intend to mount the router and antenna on.

Mounting the Antenna

Follow these instructions to mount the antenna.

- If installing the antenna on an IR529UWP-915S/K9 or IR529UBWP-915S/K9, screw the antenna's N male connector onto the N female connector on the chassis. Ensure that the connection is tight. See [Single Antenna Advanced Range Extender—Direct Connect Antenna Configuration](#) in the [Cisco IR500 Series WPAN Gateway and WPAN Range Extender Installation and Configuration Guide](#).
- If installing the antenna to a bulkhead adapter or lightning arrestor, install the lightning arrestor or adapter to the side of the enclosure first, then screw the antenna onto the N female connector of the lightning arrestor or adapter. See [Gateway Enclosure Mounted Antenna Configuration](#) in the [Cisco IR500 Series WPAN Gateway and WPAN Range Extender Installation and Configuration Guide](#).



Note

Coaxial cable loses efficiency as the frequency increases, resulting in signal loss. If a cable is used it should be kept as short as possible because cable length also determines the amount of signal loss—the longer the cable length or run, the greater the loss.

Obtaining Documentation and Submitting a Service Request

For information on obtaining documentation, submitting a service request, and gathering additional information, see the monthly What's New in Cisco Product Documentation, which also lists all new and revised Cisco technical documentation, at:

<http://www.cisco.com/en/US/docs/general/whatsnew/whatsnew.html>

Subscribe to the *What's New in Cisco Product Documentation* as an RSS (Really Simple Syndication) feed, and set it so content is delivered directly to your desktop using a reader application. The RSS feeds are a free service and Cisco currently supports RSS Version 2.0.

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)