



## FCoE Connections

---

This chapter contains the following sections:

- [Supporting Fibre Channel over Ethernet Traffic on the ACI Fabric](#) , on page 1
- [Fibre Channel over Ethernet Guidelines and Limitations](#), on page 3
- [Fibre Channel over Ethernet Supported Hardware](#), on page 3
- [Configuring FCoE Using the APIC GUI](#), on page 4
- [Configuring FCoE Using the NX\\_OS Style CLI](#), on page 19
- [Configuring FCoE Using the REST API](#), on page 30
- [SAN Boot with vPC](#), on page 45

## Supporting Fibre Channel over Ethernet Traffic on the ACI Fabric

Cisco ACI enables you to configure and manage support for Fibre Channel over Ethernet (FCoE) traffic on the ACI fabric.

FCoE is a protocol that encapsulates Fibre Channel (FC) packets within Ethernet packets, thus enabling storage traffic to move seamlessly between a Fibre Channel SAN and an Ethernet network.

A typical implementation of FCoE protocol support on the ACI fabric enables hosts located on the Ethernet-based ACI fabric to communicate with SAN storage devices located on an FC network. The hosts are connecting through virtual F ports deployed on an ACI leaf switch. The SAN storage devices and FC network are connected through a Fibre Channel Forwarding (FCF) bridge to the ACI fabric through a virtual NP port, deployed on the same ACI leaf switch as is the virtual F port. Virtual NP ports and virtual F ports are also referred to generically as virtual Fibre Channel (vFC) ports.



---


**Note** In the FCoE topology, the role of the ACI leaf switch is to provide a path for FCoE traffic between the locally connected SAN hosts and a locally connected FCF device. The leaf switch does not perform local switching between SAN hosts, and the FCoE traffic is not forwarded to a spine switch.

---

### Topology Supporting FCoE Traffic Through ACI

The topology of a typical configuration supporting FCoE traffic over the ACI fabric consists of the following components:

Figure 1: ACI Topology Supporting FCoE Traffic

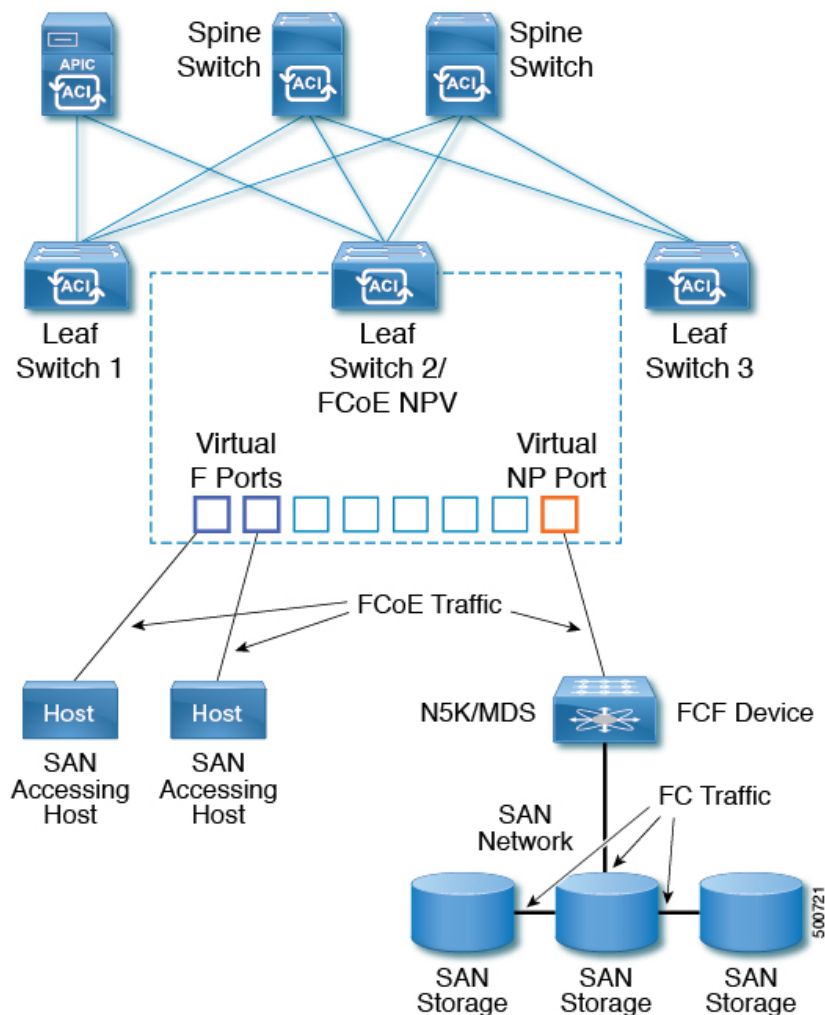

- One or more ACI leaf switches configured through FC SAN policies to function as an NPV backbone.
- Selected interfaces on the NPV-configured leaf switches configured to function as virtual F ports, which accommodate FCoE traffic to and from hosts running SAN management or SAN-consuming applications.
- Selected interfaces on the NPV-configured leaf switches configured to function as virtual NP ports, which accommodate FCoE traffic to and from a Fibre Channel Forwarding (FCF) bridge.

The FCF bridge receives FC traffic from fibre channel links typically connecting SAN storage devices and encapsulates the FC packets into FCoE frames for transmission over the ACI fabric to the SAN management or SAN Data-consuming hosts. It receives FCoE traffic and repackages it back to FC for transmission over the fibre channel network.



**Note** In the above ACI topology, FCoE traffic support requires direct connections between the hosts and virtual F ports and direct connections between the FCF device and the virtual NP port.

APIC servers enable an operator to configure and monitor the FCoE traffic through the APIC GUI, the APIC NX-OS style CLI, or through application calls to the APIC REST API.

### Topology Supporting FCoE Initialization

In order for FCoE traffic flow to take place as described, you must also set up separate VLAN connectivity over which SAN Hosts broadcast FCoE Initialization protocol (FIP) packets to discover the interfaces enabled as F ports.

### vFC Interface Configuration Rules

Whether you set up the vFC network and EPG deployment through the APIC GUI, NX-OS style CLI, or the REST API, the following general rules apply across platforms:

- F port mode is the default mode for vFC ports. NP port mode must be specifically configured in the Interface policies.
- The load balancing default mode is for leaf-switch or interface level vFC configuration is src-dst-ox-id.
- One VSAN assignment per bridge domain is supported.
- The allocation mode for VSAN pools and VLAN pools must always be static.
- vFC ports require association with a VSAN domain (also called Fibre Channel domain) that contains VSANs mapped to VLANs.

## Fibre Channel over Ethernet Guidelines and Limitations

The VLAN used for FCoE should have `vlanScope` set to `Global`. Setting `vlanScope` to `portLocal` is not supported for FCoE. The value is set using the Layer 2 interface policy (`l2IfPol`).

## Fibre Channel over Ethernet Supported Hardware

FCoE is supported on the following switches:

- N9K-C93180LC-EX (When 40 Gigabit Ethernet (GE) ports are enabled as FCoE F or NP ports, they cannot be enabled for 40GE port breakout. FCoE is not supported on breakout ports.)
- N9K-C93180YC-EX
- N9K-C93108TC-FX (FCoE support on FEX ports)
- N9K-C93180YC-FX (FCoE support on FEX ports, 40G ports (1/49-54), and 4x10G breakout ports)

FCoE is supported on the following Nexus FEX devices:

- N2K-C2348UPQ-10GE
- N2K-C2348TQ-10GE
- N2K-C2232PP-10GE
- N2K-B22DELL-P

- N2K-B22HP-P
- N2K-B22IBM-P
- N2K-B22DELL-P-FI

# Configuring FCoE Using the APIC GUI

## FCoE GUI Configuration

### FCoE Policy, Profile, and Domain Configurations

You can use the APIC GUI under the Fabric Access Policies tab to configure policies, policy groups, and profiles to enable customized and scaled-out deployment and assignment of FCoE supporting F and NP ports on your ACI leaf switches. Then, under the APIC the Tenant tab, you can configure EPG access to those ports.

#### Policies and Policy Groups

APIC policies and policy groups you create or configure for FCoE support include the following:

##### Access Switch Policy Group

The combination of switch-level policies that support FCoE traffic through ACI leaf switches.

You can associate this policy group with a leaf profile to enable FCoE support on designated ACI leaf switches.

This policy group consists of the following policies:

- **Fibre Channel SAN Policy**

Specifies the EDTOV, RATO, and MAC Address prefix (also called the FC map) values used by the NPV leaf.

- **Fibre Channel Node Policy**

Specifies the load balance options and FIP keep alive intervals that apply to FCoE traffic associated with this switch policy group.

##### Interface Policy Groups

The combination of interface-level policies that support FCoE traffic through interfaces on ACI leaf switches.

You can associate this policy group with an FCoE supportive interface profile to enable FCoE support on designated interfaces.

You configure two interface policy groups: One policy group for F ports, and one policy group for NP ports.

The following policies in the interface policy group apply to FCoE enablement and traffic:

- **Priority Flow Control Policy**

Specifies the state of priority flow control (PFC) on the interfaces to which this policy group is applied.

This policy specifies under what circumstances QoS-level priority flow control will be applied to FCoE traffic.

- **Fibre Channel Interface Policy**

Specifies whether the interfaces to which this policy group is applied are to be configured as F ports or NP ports.

- **Slow Drain Policy**

Specifies the policy for handling FCoE packets that are causing traffic congestion on the ACI Fabric.

### Global Policies

The APIC global policies whose settings can affect the performance characteristics of FCoE traffic on the ACI fabric.

The Global **QOS Class Policies** for **Level1**, **Level2**, **Level4**, **Level5**, or **Level6** connections, contain the following settings that affect FCoE traffic on the ACI fabric:

- **PFC Admin State must be set to Auto**

Specifies whether to enable priority flow control to this level of FCoE traffic (default value is false).

- **No Drop COS**

Specifies whether to enable a no-drop policy for this level of FCoE traffic designated with a certain Class of Service (CoS) level.

**Note:** QoS level enabled for PFC and FCoE no-drop must match with the Priority Group ID enabled for PFC on CNA.

**Note:** Only one QoS level can be enabled for no-drop and PFC, and the same QoS level must be associated with FCoE EPGs.

- **QoS Class**—Priority flow control requires that CoS levels be globally enabled for the fabric and assigned to the profiles of applications that generate FCoE traffic.

CoS Preservation must also be enabled—Navigate to **Fabric > Access Policies > Policies > Global > QoS Class** and enable **Preserve COS Dot1p Preserve**.




---

**Note** Some legacy CNAs may require the **Level2** Global QoS Policy to be used as the **No Drop** PFC, FCoE (Fibre Channel over Ethernet) QoS Policy. If your Converged Network Adapters (CNAs) are not logging into the fabric, and you have noticed that no FCoE Initiation Protocol (FIP) frames are being sent by the CNAs, try enabling **Level2** as the FCoE QoS policy. The **Level2** policy must be attached to the FCoE EPGs in use and only one QoS level can be enabled for PFC no-drop.

---

### Profiles

APIC profiles that you can create or configure for FCoE support include the following:

#### Leaf Profile

Specifies the ACI Fabric leaf switches on which to configure support of FCoE traffic.

The combination of policies contained in the access switch policy group can be applied to the leaf switches included in this profile.

### Interface Profiles

Specifies a set of interfaces on which to deploy F Ports or NP Ports.

You configure at least two leaf interface profiles: One interface profile for F ports, and one interface profile for NP ports.

The combination of policies contained in the interface policy group for F ports can be applied to the set of interfaces included in the interface profile for F ports.

The combination of policies contained in the interface policy group for NP ports can be applied to the set of interfaces included in the interface profile for NP ports.

### Attached Entity Profile

Binds the interface policy group settings with the Fibre Channel domain mapping.

### Domains

Domains that you create or configure for FCoE support include the following:

#### Physical Domain

A virtual domain created to support LANs for FCoE VLAN Discovery. The Physical domain will specify the VLAN pool to support FCoE VLAN discovery.

#### Fibre Channel Domain

A virtual domain created to support virtual SANs for FCoE connections.

A Fibre Channel domain specifies a VSAN pool, VLAN pool and the VSAN Attribute over which the FCoE traffic is carried.

- **VSAN pool** - a set of virtual SANs which you associate with existing VLANs. Individual VSANs can be assigned to associated FCoE-enabled interfaces in the same way that VLANs can be assigned to those interfaces for Ethernet connectivity.
- **VLAN pool** - the set of VLANs available to be associated with individual VSANs.
- **VSAN Attribute** - The mapping of a VSAN to a VLAN.

### Tenant Entities

Under the Tenant tab, you configure bridge domain and EPG entities to access the FCoE ports and exchange the FCoE traffic.

The entities include the following:

#### Bridge Domain (configured for FCoE support)

A bridge domain created and configured under a tenant to carry FCoE traffic for applications that use FCoE connections.

#### Application EPG

The EPG under the same tenant to be associated with the FCoE bridge domain.

**Fibre Channel Path**

Specifies the interfaces enabled as FCoE F ports or NP ports to be associated with the selected EPG. After you associate the Fibre Channel path with an EPG the FCoE interface is deployed in the specified VSAN.

## Deploying FCoE vFC Ports Using the APIC GUI

The APIC GUI enables you to create customized node policy groups, leaf profiles, interface policy groups, interface profiles, and virtual SAN domains that system administrators can re-use to ensure that all interfaces they designate as F ports or NP ports to handle FCoE traffic have consistent FCoE-related policies applied.

**Before you begin**

- The ACI fabric is installed.
- If you deploy over a port channel (PC) topology, the port channel is set up as described in [ACI Leaf Switch Port Channel Configuration Using the GUI](#).
- If you deploy over a virtual port channel (vPC) topology, the vPC is set up as described in [ACI Leaf Switch Virtual Port Channel Configuration Using the GUI](#).

**Procedure**

**Step 1**

Create an FCoE supportive switch policy group to specify and combine all the leaf switch policies that support FCoE configuration.

This policy group will be applied to the leaf switches that you want to serve as NPV hosts.

- a) In the APIC GUI, starting on the APIC menu bar, click **Fabric > Access Policies > Switches > Leaf Switches > Policy Groups**.
- b) Right-click **Policy Groups** and click **Create Access Switch Policy Group**.
- c) In the **Create Access Switch Policy Group** dialog, specify the settings described below and then click **Submit**.

Policy	Description
Name	Identifies the switch policy group. Enter a name that indicates the FCoE supportive function of this switch policy group. For example, <b>fcoe_switch_policy_grp</b> .
Fibre Channel SAN Policy	Specifies the following SAN Policy values: <ul style="list-style-type: none"> <li>• FC Protocol EDTOV (default: 2000)</li> <li>• FC Protocol RATOV (default : 10000)</li> <li>• MAC address prefix (also called FC map) used by the leaf switch. This value should match the value of the peer device connected on the same port. Typically the default value OE:FC:00 is used.</li> </ul> Click the drop-down option box. <ul style="list-style-type: none"> <li>• To use the default EDTOV, RATOV, and MAC address prefix values, click <b>default</b>.</li> </ul>

Policy	Description
	<ul style="list-style-type: none"> <li>To use the value specified in an existing policy, click that policy.</li> <li>To create a new policy to specify a new customized MAC address prefix, click <b>Create Fibre Channel SAN Policy</b> and follow the prompts.</li> </ul>

**Step 2** Create a leaf profile for leaf switches to support FCoE traffic.

This profile specifies a switch or set of leaf switches to assign the switch policy group that was configured in the previous step. This association enables that set of switches to support FCoE traffic with pre-defined policy settings.

- Starting at the APIC menu bar, click **Fabric > Access Policies > Switches > Leaf Switches > Profiles**
- Right-click **Leaf Profiles**, then click **Create Leaf Profile**.
- In the **Create Leaf Profile** dialog create and name the leaf profile (for example: NPV-1)
- Also in the **Create Leaf Profile** dialog, locate the **Leaf Selectors** table, click + to create a new table row and specify the leaf switches to serve as NPV devices.
- In the new table row choose a leaf name, blocks, and assign the switch policy group that you created in the previous step.
- Click **Next** and then click **Finish**.

**Step 3** Create at least two FCoE-supportive interface policy groups: one to combine all policies that support FCoE F port interfaces, and one to combine all policies that support FCoE NP port interfaces.

These interface policy groups are to be applied to the interface profiles that are applied to interfaces that are to serve as F ports and NP ports.

- On the APIC menu bar, click **Fabric > Access Policies > Interfaces > Leaf Interfaces > Policy Groups**.
- Right-click **Policy Groups**, then, depending on how port access is configured, click one of the following options: **Create Leaf Access Port Policy Group**, **Create PC Interface Port Policy**, or **Create vPC Interface Port Policy Group**.

- Note**
- If you deploy over a PC interface, view [ACI Leaf Switch Port Channel Configuration Using the GUI](#) for additional information.
  - If you deploy over a vPC interface, view [ACI Leaf Switch Virtual Port Channel Configuration Using the GUI](#) for additional information.

- In the policy group dialog, specify for inclusion the Fibre Channel Interface policy, the slow drain policy, and the priority flow control policy you configure.

Policy	Description
Name	<p>Name of this policy group.</p> <p>Enter a name that indicates the FCoE supportive function of this Leaf Access Port Policy Group and the port type, (F or NP) that it is intended to support, for example: <b>fcoe_f_port_policy</b> or <b>fcoe_np_port_policy</b>.</p>
Priority Flow Control Policy	<p>Specifies the state of the Priority Flow Control (PFC) on the interfaces to which this policy group is applied.</p> <p>Options include the following:</p>



Policy	Description
	<ul style="list-style-type: none"> <li>• <b>Auto</b> (the default value) Enables priority flow control (PFC) on local port on the no-drop CoS as configured, on the condition that values advertised by the DCBX and negotiated with the peer succeed. Failure causes priority flow control to be disabled on the no-drop CoS.</li> <li>• <b>Off</b> disables FCoE priority flow control on the local port under all circumstances.</li> <li>• <b>On</b> enables FCoE PFC on the local port under all circumstances.</li> </ul> <p>Click the drop-down option box:</p> <ul style="list-style-type: none"> <li>• To use the default values, click <b>default</b>.</li> <li>• To use the value specified in an existing policy, click that policy.</li> <li>• To create a new policy specifying different values, click <b>Create Priority Flow Control Policy</b> and follow the prompts.</li> </ul> <p><b>Note</b> PFC requires that Class of Service (CoS) levels be globally enabled for the fabric and assigned to the profiles of applications that generate FCoE traffic. Also CoS Preservation must be enabled. To enable it, navigate to <b>Fabric &gt; Access Policies &gt; Policies &gt; Global &gt; QoS Class</b> and enable <b>Preserve COS Dot1p Preserve</b>.</p>
Slow Drain Policy	<p>Specifies how to handle FCoE packets that are causing traffic congestion on the ACI fabric. Options include the following:</p> <ul style="list-style-type: none"> <li>• Congestion Clear Action (default: disabled) Action to be taken during FCoE traffic congestion. Options include: <ul style="list-style-type: none"> <li>• Err - disable - Disable the port.</li> <li>• Log - Record congestion in the Event Log.</li> <li>• Disabled- Take no action.</li> </ul> </li> <li>• Congestion Detect Multiplier (default: 10) The number of pause frames received on a port that triggers a congestion clear action to address FCoE traffic congestion.</li> <li>• Flush Admin State <ul style="list-style-type: none"> <li>• Enabled - Flush the buffer.</li> <li>• Disabled - Don't flush the buffer.</li> </ul> </li> <li>• Flush Timeout (default: 500 milliseconds) Threshold in milliseconds to trigger buffer flush drop during congestion.</li> </ul> <ul style="list-style-type: none"> <li>• To use the default values, click <b>default</b>.</li> <li>• To use the value specified in an existing policy, click that policy.</li> </ul>

Policy	Description
	<ul style="list-style-type: none"> <li>To create a new policy specifying different values, click <b>Create Slow Drain Policy</b> and follow the prompts.</li> </ul>

**Step 4** Create at least two interface profiles: one profile to support F port connections, one profile to support NP port connections, and optional additional profiles to be associated with additional port policy variations.

- Starting at the APIC bar menu click **Fabric > Access Policies > Interfaces > Leaf Interfaces > Profiles**.
- Right-click **Profiles** and choose **Create Leaf Interface Profile**.
- In the **Create Leaf Interface Profile** dialog, enter a descriptive name for the profile, for example, **FCoE\_F\_port\_Interface\_profile-1**.
- Locate the **Interface Selectors** table and click + to display the **Create Access Port Selector** dialog. This dialog enables you to display a range of interfaces and apply settings to the fields described in the following table.

Option	Description
Name	A descriptive name for this port selector.
Interface IDs	<p>Specifies the set of interfaces to which this range applies.</p> <ul style="list-style-type: none"> <li>To include all interfaces in the switch, choose <b>All</b>.</li> <li>To include an individual interface in this range, specify single Interface ID, for example: <b>1/20</b>.</li> <li>To include a range of interfaces in this range, enter the lower and upper values separated by a dash, for example: <b>1/10 - 1/15</b>.</li> </ul> <p><b>Note</b> Specify separate, non-overlapping ranges of interfaces when configuring interface profiles for F ports and an NP port.</p>
Interface Policy Group	<p>The name of either the F port interface policy group or the NP port policy group that you configured in the previous step.</p> <ul style="list-style-type: none"> <li>To designate the interfaces included in this profile as F ports, choose the interface policy group that you configured for F ports.</li> <li>To designate the interfaces included in the profile as NP ports, choose the interface policy group that you configured for NP ports.</li> </ul>

**Step 5** Click **Submit**. Repeat the previous step so that you at least have interface profiles for both F ports and an NP port.

**Step 6** Configure whether to apply global QoS policies to FCoE traffic.

You can specify different QoS policies to different levels (1, 2, 4, 5, or 6) of FCoE traffic.

- Starting at the APIC bar menu click **Fabric > Access Policies > Policies > Global > QoS Class** and enable the **Preserve CoS** flag in the **QoS Class** pane.
- In the **QoS Class - Level 1**, **QoS Class - Level 2**, **QoS Class - Level 4**, **QoS Class - Level 5**, or **QoS Class - Level 6** dialog, edit the following fields to specify the PFC and no-drop CoS. Then click **Submit**.

**Note** Only 1 Level can be configured for PFC and no-drop CoS.

Policy	Description
PFC Admin State	Whether to enable priority flow control to this level of FCoE traffic (default value is false).  Enabling priority flow control sets the <b>Congestion Algorithm</b> for this level of FCoE traffic to <b>no-drop</b> .
No-Drop-CoS	The CoS level to impose no drop FCoE packet handling even in the case of FCoE traffic congestion.

**Step 7**

Define a Fibre Channel domain. Create a set of virtual SANs (VSANs) and map them to set of existing VLANs.

- Starting at the APIC bar menu click **Fabric > Access Policies > Physical and External Domains > Fibre Channel Domains**.
- Right-click **Fibre Channel Domains** and click **Create Fibre Channel Domain**.
- In the **Fibre Channel Domain** dialog, specify the following settings:

Option	Description/Action
Name	Specifies the name or label you want to assign the VSAN domain you are creating. (For example: vsan-dom2)
VSAN Pool	<p>The pool of VSANs assigned to this domain.</p> <ul style="list-style-type: none"> <li>To select an existing VSAN pool, click the drop-down and choose a listed pool. If you want to revise it, click the Edit icon.</li> <li>To create a VSAN pool, click <b>Create a VSAN Pool</b>.</li> </ul> <p>If you open the dialog to create a VSAN pool, follow the prompts configure the following:</p> <ul style="list-style-type: none"> <li>A <b>Static</b> resource allocation method to support FCoE.</li> <li>a range of VSANs that will be available to assign to FCoE F port interfaces and NP port interfaces.</li> </ul> <p><b>Note</b> Minimum range value is 1. Maximum range value is 4078. Configure multiple ranges of VSANs if necessary.</p>
VLAN Pool	<p>The pool of VLANs available to be mapped to by the members of the VSAN pool.</p> <p>A VLAN pool specifies numerical ranges of VLANs you want available to support FCoE connections for this domain. The VLANs in the ranges you specify are available for VSANs to map to them.</p> <ul style="list-style-type: none"> <li>To select an existing VLAN pool, click the drop-down and choose a listed pool. If you want to revise it, click the Edit icon.</li> <li>To create a VLAN pool, click <b>Create a VLAN Pool</b>.</li> </ul> <p>If you open the dialog to create a VLAN pool, follow the prompts configure the following:</p> <ul style="list-style-type: none"> <li>A <b>Static</b> resource allocation method to support FCoE.</li> <li>a range of VLANs that will be available for VSANs to map to.</li> </ul>

Option	Description/Action
	<p><b>Note</b> Minimum range value is 1. Maximum range value is 4094. Configure multiple ranges of VLANs if necessary.</p>
VSAN Attr	<p>The VSAN Attributes map for this domain.</p> <p>The VSAN Attributes map VSANs in the VSAN pool to VLANs in the VLAN pool.</p> <ul style="list-style-type: none"> <li>• To select an existing VSAN Attributes map, click the drop-down and choose a listed map. If you want to revise it, click the Edit icon.</li> <li>• To create a VSAN Attributes map, click <b>Create VSAN Attributes</b>.</li> </ul> <p>If you open the dialog to configure the VSAN attributes, follow the prompts configure the following:</p> <ul style="list-style-type: none"> <li>• The appropriate load balancing option (src-dst-ox-id or src-dst-id).</li> <li>• Mapping of individual VSANs to individual VLANs, for example: vsan-8 to vlan-10</li> </ul> <p><b>Note</b> Only VSANs and VLANs in the ranges you specified for this domain can be mapped to each other.</p>

**Step 8**

Create an attached entity profile to bind the Fibre Channel domain with the interface policy group.

- a) On the APIC menu bar, click **Fabric > Access Policies > Interfaces > Leaf Interfaces > Policy Groups > interface\_policy\_group\_name**.

In this step *interface\_policy\_group\_name* is the interface policy group that you defined in Step 3.

- b) In the interface policy group dialog, Click the Attached Entity Profile drop-down and choose an existing Attached Entity Profile or click **Create Attached Entity Profile** to create a new one.
- c) In the Attached Entity Profile dialog specify the following settings:

Field	Description
Name	A name for this Attached Entity Profile.
Domains To Be Associated To Interfaces	<p>Lists the domain to be associated with the interface policy group.</p> <p>In this case, choose the Fibre Channel domain you configured in Step 7.</p> <p>Click <b>Submit</b>.</p>

**Step 9**

Associate the leaf profile and the F port and NP port interface profiles.

- a) Starting at the APIC menu bar, click **Fabric > Access Policies > Switches > Leaf Switches > Profiles** then click the name of the leaf profile you configured in Step 2.
- b) In the **Create Leaf Profile** dialog, locate the **Associated Interface Selector Profiles** table, click +to create a new table row and choose the F port interface profile you created in Step 4.
- c) Again on the **Associated Interface Selector Profiles** table, click +to create a new table row and choose the NP port interface profile you created in Step 4.

d) Click **Submit**.

### What to do next

After successful deployment of virtual F ports and NP ports to interfaces on the ACI fabric, the next step is for system administrators to enable EPG access and connection over those interfaces.

For more information, see [Deploying EPG Access to vFC Ports Using the APIC GUI, on page 13](#).

## Deploying EPG Access to vFC Ports Using the APIC GUI

After you have configured ACI fabric entities to support FCoE traffic and F port and NP port functioning of designated interfaces, your next step is to configure EPG access to those ports.

### Before you begin

- The ACI fabric is installed.
- A Fibre Channel Forwarding (FCF) switch, connected to a FC network (for example, SAN storage), is physically attached by Ethernet to an ACI leaf switch port.
- A host application that needs to access the FC network is physically attached by Ethernet to a port on the same ACI leaf switch.
- Leaf policy groups, leaf profiles, interface policy groups, interface profiles, and Fibre Channel domains have all been configured to support FCoE traffic.

### Procedure

#### Step 1

Under an appropriate tenant configure an existing bridge domain to support FCoE or create a bridge domain to support FCoE.

Option:	Actions
To configure an existing bridge domain for FCoE	<ol style="list-style-type: none"> <li>Click <b>Tenant</b> &gt; <i>tenant_name</i> &gt; <b>Networking</b> &gt; <b>Bridge Domains</b> &gt; <i>bridge_domain_name</i> .</li> <li>In the <b>Type</b> field of the bridge domain's <b>Properties</b> panel, click <b>fc</b>.</li> <li>Click <b>Submit</b>.</li> </ol>
To create a new bridge domain for FCoE	<ol style="list-style-type: none"> <li>Click <b>Tenant</b> &gt; <i>tenant_name</i> &gt; <b>Networking</b> &gt; <b>Bridge Domains</b> &gt; <b>Actions</b> &gt; <b>Create a Bridge Domain</b>.</li> <li>In the <b>Name</b> field of the <b>Specify Bridge Domain for the VRF</b> dialog, enter a bridge domain name.</li> <li>In the <b>Type</b> field of <b>Specify Bridge Domain for the VRF</b> dialog, click <b>fc</b>.</li> <li>In VRF field select a VRF from the drop-down or click <b>Create VRF</b> to create and configure a new VRF.</li> </ol>

Option:	Actions
	<ul style="list-style-type: none"> <li>e. Finish the bridge domain configuration.</li> <li>f. Click <b>Submit</b>.</li> </ul>

**Step 2** Under the same tenant, configure an existing EPG or create a new EPG to associate with the FCoE-configured bridge domain.

Option:	Actions
<p>To associate an existing EPG</p>	<ul style="list-style-type: none"> <li>a. Click <b>Tenant</b> &gt; <i>&lt;tenant_name&gt;</i> &gt; <b>Application Profiles</b> &gt; <i>&lt;application_profile_name&gt;</i> &gt; <b>Application EPGs</b> &gt; <i>&lt;epg_name&gt;</i> .</li> <li>b. In the <b>QoS class</b> field choose the quality of service (<b>Level1</b>, <b>Level2</b>, <b>Level4</b>, <b>Level5</b>, or <b>Level6</b>) to assign to traffic generated by this EPG.  If you configured one of the QoS levels for priority-flow control no-drop congestion handling and you want FCoE traffic handled with no-dropped packet priority, assign that QoS level to this EPG.</li> <li>c. In the <b>Bridge Domain</b> field of the EPG's <b>Properties</b> panel, click the drop-down list and choose the name of a bridge domain configured for Type: fcoe.</li> <li>d. Click <b>Submit</b>.  <b>Note</b> If you change the <b>Bridge Domain</b> field, you must wait 30-35 seconds between changes. Changing the Bridge Domain field too rapidly causes vFC interfaces on the NPV Switch to fail and a switch reload must be executed.</li> </ul>
<p>To create and associate a new EPG</p>	<ul style="list-style-type: none"> <li>a. Click <b>Tenant</b> &gt; <i>&lt;tenant_name&gt;</i> &gt; <b>Application Profiles</b> &gt; <i>&lt;application_profile_name&gt;</i> &gt; <b>Application EPGs</b>.</li> <li>b. Right-click <b>Application EPGs</b> and click <b>Create Application EPG</b>.</li> <li>c. In the <b>QoS class</b> field choose the quality of service (<b>Level1</b>, <b>Level2</b>, <b>Level4</b>, <b>Level5</b>, or <b>Level6</b>) to assign to traffic generated by this EPG.  If you configured one of the QoS levels for priority-flow control no-drop congestion handling and you want FCoE traffic handled with no-dropped packet priority, assign that QoS level to this EPG.</li> <li>d. In the <b>Bridge Domain</b> field of the <b>Specify the EPG Identity</b> dialog, click the drop-down list and choose the name of a bridge domain configured for Type: fcoe.  <b>Note</b> If you change the <b>Bridge Domain</b> field, you must wait 30-35 seconds between changes. Changing the Bridge Domain field too rapidly causes vFC interfaces on the NPV Switch to fail and a switch reload must be executed.</li> <li>e. Finish the bridge domain configuration.</li> <li>f. Click <b>Finish</b>.</li> </ul>

- Step 3** Add a Fibre Channel Domain association with the EPG.
- Click **Tenant** > *<tenant\_name>* > **Application Profiles** > *<application\_profile\_name>* > **Application EPGs** > *<epg\_name>* > **Domains (VMs and Bare Metal)**.
  - Right-click **Domains (VMs and Bare Metal)** and click **Add Fibre Channel Domain Association**.
  - In the **Add Fibre Channel Domain Association** dialog, locate the **Fibre Channel Domain Profile Field**.
  - Click the drop-down list and choose the name of the Fibre Channel domain that you previously configured.
  - Click **Submit**.

**Step 4** Under the associated EPG define a Fibre Channel path.

The Fibre Channel path specifies the interfaces enabled as FCoE F ports or NP ports to be associated with the selected EPG.

- Click **Tenant** > *<tenant\_name>* > **Application Profiles** > *<application\_profile\_name>* > **Application EPGs** > *<epg\_name>* > **Fibre Channel (Paths)**.
- Right-click **Fibre Channel (Paths)** and click **Deploy Fibre Channel**.
- In the **Deploy Fibre Channel** dialog configure the following settings:

Option:	Actions
Path Type	The type of interface (Port, Direct Port Channel, or Virtual Port Channel) being accessed for sending and receiving FCoE traffic.
Path	<p>The Node-interface path through which FCoE traffic associated with the selected EPG will flow.</p> <p>Click the drop-down list and choose from the listed interfaces. .</p> <p><b>Note</b> Choose only the interfaces previously configured as F ports or NP ports. Choosing interfaces that you did not configure causes only default values to apply to those interfaces.</p> <p><b>Note</b> To deploy FCoE over FEX, select the FEX ports previously configured.</p>
VSAN	<p>The VSAN which will use the interface selected in the <b>Path</b> field.</p> <p><b>Note</b> The specified VSAN must be in the range of VSANs that was designated for the VSAN pool.</p> <p>In most cases, all interfaces that this EPG is configured to access must be assigned the same VSAN, unless you specify a Fibre Channel path over a Virtual Port Channel (VPC) connection. In that case, you can specify two VSANs, one for each leg of the connection.</p>
VSAN Mode	<p>The mode (<b>Native</b> or <b>Regular</b>) in which the selected VSAN accesses the selected interface.</p> <p>Every interface configured for FCoE support, requires one VSAN and only one VSAN configured for Native mode. Any additional VSANs assigned to the same interface must access it in Regular mode.</p>
Pinning label	(Optional) This option applies only if you are mapping access to an F port and it is necessary to bind this F port with a specific uplink NP port. It associates a pinning label (pinning label 1 or pinning label 2) with a specific NP port. You can then assign that pinning label to the target F port. This association causes the associated NP port to serve in all cases as the uplink port to the target F Port.

Option:	Actions
	Choose a pinning label and associate it with an interface configured as an NP port. This option implements what is also referred to as "traffic-mapping."
<b>Note</b>	The F port and the associated Pinning Label NP port must be on the same Leaf switch.

**Step 5** Click **Submit**.

**Step 6** Repeat Steps 4 and 5 for every FCoE enabled interface to which you are mapping EPG access.

**Step 7** Verify successful deployment, as follows:

a) Click **Fabric > Inventory > Pod\_name > leaf\_name > Interfaces > VFC interfaces**.

The interfaces on which you deployed ports are listed under VFC Interfaces.

### What to do next

After you have set up EPG access to the vFC interfaces, the final step is to set up the network supporting the FCoE initialization protocol (FIP), which enables discovery of those interfaces.

For more information, see [Deploying the EPG to Support the FCoE Initiation Protocol, on page 16](#).

## Deploying the EPG to Support the FCoE Initiation Protocol

After you have configured FCoE EPG access to your server ports, you must also configure EPG access to support the FCoE Initiation Protocol (FIP).

### Before you begin

- The ACI fabric is installed.
- A host application that needs to access the FC network is physically attached by Ethernet to a port on the same ACI leaf switch.
- Leaf policy groups, leaf profiles, interface policy groups, interface profiles, and Fibre Channel domains have all been configured to support FCoE traffic as described in the topic [Deploying EPG Access to vFC Ports Using the APIC GUI, on page 13](#).
- EPG access to the vFC ports is enabled as described in the topic [Deploying EPG Access to vFC Ports Using the APIC GUI, on page 13](#).

### Procedure

**Step 1** Under the same tenant configure an existing bridge domain to support FIP or create a regular bridge domain to support FIP.

Option:	Actions
To configure an existing bridge domain for FCoE	a. Click <b>Tenant &gt; tenant_name &gt; Networking &gt; Bridge Domains &gt; bridge_domain_name</b> .



Option:	Actions
	<ul style="list-style-type: none"> <li>b. In the <b>Type</b> field of the bridge domain's <b>Properties</b> panel, click <b>Regular</b>.</li> <li>c. Click <b>Submit</b>.</li> </ul>
To create a new bridge domain for FCoE	<ul style="list-style-type: none"> <li>a. Click <b>Tenant &gt; <i>tenant_name</i> &gt; Networking &gt; Bridge Domains &gt; Actions &gt; Create a Bridge Domain</b>.</li> <li>b. In the <b>Name</b> field of the <b>Specify Bridge Domain for the VRF</b> dialog, enter a bridge domain name.</li> <li>c. In the <b>Type</b> field of <b>Specify Bridge Domain for the VRF dialog</b>, click <b>Regular</b>.</li> <li>d. In <b>VRF</b> field select a VRF from the drop-down or click <b>Create VRF</b> to create and configure a new VRF.</li> <li>e. Finish the bridge domain configuration.</li> <li>f. Click <b>Submit</b>.</li> </ul>

**Step 2**

Under the same tenant, configure an existing EPG or create a new EPG to associate with the regular-type bridge domain.

Option:	Actions
To associate an existing EPG	<ul style="list-style-type: none"> <li>a. Click <b>Tenant &gt; <i>tenant_name</i> &gt; Application Profiles &gt; ap1 &gt; Application EPGs &gt; <i>epg_name</i></b> .</li> <li>b. In the <b>Bridge Domain</b> field of the EPG's <b>Properties</b> panel, click the drop-down list and choose the name of the regular bridge domain that you just configured to support FIP.</li> <li>c. Click <b>Submit</b>.</li> </ul>
To create and associate a new EPG	<ul style="list-style-type: none"> <li>a. Click <b>Tenant &gt; <i>tenant_name</i> &gt; Application Profiles &gt; ap1 &gt; Application EPGs</b>.</li> <li>b. Right-click <b>Application EPGs</b> and click <b>Create Application EPG</b>.</li> <li>c. In the <b>Bridge Domain</b> field of the <b>Specify the EPG Identity</b> dialog, click the drop-down list and choose the name of the regular bridge domain that you just configured to support FIP.</li> <li>d. Finish the bridge domain configuration.</li> <li>e. Click <b>Finish</b>.</li> </ul>

**Step 3**

Add a Physical Domain association with the EPG.

- a) Click **Tenant > *tenant\_name* > Application Profiles > ap1 > Application EPGs > *epg\_name* > Domains & Bare Metal**.
- b) Right-click **Domains & Bare Metal** and click **Add Physical Domain Association**.
- c) In the **Add Physical Domain Association** dialog, locate Physical Domain Profile Field.

- d) Click the drop-down list and choose the name of the physical domain that contains the LAN that intended for use in FIP support.
- e) Click **Submit**.

**Step 4** Under the associated EPG define a path.

The path specifies the interfaces enabled as FCoE F ports or NP ports to be associated with the selected EPG.

- a) Click **Tenant** > *tenant\_name* > **Application Profiles** > **ap1** > **Application EPGs** > *epg\_name* > **Static Ports**.
- b) Right-click **Static Ports** and click **Deploy Static EPG on PC, VPC, or Interface**.
- c) In the **Path Type** field, specify the port type (Port, Direct Port Channel, or Virtual Port Channel) on which you want to deploy an F mode vFC.
- d) In the **Path** field, specify all the paths on which are deployed the F ports.
- e) Choose the VLAN Encap that you want to use as your FCoE VLAN discovery and 802.1p(access) as port mode.
- f) Click **Submit**.

---

The FCoE components will begin the discovery process to initiate the operation of the FCoE network.

## Undeploying FCoE Connectivity Using the APIC GUI

To undo FCoE enablement of leaf switch interfaces on the ACI fabric, delete the Fibre Channel path and Fibre Channel domain and its elements that you defined in [Deploying FCoE vFC Ports Using the APIC GUI, on page 7](#).



**Note** If during clean up you delete the Ethernet configuration object (infraHPortS) for a vFC port (for example, in the **Interface Selector** table on the **Leaf Interface Profiles** page of the GUI), the default vFC properties remain associated with that interface. For example if the interface configuration for vFC NP port 1/20 is deleted, that port remains a vFC port but with default F port setting rather than non-default NP port setting applied.

### Before you begin

You must know the name of the Fibre Channel path and Fibre Channel domain including its associated VSAN pool, VLAN pool, and VSAN Attributes map that you specified during FCoE deployment.

### Procedure

**Step 1** Delete the associated Fibre Channel path to undeploy vFC from the port/vsan whose path was specified on this deployment.

This action removes vFC deployment from the port/vsan whose path was specified on this deployment.

- a) Click **Tenants** > *tenant\_name* > **Application Profiles** > *app\_profile\_name* > **Application EPGs** > *app\_epg\_name* > **Fibre Channel (Paths)**. Then right-click the name of the target Fibre Channel path and choose **Delete**.
- b) Click **Yes** to confirm the deletion.

- Step 2** Delete the VLAN to VSAN map that you configured when you defined the Fibre Channel domain.  
This action removes vFC deployment from all the elements defined in the map.
- Click **Fabric > Access Policies > Pools > VSAN Attributes**. Then right-click the name of the target map and choose **Delete**.
  - Click **Yes** to confirm the deletion.
- Step 3** Delete the VLAN and VSAN pools that you defined when you defined the Fibre Channel domain.  
This action eliminates all vFC deployment from the ACI fabric.
- Click **Fabric > Access Policies > Pools > VSAN** and then, right-click the name of the target VSAN pool name and choose **Delete**.
  - Click **Yes** to confirm the deletion.
  - Click **Fabric > Access Policies > Pools > VLAN** then, right-click the target VLAN pool name and choose **Delete**.
  - Click **Yes** to confirm the deletion.
- Step 4** Delete the Fibre Channel Domain that contained the VSAN pool, VLAN pool, and Map elements you just deleted.
- Click **Tenants > tenant\_name > Application Profiles > Fibre Channel Domains**. Then right-click the name of the target Fibre Channel Domain and choose **Delete**.
  - Click **Yes** to confirm the deletion.
- Step 5** You can delete the tenant/EPG/App and the selectors if you don't need them.

Option	Action
If you want to delete the associated application EPG but save the associated tenant and application profile:	Click <b>Tenants &gt; tenant_name &gt; Application Profiles &gt; app_profile_name &gt; Application EPGs</b> , right-click the name of the target application EPG, choose <b>Delete</b> , then click <b>Yes</b> to confirm deletion.
If you want to delete the associated application profile but save the associated tenant:	Click <b>Tenants &gt; tenant_name &gt; Application Profiles</b> , right-click the name of the target application profile, choose <b>Delete</b> , then click <b>Yes</b> to confirm deletion.
If you want to delete the associated tenant:	Click <b>Tenants &gt;</b> , right-click the name of the target tenant, choose <b>Delete</b> , then click <b>Yes</b> to confirm deletion.

## Configuring FCoE Using the NX\_OS Style CLI

### FCoE NX-OS Style CLI Configuration

#### Configuring FCoE Connectivity Without Policies or Profiles Using the NX-OS Style CLI

The following sample NX-OS style CLI sequences configure FCoE connectivity for EPG **e1** under tenant **t1** without configuring or applying switch-level and interface-level policies and profiles.

## Procedure

	Command or Action	Purpose
<b>Step 1</b>	<p>Under the target tenant configure a bridge domain to support FCoE traffic.</p> <p><b>Example:</b></p> <pre>apicl(config)# tenant t1 apicl(config-tenant)# vrf context v1 apicl(config-tenant-vrf)# exit apicl(config-tenant)# bridge-domain b1 apicl(config-tenant-bd)# fc apicl(config-tenant-bd)# vrf member v1 apicl(config-tenant-bd)# exit apicl(config-tenant)# exit</pre>	The sample command sequence creates bridge domain <b>b1</b> under tenant <b>t1</b> configured to support FCoE connectivity.
<b>Step 2</b>	<p>Under the same tenant, associate the target EPG with the FCoE-configured bridge domain.</p> <p><b>Example:</b></p> <pre>apicl(config)# tenant t1 apicl(config-tenant)# application a1 apicl(config-tenant-app)# epg e1 apicl(config-tenant-app-epg)# bridge-domain member b1 apicl(config-tenant-app-epg)# exit apicl(config-tenant-app)# exit apicl(config-tenant)# exit</pre>	The sample command sequence creates EPG <b>e1</b> and associates that EPG with the FCoE-configured bridge domain <b>b1</b> .
<b>Step 3</b>	<p>Create a VSAN domain, VSAN pools, VLAN pools and VSAN to VLAN mapping.</p> <p><b>Example:</b></p> <p><b>A</b></p> <pre>apicl(config)# vsan-domain dom1 apicl(config-vsan)# vsan 1-10 apicl(config-vsan)# vlan 1-10 apicl(config-vsan)# fcoe vsan 1 vlan 1 loadbalancing src-dst-ox-id apicl(config-vsan)# fcoe vsan 2 vlan 2</pre> <p><b>Example:</b></p> <p><b>B</b></p> <pre>apicl(config)# template vsan-attribute poll apicl(config-vsan-attr)# fcoe vsan 2 vlan 12 loadbalancing src-dst-ox-id apicl(config-vsan-attr)# fcoe vsan 3 vlan 13 loadbalancing src-dst-ox-id apicl(config-vsan-attr)# exit apicl(config)# vsan-domain dom1 apicl(config-vsan)# vsan 1-10 apicl(config-vsan)# vlan 1-10 apicl(config-vsan)# inherit vsan-attribute poll apicl(config-vsan)# exit</pre>	<p>In <b>Example A</b>, the sample command sequence creates VSAN domain, <b>dom1</b> with VSAN pools and VLAN pools, maps VSAN 1 to VLAN 1 and maps VSAN 2 to VLAN 2</p> <p>In <b>Example B</b>, an alternate sample command sequence creates a reusable VSAN attribute template <b>poll</b> and then creates VSAN domain <b>dom1</b>, which inherits the attributes and mappings from that template.</p>

	Command or Action	Purpose
<b>Step 4</b>	<p>Create the physical domain to support the FCoE Initialization (FIP) process.</p> <p><b>Example:</b></p> <pre>apicl(config)# vlan-domain fipVlanDom apicl(config-vlan)# vlan 120 apicl(config-vlan)# exit</pre>	In the example, the command sequence creates a regular VLAN domain, <b>fipVlanDom</b> , which includes VLAN <b>120</b> to support the FIP process.
<b>Step 5</b>	<p>Under the target tenant configure a regular bridge domain.</p> <p><b>Example:</b></p> <pre>apicl(config)# tenant t1 apicl(config-tenant)# vrf context v2 apicl(config-tenant-vrf)# exit apicl(config-tenant)# bridge-domain fip-bd apicl(config-tenant-bd)# vrf member v2 apicl(config-tenant-bd)# exit apicl(config-tenant)# exit</pre>	In the example, the command sequence creates bridge domain <b>fip-bd</b> .
<b>Step 6</b>	<p>Under the same tenant, associate this EPG with the configured regular bridge domain.</p> <p><b>Example:</b></p> <pre>apicl(config)# tenant t1 apicl(config-tenant)# application a1 apicl(config-tenant-app)# epg epg-fip apicl(config-tenant-app-epg)# bridge-domain member fip-bd apicl(config-tenant-app-epg)# exit apicl(config-tenant-app)# exit apicl(config-tenant)# exit</pre>	In the example, the command sequence associates EPG <b>epg-fip</b> with bridge domain <b>fip-bd</b> .
<b>Step 7</b>	<p>Configure a VFC interface with F mode.</p> <p><b>Example:</b></p> <p><b>A</b></p> <pre>apicl(config)# leaf 101 apicl(config-leaf)# interface ethernet 1/2 apicl(config-leaf-if)# vlan-domain member fipVlanDom apicl(config-leaf-if)# switchport trunk native vlan 120 tenant t1 application a1 epg epg-fip apicl(config-leaf-if)# exit  apicl(config-leaf)# exit apicl(config-leaf)# interface vfc 1/2 apicl(config-leaf-if)# switchport mode f apicl(config-leaf-if)# vsan-domain member dom1 apicl(config-leaf-if)# switchport vsan 2 tenant t1 application a1 epg e1 apicl(config-leaf-if)# switchport trunk</pre>	<p>In example <b>A</b> the command sequence enables interface <b>1/2</b> on leaf switch <b>101</b> to function as an <b>F</b> port and associates that interface with VSAN domain <b>dom1</b>.</p> <p>Each of the targeted interfaces must be assigned one (and only one) VSAN in native mode. Each interface may be assigned one or more additional VSANs in regular mode.</p> <p>The sample command sequence associates the target interface <b>1/2</b> with:</p> <ul style="list-style-type: none"> <li>• VLAN <b>120</b> for FIP discovery and associates it with EPG <b>epg-fip</b> and application <b>a1</b> under tenant <b>t1</b>.</li> <li>• VSAN <b>2</b> as a native VSAN and associates it with EPG <b>e1</b> and application <b>a1</b> under tenant <b>t1</b>.</li> <li>• VSAN <b>3</b> as a regular VSAN.</li> </ul>

	Command or Action	Purpose
	<pre>allowed vsan 3 tenant t1 application a1 epg e2 apic1(config-leaf-if)# exit</pre> <p><b>Example:</b></p> <p><b>B</b></p> <pre>apic1(config)# vpc context leaf 101 102 apic1(config-vpc)# interface vpc vpc1 apic1(config-vpc-if)# vlan-domain member vfdom100 apic1(config-vpc-if)# vsan-domain member dom1 apic1(config-vpc-if)# #For FIP discovery apic1(config-vpc-if)# switchport trunk native vlan 120 tenant t1 application a1 epg epg-fip apic1(config-vpc-if)# switchport vsan 2 tenant t1 application a1 epg e1 apic1(config-vpc-if)# exit apic1(config-vpc)# exit apic1(config)# leaf 101-102 apic1(config-leaf)# interface ethernet 1/3 apic1(config-leaf-if)# channel-group vpc1 vpc apic1(config-leaf-if)# exit apic1(config-leaf)# exit</pre> <p><b>Example:</b></p> <p><b>C</b></p> <pre>apic1(config)# leaf 101 apic1(config-leaf)# interface vfc-po p1 apic1(config-leaf-if)# vsan-domain member dom1 apic1(config-leaf-if)# switchport vsan 2 tenant t1 application a1 epg e1 apic1(config-leaf-if)# exit apic1(config-leaf)# interface ethernet 1/2 apic1(config-leaf-if)# channel-group p1 apic1(config-leaf-if)# exit apic1(config-leaf)# exit</pre>	<p>In example <b>B</b>, the command sequence configures a vFC over a vPC with the same VSAN on both the legs. From the CLI you cannot specify different VSANs on each leg. The alternate configuration can be carried out in the APIC advanced GUI.</p>
<b>Step 8</b>	<p>Configure a VFC interface with NP mode.</p> <p><b>Example:</b></p> <pre>apic1(config)# leaf 101 apic1(config-leaf)# interface vfc 1/4 apic1(config-leaf-if)# switchport mode np apic1(config-leaf-if)# vsan-domain member dom1</pre>	<p>The sample command sequence enables interface <b>1/4</b> on leaf switch <b>101</b> to function as an <b>NP</b> port and associates that interface with VSAN domain <b>dom1</b>.</p>
<b>Step 9</b>	<p>Assign the targeted FCoE-enabled interfaces a VSAN.</p> <p><b>Example:</b></p> <pre>apic1(config-leaf-if)# switchport trunk allowed vsan 1 tenant t1 application a1</pre>	<p>Each of the targeted interfaces must be assigned one (and only one) VSAN in native mode. Each interface may be assigned one or more additional VSANs in regular mode.</p>

	Command or Action	Purpose
	<pre>epg e1 apic1(config-leaf-if)# switchport vsan 2 tenant t4 application a4 epg e4</pre>	The sample command sequence assigns the target interface to VSAN <b>1</b> and associates it with EPG <b>e1</b> and application <b>a1</b> under tenant <b>t1</b> . "trunk allowed" assigns vsan 1 regular mode status. The command sequence also assigns the interface a required <b>native mode</b> VSAN <b>2</b> . As this example shows, it is permissible for different VSANs to provide different EPGs running under different tenants access to the same interfaces.

## Configuring FCoE Connectivity With Policies and Profiles Using the NX-OS Style CLI

The following sample NX-OS style CLI sequences create and use policies to configure FCoE connectivity for EPG **e1** under tenant **t1**.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<p>Under the target tenant configure a bridge domain to support FCoE traffic.</p> <p><b>Example:</b></p> <pre>apic1# configure apic1(config)# tenant t1 apic1(config-tenant)# vrf context v1 apic1(config-tenant-vrf)# exit apic1(config-tenant)# bridge-domain b1  apic1(config-tenant-bd)# fc apic1(config-tenant-bd)# vrf member v1 apic1(config-tenant-bd)# exit apic1(config-tenant)# exit apic1(config)#</pre>	The sample command sequence creates bridge domain <b>b1</b> under tenant <b>t1</b> configured to support FCoE connectivity.
<b>Step 2</b>	<p>Under the same tenant, associate your target EPG with the FCoE configured bridge domain.</p> <p><b>Example:</b></p> <pre>apic1(config)# tenant t1 apic1(config-tenant)# application a1 apic1(config-tenant-app)# epg e1 apic1(config-tenant-app-epg)# bridge-domain member b1 apic1(config-tenant-app-epg)# exit apic1(config-tenant-app)# exit apic1(config-tenant)# exit apic1(config)#</pre>	The sample command sequence creates EPG <b>e1</b> associates that EPG with FCoE-configured bridge domain <b>b1</b> .

	Command or Action	Purpose
<b>Step 3</b>	<p>Create a VSAN domain, VSAN pools, VLAN pools and VSAN to VLAN mapping.</p> <p><b>Example:</b></p> <p><b>A</b></p> <pre>apicl(config)# vsan-domain dom1 apicl(config-vsan)# vsan 1-10 apicl(config-vsan)# vlan 1-10 apicl(config-vsan)# fcoe vsan 1 vlan 1 loadbalancing src-dst-ox-id apicl(config-vsan)# fcoe vsan 2 vlan 2</pre> <p><b>Example:</b></p> <p><b>B</b></p> <pre>apicl(config)# template vsan-attribute poll apicl(config-vsan-attr)# fcoe vsan 2 vlan 12 loadbalancing src-dst-ox-id apicl(config-vsan-attr)# fcoe vsan 3 vlan 13 loadbalancing src-dst-ox-id apicl(config-vsan-attr)# exit apicl(config)# vsan-domain dom1 apicl(config-vsan)# inherit vsan-attribute poll apicl(config-vsan)# exit</pre>	<p>In <b>Example A</b>, the sample command sequence creates VSAN domain, <b>dom1</b> with VSAN pools and VLAN pools, maps VSAN 1 VLAN 1 and maps VSAN 2 to VLAN 2</p> <p>In <b>Example B</b>, an alternate sample command sequence creates a reusable vsan attribute template <b>poll</b> and then creates VSAN domain <b>dom1</b>, which inherits the attributes and mappings from that template.</p>
<b>Step 4</b>	<p>Create the physical domain to support the FCoE Initialization (FIP) process.</p> <p><b>Example:</b></p> <pre>apicl(config)# vlan-domain fipVlanDom apicl(config)# vlan-pool fipVlanPool</pre>	
<b>Step 5</b>	<p>Configure a Fibre Channel SAN policy.</p> <p><b>Example:</b></p> <pre>apicl# apicl# configure apicl(config)# template fc-fabric-policy ffp1 apicl(config-fc-fabric-policy)# fctimer e-d-tov 1111 apicl(config-fc-fabric-policy)# fctimer r-a-tov 2222 apicl(config-fc-fabric-policy)# fcoe fcmmap 0E:FC:01 apicl(config-fc-fabric-policy)# exit</pre>	<p>The sample command sequence creates Fibre Channel SAN policy <b>ffp1</b> to specify a combination of error-detect timeout values (EDTOV), resource allocation timeout values (RATOV), and the default FC map values for FCoE-enabled interfaces on a target leaf switch.</p>
<b>Step 6</b>	<p>Create a Fibre Channel node policy.</p> <p><b>Example:</b></p>	<p>The sample command sequence creates Fibre Channel node policy <b>flp1</b> to specify a</p>



	Command or Action	Purpose
	<pre>apicl(config)# template fc-leaf-policy flp1 apicl(config-fc-leaf-policy)# fcoe fka-adv-period 44 apicl(config-fc-leaf-policy)# exit</pre>	combination of disruptive load-balancing enablement and FIP keep-alive values. These values also apply to all the FCoE-enabled interfaces on a target leaf switch.
<b>Step 7</b>	<p>Create Node Policy Group.</p> <p><b>Example:</b></p> <pre>apicl(config)# template leaf-policy-group lpg1 apicl(config-leaf-policy-group)# inherit fc-fabric-policy ffp1 apicl(config-leaf-policy-group)# inherit fc-leaf-policy flp1 apicl(config-leaf-policy-group)# exit apicl(config)# exit apicl#</pre>	The sample command sequence creates a Node Policy group, <b>lpg1</b> , which combines the values of the Fibre Channel SAN policy <b>ffp1</b> and Fibre Channel node policy, <b>flp1</b> . The combined values of this node policy group can be applied to Node profiles configured later.
<b>Step 8</b>	<p>Create a Node Profile.</p> <p><b>Example:</b></p> <pre>apicl(config)# leaf-profile lp1 apicl(config-leaf-profile)# leaf-group lg1 apicl(config-leaf-group)# leaf 101 apicl(config-leaf-group)# leaf-policy-group lpg1</pre>	The sample command sequence creates node profile <b>lp1</b> associates it with node policy group <b>lpg1</b> , node group <b>lg1</b> , and leaf switch <b>101</b> .
<b>Step 9</b>	<p>Create an interface policy group for F port interfaces.</p> <p><b>Example:</b></p> <pre>apicl(config)# template policy-group ipg1 apicl(config-pol-grp-if)# priority-flow-control mode auto apicl(config-pol-grp-if)# switchport mode f apicl(config-pol-grp-if)# slow-drain pause timeout 111 apicl(config-pol-grp-if)# slow-drain congestion-timeout count 55 apicl(config-pol-grp-if)# slow-drain congestion-timeout action log</pre>	The sample command sequence creates interface policy group <b>ipg1</b> and assigns a combination of values that determine priority flow control enablement, F port enablement, and slow-drain policy values for any interface that this policy group is applied to.
<b>Step 10</b>	<p>Create an interface policy group for NP port interfaces.</p> <p><b>Example:</b></p> <pre>apicl(config)# template policy-group ipg2 apicl(config-pol-grp-if)# priority-flow-control mode auto apicl(config-pol-grp-if)# switchport mode np apicl(config-pol-grp-if)# slow-drain pause timeout 111 apicl(config-pol-grp-if)# slow-drain congestion-timeout count 55</pre>	The sample command sequence creates interface policy group <b>ipg2</b> and assigns a combination of values that determine priority flow control enablement, NP port enablement, and slow-drain policy values for any interface that this policy group is applied to.

	Command or Action	Purpose
	<pre>apicl(config-pol-grp-if)# slow-drain congestion-timeout action log</pre>	
<b>Step 11</b>	<p>Create an interface profile for F port interfaces.</p> <p><b>Example:</b></p> <pre>apicl# configure apicl(config)# leaf-interface-profile lip1 apicl(config-leaf-if-profile)# description 'test description lip1' apicl(config-leaf-if-profile)# leaf-interface-group lig1 apicl(config-leaf-if-group)# description 'test description lig1' apicl(config-leaf-if-group)# policy-group ipg1 apicl(config-leaf-if-group)# interface ethernet 1/2-6, 1/9-13</pre>	<p>The sample command sequence creates an interface profile <b>lip1</b> for F port interfaces, associates the profile with F port specific interface policy group <b>ipg1</b>, and specifies the interfaces to which this profile and its associated policies applies.</p>
<b>Step 12</b>	<p>Create an interface profile for NP port interfaces.</p> <p><b>Example:</b></p> <pre>apicl# configure apicl(config)# leaf-interface-profile lip2 apicl(config-leaf-if-profile)# description 'test description lip2' apicl(config-leaf-if-profile)# leaf-interface-group lig2 apicl(config-leaf-if-group)# description 'test description lig2' apicl(config-leaf-if-group)# policy-group ipg2 apicl(config-leaf-if-group)# interface ethernet 1/14</pre>	<p>The sample command sequence creates an interface profile <b>lip2</b> for NP port interfaces, associates the profile with NP port specific interface policy group <b>ipg2</b>, and specifies the interface to which this profile and its associated policies applies.</p>
<b>Step 13</b>	<p>Configure QoS Class Policy for Level 1.</p> <p><b>Example:</b></p> <pre>apicl(config)# qos parameters level1 apicl(config-qos)# pause no-drop cos 3</pre>	<p>The sample command sequence specifies the QoS level of FCoE traffic to which priority flow control policy might be applied and pauses no-drop packet handling for Class of Service level 3.</p>

## Configuring FCoE Over FEX Using NX-OS Style CLI

FEX ports are configured as port VSANs.

### Procedure

**Step 1** Configure Tenant and VSAN domain:

**Example:**

```

apic1# configure
apic1(config)# tenant t1
apic1(config-tenant)# vrf context v1
apic1(config-tenant-vrf)# exit
apic1(config-tenant)# bridge-domain b1
apic1(config-tenant-bd)# fc
apic1(config-tenant-bd)# vrf member v1
apic1(config-tenant-bd)# exit
apic1(config-tenant)# application a1
apic1(config-tenant-app)# epg e1
apic1(config-tenant-app-epg)# bridge-domain member b1
apic1(config-tenant-app-epg)# exit
apic1(config-tenant-app)# exit
apic1(config-tenant)# exit

apic1(config)# vsan-domain dom1
apic1(config-vsan)# vlan 1-100
apic1(config-vsan)# vsan 1-100
apic1(config-vsan)# fcoe vsan 2 vlan 2 loadbalancing src-dst-ox-id
apic1(config-vsan)# fcoe vsan 3 vlan 3 loadbalancing src-dst-ox-id
apic1(config-vsan)# fcoe vsan 5 vlan 5
apic1(config-vsan)# exit

```

**Step 2** Associate FEX to an interface:

**Example:**

```

apic1(config)# leaf 101
apic1(config-leaf)# interface ethernet 1/12
apic1(config-leaf-if)# fex associate 111
apic1(config-leaf-if)# exit

```

**Step 3** Configure FCoE over FEX per port, port-channel, and VPC:

**Example:**

```

apic1(config-leaf)# interface vfc 111/1/2
apic1(config-leaf-if)# vsan-domain member dom1
apic1(config-leaf-if)# switchport vsan 2 tenant t1 application a1 epg e1

apic1(config-leaf-if)# exit

apic1(config-leaf)# interface vfc-po pc1 fex 111
apic1(config-leaf-if)# vsan-domain member dom1
apic1(config-leaf-if)# switchport vsan 2 tenant t1 application a1 epg e1
apic1(config-leaf-if)# exit
apic1(config-leaf)# interface ethernet 111/1/3
apic1(config-leaf-if)# channel-group pc1
apic1(config-leaf-if)# exit
apic1(config-leaf)# exit

apic1(config)# vpc domain explicit 12 leaf 101 102
apic1(config-vpc)# exit
apic1(config)# vpc context leaf 101 102
apic1(config-vpc)# interface vpc vpc1 fex 111 111
apic1(config-vpc-if)# vsan-domain member dom1
apic1(config-vpc-if)# switchport vsan 2 tenant t1 application a1 epg e1
apic1(config-vpc-if)# exit
apic1(config-vpc)# exit
apic1(config)# leaf 101-102
apic1(config-leaf)# interface ethernet 1/2
apic1(config-leaf-if)# fex associate 111
apic1(config-leaf-if)# exit
apic1(config-leaf)# interface ethernet 111/1/2

```

```
apic1(config-leaf-if)# channel-group vpc1 vpc
apic1(config-leaf-if)# exit
```

**Step 4** Verify the configuration with the following command:

**Example:**

```
apic1(config-vpc)# show vsan-domain detail
vsan-domain : dom1
```

```
vsan : 1-100
```

```
vlan : 1-100
```

Leaf	Interface	Vsan	Vlan	Vsan-Mode	Port-Mode	Usage
101 Operational Deployed	vfc111/1/2	2	2	Native		Tenant: t1 App: a1 Epg: e1
101 Operational Deployed	PC:pc1	5	5	Native		Tenant: t1 App: a1 Epg: e1
101 Operational Deployed	vfc111/1/3	3	3	Native	F	Tenant: t1 App: a1 Epg: e1

## Verifying FCoE Configuration Using the NX-OS Style CLI

The following **show** command verifies the FCoE configuration on your leaf switch ports.

**Procedure**

Use the **show vsan-domain** command to verify FCoE is enabled on the target switch.

The command example confirms FCoE enabled on the listed leaf switches and its FCF connection details.

**Example:**

```
ifav-isim8-ifc1# show vsan-domain detail
vsan-domain : iPostfcoeDomP1
```

```
vsan : 1-20 51-52 100-102 104-110 200 1999 3100-3101 3133
      2000
```

```
vlan : 1-20 51-52 100-102 104-110 200 1999 3100-3101 3133
      2000
```

Leaf	Interface	Vsan	Vlan	Vsan Mode	Port Mode	Usage	Operational State
101	vfc1/11	1	1	Regular	F	Tenant: iPost101	Deployed

```

App: iPost1
Epg: iPost1

101   vfc1/12           1     1     Regular  NP   Tenant: iPost101  Deployed
App: iPost1
Epg: iPost1

101   PC:infraAccBndl 4     4     Regular  NP   Tenant: iPost101  Deployed
      Grp_pc01
App: iPost4
Epg: iPost4

101   vfc1/30           2000  Native  Tenant: t1        Not deployed
      App: a1          (invalid-path)
      Epg: e1

```

---

## Undeploying FCoE Elements Using the NX-OS Style CLI

Any move to undeploy FCoE connectivity from the ACI fabric requires that you remove the FCoE components on several levels.

### Procedure

- Step 1** List the attributes of the leaf port interface, set its mode setting to default, and then remove its EPG deployment and domain association.

The example sets the port mode setting of interface **vfc 1/2** to default and then removes the deployment of EPG **e1** and the association with VSAN Domain **dom1** from that interface.

### Example:

```

apic1(config)# leaf 101
apic1(config-leaf)# interface vfc 1/2
apic1(config-leaf-if)# show run
# Command: show running-config leaf 101 interface vfc 1 / 2
# Time: Tue Jul 26 09:41:11 2016
  leaf 101
    interface vfc 1/2
      vsan-domain member dom1
      switchport vsan 2 tenant t1 application a1 epg e1
    exit
  exit
apic1(config-leaf-if)# no switchport mode
apic1(config-leaf-if)# no switchport vsan 2 tenant t1 application a1 epg e1

```

```
apicl(config-leaf-if)# no vsan-domain member dom1
apicl(config-leaf-if)# exit
apicl(config-leaf)# exit
```

**Step 2** List and remove the VSAN/VLAN mapping and the VLAN and VSAN pools.

The example removes the VSAN/VLAN mapping for **vsan 2**, VLAN pool **1-10**, and VSAN pool **1-10** from VSAN domain **dom1**.

**Example:**

```
apicl(config)# vsan-domain dom1
apicl(config-vsan)# show run
# Command: show running-config vsan-domain dom1
# Time: Tue Jul 26 09:43:47 2016
  vsan-domain dom1
    vsan 1-10
    vlan 1-10
    fcoe vsan 2 vlan 2
  exit
apicl(config-vsan)# no fcoe vsan 2
apicl(config-vsan)# no vlan 1-10
apicl(config-vsan)# no vsan 1-10
apicl(config-vsan)# exit
```

```
#####
NOTE: To remove a template-based VSAN to VLAN mapping use an alternate sequence:
#####
```

```
apicl(config)# template vsan-attribute <template_name>
apicl(config-vsan-attr)# no fcoe vsan 2
```

**Step 3** Delete the VSAN Domain.

The example deletes VSAN domain **dom1**.

**Example:**

```
apicl(config)# no vsan-domain dom1
```

**Step 4** You can delete the associated tenant, EPG, and selectors if you do not need them.

## Configuring FCoE Using the REST API

### Configuring FCoE Connectivity Using the REST API

You can configure FCoE-enabled interfaces and EPGs accessing those interfaces using the FCoE protocol with the REST API.

**Procedure**

**Step 1** To create a VSAN pool, send a post with XML such as the following example.

The example creates VSAN pool **vsanPool1** and specifies the range of VSANs to be included.

**Example:**

```
https://apic-ip-address/api/mo/uni/infra/vsanns-[vsanPool1]-static.xml

<!-- Vsan-pool -->
<fvnsVsanInstP name="vsanPool1" allocMode="static">
  <fvnsVsanEncapBlk name="encap" from="vsan-5" to="vsan-100"/>
</fvnsVsanInstP>
```

**Step 2** To create a VLAN pool, send a post with XML such as the following example.

The example creates VLAN pool **vlanPool1** and specifies the range of VLANs to be included.

**Example:**

```
https://apic-ip-address/api/mo/uni/infra/vlanns-[vlanPool1]-static.xml

<!-- Vlan-pool -->
<fvnsVlanInstP name="vlanPool1" allocMode="static">
  <fvnsEncapBlk name="encap" from="vlan-5" to="vlan-100"/>
</fvnsVlanInstP>
```

**Step 3** To create a VSAN-Attribute policy, send a post with XML such as the following example.

The example creates VSAN attribute policy **vsanattr1**, maps **vsan-10** to **vlan-43**, and maps **vsan-11** to **vlan-44**.

**Example:**

```
https://apic-ip-address/api/mo/uni/infra/vsanattrp-[vsanattr1].xml

<fcVsanAttrP name="vsanattr1">
  <fcVsanAttrPEntry vlanEncap="vlan-43" vsanEncap="vsan-10"/>
  <fcVsanAttrPEntry vlanEncap="vlan-44" vsanEncap="vsan-11"
    lbType="src-dst-ox-id"/>
</fcVsanAttrP>
```

**Step 4** To create a Fibre Channel domain, send a post with XML such as the following example.

The example creates VSAN domain **vsanDom1**.

**Example:**

```
https://apic-ip-address/api/mo/uni/fc-vsanDom1.xml

<!-- Vsan-domain -->
<fcDomP name="vsanDom1">
  <fcRsVsanAttr tDn="uni/infra/vsanattrp-[vsanattr1]"/>
  <infraRsVlanNs tDn="uni/infra/vlanns-[vlanPool1]-static"/>
  <fcRsVsanNs tDn="uni/infra/vsanns-[vsanPool1]-static"/>
</fcDomP>
```

**Step 5** To create the tenant, application profile, EPG and associate the FCoE bridge domain with the EPG, send a post with XML such as the following example.

The example creates a bridge domain **bd1** under a target tenant configured to support FCoE and an application EPG **epg1**. It associates the EPG with VSAN domain **vsanDom1** and a Fibre Channel path (to interface **1/39** on leaf switch **101**). It deletes a Fibre channel path to interface **1/40** by assigning the `<fvRsFcPathAtt>` object with "deleted" status. Each interface is associated with a VSAN.

**Note** Two other possible alternative vFC deployments are also displayed. One sample deploys vFC on a port channel. The other sample deploys vFC on a virtual port channel.

**Example:**

```

https://apic-ip-address/api/mo/uni/tn-tenant1.xml

<fvTenant
name="tenant1">
  <fvCtx name="vrf1"/>

  <!-- bridge domain -->
  <fvBD name="bd1" type="fc" >
    <fvRsCtx tnFvCtxName="vrf1" />
  </fvBD>

  <fvAp name="app1">
    <fvAEPg name="epg1">
      <fvRsBd tnFvBDName="bd1" />
      <fvRsDomAtt tDn="uni/fc-vsanDom1" />
      <fvRsFcPathAtt tDn="topology/pod-1/paths-101/pathep-[eth1/39]"
        vsan="vsan-11" vsanMode="native"/>
      <fvRsFcPathAtt tDn="topology/pod-1/paths-101/pathep-[eth1/40]"
        vsan="vsan-10" vsanMode="regular" status="deleted"/>
    </fvAEPg>

  <!-- Sample deployment of vFC on a port channel -->

    <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
      tDn="topology/pod-1/paths 101/pathep-pc01"/>

  <!-- Sample deployment of vFC on a virtual port channel -->

    <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
      tDn="topology/pod-1/paths-101/pathep-vpc01"/>
    <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
      tDn="topology/pod-1/paths-102/pathep-vpc01"/>

  </fvAp>
</fvTenant>

```

**Step 6** To create a port policy group and an AEP, send a post with XML such as the following example.

The example executes the following requests:

- Creates a policy group **portgrp1** that includes an FC interface policy **fcIfPol1**, a priority flow control policy **pfcIfPol1** and a slow-drain policy **sdIfPol1**.
- Creates an attached entity profile (AEP) **AttEntP1** that associates the ports in VSAN domain **vsanDom1** with the settings to be specified for **fcIfPol1**, **pfcIfPol1**, and **sdIfPol1**.

**Example:**

```

https://apic-ip-address/api/mo/uni.xml

<polUni>
  <infraInfra>
    <infraFuncP>
      <infraAccPortGrp name="portgrp1">
        <infraRsFcIfPol tnFcIfPolName="fcIfPol1"/>
        <infraRsAttEntP tDn="uni/infra/attentp-AttEntP1" />
        <infraRsQosPfcIfPol tnQosPfcIfPolName="pfcIfPol1"/>
        <infraRsQosSdIfPol tnQosSdIfPolName="sdIfPol1"/>
      </infraAccPortGrp>
    </infraFuncP>

    <infraAttEntityP name="AttEntP1">
      <infraRsDomP tDn="uni/fc-vsanDom1"/>
    </infraAttEntityP>

```



```

    <qosPfcIfPol dn="uni/infra/pfc-pfcIfPol1" adminSt="on">
    </qosPfcIfPol>
    <qosSdIfPol dn="uni/infra/qosdpol-sdIfPol1" congClearAction="log"
      congDetectMult="5" flushIntvl="100" flushAdminSt="enabled">
    </qosSdIfPol>
    <fcIfPol dn="uni/infra/fcIfPol-fcIfPol1" portMode="np">
    </fcIfPol>

  </infraInfra>
</polUni>

```

**Step 7** To create a node selector and a port selector, send a post with XML such as the following example.

The example executes the following requests:

- Creates node selector **leafsell** that specifies leaf node **101**.
- Creates port selector **portsell** that specifies port **1/39**.

**Example:**

<https://apic-ip-address/api/mo/uni.xml>

```

<polUni>
  <infraInfra>
    <infraNodeP name="nprof1">
      <infraLeafS name="leafsell" type="range">
        <infraNodeBlk name="nblk1" from_"101" to_"101"/>
      </infraLeafS>
      <infraRsAccPortP tDn="uni/infra/accportprof-pprof1"/>
    </infraNodeP>

    <infraAccPortP name="pprof1">
      <infraHPortS name="portsell" type="range">
        <infraPortBlk name="blk"
          fromCard="1" toCard="1" fromPort="39" toPort="39">
        </infraPortBlk>

        <infraRsAccBaseGrp tDn="uni/infra/funcprof/accportgrp-portgrp1" />
      </infraHPortS>

    </infraAccPortP>
  </infraInfra>
</polUni>

```

**Step 8** To create a vPC, send a post with XML such as the following example.

**Example:**

<https://apic-ip-address/api/mo/uni.xml>

```

<polUni>
  <fabricInst>

    <vpcInstPol name="vpc01" />

    <fabricProtPol pairT="explicit" >
      <fabricExplicitGEp name="vpc01" id="100" >
        <fabricNodePEp id="101"/>
        <fabricNodePEp id="102"/>
        <fabricRsVpcInstPol tnVpcInstPolName="vpc01" />
        <!-- <fabricLagId accBndlGrp="infraAccBndlGrp_{{pcname}}"/> -->
      </fabricExplicitGEp>

```

```

    </fabricProtPol>

</fabricInst>
</polUni>

```

## Configuring FCoE Over FEX Using REST API

### Before you begin

- Follow the steps 1 through 4 as described in [Configuring FCoE Connectivity Using the REST API, on page 30](#)

### Procedure

#### Step 1 Configure FCoE over FEX (Selectors): Port:

##### Example:

```

<infraInfra dn="uni/infra">
  <infraNodeP name="nprof1">
    <infraLeafS name="leafsell1" type="range">
      <infraNodeBlk name="nblk1" from_"101" to_"101"/>
    </infraLeafS>
    <infraRsAccPortP tDn="uni/infra/accportprof-pprof1" />
  </infraNodeP>

  <infraAccPortP name="pprof1">
    <infraHPortS name="portsell1" type="range">
      <infraPortBlk name="blk"
        fromCard="1" toCard="1" fromPort="17" toPort="17"></infraPortBlk>
      <infraRsAccBaseGrp tDn="uni/infra/fexprof-fexprof1/fexbundle-fexbundle1" fexId="110"
        />
    </infraHPortS>
  </infraAccPortP>

  <infraFuncP>
    <infraAccPortGrp name="portgrp1">
      <infraRsAttEntP tDn="uni/infra/attentp-attentp1" />
    </infraAccPortGrp>
  </infraFuncP>

  <infraFexP name="fexprof1">
    <infraFexBndlGrp name="fexbundle1"/>
    <infraHPortS name="portsel2" type="range">
      <infraPortBlk name="blk2"
        fromCard="1" toCard="1" fromPort="20" toPort="20"></infraPortBlk>
      <infraRsAccBaseGrp tDn="uni/infra/funcprof/accportgrp-portgrp1"/>
    </infraHPortS>
  </infraFexP>

  <infraAttEntityP name="attentp1">
    <infraRsDomP tDn="uni/fc-vsanDom1"/>
  </infraAttEntityP>
</infraInfra>

```

#### Step 2 Tenant configuration:

**Example:**

```
fvTenant name="tenant1">
<fvCtx name="vrfl"/>

<!-- bridge domain -->
  <fvBD name="bd1" type="fc" >
    <fvRsCtx tnFvCtxName="vrfl" />
  </fvBD>

<fvAp name="appl">
  <fvAEPg name="epg1">
    <fvRsBd tnFvBDName="bd1" />
    <fvRsDomAtt tDn="uni/fc-vsanDom1" />
  <fvRsFcPathAtt tDn="topology/pod-1/paths-101/extpaths-110/pathep-[eth1/17]" vsan="vsan-11"
  vsanMode="native"/>
  </fvAEPg>
</fvAp>
</fvTenant>
```

**Step 3** Configure FCoE over FEX (Selectors): Port-Channel:**Example:**

```
<infraInfra dn="uni/infra">
  <infraNodeP name="nprof1">
    <infraLeafS name="leafsell" type="range">
      <infraNodeBlk name="nblk1" from_="101" to_"101"/>
    </infraLeafS>
    <infraRsAccPortP tDn="uni/infra/accportprof-pprof1" />
  </infraNodeP>

  <infraAccPortP name="pprof1">
    <infraHPortS name="portsell" type="range">
      <infraPortBlk name="blk1"
        fromCard="1" toCard="1" fromPort="18" toPort="18"></infraPortBlk>
      <infraRsAccBaseGrp tDn="uni/infra/fexprof-fexprof1/fexbundle-fexbundle1" fexId="111"
      />
    </infraHPortS>
  </infraAccPortP>

  <infraFexP name="fexprof1">
    <infraFexBndlGrp name="fexbundle1"/>
    <infraHPortS name="portsell" type="range">
      <infraPortBlk name="blk1"
        fromCard="1" toCard="1" fromPort="20" toPort="20"></infraPortBlk>
      <infraRsAccBaseGrp tDn="uni/infra/funcprof/accbundle-pc1"/>
    </infraHPortS>
  </infraFexP>

  <infraFuncP>
    <infraAccBndlGrp name="pc1">
      <infraRsAttEntP tDn="uni/infra/attentp-attentp1" />
    </infraAccBndlGrp>
  </infraFuncP>

  <infraAttEntityP name="attentp1">
<infraRsDomP tDn="uni/fc-vsanDom1"/>
  </infraAttEntityP>
</infraInfra>
```

**Step 4** Tenant configuration:**Example:**

```

<fvTenant name="tenant1">
<fvCtx name="vrf1"/>

<!-- bridge domain -->
  <fvBD name="bd1" type="fc" >
    <fvRsCtx tnFvCtxName="vrf1" />
  </fvBD>

<fvAp name="app1">
  <fvAEPg name="epg1">
    <fvRsBd tnFvBDName="bd1" />
    <fvRsDomAtt tDn="uni/fc-vsanDom1" />
  <fvRsFcPathAtt tDn="topology/pod-1/paths-101/extpaths-111/pathep-[pc1]" vsan="vsan-11"
  vsanMode="native" />
  </fvAEPg>
</fvAp>
</fvTenant>

```

### Step 5 Configure FCoE over FEX (Selectors): vPC:

#### Example:

```

<polUni>
<fabricInst>
<vpcInstPol name="vpc1" />
<fabricProtPol pairT="explicit" >
<fabricExplicitGEp name="vpc1" id="100" >
<fabricNodePEp id="101"/>
<fabricNodePEp id="102"/>
<fabricRsVpcInstPol tnVpcInstPolName="vpc1" />
</fabricExplicitGEp>
</fabricProtPol>
</fabricInst>
</polUni>

```

### Step 6 Tenant configuration:

#### Example:

```

<fvTenant name="tenant1">
<fvCtx name="vrf1"/>

<!-- bridge domain -->
  <fvBD name="bd1" type="fc" >
    <fvRsCtx tnFvCtxName="vrf1" />
  </fvBD>

<fvAp name="app1">
  <fvAEPg name="epg1">
    <fvRsBd tnFvBDName="bd1" />
    <fvRsDomAtt tDn="uni/fc-vsanDom1" />
  <fvRsFcPathAtt vsanMode="native" vsan="vsan-11"
  tDn="topology/pod-1/protpaths-101-102/extprotpaths-111-111/pathep-[vpc1]" />
  </fvAEPg>
</fvAp>
</fvTenant>

```

### Step 7 Selector configuration:

#### Example:

```

<polUni>
<infraInfra>
<infraNodeP name="nprofl">
<infraLeafS name="leafsell" type="range">
<infraNodeBlk name="nblk1" from_"=101" to_"=101"/>

```

```

</infraLeafS>
<infraRsAccPortP tDn="uni/infra/accportprof-pprof1" />
</infraNodeP>

<infraNodeP name="nprof2">
<infraLeafS name="leafsel2" type="range">
<infraNodeBlk name="nblk2" from_="102" to_="102"/>
</infraLeafS>
<infraRsAccPortP tDn="uni/infra/accportprof-pprof2" />
</infraNodeP>

<infraAccPortP name="pprof1">
<infraHPortS name="portsell1" type="range">
<infraPortBlk name="blk1"
fromCard="1" toCard="1" fromPort="18" toPort="18">
</infraPortBlk>
<infraRsAccBaseGrp tDn="uni/infra/fexprof-fexprof1/fexbundle-fexbundle1" fexId="111" />
</infraHPortS>
</infraAccPortP>
<infraAccPortP name="pprof2">
<infraHPortS name="portsel2" type="range">
<infraPortBlk name="blk2"
fromCard="1" toCard="1" fromPort="18" toPort="18">
</infraPortBlk>
<infraRsAccBaseGrp tDn="uni/infra/fexprof-fexprof2/fexbundle-fexbundle2" fexId="111" />
</infraHPortS>
</infraAccPortP>

<infraFexP name="fexprof1">
<infraFexBndlGrp name="fexbundle1"/>
<infraHPortS name="portsell1" type="range">
<infraPortBlk name="blk1"
fromCard="1" toCard="1" fromPort="20" toPort="20">
</infraPortBlk>
  <infraRsAccBaseGrp tDn="uni/infra/funcprof/accbundle-vcpl"/>
</infraHPortS>
</infraFexP>

<infraFexP name="fexprof2">
<infraFexBndlGrp name="fexbundle2"/>
<infraHPortS name="portsel2" type="range">
<infraPortBlk name="blk2"
fromCard="1" toCard="1" fromPort="20" toPort="20">
</infraPortBlk>
<infraRsAccBaseGrp tDn="uni/infra/funcprof/accbundle-vcpl"/>
</infraHPortS>
</infraFexP>

<infraFuncP>
<infraAccBndlGrp name="vcpl" lagT="node">
  <infraRsAttEntP tDn="uni/infra/attentp-attentp1" />
</infraAccBndlGrp>
</infraFuncP>

<infraAttEntityP name="attentp1">
<infraRsDomP tDn="uni/fc-vsanDom1"/>
</infraAttEntityP>
</infraInfra>
</polUni>

```

## Configuring an FCoE vPC Using the REST API

This procedure creates a virtual port channel (vPC).

### Procedure

#### Step 1 Create a vPC domain.

This step creates a virtual port channel security policy (fabric:ProtPol) containing a group policy (fabric:ExplicitGep) that contains two node policy endpoints (fabric:NodePEp) named "101" and "102."

#### Example:

```
POST https://apic-ip-address/api/node/mo/uni/fabric/protpol.xml

<fabricProtPol>
  <fabricExplicitGep name="vpc-explicitGrp1101102" id="100" >
    <fabricNodePEp id="101" />
    <fabricNodePEp id="102" />
  </fabricExplicitGep>
</fabricProtPol>
```

#### Step 2 Create a Fibre Channel interface policy.

This step creates a Fibre Channel interface policy (fc:IfPol) named "vpc1" that has trunk mode enabled.

#### Example:

```
POST https://apic-ip-address/api/node/mo/uni/infra/fcIfPol-vpc1.xml

<fcIfPol name="vpc1" trunkMode="trunk-on" />
```

#### Step 3 Create an LACP port channel policy.

This step creates an LACP port channel policy (lacp:LagPol) named "vpc1" that has LACP-active mode enabled. The suspend-individual-port control is disabled from the port channel; otherwise the physical interface will be suspended when LACP BPDU is not received from the host.

#### Example:

```
POST https://apic-ip-address/api/node/mo/uni/infra/lacplagp-vpc1.xml

<lacpLagPol name="vpc1" mode="active" ctrl="graceful-conv,fast-sel-hot-stdby" />
```

#### Step 4 Create the vPC.

#### Example:

```
POST https://apic-ip-address/api/node/mo/uni/infra.xml

<infraInfra>
  <infraAccPortP
    name="Switch101-102_Profile_ifselector"
    descr="GUI Interface Selector Generated PortP Profile: Switch101-102_Profile">
    <infraHPortS name="Switch101-102_1-ports-49" type="range">
      <infraPortBlk name="block1" fromPort="49" toPort="49" />
    </infraHPortS>
  </infraAccPortP>
</infraInfra>
```

```

        <infraRsAccBaseGrp
            tDn="uni/infra/funcprof/accbundle-Switch101-102_1-ports-49_PolGrp" />
    </infraHPorts>
</infraAccPortP>
<infraFuncP>
    <infraAccBndlGrp name="Switch101-102_1-ports-49_PolGrp" lagT="node">
        <infraRsAttEntP tDn="uni/infra/attentp-fcDom_AttEntityP" />
        <infraRsFcIfPol tnFcIfPolName="vpc1" />
        <infraRsLacpPol tnLacpLagPolName="vpc1" />
    </infraAccBndlGrp>
</infraFuncP>
<infraNodeP
    name="Switch101-102_Profile"
    descr="GUI Interface Selector Generated Profile: Switch101-102_Profile">
    <infraLeafS name="Switch101-102_Profile_selector_101102" type="range">
        <infraNodeBlk name="single0" from_"101" to_"101" />
        <infraNodeBlk name="single1" from_"102" to_"102" />
    </infraLeafS>
    <infraRsAccPortP
        tDn="uni/infra/accportprof-Switch101-102_Profile_ifselector" />>
</infraNodeP>
</infraInfra>

```

### Step 5 Create a native VLAN.

- a) Create a bridge domain and associate it with a VRF.

#### Example:

```

POST https://apic-ip-address/api/node/mo/uni/tn-newtenant/BD-BDnew1.xml

<fvBD name="BDnew1" mac="00:22:BD:F8:19:FF" >
    <fvRsCtx tnFvCtxName="vrf" />
</fvBD>

```

- b) Create an application EPG and associate it with the bridge domain.

#### Example:

```

POST https://apic-ip-address/api/node/mo/uni/tn-newtenant/ap-AP1/epg-epgNew.xml

<fvAEPg name="epgNew" >
    <fvRsBd tnFvBDName="BDnew1" />
</fvAEPg>

```

- c) Create a static path and associate it with a VLAN.

#### Example:

```

POST https://apic-ip-address/api/node/mo/uni/tn-newtenant/ap-AP1/epg-epgNew.xml

<fvRsPathAtt
    encap="vlan-1"
    instrImedcy="immediate"
    mode="native"
    tDn="topology/pod-1/protopaths-101-102/pathep-[Switch101-102_1-ports-49_PolGrp]" />

```

### Step 6 Create a vFC.

- a) Create a bridge domain and associate it with a VRF.

**Example:**

```
POST https://apic-ip-address/api/node/mo/uni/tn-newtenant/BD-BD3.xml

<fvBD
  name="BD3"
  mac="00:22:BD:F8:19:FF"
  type="fc"
  unicastRoute="false" >
  <fvRsCtx tnFvCtxName="vrf" />
</fvBD>
```

- b) Create an application EPG and associate it with the bridge domain.

**Example:**

```
POST https://apic-ip-address/api/node/mo/uni/tn-newtenant/ap-AP1/epg-epg3.xml

<fvAEPg name="epg3" >
  <fvRsBd tnFvBDName="BD3" />
</fvAEPg>
```

- c) Create a static path and associate it with a VSAN.

**Example:**

```
POST https://apic-ip-address/api/node/mo/uni/tn-newtenant/ap-AP1/epg-epg3.xml

<fvRsFcPathAtt
  vsan="vsan-3"
  vsanMode="native"
  tDn="topology/pod-1/paths-101/pathep-[eth1/49]" />
```

## Undeploying FCoE Connectivity through the REST API or SDK

To undeploy FCoE connectivity through the APIC REST API or SDK, delete the following objects associated with the deployment:

Object	Description
<fvRsFcPathAtt> (Fibre Channel Path)	The Fibre Channel path specifies the vFC path to the actual interface. Deleting each object of this type removes the deployment from that object's associated interfaces.
<fcVsanAttrp> (VSAN/VLAN map)	The VSAN/VLAN map maps the VSANs to their associated VLANs deleting this object removes the association between the VSANs that support FCoE connectivity and their underlying VSANs.
<fvnsVsanInstP> (VSAN pool)	The VSAN pool specifies the set of VSANs available to support FCoE connectivity. Deleting this pool removes those VSANs.



Object	Description
<fvnsVlanIsntP> ((VLAN pool)	The VLAN pool specifies the set of VLANs available for VSAN mapping. Deleting the associated VLAN pool cleans up after an FCoE undeployment, removing the underlying VLAN entities over which the VSAN entities ran.
<fcDomP> (VSAN or Fibre Channel domain)	The Fibre Channel domain includes all the VSANs and their mappings. Deleting this object undeploys vFC from all interfaces associated with this domain.
<fvAEPg> (application EPG)	The application EPG associated with the FCoE connectivity. If the purpose of the application EPGs was only to support FCoE-related activity, you might consider deleting this object.
<fvAp> (application profile)	The application profile associated with the FCoE connectivity. If the purpose of the application profile was only to support FCoE-related activity, you might consider deleting this object.
<fvTenant> (tenant)	The tenant associated with the FCoE connectivity. If the purpose of the tenant was only to support FCoE-related activity, you might consider deleting this object.



**Note** If during clean up you delete the Ethernet configuration object (infraHPortS) for a vFC port, the default vFC properties remain associated with that interface. For example if the interface configuration for vFC NP port 1/20 is deleted, that port remains a vFC port but with default F port setting rather than non-default NP port setting applied.

The following steps undeploy FCoE-enabled interfaces and EPGs accessing those interfaces using the FCoE protocol.

### Procedure

**Step 1** To delete the associated Fibre Channel path objects, send a post with XML such as the following example.

The example deletes all instances of the Fibre Channel path object <fvRsFcPathAtt>.

**Note** Deleting the Fibre Channel paths undeploys the vFC from the ports/VSANs that used them.

#### Example:

`https://apic-ip-address/api/mo/uni/tn-tenant1.xml`

```
<fvTenant
name="tenant1">
  <fvCtx name="vrf1"/>

  <!-- bridge domain -->
  <fvBD name="bd1" type="fc" >
    <fvRsCtx tnFvCtxName="vrf1" />
  </fvBD>

  <fvAp name="appl">
```

```

    <fvAEPg name="epg1">
      <fvRsBd tnFvBDName="bd1" />
      <fvRsDomAtt tDn="uni/fc-vsanDom1" />
      <fvRsFcPathAtt tDn="topology/pod-1/paths-101/pathep-[eth1/39]"
        vsan="vsan-11" vsanMode="native" status="deleted"/>
      <fvRsFcPathAtt tDn="topology/pod-1/paths-101/pathep-[eth1/40]"
        vsan="vsan-10" vsanMode="regular" status="deleted"/>
    </fvAEPg>

<!-- Sample undeployment of vFC on a port channel -->

    <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
      tDn="topology/pod-1/paths 101/pathep-pc01" status="deleted"/>

<!-- Sample undeployment of vFC on a virtual port channel -->

    <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
      tDn="topology/pod-1/paths-101/pathep-vpc01" status="deleted"/>
    <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
      tDn="topology/pod-1/paths-102/pathep-vpc01" status="deleted"/>

  </fvAp>
</fvTenant>

```

- Step 2** To delete the associated VSAN/VLAN map, send a post such as the following example. The example deletes the VSAN/VLAN map **vsanattr1** and its associated `<fcVsanAttrP>` object.

**Example:**

[https://apic-ip-address/api/mo/uni/infra/vsanattrp-\[vsanattr1\].xml](https://apic-ip-address/api/mo/uni/infra/vsanattrp-[vsanattr1].xml)

```

<fcVsanAttrP name="vsanattr1" status="deleted">
  <fcVsanAttrPEntry vlanEncap="vlan-43" vsanEncap="vsan-10" status="deleted"/>
  <fcVsanAttrPEntry vlanEncap="vlan-44" vsanEncap="vsan-11"
    lbType="src-dst-ox-id" status="deleted" />
</fcVsanAttrP>

```

- Step 3** To delete the associated VSAN pool, send a post such as the following example. The example deletes the VSAN pool **vsanPool1** and its associated `<fvnsVsanInstP>` object.

**Example:**

[https://apic-ip-address/api/mo/uni/infra/vsanns-\[vsanPool1\]-static.xml](https://apic-ip-address/api/mo/uni/infra/vsanns-[vsanPool1]-static.xml)

```

<!-- Vsan-pool -->
<fvnsVsanInstP name="vsanPool1" allocMode="static" status="deleted">
  <fvnsVsanEncapBlk name="encap" from="vsan-5" to="vsan-100" />
</fvnsVsanInstP>

```

- Step 4** To delete the associated VLAN pool, send a post with XML such as the following example. The example deletes the VLAN pool **vlanPool1** and its associated `<fvnsVlanInstP>` object.

**Example:**

[https://apic-ip-address/api/mo/uni/infra/vlanns-\[vlanPool1\]-static.xml](https://apic-ip-address/api/mo/uni/infra/vlanns-[vlanPool1]-static.xml)

```

<!-- Vlan-pool -->
<fvnsVlanInstP name="vlanPool1" allocMode="static" status="deleted">
  <fvnsEncapBlk name="encap" from="vlan-5" to="vlan-100" />
</fvnsVlanInstP>

```

- Step 5** To delete the associated Fibre Channel domain, send a post with XML such as the following example.

The example deletes the VSAN domain **vsanDom1** and its associated <fcDomP> object.

**Example:**

```
https://apic-ip-address/api/mo/uni/fc-vsanDom1.xml
<!-- Vsan-domain -->
<fcDomP name="vsanDom1" status="deleted">
  <fcRsVsanAttr tDn="uni/infra/vsanattrp-[vsanattr1]"/>
  <infraRsVlanNs tDn="uni/infra/vlanns-[vlanPool1]-static"/>
  <fcRsVsanNs tDn="uni/infra/vsanns-[vsanPool1]-static"/>
</fcDomP>
```

- Step 6** **Optional:** If appropriate, you can delete the associated application EPG, the associated application profile, or the associated tenant.

**Example:**

In the following sample, the associated application EPG **epg1** and its associated <fvAEPg> object is deleted.

```
https://apic-ip-address/api/mo/uni/tn-tenant1.xml

<fvTenant
name="tenant1"/>
  <fvCtx name="vrf1"/>

  <!-- bridge domain -->
  <fvBD name="bd1" type="fc" >
    <fvRsCtx tnFvCtxName="vrf1" />
  </fvBD>

  <fvAp name="app1">
    <fvAEPg name="epg1" status="deleted">
      <fvRsBd tnFvBDName="bd1" />
      <fvRsDomAtt tDn="uni/fc-vsanDom1" />
      <fvRsFcPathAtt tDn="topology/pod-1/paths-101/pathep-[eth1/39]"
        vsan="vsan-11" vsanMode="native" status="deleted"/>
      <fvRsFcPathAtt tDn="topology/pod-1/paths-101/pathep-[eth1/40]"
        vsan="vsan-10" vsanMode="regular" status="deleted"/>
    </fvAEPg>

    <!-- Sample undeployment of vFC on a port channel -->
    <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
      tDN="topology/pod-1/paths 101/pathep-pc01" status="deleted"/>

    <!-- Sample undeployment of vFC on a virtual port channel -->
    <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
      tDn="topology/pod-1/paths-101/pathep-vpc01" status="deleted"/>
    <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
      tDn="topology/pod-1/paths-102/pathep-vpc01" status="deleted"/>

  </fvAp>
</fvTenant>
```

**Example:**

In the following example, the associated application profile **app1** and its associated <fvAp> object is deleted.

```
https://apic-ip-address/api/mo/uni/tn-tenant1.xml

<fvTenant
name="tenant1">
  <fvCtx name="vrf1"/>

  <!-- bridge domain -->
```

```

<fvBD name="bd1" type="fc">
  <fvRsCtx tnFvCtxName="vrf1" />
</fvBD>

<fvAp name="appl" status="deleted">
  <fvAEPg name="epg1" status="deleted">
    <fvRsBd tnFvBDName="bd1" />
    <fvRsDomAtt tDn="uni/fc-vsanDom1" />
    <fvRsFcPathAtt tDn="topology/pod-1/paths-101/pathep-[eth1/39]"
      vsan="vsan-11" vsanMode="native" status="deleted"/>
    <fvRsFcPathAtt tDn="topology/pod-1/paths-101/pathep-[eth1/40]"
      vsan="vsan-10" vsanMode="regular" status="deleted"/>
  </fvAEPg>

<!-- Sample undeployment of vFC on a port channel -->

  <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
    tDn="topology/pod-1/paths 101/pathep-pc01" status="deleted"/>

<!-- Sample undeployment of vFC on a virtual port channel -->

  <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
    tDn="topology/pod-1/paths-101/pathep-vpc01" status="deleted"/>
  <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
    tDn="topology/pod-1/paths-102/pathep-vpc01" status="deleted"/>

</fvAp>
</fvTenant>

```

**Example:**

In the following example, the entire tenant **tenant1** and its associated `<fvTenant>` object is deleted.

<https://apic-ip-address/api/mo/uni/tn-tenant1.xml>

```

<fvTenant
name="tenant1" status="deleted">
  <fvCtx name="vrf1"/>

  <!-- bridge domain -->
  <fvBD name="bd1" type="fc" status="deleted">
    <fvRsCtx tnFvCtxName="vrf1" />
  </fvBD>

  <fvAp name="appl">
    <fvAEPg name="epg1" status="deleted">
      <fvRsBd tnFvBDName="bd1" />
      <fvRsDomAtt tDn="uni/fc-vsanDom1" />
      <fvRsFcPathAtt tDn="topology/pod-1/paths-101/pathep-[eth1/39]"
        vsan="vsan-11" vsanMode="native" status="deleted"/>
      <fvRsFcPathAtt tDn="topology/pod-1/paths-101/pathep-[eth1/40]"
        vsan="vsan-10" vsanMode="regular" status="deleted"/>
    </fvAEPg>

  <!-- Sample undeployment of vFC on a port channel -->

    <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
      tDn="topology/pod-1/paths 101/pathep-pc01" status="deleted"/>

  <!-- Sample undeployment of vFC on a virtual port channel -->

    <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
      tDn="topology/pod-1/paths-101/pathep-vpc01" status="deleted"/>
    <fvRsFcPathAtt vsanMode="native" vsan="vsan-10"
      tDn="topology/pod-1/paths-102/pathep-vpc01" status="deleted"/>

```

```
</fvAp>
</fvTenant>
```


# SAN Boot with vPC

Cisco ACI supports the SAN boot of initiators on Link Aggregation Control Protocol (LACP) based vPC. This limitation is specific to LACP-based port channels.

In the normal host-to-vPC topology, the host-facing vFC interface is bound to the vPC, and the vPC must be logically up before the vFC interface can come up. In this topology, a host will not be able to boot from SAN when LACP is configured on the vPC, because LACP on the host is typically implemented in the host driver and not in the adapter firmware.


For SAN boot, the host-facing vFC interfaces are bound to port channel members instead of the port channel itself. This binding ensures that the host-side vFC comes up during a SAN boot as soon as the link on the CNA/Host Bus Adapter (HBA) comes up, without relying on the LACP-based port channel to form first.

Figure 2: SAN Boot Topology with vPC

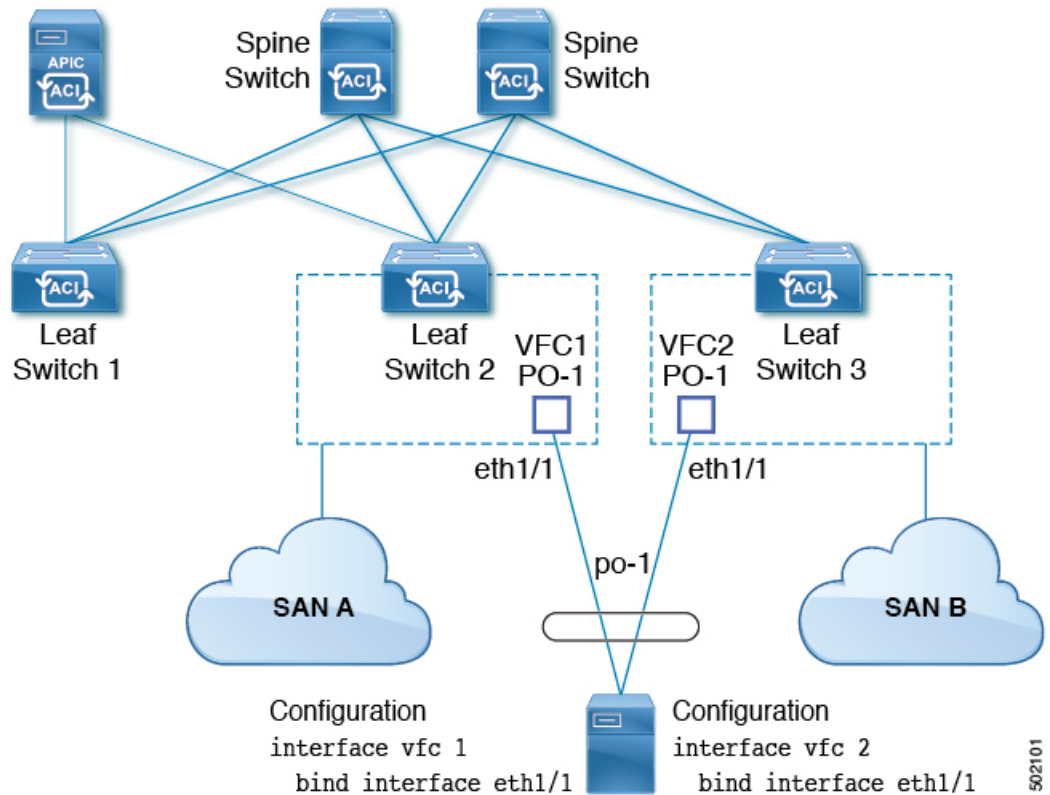

Beginning with Cisco APIC Release 4.0(2), SAN boot is supported through a FEX host interface (HIF) port vPC, as shown in the following figure.

Figure 3: SAN Boot Topology with a FEX host interface (HIF) port vPC

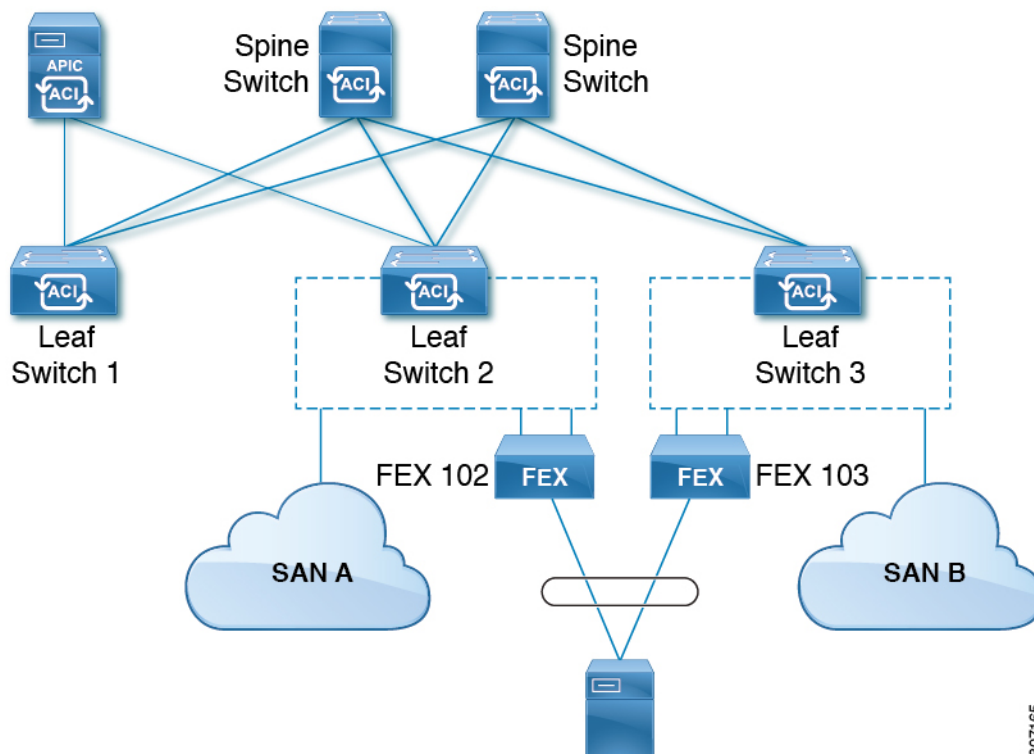

307165

#### Guidelines and Restrictions for SAN Boot with vPC

- Multi-member port channels are not supported.
- If a vFC is bound to a member port, the port channel cannot have more than 1 member.
- If a vFC is bound to a port channel, the port channel can have only one member port.

## Configuring SAN Boot with vPC Using the GUI

To simplify the configuration, this procedure uses the **Configure Interface, PC, and vPC** wizard in **Fabric > Access Policies > Quickstart**.

#### Before you begin

This procedure assumes that the following items are already configured:

- VSAN Pool
- VLAN Pool
- VSAN Attributes, mapping VSANs in the VSAN pool to VLANs
- Fibre Channel domain (VSAN domain)
- Tenant, Application Profile

- Attached Entity Profile

## Procedure

- 
- Step 1** On the APIC menu bar, navigate to **Fabric > Access Policies > Quickstart** and click *Configure an interface, PC, and VPC*.
- Step 2** In the *Configure an interface, PC, and VPC* work area, in the **vPC Switch Pairs** toolbar, click + to create a switch pair. Perform the following actions:
- From the **vPC Domain ID** text box, enter a number to designate the switch pair.
  - From the **Switch 1** drop-down list, select a leaf switch.  
Only switches with interfaces in the same vPC policy group can be paired together.
  - From the **Switch 2** drop-down list, select a leaf switch.
  - click **Save** to save this switch pair.
- Step 3** In the *Configure an interface, PC, and vPC* work area, click the large green + to select switches. The **Select Switches To Configure Interfaces** work area opens with the **Quick** option selected by default.
- Step 4** Select two switch IDs from the **Switches** drop-down list, and name the switch profile.
- Step 5** Click the large green + again to configure the switch interfaces.
- Step 6** In the **Interface Type** control, select **vPC**.
- Step 7** For **Interfaces**, enter a single port number, such as **1/49**, that will be used on both switches as vPC members. This action creates an interface selector policy. You can accept or change the name of the policy in the **Interface Selector Name** text box.
- Step 8** In the **Interface Policy Group** control, select **Create One**.
- Step 9** From the **Fibre Channel Interface Policy** text box, select **Create Fibre Channel Interface Policy** and perform the following actions.
- In the **Name** field, type a name for the Fibre Channel interface policy.
  - From the **Port Mode** selector, select **F**.
  - From the **Trunk Mode** selector, select **trunk-on**.
  - Click **Submit**.
- Step 10** From the **Port Channel Policy** text box, select **Create Port Channel Policy** and perform the following actions.
- In the **Name** field, type a name for the port channel policy.
  - From the **Mode** drop-down list, select **LACP Active**.
  - From the **Control** selector, delete **Suspend Individual Port**.  
**Suspend Individual Port** must be removed from the port channel; otherwise the physical interface will be suspended when LACP BPDU is not received from the host.
  - Click **Submit**.
- Step 11** From the **Attached Device Type** drop-down list, select **Fibre Channel**.
- Step 12** From the **Fibre Channel Domain** drop-down list, select your Fibre Channel domain (VSAN domain).
- Step 13** Click **Save** to save this vPC configuration.
- Step 14** Click **Save** to save this interface configuration.

- Step 15** Click **Submit**.
- Step 16** Expand **Tenants > Tenant name > Application Profiles > name > Application EPGs**.
- Step 17** Right-click **Application EPGs**, select **Create Application EPG** and perform the following actions.
- This EPG will be the Native EPG, in which the Native VLAN will be configured.
- In the **Name** field, type a name for the EPG.
  - From the **Bridge Domain** drop-down list, select **Create Bridge Domain**.
  - In the **Name** field, type a name for the bridge domain.
  - From the **Type** control, select **regular**.
  - From the **VRF** drop-down list, choose the tenant VRF. If no VRF exists yet, select **Create VRF**, name the VRF and click **Submit**.
  - Click **Next**, **Next**, and **Finish** to return to **Create Application EPG**.
  - Click **Finish**.
- Step 18** Expand the Native EPG created in the previous step.
- Step 19** Right-click **Static Ports**, select **Deploy Static EPG On PC, VPC, or Interface** and perform the following actions.
- From the **Path Type** control, select **Virtual Port Channel**.
  - From the **Path** drop-down list, select the port channel policy created for vPC.
  - From the **Port Encap** drop-down list, select **VLAN** and enter the number of an Ethernet VLAN.
  - From the **Deployment Immediacy** control, select **Immediate**.
  - From the **Mode** control, select **Access (802.1P)**.
  - Click **Submit**.
- Step 20** Right-click **Application EPGs**, select **Create Application EPG** and perform the following actions.
- This EPG will be the first of two EPGs, one for each SAN.
- In the **Name** field, type a name for the EPG.
  - From the **Bridge Domain** drop-down list, select **Create Bridge Domain**.
  - In the **Name** field, type a name for the bridge domain.
  - From the **Type** control, select **fc**.
  - From the **VRF** drop-down list, choose the tenant VRF. If no VRF exists yet, select **Create VRF**, name the VRF and click **Submit**.
  - Click **Next**, **Next**, and **Finish** to return to **Create Application EPG**.
  - Click **Finish**.
- Step 21** Repeat the previous step to create a second application EPG.
- This second EPG will be used for the second SAN.
- Step 22** Expand one of the two SAN EPGs, right-click **Fibre Channel (Paths)**, select **Deploy Fibre Channel** and perform the following actions.
- From the **Path Type** control, select **Port**.
  - From the **Node** drop-down list, select one leaf of your switch pair.
  - From the **Path** drop-down list, select the Ethernet port number of your VPC.
  - In the **VSAN** text box, type the VSAN number prefixed by "vsan-".  
For example, type "vsan-300" for VSAN number 300.
  - In the **VSAN Mode** control, select **Native**.



f) Click **Submit**.

### Step 23

Expand the other of the two SAN EPGs and repeat the previous step, selecting the other leaf of your switch pair.

## SAN Boot with vPC Configuration Using the CLI

This example assumes that the following items have been configured:

- A VLAN domain
- A tenant, application profile, and an application EPG
- A port channel template "Switch101-102\_1-ports-49\_PolGrp"

In this example, VSAN 200 is bound to physical Ethernet interface 1/49 on leaf 101 and VSAN 300 is bound to physical Ethernet interface 1/49 on leaf 102. The two interfaces are members of virtual port channel Switch101-102\_1-ports-49\_PolGrp.

```

apic1(config-leaf)# show running-config
# Command: show running-config leaf 101
# Time: Sat Sep  1 12:51:23 2018
leaf 101

    interface ethernet 1/49
        # channel-group Switch101-102_1-ports-49_PolGrp vpc
        switchport trunk native vlan 5 tenant newtenant application AP1 epg epgNative
        port-direction downlink
        exit

    # Port-Channel inherits configuration from "template port-channel
Switch101-102_1-ports-49_PolGrp"
    interface port-channel Switch101-102_1-ports-49_PolGrp
        exit

    interface vfc 1/49
        # Interface inherits configuration from "channel-group Switch101-102_1-ports-49_PolGrp"
        applied to interface ethernet 1/49
        switchport vsan 200 tenant newtenant application AP1 epg epg200
        exit

apic1(config-leaf)# show running-config
# Command: show running-config leaf 102
# Time: Sat Sep  1 13:28:02 2018
leaf 102

    interface ethernet 1/49
        # channel-group Switch101-102_1-ports-49_PolGrp vpc
        switchport trunk native vlan 1 tenant newtenant application AP1 epg epgNative
        port-direction downlink
        exit

    # Port-Channel inherits configuration from "template port-channel
Switch101-102_1-ports-49_PolGrp"
    interface port-channel Switch101-102_1-ports-49_PolGrp
        exit

    interface vfc 1/49
        # Interface inherits configuration from "channel-group Switch101-102_1-ports-49_PolGrp"
        applied to interface ethernet 1/49

```

```
switchport vsan 300 tenant newtenant application AP1 epg epg300
```