



Configuring RISE

This chapter describes how to configure the Remote Integrated Service Engine (RISE) feature on the Cisco Nexus 6000 Series switches and the Cisco NetScaler Application Delivery Controller (ADC) appliance. The Cisco NX-OS software supports the Cisco Nexus 6000 Series switches, which includes the Cisco Nexus 6000 Series switches. You can find detailed information about supported hardware in the *Cisco Nexus 6000 Series Hardware Installation and Reference Guide*.

This chapter includes the following sections:

- [Finding Feature Information, page 1](#)
- [Licensing for Cisco RISE , page 2](#)
- [Prerequisites for Configuring RISE, page 2](#)
- [Guidelines and Limitations, page 2](#)
- [Default Settings for RISE, page 3](#)
- [Accessing the Switch and Appliance Interfaces , page 4](#)
- [Configuring Cisco RISE in a Direct Mode Deployment, page 7](#)
- [Configuring RISE in an Indirect Mode Deployment, page 10](#)
- [Configuring RISE in vPC Mode \(Recommended Deployment Mode\), page 15](#)
- [Verifying the RISE Configuration, page 24](#)
- [Monitoring Cisco RISE, page 26](#)
- [Configuration Examples for RISE, page 26](#)
- [Related Documents, page 28](#)
- [Feature History for RISE, page 29](#)

Finding Feature Information

Your software release might not support all the features documented in this module. For the latest caveats and feature information, see the Bug Search Tool at <https://tools.cisco.com/bugsearch/> and the release notes for your software release. To find information about the features documented in this module, and to see a list

of the releases in which each feature is supported, see the “New and Changed Information” chapter or the Feature History table below.

Licensing for Cisco RISE

The following table shows the licensing requirements for this feature:

Product	License Requirements
Cisco NX-OS	The Cisco Remote Integrated Services Engine (RISE) requires the Network Services Package on the Cisco Nexus 6000 Series switch. The NETWORK_SERVICES_PKG license is available starting with Cisco NX-OS Release 7.2(0)N1(1). If you need to use RISE and ITD features with the Cisco NX-OS Release 7.1(1)N1(1), please use the ENHANCED_LAYER2_PKG license. For a complete explanation of the Cisco NX-OS licensing scheme and how to obtain and apply licenses, see the Cisco NX-OS Licensing Guide .
Citrix NetScaler Application Delivery Controller (ADC) operation system	The Cisco Remote Integrated Services Engine (RISE) does not require a license on the Citrix NetScaler Application Delivery Controller (ADC) appliance for auto-attach. Advanced features, such as auto policy-based routing (APBR), require the NetScaler Platinum or Enterprise license on the Citrix NetScaler Application Delivery Controller (ADC) appliance. To display the license status, use the show license command in the NetScaler command line interface

Prerequisites for Configuring RISE

The RISE feature has the following prerequisites:

- Cable and power up the NetScaler Application Delivery Controller (ADC) appliance. See the “Preparing for RISE Integration” chapter for information on connecting the Cisco NetScaler Application Delivery Controller (ADC) appliance.
- For direct connect mode, create an interface or port channel on the Cisco Nexus 6000 Series switch and add all relevant management and data VLANs for the NetScaler Application Delivery Controller (ADC) appliance. See the *Cisco Nexus 6000Series NX-OS Interfaces Configuration Guide* for information.
- For indirect connect mode, the RISE-enabled appliance must be configured with IP connectivity to the Cisco Nexus switch with Layer 2 adjacency.

Guidelines and Limitations

This section includes the following topics:

Guidelines and Limitations for Configuring RISE

RISE has the following guidelines and limitations:

- Cisco NX-OS Release 7.1(1)N1(1) supports the Cisco Remote Integrated Services Engine (RISE) on the following Fabric Extenders:
 - Cisco Nexus 2248PQ-10GE Fabric Extender
 - Cisco Nexus 2248TP-1GE Fabric Extender
- Auto-discovery, bootstrap, and auto port configuration are supported only in the direct connect and vPC direct connect modes. In indirect connect mode, manual configuration is required at each end on the Cisco Nexus 6000 Series switches and the Citrix NetScaler Application Delivery Controller (ADC) appliance in order to establish control channel connectivity and for the discovery and bootstrap process to occur.
- When the Citrix NetScaler Application Delivery Controller (ADC) appliance is indirectly connected to the Cisco Nexus 6000 Series switch, the service or management VLAN on the Citrix NetScaler Application Delivery Controller (ADC) appliance must establish the TCP RISE control channel with the Cisco Nexus 6000 Series switches.
- You can create up to 32 RISE services. However, the number of active RISE services that are supported is limited by the Cisco NX-OS software. In Cisco NX-OS Release 7.1(1)N1(1), only 16 active RISE services are supported. Before Cisco NX-OS Release 7.1(1)N1(1), only 8 active RISE services are supported.
- Multiple instances of RISE services are supported per VDC.
- VLANs cannot be shared across virtual device contexts (VDCs) in a RISE deployment.
- After the RISE service is enabled on the Cisco Nexus 6000 Series switch, a service vlan-group must be created and associated to the RISE service to specify the data VLANs to be used on the Citrix NetScaler Application Delivery Controller (ADC) appliance.
- Control Plane Policing (CoPP) limits the number of packets that can be handled by a Cisco Nexus 6000 Series switch at one time. CoPP policies for RISE ports 8000 and 8001 are enabled by default as part of the (default) CoPP profiles.

Default Settings for RISE

The following table lists the default settings for RISE:

Table 1: Default RISE Parameters on the Cisco Nexus 6000 Series Switch

Parameter	Default
RISE mode	Disabled
CoPP	CoPP policies for RISE ports 8000 and 8001 are enabled by default.

Accessing the Switch and Appliance Interfaces

This section provides information on how to access the command-line interface (CLI) for the Cisco Nexus Series 6000 Series switch and the CLI and GUI for the Citrix NetScaler Application Delivery Controller (ADC) appliance. The switch and appliance interfaces enable you to perform many administrative tasks, including configuring the RISE feature.

Before logging into the interfaces, ensure that you have completed the installation process outlined in the “Preparing for RISE Integration” chapter.

This section includes the following topics:

Accessing the Cisco Nexus 6000 Series Switch

After the Cisco Nexus 6000 Series switch boots up, you can access the command-line interface (CLI). See the *Cisco Nexus 6000 Series NX-OS Fundamentals Configuration Guide* for more information on using the CLI.

To log onto the CLI through the console port, follow these steps:

-
- Step 1** Use the switch’s IP address to establish a Telnet or SSH connection from your PC to the switch.
- Step 2** When the login prompt appears, enter your *login ID* and *password* to access the switch CLI.
-

Accessing the Citrix Netscaler Application Delivery Controller (ADC) Appliance

A Citrix NetScaler appliance has both a command line interface (CLI) and a graphical user interface (GUI). The GUI includes a configuration utility for configuring the appliance and a Dashboard for monitoring Netscaler performance. For initial access, all appliances ship with the default NetScaler IP address (NSIP) of 192.168.100.1 and default subnet mask of 255.255.0.0. You can assign a new NSIP and an associated subnet mask during initial configuration.



Note If you are using the direct connect mode to connect the appliance to the Cisco Nexus switch, you are not required to access the Citrix Netscaler Application Delivery Controller (ADC) appliance to configure RISE. For direct connect mode, the IP address and VLAN for management are pushed from the Cisco Nexus switch as part of RISE simplified provisioning.

The following table summarizes the available access methods.

Table 2: Methods for Accessing the Citrix Netscaler Appliance

Access Method	Port	Default IP Address Required?
CLI	Console	No
CLI and GUI	Ethernet	Yes

Using the Netscaler CLI

You can access the CLI either locally by connecting a workstation to the console port or remotely by connecting through Secure Shell (SSH) from any workstation on the same network.



Note To access Citrix eDocs, see the Citrix eDocs listing page for NetScaler 10.1 at <http://support.citrix.com/proddocs/topic/netscaler/ns-gen-netscaler10-1-wrapper-con.html>.

This section includes the following topics:

Logging onto the CLI Using the Console Port

The appliance has a console port for connecting to a computer workstation. To log on to the appliance, you need a serial crossover cable and a workstation with a terminal emulation program.

To log onto the CLI through the console port, follow these steps:

-
- Step 1** Connect the console port to a serial port on the workstation, as described in the Citrix eDoc, *Connecting the Console Cable*.
 - Step 2** On the workstation, start HyperTerminal or any other terminal emulation program. If the logon prompt does not appear, you might need to press **Enter** one or more times to display the prompt.
 - Step 3** Log on using the administrator credentials. The command prompt (>) is displayed on the workstation monitor.
-

Logging into the Appliance CLI Using SSH

The SSH protocol is the recommended remote access method for accessing the command-line interface (CLI) of an appliance remotely from any workstation on the same network. You can use either SSH version 1 (SSH1) or SSH version 2 (SSH2). To verify that the SSH client is installed properly, use it to connect to any device on your network that accepts SSH connections.

To log onto the CLI using SSH, follow these steps:

-
- Step 1** On your workstation, start the SSH client.
 - Step 2** For initial configuration, use the default NetScaler IP (NSIP) address, which is 192.168.100.1. For subsequent access, use the NSIP that was assigned during initial configuration. Select either SSH1 or SSH2 as the protocol. For information on initial configurations, see the Citrix eDoc, [Configuring a NetScaler for the First Time](#). To access Citrix eDocs, see the Citrix eDocs listing page for NetScaler 10.1 at <http://support.citrix.com/proddocs/topic/netscaler/ns-gen-netscaler10-1-wrapper-con.html>.
 - Step 3** Log on by using the administrator credentials. For initial configuration, use **nsroot** as both the username and password. For example:

```
login as: nsroot
Using keyboard-interactive authentication.
```

```

Password:
Last login: Tue Jun 16 10:37:28 2009 from 10.102.29.9
Done
>

```

Using the Netscaler GUI

The graphical user interface (GUI) includes a configuration utility and a statistical utility, called the Dashboard, either of which you access through a workstation connected to an Ethernet port on the appliance. If your computer does not have a supported Java plug-in installed, the utility prompts you to download and install the plug-in the first time you log on. If automatic installation fails, you can install the plug-in separately before you attempt to log on to the configuration utility or Dashboard.



Note Your workstation must have a supported web browser and version 1.6 or above of the Java applet plug-in installed to access the configuration utility and Dashboard.

Using the NetScaler Configuration Utility

After you log on to the configuration utility, you can configure the appliance through a graphical interface that includes context-sensitive help.

If your computer does not have a supported Java plug-in installed, the first time you log on to the appliance, the configuration utility prompts you to download and install the plug-in.



Note Before installing the Java 2 Runtime Environment, make sure that you have installed the full set of required operating system patches needed for the current Java release.

To log onto the configuration utility, follow these steps:

-
- Step 1** Open your web browser and enter the NetScaler IP (NSIP) address as an HTTP address. If you have not set up the initial configuration, enter the default NSIP address (<http://192.168.100.1>). The Citrix Logon page appears.
- Note** If you have two Citrix NetScaler appliances in a high availability setup, make sure that you do not access the GUI by entering the IP address of the secondary Citrix NetScaler appliance. If you do so and use the GUI to configure the secondary appliance, your configuration changes are not applied to the primary appliance.
- Step 2** In the User Name text box, enter `nsroot`.
- Step 3** In the Password text box, type the *administrative password* that you assigned to the `nsroot` account during the initial configuration.
- Step 4** For Deployment Type, choose **NetScaler ADC**.
- Step 5** In the Start in list, click **Configuration**, and then click **Login**. The Configuration Utility page appears.
- Note** If your workstation does not already have a supported version of the Java runtime plug-in installed, the NetScaler prompts you to download the Java Plug-in. After the download is complete, the configuration utility page appears.
-

Using the Statistical Utility

The Dashboard is a browser-based application that displays charts and tables on which you can monitor NetScaler performance.


To log onto Dashboard, follow these steps:

-
- Step 1** Open your web browser and enter the NetScaler appliance's NSIP address as an HTTP address (<http://<NSIP>>). The Citrix Logon page appears.
 - Step 2** In the User Name text box, enter **nsroot**.
 - Step 3** In the Password text box, enter the *administrative password* that you assigned to the nsroot account during the initial configuration.
 - Step 4** In the Start in list, choose **Dashboard** and then choose **Login**.
For more information, see the Citrix eDoc, [Accessing a Citrix NetScaler](#). To access Citrix eDocs, see the Citrix eDocs listing page for NetScaler 10.1 at <http://support.citrix.com/proddocs/topic/netScaler/ns-gen-netScaler10-1-wrapper-con.html>.
-

Configuring Cisco RISE in a Direct Mode Deployment

In a direct mode deployment, the service appliance, such as Citrix Netscaler Application Delivery Controller (ADC) appliance, is attached to a single Nexus 6000 Series switch. The switch can be standalone device or a VPC peer (recommended deployment). The following figure shows the topology for a direct mode deployment for a standalone Cisco Nexus switch.

Figure 1: Direct Connect Mode for the Appliance and a Standalone Switch

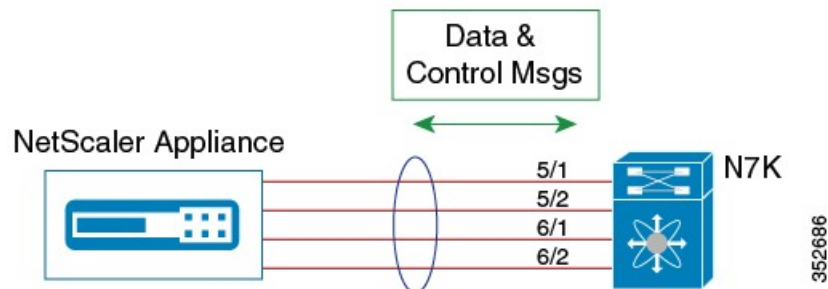

Note

This task describes how to configure a standalone Cisco Nexus switch in a direct mode deployment. After configuring the Cisco Remote Integrated Services Engine (RISE) on the Cisco Nexus 6000 Series switch, the appliance that is directly connected to the standalone switch is automatically configured for RISE mode and all of its ports are in operation mode. No configuration is required on the appliance in a direct mode deployment.

To configure a switch that is a vPC peer in a direct mode deployment, see the “Configuring RISE in a vPC Mode Deployment” section.

Before You Begin

- To enable auto-discovery of the appliance by the switches, use the **no shutdown** command to ensure that the physical ports are up by default.
- Interconnect the ports on the appliance with the standalone or port channel of the switch.
- Ensure that all of the switch ports to which the appliance is connected are dedicated to the appliance.
- Make sure that you are in the correct VDC on the Cisco Nexus switch. To switch VDCs, use the **switchto vdc** command.

DETAILED STEPS

	Command or Action	Purpose
Step 1	switch# configure terminal	Enters global configuration mode.
Step 2	switch(config)# feature rise	Enables the RISE feature on the Cisco Nexus 6000 Series switch.
Step 3	switch(config)# service vlan-group <i>group-number</i> <i>vlan-range</i>	Creates a VLAN group for the NetScaler appliance data VLANs on the Cisco Nexus 6000 Series switch. The range for the VLAN group is from 1 to 32, and the range for the configured VLANs is from 1 to 3967. You can enter the <i>vlan-range</i> using a comma (,), a dash (-), and the numbers.
Step 4	switch(config)# service type rise name <i>service-name</i> mode direct	Creates a RISE service instance, enters the RISE configuration mode on the Cisco Nexus 6000 Series switch, and specifies that the appliance is directly connected to the switch in order to establish RISE connectivity. You can enter up to 31 alphanumeric characters for the name of the RISE service instance.
Step 5	switch(config-rise)# vlan <i>vlan-id</i>	Assigns a VLAN to the Netscaler Application Delivery Controller (ADC) appliance that is directly connected to the Cisco Nexus 6000 Series switch. <ul style="list-style-type: none"> • The range is from 1 to 4094. • This VLAN controls message communication with the supervisor over the RISE port channel. The same VLAN can be used for the Netscaler Application Delivery Controller (ADC) appliance management VLAN. • The VLAN ID and SVI interface must be created before the RISE channel can be established. The IP address of the SVI interface is the supervisor IP address for Cisco Netscaler Application Delivery Controller (ADC) appliance to communicate with and send the control messages.
Step 6	switch(config-rise)# ip <i>ip-address netmask</i>	Specifies the IP address of the Citrix Netscaler Application Delivery Controller (ADC) appliance that is directly connected to the Cisco Nexus 6000 Series switch.

	Command or Action	Purpose
		This IP address controls message communication with the supervisor over the RISE port channel. The same IP address can be used for the management IP address of NetScaler appliance.
Step 7	switch(config-rise)# vlan group <i>vlan-group</i>	Specifies the RISE VLAN group to be used by Citrix Netscaler Application Delivery Controller (ADC) appliance. The range is from 1 to 32. Note The trunk-allowed VLANs on the port channel must include all of the VLANs in the VLAN group as well as the VLAN for the RISE control message.
Step 8	Use one of the following: • switch(config-rise)# ethernet <i>slot/port</i> • switch(config-rise)# port-channel <i>channel-number</i>	Creates an interface for sending out RISE discovery packets. • The range for the slot argument is from 1 to 253. The range for the port argument is from 1 to 128. • The range for the channel-number argument is from 1 to 4096.
Step 9	switch(config-rise)# no shutdown	Launches the auto-discovery and bootstrap configuration process. The NetScaler ADC appliance port channel is created with the RISE IP address set at the Citrix Netscaler Application Delivery Controller (ADC) appliance. Note The Cisco Nexus 6000 Series switches associates the Netscaler Application Delivery Controller (ADC) appliance serial number with the virtual slot number for this Cisco Netscaler Application Delivery Controller (ADC) appliance. Note Discovery does not start if any required information (such as the port, RISE VLAN, RISE IP address, or switch virtual interface [SVI] of the RISE VLAN) is not provided. If the discovery times out, the virtual module is shown in the inactive state. The show rise detail command on the switch displays the reason for discovery failure.
Step 10	switch(config-rise)# show module service	(Optional) Displays the status of the RISE service module on the Cisco Nexus 6000 Series switch. If the RISE service module is operational, the status that is displayed is "active."
Step 11	switch(config-rise)# attach rise { <i>slot slot-number</i> name name }	(Optional) Connects the Cisco Nexus 6000 Series switch to the RISE service module and generates a RISE session from the switch, which allows Telnet access. • The slot number range varies based on the valid slot numbers for a particular VDC. The Cisco Nexus 6000 Series switch supports 32 RISE instances per VDC. The slot number range is as follows: • From 300 to 331 for VDC 1 • From 332 to 363 for VDC 2 • From 364 to 395 for VDC 3 • From 396 to 427 for VDC 4 • You can enter up to 32 alphanumeric characters for the RISE service module name.

	Command or Action	Purpose
		<ul style="list-style-type: none"> After you enter the password, you can access the Citrix Netscaler Application Delivery Controller (ADC) appliance to configure it.
Step 12	switch(config-rise)# show rise	Displays the RISE configuration status on the Cisco Nexus 6000 Series switch. If RISE is configured on the switch, the state that is displayed is “active.”

What to Do Next




Note

After configuring RISE on the Cisco Nexus 6000 Series switch, the Citrix Netscaler Application Delivery Controller (ADC) appliance that is directly connected to the switch is automatically configured for RISE mode and all of its ports are in operation mode. No further configuration is required to deploy RISE on the Citrix Netscaler Application Delivery Controller (ADC) appliance.

Configuring RISE in an Indirect Mode Deployment

In an indirect mode deployment, a virtual service appliance, such as Citrix NetScaler Application Delivery Controller (ADC) appliance, is connected to a Cisco Nexus 6000 Series switch through a switched Layer 2 network. The topology in the following figure is for an indirect mode deployment.

Figure 2: Indirect Connect Mode Through a Layer 2 Network

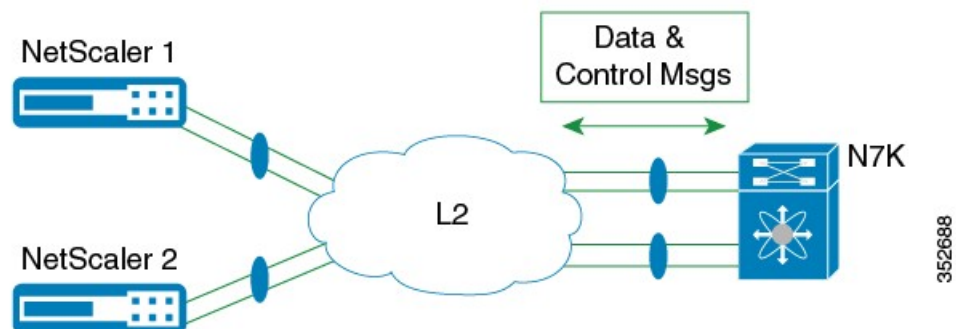

This section includes the following topics:

Configuring RISE on the Cisco Nexus Switch

Before You Begin

- Enable and configure the Cisco Nexus switches as vPC peers. See the *Cisco Nexus 6000 Series NX-OS Interfaces Configuration Guide* for information. The following parameters must be the same on both Cisco Nexus switches:
 - The vPC ID
 - The name of the RISE service instance
 - The vPC number of the port channel
 - The IP address of the Netscaler appliance
 - The number and range of the VLAN group for the Citrix NetScaler Application Delivery Controller (ADC) appliance.
- Make sure that you are in the correct VDC on the Cisco Nexus switch. To switch VDCs, use the **switchto vdc** command.

DETAILED STEPS

	Command or Action	Purpose
Step 1	switch# configure terminal	Enters global configuration mode.
Step 2	switch(config)# feature rise	Enables the RISE feature on the Cisco Nexus 6000 Series switch.
Step 3	switch(config)# service vlan-group <i>group-number</i> <i>vlan-range</i>	Creates a VLAN group for the Citrix NetScaler Application Delivery Controller (ADC) appliance data VLANs on the Cisco Nexus 6000 Series switch. The range for the VLAN group is from 1 to 32, and the range for the configured VLANs is from 1 to 3967. You can enter the <i>vlan-range</i> using a comma (,), a dash (-), and the numbers.
Step 4	switch(config)# service type rise <i>name</i> <i>service-name</i> mode indirect	Creates a RISE service instance, enters the RISE configuration mode on the Cisco Nexus 6000 Series switch, and specifies that the appliance is indirectly connected to the switch in order to establish RISE connectivity. You can enter up to 31 alphanumeric characters for the name of the RISE service instance.
Step 5	switch(config-rise)# vlan <i>vlan-id</i>	Assigns a VLAN to the Citrix NetScaler Application Delivery Controller (ADC) appliance that is directly connected to the Cisco Nexus 6000 Series switch. <ul style="list-style-type: none"> • The range is from 1 to 4094. • This VLAN controls message communication with the supervisor over the RISE port channel. The same VLAN can be used for the Citrix NetScaler Application Delivery Controller (ADC) appliance management VLAN. • The VLAN ID and SVI interface must be created before the RISE channel can be established. The IP address of the SVI interface is the supervisor IP address for

	Command or Action	Purpose
		Citrix NetScaler Application Delivery Controller (ADC) appliance to communicate with and send the control messages.
Step 6	<code>switch(config-rise)# ip ip-address netmask</code>	Specifies the IP address of the Citrix NetScaler Application Delivery Controller (ADC) appliance that is directly connected to the Cisco Nexus 6000 Series switch. This IP address controls message communication with the supervisor over the RISE port channel. The same IP address can be used for the management IP address of NetScaler appliance.
Step 7	<code>switch(config-rise)# vlan group vlan-group</code>	Specifies the RISE VLAN group to be used by Citrix NetScaler Application Delivery Controller (ADC) appliance. The range is from 1 to 32. Note The trunk-allowed VLANs on the port channel must include all of the VLANs in the VLAN group as well as the VLAN for the RISE control VLAN message.
Step 8	<code>switch(config-rise)# no shutdown</code>	Launches the auto-discovery and bootstrap configuration process. The Citrix NetScaler Application Delivery Controller (ADC) appliance port channel is created with the RISE IP address set at the Citrix NetScaler Application Delivery Controller (ADC) appliance. Note The Cisco Nexus 6000 Series switches associates the NetScaler appliance serial number with the virtual slot number for this Citrix NetScaler Application Delivery Controller (ADC) appliance. Note Discovery does not start if any required information (such as the port, RISE VLAN, RISE IP address, or switch virtual interface [SVI] of the RISE VLAN) is not provided. If the discovery times out, the virtual module is shown in the inactive state. The show rise command on the switch displays the reason for discovery failure.
Step 9	<code>switch(config-rise)# show module service</code>	(Optional) Displays the status of the RISE service module on the Cisco Nexus 6000 Series switch. If the RISE service module is operational, the status that is displayed is "active."
Step 10	<code>switch(config-rise)# attach rise {slot slot-number name name}</code>	(Optional) Connects the Cisco Nexus 6000 Series switch to the RISE service module and generates a RISE session from the switch, which allows Telnet access. <ul style="list-style-type: none"> • The slot number range varies based on the valid slot numbers for a particular VDC. The Cisco Nexus 6000 Series switch supports 32 RISE instances per VDC. The slot number range is as follows: <ul style="list-style-type: none"> • From 300 to 331 for VDC 1 • From 332 to 363 for VDC 2 • From 364 to 395 for VDC 3 • From 396 to 427 for VDC 4 • You can enter up to 32 alphanumeric characters for the RISE service module name. • After you enter the password, you can access the Citrix NetScaler Application Delivery Controller (ADC) appliance to configure it.

	Command or Action	Purpose
Step 11	switch(config-rise)# show rise	Displays the RISE configuration status on the Cisco Nexus 6000 Series switch. If RISE is configured on the switch, the state that is displayed is “active.”

Configuring NSIP on the Appliance

The NetScaler management IP address (NSIP) is the IP address for management and general system access to the Citrix NetScaler Application Delivery Controller (ADC) appliance and for high availability (HA) communication.

Configuring NSIP Using the CLI

You can configure the NSIP on your appliance by using either the configuration prompts or the command-line interface (CLI).



Note

To prevent an attacker from impeding your ability to send packets to the appliance, choose a nonroutable IP address on your organization's LAN as your appliance IP address.

Before You Begin

Ensure that a port channel is configured on the appliance and that the appliance's physical ports are mapped to this port channel.

Perform one of the following tasks:

Option	Description
config ns	Displays prompts for configuring the NSIP.
set ns config -ipaddress <i>address</i> -netmask <i>netmask</i> add ns ip <i>ip-address netmask -type type</i> add route <i>network netmask gateway</i> save ns config reboot	Configures the NSIP using the CLI.

Example:

The following example shows how to configure the NSIP using the CLI:

```
set ns config -ipaddress 10.102.29.60 -netmask 255.255.255.0
add ns ip 10.102.29.61 255.255.255.0 -type snip
```

```
add route 0.0.0.0 0.0.0.0 10.102.29.1
save ns
```

Configuring NSIP Using the Configuration Utility

Before You Begin

- Create a port channel on the Citrix NetScaler Application Delivery Controller (ADC) appliance and map its physical ports to this port channel.
-

- Step 1** Navigate to **System > Settings**.
- Step 2** In the details pane, under Settings, click **Change NSIP Settings**.
- Step 3** In the Configure NSIP Settings dialog box, set the parameters. For a description of a parameter, hover the mouse cursor over the corresponding field.
- Step 4** Under Interfaces, choose the interfaces from the Available Interfaces list and click **Add** to move them to the Configured Interfaces list.
- Step 5** Click **OK**. In the Warning dialog box, click **OK**. The configuration takes effect after the Citrix NetScaler Application Delivery Controller (ADC) appliance is restarted.
-

Configuring a NSVLAN on Citrix NetScaler Application Delivery Controller (ADC) Appliance

The NSVLAN is a VLAN to which the NetScaler management IP (NSIP) address's subnet is bound. The NSIP subnet is available only on interfaces that are associated with NSVLAN. By default, NSVLAN is VLAN1, but you can designate a different VLAN as NSVLAN. If you designate a different VLAN as an NSVLAN, you must reboot the Citrix NetScaler Application Delivery Controller (ADC) appliance for the change to take effect. After the reboot, NSIP subnet traffic is restricted to the new NSVLAN.

Perform only one of the following tasks:

Configuring NSVLAN Using the CLI

Enter the following commands prompt to configure NSVLAN using the CLI:

Before You Begin

- Create a port channel on the Citrix NetScaler Application Delivery Controller (ADC) appliance and map its physical ports to this port channel.

- Configure the NS IP address (NSIP) on the appliance.

Step 1 `set ns config -nsvlan positive_integer -ifnum interface_name ... [-tagged (YES | NO)]`

Note You must reboot the appliance for the configuration to take effect.

Step 2 (Optional) `show ns config`

```
set ns config -nsvlan 300 -ifnum 1/1 1/2 1/3 -tagged NO
save config
```

Step 3 (Optional) `unset ns config -nsvlan`

Restores the default configuration.

Configuring NSVLAN Using the Configuration Utility

Before You Begin

- Create a port channel on the Citrix NetScaler Application Delivery Controller (ADC) appliance and map its physical ports to this port channel.
- Configure the NetScaler IP address (NSIP) on the appliance.

Step 1 Navigate to **System > Settings**.

Step 2 In the details pane, under Settings, click **Change NSVLAN Settings**.

Step 3 In the Configure NSVLAN Settings dialog box, set the parameters. For a description of a parameter, hover the mouse cursor over the corresponding field.

Step 4 Under Interfaces, choose the interfaces from the Available Interfaces list and click **Add** to move them to the Configured Interfaces list.

Step 5 Click **OK**. In the Warning dialog box, click **OK**. The configuration takes effect after the Citrix NetScaler Application Delivery Controller (ADC) appliance is restarted.

Configuring RISE in vPC Mode (Recommended Deployment Mode)


In a virtual port channel (vPC) deployment, two service appliances, such as a Citrix NetScaler Application Delivery Controller (ADC) appliance, are each connected to separate Cisco Nexus 6000 Series switches that are in vPC mode through a peer link. This is the recommended topology for deploying the RISE feature on a Cisco Nexus switch and a Citrix NetScaler Application Delivery Controller (ADC) appliance.

This section includes the following topics:

Configuring RISE in a vPC Direct Mode Deployment

In an direct mode deployment, the service appliance, such as appliance, is attached to a single Nexus 6000 Series switch. The switch can be standalone device or a VPC peer (recommended deployment). The following figure shows the topologies for a vPC direct mode deployment.

Figure 3: vPC Direct Connect Mode for Connecting to vPC Peer Switches

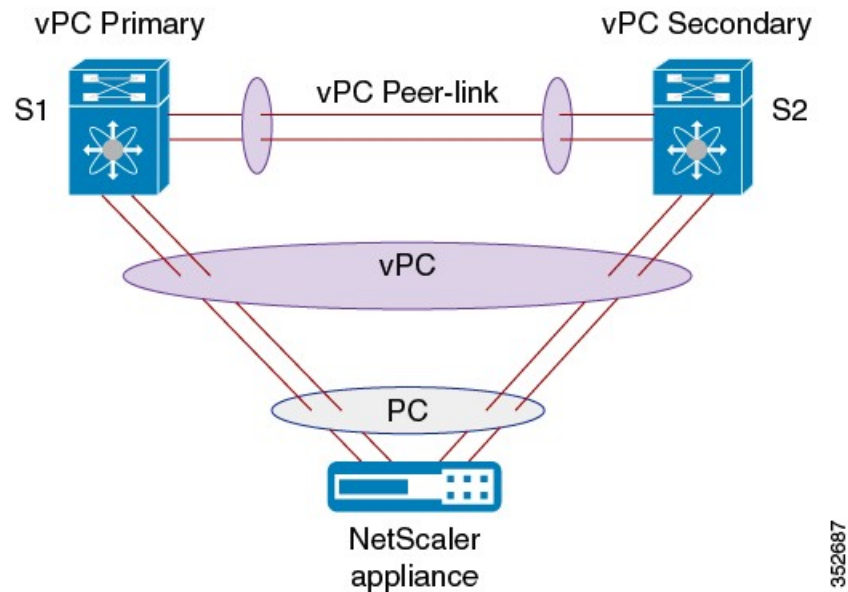

Note

This task describes how to configure a vPC peer switch in a direct mode deployment. After configuring RISE on the Cisco Nexus 6000 Series switch, the Citrix NetScaler Application Delivery Controller (ADC) appliance that is directly connected to the switch is automatically configured for RISE mode and all of its ports are in operation mode. No configuration is required on the Citrix NetScaler appliance in a direct mode deployment.

Repeat these steps to configure each vPC peer switch to which an appliance is connected.

Before You Begin

- Enable and configure the Cisco Nexus switches as vPC peers. See the *Cisco Nexus 6000 Series NX-OS Interfaces Configuration Guide* for information. The following parameters must be the same on both Cisco Nexus switches:
 - The vPC ID
 - The name of the RISE service instance
 - The vPC number of the port channel
 - The IP address of the appliance

- The number and range of the VLAN group for the ADC appliance
- Make sure that you are in the correct VDC on the Cisco Nexus switch. To switch VDCs, use the **switchto vdc** command.

DETAILED STEPS


	Command or Action	Purpose
Step 1	<code>switch# configure terminal</code>	Enters global configuration mode.
Step 2	<code>switch(config)# feature rise</code>	Enables the RISE feature on the Cisco Nexus 6000 Series switch.
Step 3	<code>switch(config)# service vlan-group group-number vlan-range</code>	Creates a VLAN group for the NetScaler appliance data VLANs on the Cisco Nexus 6000 Series switch. The range for the VLAN group is from 1 to 32, and the range for the configured VLANs is from 1 to 3967. You can enter the <code>vlan-range</code> using a comma (,), a dash (-), and the numbers.
Step 4	<code>switch(config)# service type rise name service-name mode vpc</code>	Creates a RISE service instance, enters the RISE configuration mode on the Cisco Nexus 6000 Series switch, and specifies that the appliance is directly connected to the switch in order to establish RISE connectivity. You can enter up to 31 alphanumeric characters for the name of the RISE service instance.
Step 5	<code>switch(config-rise)# vlan vlan-id</code>	Assigns a VLAN to the NetScaler appliance that is directly connected to the Cisco Nexus 6000 Series switch. <ul style="list-style-type: none"> • The range is from 1 to 4094. • This VLAN controls message communication with the supervisor over the RISE port channel. The same VLAN can be used for the Citrix Netscaler Application Delivery Controller (ADC) appliance management VLAN. • The VLAN ID and SVI interface must be created before the RISE channel can be established. The IP address of the SVI interface is the supervisor IP address for Citrix NetScaler Application Delivery Controller (ADC) appliance to communicate with and send the control messages.
Step 6	<code>switch(config-rise)# ip ip-address netmask</code>	Specifies the IP address of the Citrix NetScaler Application Delivery Controller (ADC) appliance that is directly connected to the Cisco Nexus 6000 Series switch. This IP address controls message communication with the supervisor over the RISE port channel. The same IP address can be used for the management IP address of Citrix Netscaler Application Delivery Controller (ADC) appliance.
Step 7	<code>switch(config-rise)# vlan group vlan-group</code>	Specifies the RISE VLAN group to be used by Citrix NetScaler Application Delivery Controller (ADC) appliance. The range is from 1 to 32. Note The trunk-allowed VLANs on the port channel must include all of the VLANs in the VLAN group as well as the VLAN for the RISE control message.

	Command or Action	Purpose
Step 8	Use one of the following: <ul style="list-style-type: none"> switch(config-rise)# ethernet <i>slot/port</i> switch(config-rise)# port-channel <i>channel-number</i> 	Creates an interface for sending out RISE discovery packets. <ul style="list-style-type: none"> The range for the slot argument is from 1 to 253. The range for the port argument is from 1 to 128. The range for the channel-number argument is from 1 to 4096.
Step 9	switch(config-rise)# no shutdown	Launches the auto-discovery and bootstrap configuration process. The Citrix NetScaler Application Delivery Controller (ADC) appliance port channel is created with the RISE IP address set at the Citrix NetScaler Application Delivery Controller (ADC) appliance. <p>Note The Cisco Nexus 6000 Series switches associates the NetScaler appliance serial number with the virtual slot number for this Citrix Netscaler Application Delivery Controller (ADC) appliance.</p> <p>Note Discovery does not start if any required information (such as the port, RISE VLAN, RISE IP address, or switch virtual interface [SVI] of the RISE VLAN) is not provided. If the discovery times out, the virtual module is shown in the inactive state. The show rise command on the switch displays the reason for discovery failure.</p>
Step 10	switch(config-rise)# show module service	(Optional) Displays the status of the RISE service module on the Cisco Nexus 6000 Series switch. If the RISE service module is operational, the status that is displayed is “active.”
Step 11	switch(config-rise)# attach rise { <i>slot slot-number</i> <i>name name</i> }	(Optional) Connects the Cisco Nexus 6000 Series switch to the RISE service module and generates a RISE session from the switch, which allows Telnet access. <ul style="list-style-type: none"> The slot number range varies based on the valid slot numbers for a particular VDC. The Cisco Nexus 6000 Series switch supports 32 RISE instances per VDC. The slot number range is as follows: <ul style="list-style-type: none"> From 300 to 331 for VDC 1 From 332 to 363 for VDC 2 From 364 to 395 for VDC 3 From 396 to 427 for VDC 4 You can enter up to 32 alphanumeric characters for the RISE service module name. After you enter the password, you can access the Citrix NetScaler Application Delivery Controller (ADC) appliance to configure it.
Step 12	switch(config-rise)# show rise	Displays the RISE configuration status on the Cisco Nexus 6000 Series switch. If RISE is configured on the switch, the state that is displayed is “active.”

Configuring RISE in a vPC Indirect Mode Deployment

In a vPC indirect mode deployment, the service appliance, such as Citrix NetScaler Citrix Netscaler Application Delivery Controller (ADC) appliance, is indirectly attached to a Cisco Nexus vPC peer through a Layer 2 network. The following figure shows the topology for a vPC indirect mode deployment.

Figure 4: vPC Indirect Connect Mode for Connecting to vPC Peer Switches

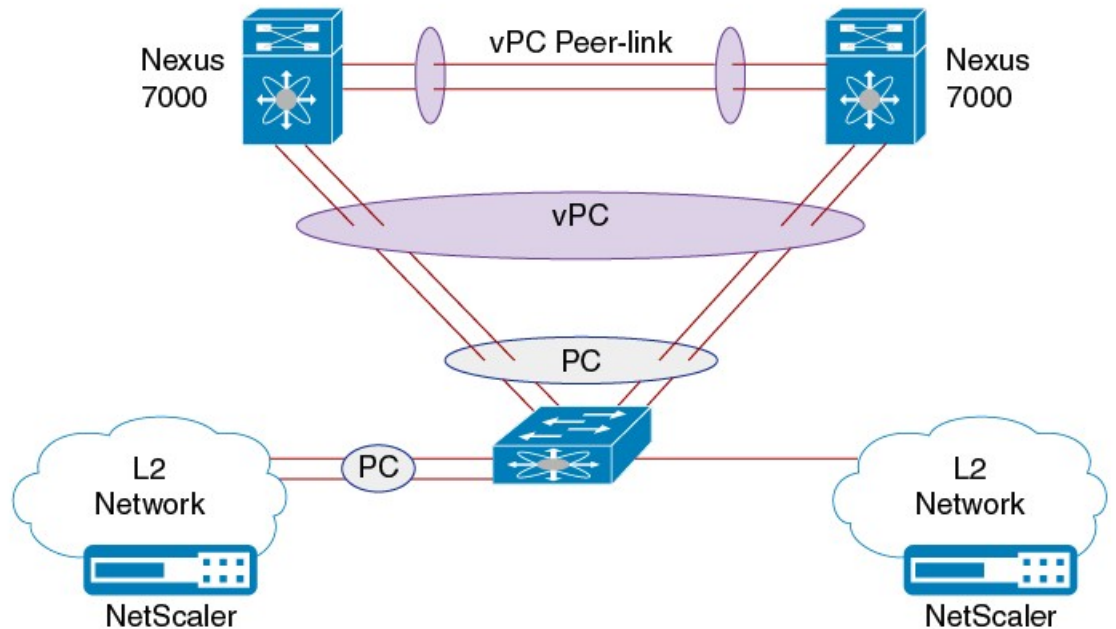

352689

This section includes the following topics:

Configuring RISE on the Cisco Nexus Switch

Before You Begin

- Enable and configure the Cisco Nexus switches as vPC peers. See the *Cisco Nexus 6000 Series NX-OS Interfaces Configuration Guide* for information. The following parameters must be the same on both Cisco Nexus switches:
 - The vPC ID
 - The name of the RISE service instance
 - The vPC number of the port channel
 - The IP address of the Netscaler appliance
 - The number and range of the VLAN group for the Citrix NetScaler Application Delivery Controller (ADC) appliance.

- Make sure that you are in the correct VDC on the Cisco Nexus switch. To switch VDCs, use the **switchto vdc** command.

DETAILED STEPS

	Command or Action	Purpose
Step 1	switch# configure terminal	Enters global configuration mode.
Step 2	switch(config)# feature rise	Enables the RISE feature on the Cisco Nexus 6000 Series switch.
Step 3	switch(config)# service vlan-group <i>group-number</i> <i>vlan-range</i>	Creates a VLAN group for the Citrix NetScaler Application Delivery Controller (ADC) appliance data VLANs on the Cisco Nexus 6000 Series switch. The range for the VLAN group is from 1 to 32, and the range for the configured VLANs is from 1 to 3967. You can enter the <i>vlan-range</i> using a comma (,), a dash (-), and the numbers.
Step 4	switch(config)# service type rise name <i>service-name</i> mode indirect	Creates a RISE service instance, enters the RISE configuration mode on the Cisco Nexus 6000 Series switch, and specifies that the appliance is indirectly connected to the switch in order to establish RISE connectivity. You can enter up to 31 alphanumeric characters for the name of the RISE service instance.
Step 5	switch(config-rise)# vlan <i>vlan-id</i>	Assigns a VLAN to the Citrix NetScaler Application Delivery Controller (ADC) appliance that is directly connected to the Cisco Nexus 6000 Series switch. <ul style="list-style-type: none"> • The range is from 1 to 4094. • This VLAN controls message communication with the supervisor over the RISE port channel. The same VLAN can be used for the Citrix NetScaler Application Delivery Controller (ADC) appliance management VLAN. • The VLAN ID and SVI interface must be created before the RISE channel can be established. The IP address of the SVI interface is the supervisor IP address for Citrix NetScaler Application Delivery Controller (ADC) appliance to communicate with and send the control messages.
Step 6	switch(config-rise)# ip <i>ip-address netmask</i>	Specifies the IP address of the Citrix NetScaler Application Delivery Controller (ADC) appliance that is directly connected to the Cisco Nexus 6000 Series switch. This IP address controls message communication with the supervisor over the RISE port channel. The same IP address can be used for the management IP address of NetScaler appliance.
Step 7	switch(config-rise)# vlan group <i>vlan-group</i>	Specifies the RISE VLAN group to be used by Citrix NetScaler Application Delivery Controller (ADC) appliance. The range is from 1 to 32. Note The trunk-allowed VLANs on the port channel must include all of the VLANs in the VLAN group as well as the VLAN for the RISE control VLAN message.

	Command or Action	Purpose
Step 8	switch(config-rise)# no shutdown	<p>Launches the auto-discovery and bootstrap configuration process. The Citrix NetScaler Application Delivery Controller (ADC) appliance port channel is created with the RISE IP address set at the Citrix NetScaler Application Delivery Controller (ADC) appliance.</p> <p>Note The Cisco Nexus 6000 Series switches associates the NetScaler appliance serial number with the virtual slot number for this Citrix NetScaler Application Delivery Controller (ADC) appliance.</p> <p>Note Discovery does not start if any required information (such as the port, RISE VLAN, RISE IP address, or switch virtual interface [SVI] of the RISE VLAN) is not provided. If the discovery times out, the virtual module is shown in the inactive state. The show rise command on the switch displays the reason for discovery failure.</p>
Step 9	switch(config-rise)# show module service	(Optional) Displays the status of the RISE service module on the Cisco Nexus 6000 Series switch. If the RISE service module is operational, the status that is displayed is “active.”
Step 10	switch(config-rise)# attach rise {slot slot-number name name}	<p>(Optional) Connects the Cisco Nexus 6000 Series switch to the RISE service module and generates a RISE session from the switch, which allows Telnet access.</p> <ul style="list-style-type: none"> • The slot number range varies based on the valid slot numbers for a particular VDC. The Cisco Nexus 6000 Series switch supports 32 RISE instances per VDC. The slot number range is as follows: <ul style="list-style-type: none"> • From 300 to 331 for VDC 1 • From 332 to 363 for VDC 2 • From 364 to 395 for VDC 3 • From 396 to 427 for VDC 4 • You can enter up to 32 alphanumeric characters for the RISE service module name. • After you enter the password, you can access the Citrix NetScaler Application Delivery Controller (ADC) appliance to configure it.
Step 11	switch(config-rise)# show rise	Displays the RISE configuration status on the Cisco Nexus 6000 Series switch. If RISE is configured on the switch, the state that is displayed is “active.”

Configuring NSIP on the Appliance

The NetScaler management IP address (NSIP) is the IP address for management and general system access to the Citrix NetScaler Application Delivery Controller (ADC) appliance and for high availability (HA) communication.

Configuring NSIP Using the CLI

You can configure the NSIP on your appliance by using either the configuration prompts or the command-line interface (CLI).



Note To prevent an attacker from impeding your ability to send packets to the appliance, choose a nonroutable IP address on your organization's LAN as your appliance IP address.

Before You Begin

Ensure that a port channel is configured on the appliance and that the appliance's physical ports are mapped to this port channel.

Perform one of the following tasks:

Option	Description
<code>config ns</code>	Displays prompts for configuring the NSIP.
<code>set ns config -ipaddress address -netmask netmask</code> <code>add ns ip ip-address netmask -type type</code> <code>add route network netmask gateway</code> <code>save ns config</code> <code>reboot</code>	Configures the NSIP using the CLI.

Example:

The following example shows how to configure the NSIP using the CLI:

```
set ns config -ipaddress 10.102.29.60 -netmask 255.255.255.0
add ns ip 10.102.29.61 255.255.255.0 -type snip
add route 0.0.0.0 0.0.0.0 10.102.29.1
save ns
```

Configuring NSIP Using the Configuration Utility

Before You Begin

- Create a port channel on the Citrix NetScaler Application Delivery Controller (ADC) appliance and map its physical ports to this port channel.

-
- Step 1** Navigate to **System > Settings**.
- Step 2** In the details pane, under Settings, click **Change NSIP Settings**.
- Step 3** In the Configure NSIP Settings dialog box, set the parameters. For a description of a parameter, hover the mouse cursor over the corresponding field.
- Step 4** Under Interfaces, choose the interfaces from the Available Interfaces list and click **Add** to move them to the Configured Interfaces list.
- Step 5** Click **OK**. In the Warning dialog box, click **OK**. The configuration takes effect after the Citrix NetScaler Application Delivery Controller (ADC) appliance is restarted.
-

Configuring a NSVLAN on Citrix NetScaler Application Delivery Controller (ADC) Appliance

The NSVLAN is a VLAN to which the NetScaler management IP (NSIP) address's subnet is bound. The NSIP subnet is available only on interfaces that are associated with NSVLAN. By default, NSVLAN is VLAN1, but you can designate a different VLAN as NSVLAN. If you designate a different VLAN as an NSVLAN, you must reboot the Citrix NetScaler Application Delivery Controller (ADC) appliance for the change to take effect. After the reboot, NSIP subnet traffic is restricted to the new NSVLAN.

Perform only one of the following tasks:

Configuring NSVLAN Using the CLI

Enter the following commands prompt to configure NSVLAN using the CLI:

Before You Begin

- Create a port channel on the Citrix NetScaler Application Delivery Controller (ADC) appliance and map its physical ports to this port channel.
- Configure the NS IP address (NSIP) on the appliance.

-
- Step 1** `set ns config - nsvlan positive_integer - ifnum interface_name ... [-tagged (YES | NO)]`

Note You must reboot the appliance for the configuration to take effect.

- Step 2** (Optional) `show ns config`

```
set ns config -nsvlan 300 -ifnum 1/1 1/2 1/3 -tagged NO
save config
```

- Step 3** (Optional) **unset ns config -nsvlan**
Restores the default configuration.

Configuring NSVLAN Using the Configuration Utility

Before You Begin

- Create a port channel on the Citrix NetScaler Application Delivery Controller (ADC) appliance and map its physical ports to this port channel.
- Configure the NetScaler IP address (NSIP) on the appliance.

- Step 1** Navigate to **System > Settings**.
- Step 2** In the details pane, under Settings, click **Change NSVLAN Settings**.
- Step 3** In the Configure NSVLAN Settings dialog box, set the parameters. For a description of a parameter, hover the mouse cursor over the corresponding field.
- Step 4** Under Interfaces, choose the interfaces from the Available Interfaces list and click **Add** to move them to the Configured Interfaces list.
- Step 5** Click **OK**. In the Warning dialog box, click **OK**. The configuration takes effect after the Citrix NetScaler Application Delivery Controller (ADC) appliance is restarted.

Verifying the RISE Configuration

To display the RISE configuration on the Cisco Nexus 6000 Series switch, perform one of the following tasks.



Note

For detailed information about the fields in the output from these commands, see the “Cisco NX-OS RISE Commands” chapter.

Command	Purpose
show module service	Displays the status of the RISE service module on the Cisco Nexus 6000 Series switch.
show rise [detail]	Displays the RISE configuration status on the Cisco Nexus 6000 Series switch.
show rise vlan-group	Displays VLAN group information for the NetScaler appliance data VLANs on the Cisco Nexus 6000 Series switch.

Command	Purpose
show running-config services	Displays the RISE running configuration on the Cisco Nexus 6000 Series switch.
show tech-support services [detail]	Displays troubleshooting information for RISE on the Cisco Nexus 6000 Series switch.

The following example is partial sample output from the **show rise** command:

```
switch# show rise
Name          Slot Vdc Rise-IP          State      Interface
           Id  Id  Id
-----
mpx205a      332  2   10.90.14.216    active     Po2051
```

The following example is partial sample output from the **show rise detail** command:

```
swicth# show rise detail

RISE module name: mpx205a
State: active
Admin state: Enabled
Interface: Po2051
RISE Channel connectivity via interface Po2051
Mode: vpc
Slot id: 332
Service token: 0x2
Serial number: MH8C02AM50
SUP IP: 10.90.14.138
RISE IP: 10.90.14.216
VDC id: 2
VLAN: 99
VLAN group: 20
VLAN list: 99-101
Data Interface: N/A
```

To display the RISE configuration on the Citrix Netscaler Application Delivery Controller (ADC) appliance, perform one of the following:

Command	Purpose
show rise apbrsvc	Displays the RISE configuration status on the Citrix Netscaler Application Delivery Controller (ADC) appliance.

The following example is sample output from the **show rise profile** command:

```
mpx24> show rise profile

1)      Service Name   : mpx4
        Status        : Active
        Mode          : vPC-Direct
        Device Id     : FOC1824R00P
        Slot Number   : 300
        VDC Id        : 1
        vPC Id        : 510
        SUP IP        : 172.16.0.2
        VLAN          : 301
        VLAN Group    : 1
        ISSU          : None
        Interface     : LA/1 : 10/3 10/4

2)      Service Name   : mpx4
        Status        : Active
```

```

Mode           : vPC-Direct
Device Id      : FOC1751R0QV
Slot Number    : 300
VDC Id         : 1
vPC Id         : 510
SUP IP         : 172.16.0.3
VLAN           : 301
VLAN Group     : 1
ISSU           : None
Interface      : LA/1 : 10/7 10/8

```

Done

Monitoring Cisco RISE

Use the **show rise profile** command on the Citrix Netscaler Application Delivery Controller (ADC) appliance to display RISE statistics, as shown in the following example:

For vPC mode (direct):

```

mpx24> show rise profile
1) Service Name   : mpx24
   Status         : Active
   Mode           : vPC-Direct
   Device Id      : FOC2865R92P
   Slot Number    : 300
   VDC Id         : 1
   vPC Id         : 510
   SUP IP         : 172.16.0.2
   VLAN           : 10
   VLAN Group     : 1
   ISSU           : None
   Interface      : LA/1 : 10/3 10/4

```

For Indirect mode (in vPC, only 1 out of 2 entries shown):

```

1) Service Name   : profile_301
   Status         : Active
   Mode           : Indirect
   Device Id      : N77-C7706:FXS1736Q96T
   Slot Number    : 332
   VDC Id         : 2
   vPC Id         : 0
   SUP IP         : 172.16.0.2
   VLAN           : 10
   VLAN Group     : 24
   ISSU           : None
   Interface      : N/A

```

Configuration Examples for RISE

Example: RISE Direct Mode Deployment

This example shows how to configure a RISE service on a standalone Cisco Nexus 6000 Series switch that is connected directly to a Citrix Netscaler Application Delivery Controller (ADC) appliance.

**Note**

When the Citrix Netscaler Application Delivery Controller (ADC) appliance is directly connected to a standalone Cisco Nexus 6000 Series switch and the RISE control channel is configured on the Cisco Nexus 6000 Series switch, the Citrix Netscaler Application Delivery Controller (ADC) appliance is automatically configured for RISE mode and all of its ports are set to operation mode.

```
switch# configure terminal
switch(config)# port-channel 300
switch(config-if)# switchport trunk allowed vlan 20,30,40
switch(config-if)# no shut
switch(config)# ethernet 5/1-2
switch(config-if-range)# channel-group 100
switch(config)# ethernet 6/1-2
switch(config-if-range)# channel-group 100
switch(config)# service vlan-group 1 20,30,40
switch(config)# feature rise
switch(config)# service type rise name ns21 mode direct
switch(config-rise)# vlan 3
switch(config-rise)# ip 3.3.3.21 255.0.0.0
switch(config-rise)# vlan group 1
switch(config-rise)# port-channel 100
switch(config-rise)# no shutdown

switch(config-rise)# attach rise slot 300
Attaching to RISE 300 ...

Username:nsroot
Warning: Permanently added '3.3.3.21' (RSA) to the list of known hosts.
Password:
Last login: Fri Sep 27 14:58:44 2013 from 10.99.0.15
Copyright (c) 1980, 1983, 1986, 1988, 1990, 1991, 1993, 1994
The Regents of the University of California. All rights reserved.

Done
```

Example: RISE Indirect Mode Deployment

This example shows how to configure a RISE service on the Cisco Nexus 6000 Series switch that is connected to a Citrix Netscaler Application Delivery Controller (ADC) appliance through a Layer 2 network:

```
switch# configure terminal
switch(config)# port-channel 301
switch(config-if)# switchport
switch(config-if)# switchport mode trunk
switch(config-if)# switchport allowed vlan 10,20,30,40,50,60
switch(config)# ethernet 5/1-2
switch(config-if-range)# channel-group 100
switch(config-if-range)# no shutdown
switch(config)# ethernet 6/1-2
switch(config-if-range)# channel-group 100
switch(config-if-range)# no shutdown
switch(config)# service vlan-group 1 20,30,40
switch(config)# feature rise
switch(config)# service type rise name ns22 mode indirect
switch(config-rise)# vlan 10
switch(config-rise)# ip 3.3.3.22 255.0.0.0
switch(config-rise)# vlan group 22
switch(config-rise)# no shutdown
switch(config-rise)# show module service

switch(config-rise)# attach rise slot 301
rise_ent->rise_ip = 2010101
ipaddr 10.10.10.5
Attaching to RISE 301 ...
```

```
To exit type 'exit', to abort type '$.'
Telnet rlogin escape character is '$'.
Trying 10.10.10.5...
Connected to 10.10.10.5.
Escape character is '^J'.
```

The following sample output from **show** commands enables you to verify the configuration:

```
switch(config-rise)# show rise detail
RISE module name: ns22
State: active
Admin state: enabled
Interface: N/A
Mode: indirect
Slot id: 301
Service token: 0x1
Serial number: HE2H81UJ47
SUP IP: 3.101.0.10
RISE IP: 10.10.10.5
VDC id: 1
VLAN: 10
VLAN group: 22
VLAN list: 122,221-224,231-234
```

Example: RISE vPC Direct Mode Deployment

You configure RISE on the Cisco Nexus switch vPC peer that are indirectly connected to the Citrix Netscaler Application Delivery Controller (ADC) appliance following the same steps that you use to configure an indirect mode deployment.

The following sample outputs show that the RISE device is active and operational and is connected using the vPC deployment mode:

```
switch# show rise
Name          Slot  Vdc  Rise-IP          State      Interface
          Id   Id
-----
mpx205a       332  2   10.90.14.216    active     Po2051

switch# show rise detail

RISE module name: mpx205a
State: active
Admin state: Enabled
Interface: Po2051
RISE Channel connectivity via interface Po2051
Mode: vpc
Slot id: 332 <== unique slot ID for the RISE device
Service token: 0x2
Serial number: MH8C02AM50
SUP IP: 10.90.14.138
RISE IP: 10.90.14.216
VDC id: 2
VLAN: 99
VLAN group: 20
VLAN list: 99-101
Data Interface: N/A
```

Related Documents

Related Topic	Document Title
Commands on the Cisco Nexus 6000 Series switch	<i>Cisco Nexus 6000 Series NX-OS Fundamentals Configuration Guide</i>

Related Topic	Document Title
CoPP	<i>Cisco Nexus 6000 Series NX-OS Security Configuration Guide</i>
Interfaces and vPCs	<i>Cisco Nexus 6000 Series NX-OS Interfaces Configuration Guide</i>
Policy-based routing	<i>Cisco Nexus 6000 Series NX-OS Unicast Routing Configuration Guide</i>
VDCs	<i>Cisco Nexus 6000 Series NX-OS Virtual Device Context Configuration Guide</i>
High availability and Cisco Nexus 6000 Series switches	<i>Cisco Nexus 6000 Series NX-OS High Availability and Redundancy Guide</i>

Feature History for RISE

The following table lists the feature history for this feature.

Table 3: Feature History for RISE

Feature Name	Release	Feature Information
RISE vPC	Cisco NX-OS 7.1(1)N1(1)	Added support for direct and indirect connect mode for a service appliance that is attached to a virtual port channel (vPC) peer through a Layer 2 network.
RISE	Cisco NX-OS 7.1(1)N1(1)	This feature was introduced on the Cisco Nexus 6000 Series switch.
	Citrix Netscaler 10.1.e	This feature was introduced on the Citrix Netscaler Application Delivery Controller (ADC) appliance

