



Prepare the Appliance for Configuration

- [Preparation for Appliance Configuration Overview](#), on page 1
- [Enable Browser Access to Cisco Integrated Management Controller](#), on page 1
- [Execute Preconfiguration Checks](#), on page 6
- [Reimage the Appliance](#), on page 13

Preparation for Appliance Configuration Overview

Before you can successfully configure your Cisco DNA Center appliance, first complete the following tasks:

1. Enable browser access to the appliance's Cisco IMC (see [Enable Browser Access to Cisco Integrated Management Controller](#)).
2. Use Cisco IMC to check and adjust important hardware and switch settings (see [Execute Preconfiguration Checks](#)).
3. Cisco DNA Center software is preinstalled on your appliance, but you may need to reinstall the software in certain situations (such as before you change the current cluster link configuration). If this is the case, you must also complete the tasks described in [Reimage the Appliance](#).



Note If you do not need to reimage your appliance, proceed to [Appliance Configuration Overview](#).

Enable Browser Access to Cisco Integrated Management Controller

After installing the appliance, as described in [Appliance Installation Workflow](#), use the Cisco IMC configuration utility to assign an IP address and gateway to the appliance's CIMC port. This gives you access to the Cisco IMC GUI, which you should use to configure the appliance.

After you complete the Cisco IMC setup, log in to Cisco IMC and run the tasks listed in [Execute Preconfiguration Checks](#) to ensure correct configuration.



Tip To help ensure the security of your deployment, Cisco IMC prompts you to change the Cisco IMC user's default password when you boot the appliance for the first time. To change the Cisco IMC user password later, use the Cisco IMC GUI, as follows:

1. From the top-left corner of the GUI, click the **Toggle Navigation** icon () and then choose **Admin > User Management**.

The **Local User Management** tab should already be selected.

2. Check the check box for user **1**, and then click **Modify User**.

The **Modify User Details** dialog box opens.

3. Check the **Change Password** check box.

4. Enter and confirm the new password, and then click **Save**.

Step 1 Access the appliance console by attaching either of the following:


- A KVM cable to the KVM connector on the appliance's front panel (component 12 on the front panel illustrated in [Front and Rear Panels](#))
- A keyboard and monitor to the USB and VGA ports on the appliance's rear panel (components 7 and 12, respectively, on the rear panel illustrated in [Front and Rear Panels](#)).

Step 2 Make sure that the appliance's power cord is plugged in and the power is on.

Step 3 Press the **Power** button on the front panel to boot the appliance.

The Cisco IMC configuration utility boot screen should be displayed, as shown below.

```

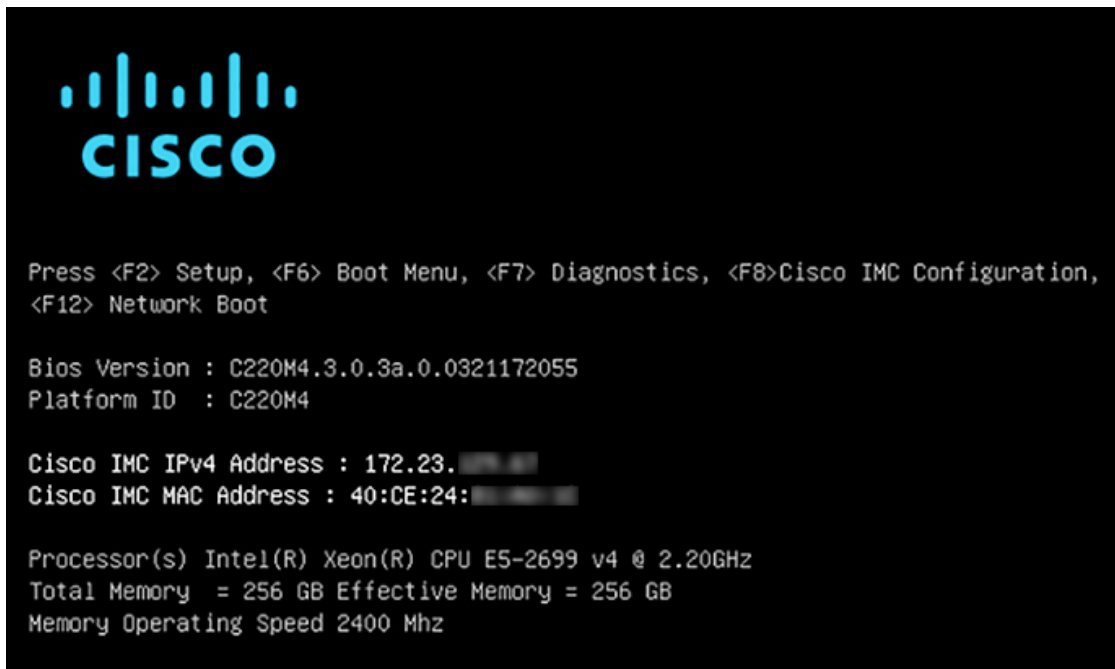
The image shows a black terminal window with white text. At the top is the Cisco logo (a stylized bridge) and the word "CISCO" in blue. Below the logo, the text reads: "Press <F2> Setup, <F6> Boot Menu, <F7> Diagnostics, <F8>Cisco IMC Configuration, <F12> Network Boot". This is followed by system information: "Bios Version : C220M4.3.0.3a.0.0321172055" and "Platform ID : C220M4". Then, network settings are shown: "Cisco IMC IPv4 Address : 172.23. [redacted]" and "Cisco IMC MAC Address : 40:CE:24: [redacted]". At the bottom, hardware specifications are listed: "Processor(s) Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz", "Total Memory = 256 GB Effective Memory = 256 GB", and "Memory Operating Speed 2400 Mhz".

```

- Step 4** As soon as the boot screen is displayed, press **F8** to perform Cisco IMC configuration.
The CIMC configuration utility displays the **CIMC User Details** screen, as shown below.

```

CIMC User Details          (Press Enter to Save / Continue)
-----
Enter current CIMC password [XXXXXXXXXX]
Enter new CIMC password    [          ]
Re-Enter new CIMC password [          ]
  
```

- Step 5** Enter the default CIMC user password (the default on a new appliance is *password*) in the **Enter current CIMC Password** field.

- Step 6** Enter and confirm the new CIMC user password in the **Enter new CIMC password** and **Re-Enter new CIMC password** fields.

When you press **Enter** after entering the new password in the **Re-Enter new CIMC password** field, the Cisco IMC configuration utility displays the **NIC Properties** screen, as shown below.

```

Cisco IMC Configuration Utility Version 2.0 Cisco Systems, Inc.
*****
NIC Properties
NIC mode                NIC redundancy
Dedicated:             [X]          None:                    [X]
Shared LOM:            [ ]          Active-standby:         [ ]
Cisco Card:            [ ]          Active-active:          [ ]
  Riser1:              [ ]          VLAN (Advanced)
  Riser2:              [ ]          VLAN enabled:           [ ]
  MLom:                [ ]          VLAN ID:                 1
Shared LOM Ext:        [ ]          Priority:                 0
IP (Basic)
IPV4:                  [X]          IPV6:                    [ ]
DHCP enabled           [ ]
CIMC IP:               172.23.
Prefix/Subnet:         255.255.0.0
Gateway:               172.23.
Pref DNS Server:       171.70.
*****
<Up/Down>Selection  <F10>Save  <Space>Enable/Disable  <F5>Refresh  <ESC>Exit
<F1>Additional settings
  
```

- Step 7** Perform the following actions:
- **NIC mode:** Select **Dedicated**.
 - **IP (Basic):** Select **IPV4**.
 - **CIMC IP:** Enter the IP address of the CIMC port.

- **Prefix/Subnet:** Enter the subnet mask for the CIMC port IP address.
- **Gateway:** Enter the IP address of your preferred default gateway.
- **Pref DNS Server:** Enter the IP address of your preferred DNS server.
- **NIC Redundancy:** Select **None**.

Step 8 Press **F1** to specify **Additional settings**.

The Cisco IMC configuration utility displays the **Common Properties** screen, as shown below.

```

Cisco IMC Configuration Utility Version 2.0 Cisco Systems, Inc.
*****
Common Properties
  Hostname:      C220-FCH212
  Dynamic DNS:   [ ]
  DDNS Domain:
FactoryDefaults
  Factory Default: [ ]
Default User(Basic)
  Default password:
  Reenter password:
Port Properties
  Auto Negotiation: [X]
                               Admin Mode      Operation Mode
Speed[1000/100/10Mbps]:      Auto          1000
Duplex mode[half/full]:      Auto          full
Port Profiles
  Reset:         [ ]
  Name:
*****
<Up/Down>Selection  <F10>Save  <Space>Enable/Disable  <F5>Refresh  <ESC>Exit
<F2>PreviousPageettings

```

Step 9 Perform the following actions:

- **Hostname:** Enter a hostname for CIMC on this appliance.
- **Dynamic DNS:** Uncheck the check box to disable this feature.
- **Factory Defaults:** Uncheck the check box to disable this feature.
- **Default User (Basic):** Leave these fields blank.
- **Port Properties:** Enter new settings or accept the defaults shown in these fields.
- **Port Profiles:** Uncheck the check box to disable this feature.

Step 10 Press **F10** to save the settings.

Step 11 Press **Escape** to exit and reboot the appliance.

Step 12 After the settings are saved and the appliance finishes rebooting, open a compatible browser on a client machine with access to the subnet on which the appliance is installed, and enter the following URL:

`https://CIMC_ip_address`, where `CIMC_ip_address` is the Cisco IMC port IP address that you entered in Step 7.

Your browser displays a main Cisco IMC GUI login window similar to the one shown below.

**Step 13**

Log in using the Cisco IMC user ID and password you set in Step 5.

If the login is successful, your browser displays a **Cisco Integrated Management Controller Chassis Summary** window similar to the one shown below.

The screenshot shows the Cisco IMC Chassis Summary page for a Cisco C220-M4SX server. The page is divided into several sections:

- Server Properties:**
 - Product Name: UCS C220 M4SX
 - Serial Number: FCH212
 - PID: UCSC-C220-M4SX
 - UUID: 1DB0E03F-59AF-4B5B-BAB7-
 - BIOS Version: C220M4.3.1.3c.0.0307181404
 - Description: (empty field)
 - Asset Tag: Unknown
- Cisco Integrated Management Controller (Cisco IMC) Information:**
 - Hostname: C220-FCH212
 - IP Address: 172. .25
 - MAC Address: 70:79: F0
 - Firmware Version: 3.1(3a)
 - Current Time (UTC): Tue Aug 14 15 2018
 - Local Time: Tue Aug 14 15 2018 UTC +0000
 - Timezone: UTC (with a "Select Timezone" link)
- Chassis Status:**
 - Power State: On
 - Overall Server Status: Good
 - Temperature: Good
 - Overall DIMM Status: Good
 - Power Supplies: Good
 - Fans: Good
 - Locator LED: Off
 - Overall Storage Status: Good
- Server Utilization:** A bar chart showing utilization percentages for Overall Utilization (%), CPU Utilization (%), Memory Utilization (%), and IO Utilization (%). The chart shows very low utilization for all categories.

At the bottom right of the page, there are buttons for "Save Changes" and "Reset Values".

Execute Preconfiguration Checks

After installing the appliance (as described in [Appliance Installation Workflow](#)) and setting up access to the Cisco IMC GUI (as described in [Enable Browser Access to Cisco Integrated Management Controller](#)), use Cisco IMC to perform the following preconfiguration tasks, which help ensure correct configuration and deployment:

1. Synchronize the appliance hardware with the Network Time Protocol (NTP) servers you use to manage your network. These must be the same NTP servers whose hostnames or IPs you gathered for use when planning your implementation, as explained in [Required IP Addresses and Subnets](#). This is a critical task that ensures that your Cisco DNA Center data is synchronized properly across the network.
2. Check that the appliance's 10-Gbps ports are enabled and properly configured for high throughput.
3. Reconfigure the switches connected to the 10-Gbps appliance ports to support higher throughput settings.
4. Reconfigure the switches connected to the 10-Gbps appliance ports to support oversize 802.1p frames.

Step 1 Log in to the appliance's Cisco IMC using the Cisco IMC IP address, user ID, and password you set in [Enable Browser Access to Cisco Integrated Management Controller](#).

If the login is successful, your browser displays the **Cisco Integrated Management Controller Chassis Summary** window, as shown below.

The screenshot shows the Cisco IMC Chassis Summary page. The top navigation bar includes the Cisco logo, the title 'Cisco Integrated Management Controller', and user information 'admin@1' for device '-C220-FCH212'. The breadcrumb is '/ Chassis / Summary'. The page is divided into two main sections: 'Server Properties' and 'Cisco Integrated Management Controller (Cisco IMC) Information'. Below these are 'Chassis Status' and 'Server Utilization'.

Server Properties:

- Product Name: UCS C220 M4SX
- Serial Number: FCH212
- PID: UCSC-C220-M4SX
- UUID: 1DB0E03F-59AF-4B5B-BAB7-
- BIOS Version: C220M4.3.1.3c.0.0307181404
- Description: [Empty field]
- Asset Tag: Unknown

Cisco IMC Information:

- Hostname: C220-FCH212
- IP Address: 172. .25
- MAC Address: 70:79: F0
- Firmware Version: 3.1(3a)
- Current Time (UTC): Tue Aug 14 15 2018
- Local Time: Tue Aug 14 15 2018 UTC +0000
- Timezone: UTC

Chassis Status:

- Power State: On
- Overall Server Status: Good
- Temperature: Good
- Overall DIMM Status: Good
- Power Supplies: Good
- Fans: Good
- Locator LED: Off
- Overall Storage Status: Good

Server Utilization:

A bar chart showing utilization percentages for a single server. The Y-axis ranges from 0 to 100%. The legend includes Overall Utilization (%), CPU Utilization (%), Memory Utilization (%), and IO Utilization (%). The chart shows very low utilization for all categories.

Buttons at the bottom right: Save Changes, Reset Values.

Step 2

Synchronize the appliance's hardware with the Network Time Protocol (NTP) servers you use to manage your network, as follows:

- From the top-left corner of the Cisco IMC GUI, click the **Toggle Navigation** icon (☰).
- From the Cisco IMC menu, select **Admin > Networking**, and then choose the **NTP Setting** tab.
- Make sure that the **NTP Enabled** check box is checked and enter up to four NTP server host names or addresses in the numbered **Server** fields, as shown in the example below.

The screenshot shows the Cisco IMC Networking NTP Setting page. The top navigation bar is the same as the previous screenshot. The breadcrumb is '/ ... / Networking / NTP Setting'. The page has tabs for 'Network', 'Network Security', and 'NTP Setting'. The 'NTP Properties' section is visible.

NTP Properties:


- NTP Enabled:
- Server 1: 1.ntp.example.com
- Server 2: 2.ntp.example.com
- Server 3: 3.ntp.example.com
- Server 4: [Empty field]
- Status: NTP service disabled


Buttons at the bottom right: Save Changes, Reset Values.

- d) Click **Save Changes**. Cisco IMC validates your entries and then begins to synchronize the time on the appliance's hardware with the time on the NTP servers.

Note Cisco IMC does not support NTP authentication.

Step 3 Next, check that the appliance NICs are configured to support high throughput, as follows:

- a) If needed, click the  icon to display the Cisco IMC menu.
- b) From the Cisco IMC menu, select **Chassis > Inventory > Cisco VIC Adapters**. Verify that the Product ID "UCSC-MLOM-CSC-02" is listed for the MLOM slot, as shown below:

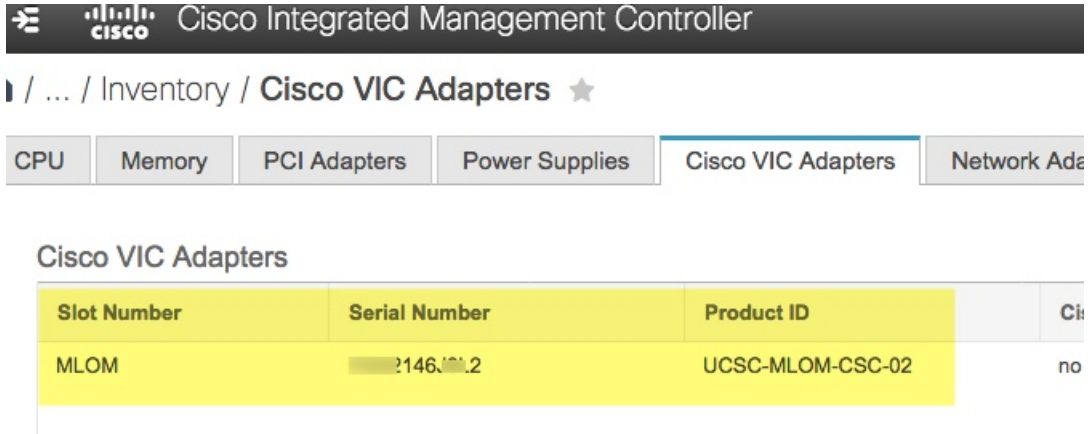

Cisco Integrated Management Controller

/ ... / Inventory / Cisco VIC Adapters ★

CPU Memory PCI Adapters Power Supplies Cisco VIC Adapters Network Adapters

Cisco VIC Adapters

| Slot Number | Serial Number | Product ID | City |
|-------------|---------------|------------------|------|
| MLOM | 2146J02 | UCSC-MLOM-CSC-02 | no |

- c) Select  > **Compute > BIOS > Configure BIOS > Advanced**. Verify that the **Reboot Host Immediately** checkbox is unchecked and note the location of the **LOM and PCIe Slots Configuration** dropdown.

d) Select **LOM and PCIe Slots Configuration**. Then, using the dropdown selectors, set **PCIe Slot: MLOM OptionROM** to **Enabled** and **PCIe Slot: MLOM Link Speed** to **Auto**.

- e) Click **Save**. You will be prompted to reboot the host. Click **OK** to continue instead of rebooting.
- f) Select **Networking > Adapter Card MLOM > General**. Take note of the MAC addresses for **Port-0** and **Port-1** (shown in the **External Ethernet Interfaces** section at the bottom of the page). In the **Adapter Card Properties**


section, use the dropdown selectors next to **Port-0** and **Port-1** to set the speed of both these ports to **Auto**, as shown below. Then click **Save Changes**.

The screenshot displays the Cisco IMC configuration page for Adapter Card MLOM. The page is divided into several sections:

- Adapter Card Properties:**
 - PCI-Slot: MLOM
 - Vendor: Cisco Systems Inc
 - Product Name: UCS VIC 1227
 - Product ID: UCSC-MLOM-CSC-02
 - Serial Number: 146J9L2
 - Version ID: V01
 - Hardware Revision: 3
 - Cisco IMC Management Enabled: no
 - Configuration Pending: no
 - ISCSI Boot Capable: True
 - CDN Capable: True
 - usNIC Capable: True
 - Description: [Empty field]
 - Enable FIP Mode:
 - Enable LLDP:
 - Enable VNTAG Mode:
 - Port-0: Auto (dropdown)
 - Port-1: Auto (dropdown)
- Firmware:**
 - Running Version: 4.1(3a)
 - Backup Version: 4.1(3a)
 - Startup Version: 4.1(3a)
 - Bootloader Version: 4.1(3a)
 - Status: Fwupdate never issued
- External Ethernet Interfaces:**
 - Port-0:**
 - MAC Address: E:31:63:2
 - Link State: Link Down
 - Encap: CE
 - Admin Speed: 10Gbps
 - Operating Speed: -
 - Port-1:**
 - MAC Address: E:31:63:2
 - Link State: Link Down
 - Encap: CE
 - Admin Speed: 10Gbps
 - Operating Speed: -

g) Click the **vNICs** tab and select **eth0** from the **vNICs** dropdown. Use the selectors and fields to set these values for **eth0**:

- **VLAN Mode: Trunk**
- **MTU: 1500**
- **Default VLAN: 99** (Please note that "99" is only an example. You should enter the default VLAN value you want your appliances and their connected uplink switch to use.)

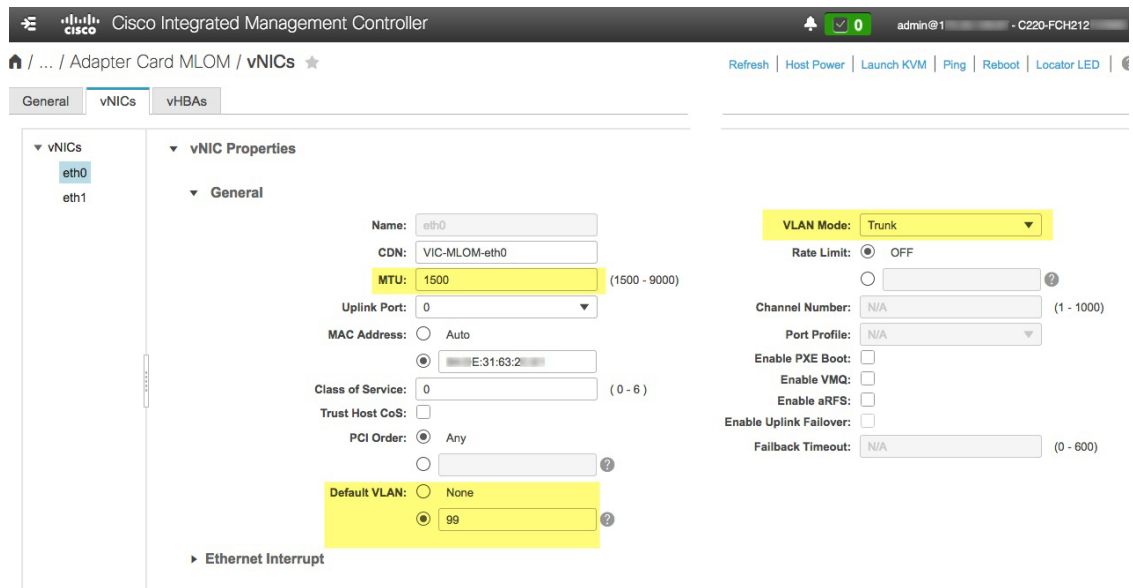

Tip 1500 is the minimum maximum transmission unit (MTU) size. You can improve throughput on the 10Gbps ports by entering any higher value, up to a maximum of 9000.

- h) Click **Save Changes**. You will be prompted to reboot the host again. Click **Cancel** to continue instead of rebooting.
- i) Select **eth1** from the **vNICs** dropdown and set the values that you want your appliances and their connected uplink switch to use.
- j) When you are finished, click **Save Changes**. You will be prompted to reboot the host. This time, click **OK** to reboot the appliance.
- k) When the appliance is finished rebooting, log in to the Cisco IMC GUI again. Select **Networking > Adapter Card MLOM > General > vNICs**. Verify the accuracy of the vNIC MAC addresses and the MTU, VLAN and VLAN Mode parameters you set earlier.
- l) When you are finished: Click the **Host Power** menu at top right and select **Power Cycle**. Then click **OK**.



Step 4 Reconfigure your switches to match the high-throughput settings on the appliance, as follows:

- a) Using a Secure Shell (SSH) client, log in to the switch to be configured and enter EXEC mode at the switch prompt.
- b) Configure the switch port.

On a Cisco Catalyst switch, enter the following commands. For example:

```
MySwitch#Config terminal
MySwitch(config)#interface tengigabitethernet 1/1/3
MySwitch(config-if)#switchport
MySwitch(config-if)#switchport mode trunk
MySwitch(config-if)#switchport trunk allowed vlan 99
MySwitch(config-if)#switchport voice vlan dot1p
MySwitch(config-if)#speed auto
MySwitch(config-if)#duplex full
MySwitch(config-if)#mtu 1500
MySwitch(config-if)#no shut
MySwitch(config-if)#end
MySwitch(config)#do copy running-config startup-config
```

On a Cisco Nexus switch, enter the following commands to disable Link Layer Discovery Protocol (LLDP) and priority flow control (PFC). For example:

```
N7K2# configure terminal
N7K2(config)# interface eth 3/4
N7K2(config-if)# no priority-flow-control mode auto
N7K2(config-if)# no lldp transmit
N7K2(config-if)# no lldp receive
```

Note that these commands are examples only. When configuring your appliance's NICs, use the same VLAN ID and MTU values you entered in Step 3 of this procedure. The values displayed for the link speed, duplex, and MTU parameters are the defaults for your switch. Enter new values for these parameters only if you have changed the defaults. You may, as with the appliance NICs, also set the MTU up to a maximum of 9000 for better throughput.

- c) Run the `show interface tengigabitethernet portID` command and verify that the port is connected, running, and has the correct MTU, duplex, and link-type settings in the command output. For example:

```
MySwitch#show interface tengigabitethernet 1/1/3
TenGigabitEthernet1/1/3 is up, line protocol is up (connected)
Hardware is Ten Gigabit Ethernet, address is XXXe.310.8000 (bia XXX.310.8000)
  MTU 1500 bytes, BW 10000000 Kbit/sec, DLY 10 usec,
    reliability 255/255, txload 1/255, rxload 1/255
Encapsulation ARPA, loopback not set
Keepalive not set
  Full-duplex, 10GB/s, link type is auto, media type is SFP-10Gbase-SR
```

- d) Run the `show run interface tengigabitethernet portID` command to configure the switch ports where the cables from the VIC 1227 ports are connected. For example:

```
MySwitch#show run interface tengigabitethernet 1/1/3
Building configuration...
Current configuration : 129 bytes
!
interface TenGigabitEthernet1/1/3
  switchport trunk allowed vlan 99
  switchport mode trunk
end

MySwitch#
```

- e) Run the `show run interface tengigabitethernet portID` command and verify from the command output that the port has the correct `voice vlan dot1p` setting. For example:

```
MySwitch#show run interface tengigabitEthernet 1/1/3
Building configuration...
Current configuration : 129 bytes
!
interface TenGigabitEthernet1/1/3
  switchport trunk allowed vlan 99
```

```

switchport mode trunk
switchport voice vlan dot1p
end

```

```
MySwitch#
```

- f) Run the `show mac address-table interface tengigabitethernet portID` command and verify the MAC address from the command output. For example:

```
MySwitch#show mac address-table interface tengigabitethernet 1/1/3
Mac Address Table
```

```

-----
Vlan      Mac Address      Type      Ports
-----
99        xxxe.3161.1000   DYNAMIC   Te1/1/3
Total Mac Addresses for this criterion: 1

```

```
MySwitch#
```

What to do next

When this task is complete, do one of the following:

- If you need to reinstall Cisco DNA Center software before you configure your appliance, see [Reimage the Appliance](#).
- If you are ready to configure your appliance, proceed to [Appliance Configuration Overview](#).

Reimage the Appliance

Situations may arise that require you to reimage your Cisco DNA Center appliance, such as recovering from a backup or changing your cluster link configuration. To do so, complete the following procedure.

Step 1 Download the Cisco DNA Center ISO image and verify that it is a genuine Cisco image.

See [Verify the Cisco DNA Center ISO Image, on page 13](#).

Step 2 Create a bootable USB drive that contains the Cisco DNA Center ISO image.

See [Create a Bootable USB Flash Drive, on page 14](#).

Step 3 Reinstall Cisco DNA Center onto your appliance.

See [Install the Cisco DNA Center ISO Image, on page 17](#).

Verify the Cisco DNA Center ISO Image

Prior to deploying Cisco DNA Center, we strongly recommend that you to verify that the ISO image you downloaded is a genuine Cisco image.

Before you begin

Obtain the location of the Cisco DNA Center ISO image (through email or by contacting the Cisco support team).

-
- Step 1** Download the Cisco DNA Center ISO image (.iso) from the location specified by Cisco.
- Step 2** Download the Cisco public key (cisco_image_verification_key.pub) for signature verification from the location specified by Cisco.
- Step 3** Download the secure hash algorithm (SHA512) checksum file for the ISO image from the location specified by Cisco.
- Step 4** Obtain the ISO image's signature file (.sig) from Cisco support through email or by download from the secure Cisco website (if available).
- Step 5** (Optional) Perform an SHA verification to determine whether the ISO image is corrupted due to a partial download.

Run one of the following commands (depending upon your operating system):

- On a Linux system: `sha512sum ISO-image-filename`
- On a Mac system: `shasum -a 512 ISO-image-filename`

Microsoft Windows does not include a built-in checksum utility, but you can use the certutil tool:

```
certutil -hashfile <filename> sha256 | md5
```

For example:

```
certutil -hashfile D:\Customers\FINALIZE.BIN sha256
```

On Windows, you can also use the [Windows PowerShell](#) to generate the digest. For example:

```
PS C:\Users\Administrator> Get-FileHash -Path D:\Customers\FINALIZE.BIN
Algorithm Hash Path
SHA256 B84B6FFD898A370A605476AC7EC94429B445312A5EEDB96166370E99F2838CB5 D:\Customers\FINALIZE.BIN
```

Compare the output of the command you run to the SHA512 checksum file that you downloaded. If the command output does not match, download the ISO image again and run the appropriate command a second time. If the output still does not match, contact Cisco support.

- Step 6** Verify that the ISO image is genuine and from Cisco by verifying its signature:

```
openssl dgst -sha512 -verify cisco_image_verification_key.pub -signature signature-filename ISO-image-filename
```

Note This command works in both MAC and Linux environments. For Windows, you need to download and install OpenSSL (available [here](#)) if you have not already done so.

If the ISO image is genuine, running this command should display a `Verified OK` message. If this message fails to appear, do not install the ISO image and contact Cisco support.

- Step 7** After confirming that you have downloaded a Cisco ISO image, create a bootable USB drive that contains the Cisco DNA Center ISO image. See [Create a Bootable USB Flash Drive](#).
-

Create a Bootable USB Flash Drive

Complete one of the following procedures to create a bootable USB flash drive from which you can install the Cisco DNA Center ISO image.

Before you begin:

- Download and verify your copy of the Cisco DNA Center ISO image. See [Verify the Cisco DNA Center ISO Image](#).
- Confirm that the USB flash drive you are using:
 - Is USB 3.0 or later.
 - Has a capacity of at least 64 GB.
 - Is unencrypted.



Note Do not use the Rufus utility to burn the Cisco DNA Center ISO image. Use only Etcher, the Linux CLI, or the Mac CLI.

Using Etcher

Step 1 Download and install Etcher (Version 1.3.1 or later), an open-source freeware utility that allows you to create a bootable USB drive on your laptop or desktop.

Linux, macOS, and Windows versions of Etcher are currently available. You can download a copy at <https://www.balena.io/etcher/>.

Note Use only the Windows version of Etcher on machines running Windows 10, as there are known compatibility issues with older versions of Windows.

Step 2 From the machine on which you installed Etcher, connect a USB drive and then start Etcher.


Step 3 In the top-right corner of the window, click  and verify that the following Etcher settings are set:

- Auto-unmount on success
- Validate write on success

Step 4 Click **Back** to return to the main Etcher window.

Step 5 Click **Select Image**.

Step 6 Navigate to the Cisco DNA Center ISO image you downloaded previously, select it, and then click **Open**.

The name of the USB drive you connected should be listed under the drive icon (). If it is not:

- a. Click **Select drive**.
- b. Click the radio button for the correct USB drive, and then click **Continue**.

Step 7 Click **Flash!** to copy the ISO image to the USB drive.

Etcher configures the USB drive as a bootable drive with the Cisco DNA Center ISO image installed.

Using the Linux CLI

Step 1 Verify that your USB flash drive is recognized by your machine:

- a) Insert a flash drive into your machine's USB port.
- b) Open a Linux shell and run the following command: **lsblk**

The command lists the disk partitions that are currently configured on your machine, as illustrated in the following example:

```
$ lsblk
NAME MAJ:MIN RM SIZE RO TYPE MOUNTPOINT
sda 8:0 0 446.1G 0 disk
├─sda1 8:1 0 1M 0 part
├─sda2 8:2 0 28.6G 0 part /
├─sda3 8:3 0 28.6G 0 part /install2
├─sda4 8:4 0 9.5G 0 part /var
├─sda5 8:5 0 30.5G 0 part [SWAP]
├─sda6 8:6 0 348.8G 0 part /data
sdb 8:16 0 1.8T 0 disk
├─sdb1 8:17 0 426.1G 0 part /data/maglev/srv/fusion
├─sdb2 8:18 0 1.3T 0 part /data/maglev/srv/maglev-system
sdc 8:32 0 3.5T 0 disk
├─sdc1 8:33 0 3.5T 0 part /data/maglev/srv/ndp
sdd 8:48 1 28.7G 0 disk
├─sdd1 8:49 1 12G 0 part
```

- c) Confirm that an `sdd` partition (which indicates the presence of a USB flash drive) is listed.

Step 2 Burn the Cisco DNA Center ISO image you downloaded previously onto your USB flash drive: **time sudo dd if=/data/tmp/ISO-image-filename of=/dev/flash-drive-partition bs=4M && sync status=progress**

For example, to create a bootable USB drive using an ISO image named `CDNAC-SW-1.330.iso`, you would run the following command: **time sudo dd if=/data/tmp/CDNAC-SW-1.330.iso of=/dev/sdd bs=4M && sync status=progress**

Using the Mac CLI

Step 1 Determine the disk partition associated with your USB flash drive:

- a) Open a Terminal window and run the following command: **diskutil list**

The command lists the disk partitions that are currently configured on your machine.

- b) Insert a flash drive into your machine's USB port and run the **diskutil list** command a second time.

The partition that was not listed the first time you ran this command corresponds to your flash drive. For example, let's assume that your flash drive's partition is `/dev/disk2`.

Step 2 Unmount the flash drive's partition: **diskutil unmountDisk flash-drive-partition**

Continuing our example, you would enter **diskutil unmountDisk /dev/disk2**

Step 3 Using the Cisco DNA Center ISO image you downloaded previously, create a disk image: **hdiutil convert -format UDRW -o Cisco-DNA-Center-version ISO-image-filename**

Continuing our example, let's assume that you are working with a Cisco DNA Center ISO image named `CDNAC-SW-1.330.iso`. You would run the following command, which creates a macOS disk image named `CDNAC-1.330.dmg`:

```
hdiutil convert -format UDRW -o CDNAC-1.330 CDNAC-SW-1.330.iso
```

Important Ensure that the ISO image does not reside on a `Box` partition.

Step 4 Create a bootable USB drive: `sudo dd if=macOS-disk-image-filename of=flash-drive-partition bs=1m status=progress`

Continuing our example, you would run the following command: `sudo dd if=CDNAC-1.330.dmg of=/dev/disk2 bs=1m status=progress`

The ISO image is about 18 GB in size, so this can take around an hour to complete.

Install the Cisco DNA Center ISO Image

Complete the following procedure to install the Cisco DNA Center ISO image onto your appliance.

Before you begin

Create the bootable USB drive from which you will install the Cisco DNA Center ISO image. See [Create a Bootable USB Flash Drive](#).

Step 1 Connect the bootable USB drive with the Cisco DNA Center ISO image to the appliance.

Step 2 Log in to Cisco IMC and start a KVM session.

Step 3 Power on or power cycle the appliance:

- Choose **Power > Power On System** if the appliance is not currently running.
- Choose **Power > Power Cycle System (cold boot)** if the appliance is already running.

Step 4 In the resulting pop-up window, click **Yes** to acknowledge that you are about to execute a server control action.

Step 5 When the Cisco logo appears, either press the **F6** key or choose **Macros > User Defined Macros > F6** from the KVM menu.

The boot device selection menu appears.

Step 6 Select your USB drive and then press **Enter**.

Step 7 In the **GNU GRUB** bootloader window, choose **Cisco DNA Center Installer** and then press **Enter**.

Note The bootloader automatically boots the Maglev Installer instead if you do not make a selection within 30 seconds.

After installation of the Cisco DNA Center ISO image is completed, the installer reboots and opens the Maglev Configuration wizard's welcome screen. Depending on whether you are going to configure a primary or secondary cluster node, proceed to Step 4 in either [Configure the Primary Node](#) or [Configure a Secondary Node](#).

