



## **Public Key Infrastructure Configuration Guide Cisco IOS Release 12.2SY**

### **Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0883



## **CONTENTS**

<b>Cisco IOS PKI Overview Understanding and Planning a PKI</b>	<b>1</b>
Finding Feature Information	1
Information About Cisco IOS PKI	1
What Is Cisco IOS PKI	1
RSA Keys Overview	2
What Are CAs	3
Hierarchical PKI Multiple CAs	3
When to Use Multiple CAs	3
Certificate Enrollment How It Works	4
Certificate Enrollment Via Secure Device Provisioning	5
Certificate Revocation Why It Occurs	5
Planning for a PKI	5
Where to Go Next	5
Additional References	6
Glossary	8
<b>Deploying RSA Keys Within a PKI</b>	<b>9</b>
Finding Feature Information	9
Prerequisites for Configuring RSA Keys for a PKI	9
Information About RSA Keys Configuration	10
RSA Keys Overview	10
Usage RSA Keys Versus General-Purpose RSA Keys	10
How RSA Key Pairs are Associated with a Trustpoint	10
Reasons to Store Multiple RSA Keys on a Router	11
Benefits of Exportable RSA Keys	11
Passphrase Protection While Importing and Exporting RSA Keys	11
How to Set Up and Deploy RSA Keys Within a PKI	12
Generating an RSA Key Pair	12
What to Do Next	13
Managing RSA Key Pairs and Trustpoint Certificates	13

Exporting and Importing RSA Keys	18
Exporting and Importing RSA Keys in PKCS12 Files	18
Exporting and Importing RSA Keys in PEM-Formatted Files	20
Encrypting and Locking Private Keys on a Router	22
Removing RSA Key Pair Settings	25
Configuration Examples for RSA Key Pair Deployment	26
Generating and Specifying RSA Keys Example	27
Exporting and Importing RSA Keys Examples	27
Exporting and Importing RSA Keys in PKCS12 Files Example	27
Exporting and Importing and RSA Keys in PEM Files Example	27
Exporting Router RSA Key Pairs and Certificates from PEM Files Example	28
Importing Router RSA Key Pairs and Certificate from PEM Files Example	29
Encrypting and Locking Private Keys on a Router Examples	30
Configuring and Verifying an Encrypted Key Example	30
Configuring and Verifying a Locked Key Example	31
Where to Go Next	31
Additional References	31
Feature Information for RSA Keys Within a PKI	32
<b>Configuring Authorization and Revocation of Certificates in a PKI</b>	<b>39</b>
Finding Feature Information	39
Prerequisites for Authorization and Revocation of Certificates	39
Restrictions for Authorization and Revocation of Certificates	40
Information About Authorization and Revocation of Certificates	40
PKI Authorization	41
PKI and AAA Server Integration for Certificate Status	41
RADIUS or TACACS+ Choosing a AAA Server Protocol	41
Attribute-Value Pairs for PKI and AAA Server Integration	42
CRLs or OCSP Server Choosing a Certificate Revocation Mechanism	43
What Is a CRL	43
Querying All CDPs During Revocation Check	44
What Is OCSP	44
When to Use an OCSP Server	45
When to Use Certificate-Based ACLs for Authorization or Revocation	45
Ignore Revocation Checks Using a Certificate-Based ACL	46
PKI Certificate Chain Validation	47

High-Availability Support	48
How to Configure Authorization and Revocation of Certificates for Your PKI	48
Configuring PKI Integration with a AAA Server	48
Troubleshooting Tips	52
Configuring a Revocation Mechanism for PKI Certificate Status Checking	53
The revocation-check Command	53
Nonces and Peer Communications with OCSP Servers	53
Configuring Certificate Authorization and Revocation Settings	56
Configuring Certificate-Based ACLs to Ignore Revocation Checks	56
Manually Overriding CDPs in a Certificate	57
Manually Overriding the OCSP Server Setting in a Certificate	57
Configuring CRL Cache Control	57
Configuring Certificate Serial Number Session Control	58
Troubleshooting Tips	64
Configuring Certificate Chain Validation	64
Configuring Certificate Servers for High Availability	66
Prerequisites	66
Setting Redundancy Mode on Certificate Servers to ACTIVE STANDBY	66
Configuring SCTP on the Active and Standby Certificate Servers	70
Synchronizing the Active and Standby Certificate Servers	72
Configuration Examples for Setting Up Authorization and Revocation of Certificates	74
Configuring and Verifying PKI AAA Authorization Examples	74
Router Configuration Example	74
Debug of a Successful PKI AAA Authorization Example	76
Debugs of a Failed PKI AAA Authorization Example	76
Configuring a Revocation Mechanism Examples	78
Configuring an OCSP Server Example	78
Specifying a CRL and Then an OCSP Server Example	78
Specifying an OCSP Server Example	78
Disabling Nonces in Communications with the OCSP Server Example	78
Configuring a Hub Router at a Central Site for Certificate Revocation Checks Example	78
Configuring Certificate Authorization and Revocation Settings Examples	82
Configuring CRL Cache Control	82
Configuring Certificate Serial Number Session Control	83
Configuring Certificate Chain Validation Examples	84

Configuring Certificate Chain Validation from Peer to Root CA	84
Configuring Certificate Chain Validation from Peer to Subordinate CA	85
Configuring Certificate Chain Validation Through a Gap	85
Configuring Certificate Servers for High Availability Example	86
Additional References	87
Feature Information for Certificate Authorization and Revocation	87
<b>Configuring Certificate Enrollment for a PKI</b>	<b>97</b>
Finding Feature Information	97
Prerequisites for PKI Certificate Enrollment	97
Information About Certificate Enrollment for a PKI	98
What Are CAs	98
Framework for Multiple CAs	98
Authentication of the CA	99
Supported Certificate Enrollment Methods	99
Cisco IOS Suite-B Support for Certificate Enrollment for a PKI	100
Registration Authorities	100
Automatic Certificate Enrollment	100
Certificate Enrollment Profiles	101
How to Configure Certificate Enrollment for a PKI	102
Configuring Certificate Enrollment or Autoenrollment	102
Configuring Manual Certificate Enrollment	107
PEM-Formatted Files for Certificate Enrollment Request	107
Restrictions for Manual Certificate Enrollment	108
Configuring Cut-and-Paste Certificate Enrollment	108
Configuring TFTP Certificate Enrollment	110
Certifying a URL Link for Secure Communication with a Trend Micro Server	113
Configuring a Persistent Self-Signed Certificate for Enrollment via SSL	118
Persistent Self-Signed Certificates Overview	119
Restrictions	119
Configuring a Trustpoint and Specifying Self-Signed Certificate Parameters	119
Enabling the HTTPS Server	121
Configuring a Certificate Enrollment Profile for Enrollment or Reenrollment	122
What to Do Next	126
Configuration Examples for PKI Certificate Enrollment Requests	126
Configuring Certificate Enrollment or Autoenrollment Example	126

- Configuring Autoenrollment Example 127
- Configuring Certificate Autoenrollment with Key Regeneration Example 127
- Configuring Cut-and-Paste Certificate Enrollment Example 128
- Configuring Manual Certificate Enrollment with Key Regeneration Example 130
- Creating and Verifying a Persistent Self-Signed Certificate Example 131
  - Enabling the HTTPS Server Example 131
  - Verifying the Self-Signed Certificate Configuration Example 131
- Configuring Direct HTTP Enrollment Example 132
- Additional References 133
- Feature Information for PKI Certificate Enrollment 134
- Configuring and Managing a Cisco IOS Certificate Server for PKI Deployment 145**
  - Finding Feature Information 145
  - Prerequisites for Configuring a Cisco IOS Certificate Server 146
  - Restrictions for Configuring a Cisco IOS Certificate Server 146
  - Information About Cisco IOS Certificate Servers 147
    - RSA Key Pair and Certificate of the Certificate Server 147
      - How the CA Certificate and CA Key Are Automatically Archived 147
  - Certificate Server Database 148
    - Certificate Server Database File Storage 148
    - Certificate Server Database File Publication 149
  - Trustpoint of the Certificate Server 150
  - Certificate Revocation Lists (CRLs) 150
  - Certificate Server Error Conditions 151
  - Certificate Enrollment Using a Certificate Server 151
    - SCEP Enrollment 152
  - Types of CA Servers Subordinate and Registration Authorities (RAs) 152
  - Automatic CA Certificate and Key Rollover 153
    - Automatic CA Certificate Rollover How It Works 153
  - Support for Specifying a Cryptographic Hash Function 154
- How to Set Up and Deploy a Cisco IOS Certificate Server 155
  - Generating a Certificate Server RSA Key Pair 155
- Configuring Certificate Servers 158
  - Prerequisites for Automatic CA Certificate Rollover 158
  - Restrictions for Automatic CA Certificate Rollover 158
  - Configuring a Certificate Server 158

Configuring a Subordinate Certificate Server	161
Examples	164
Configuring a Certificate Server to Run in RA Mode	167
Configuring the Root Certificate Server to Delegate Enrollment Tasks to the RA Mode Certificate Server	170
What to Do Next	171
Configuring Certificate Server Functionality	171
Certificate Server Default Values and Recommended Values	172
Certificate Server File Storage and Publication Locations	172
Working with Automatic CA Certificate Rollover	175
Starting Automated CA Certificate Rollover Immediately	175
Requesting a Certificate Server Client Rollover Certificate	176
Exporting a CA Rollover Certificate	177
Maintaining Verifying and Troubleshooting the Certificate Server Certificates and the CA	178
Managing the Enrollment Request Database	178
Removing Requests from the Enrollment Request Database	180
Deleting a Certificate Server	181
Verifying and Troubleshooting Certificate Server and CA Status	182
Verifying CA Certificate Information	183
Configuration Examples for Using a Certificate Server	185
Configuring Specific Storage and Publication Locations Examples	185
Removing Enrollment Requests from the Enrollment Request Database Examples	186
Autoarchiving the Certificate Server Root Keys Examples	187
Restoring a Certificate Server from Certificate Server Backup Files Examples	189
Subordinate Certificate Server Example	191
Root Certificate Server Differentiation Example	192
Show Output for a Subordinate Certificate Server Example	192
RA Mode Certificate Server Example	192
Enabling CA Certificate Rollover to Start Immediately Example	194
Where to Go Next	195
Additional References	195
Feature Information for the Cisco IOS Certificate Server	196
<b>Storing PKI Credentials</b>	<b>203</b>
Finding Feature Information	203
Prerequisites for Storing PKI Credentials	203

Restrictions for Storing PKI Credentials	204
Information About Storing PKI Credentials	204
Storing Certificates to a Local Storage Location	204
PKI Credentials and USB Tokens	205
How a USB Token Works	205
Benefits of USB Tokens	206
How to Configure PKI Storage	207
Specifying a Local Storage Location for Certificates	207
Setting Up and Using USB Tokens on Cisco Devices	208
Storing the Configuration on a USB Token	208
Logging Into and Setting Up the USB Token	209
How RSA Keys are Used with a USB Token	209
Automatic Login	209
Configuring the Device for Manual Login	210
What to Do Next	210
Configuring the USB Token	211
PINs and Passphrases	211
Unlocking and Locking the USB Token	211
Secondary Configuration and Unconfiguration Files	211
What to Do Next	214
Setting Administrative Functions on the USB Token	214
Troubleshooting USB Tokens	217
Troubleshooting the USB Port Connection	217
Determining if a USB Token is Supported by Cisco	218
Determining USB Token Device Problems	219
Displaying USB Token Information	220
Configuration Examples for PKI Storage	221
Example: Storing Certificates to a Specific Local Storage Location	221
Example: Logging Into a USB Token and Saving RSA Keys to the USB Token	222
Additional References	223
Feature Information for Storing PKI Credentials	224
<b>Source Interface Selection for Outgoing Traffic with Certificate Authority</b>	<b>229</b>
Finding Feature Information	229
Information About Source Interface Selection for Outgoing Traffic with Certificate Authority	229
Certificates That Identify an Entity	230



Source Interface for Outgoing TCP Connections Associated with a Trustpoint	230
How to Configure Source Interface Selection for Outgoing Traffic with Certificate Authority	230
Configuring the Interface for All Outgoing TCP Connections Associated with a Trustpoint	230
Troubleshooting Tips	233
Configuration Examples for Source Interface Selection for Outgoing Traffic with Certificate Authority	234
Source Interface Selection for Outgoing Traffic with Certificate Authority Example	234
Additional References	234
Feature Information for Source Interface Selection for Outgoing Traffic with Certificate Authority	235
Glossary	236



# Cisco IOS PKI Overview Understanding and Planning a PKI

---

Cisco IOS public key infrastructure (PKI) provides certificate management to support security protocols such as IP Security (IPSec), secure shell (SSH), and secure socket layer (SSL). This module identifies and describes concepts that are needed to understand, plan for, and implement a PKI.

- [Finding Feature Information, page 1](#)
- [Information About Cisco IOS PKI, page 1](#)
- [Planning for a PKI, page 5](#)
- [Where to Go Next, page 5](#)
- [Additional References, page 6](#)
- [Glossary, page 8](#)

## Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table at the end of this module.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

## Information About Cisco IOS PKI

- [What Is Cisco IOS PKI, page 1](#)
- [RSA Keys Overview, page 2](#)
- [What Are CAs, page 3](#)
- [Certificate Enrollment How It Works, page 4](#)
- [Certificate Revocation Why It Occurs, page 5](#)

## What Is Cisco IOS PKI

A PKI is composed of the following entities:

- Peers communicating on a secure network


- At least one certification authority (CA) that grants and maintains certificates
- Digital certificates, which contain information such as the certificate validity period, peer identity information, encryption keys that are used for secure communications, and the signature of the issuing CA
- An optional registration authority (RA) to offload the CA by processing enrollment requests
- A distribution mechanism (such as Lightweight Directory Access Protocol [LDAP] or HTTP) for certificate revocation lists (CRLs)

PKI provides customers with a scalable, secure mechanism for distributing, managing, and revoking encryption and identity information in a secured data network. Every entity (a person or a device) participating in the secured communication is enrolled in the PKI in a process where the entity generates an Rivest, Shamir, and Adelman (RSA) key pair (one private key and one public key) and has their identity validated by a trusted entity (also known as a CA or trustpoint).

After each entity enrolls in a PKI, every peer (also known as an end host) in a PKI is granted a digital certificate that has been issued by a CA. When peers must negotiate a secured communication session, they exchange digital certificates. Based on the information in the certificate, a peer can validate the identity of another peer and establish an encrypted session with the public keys contained in the certificate.

Although you can plan for and set up your PKI in a number of different ways, the figure below shows the major components that make up a PKI and suggests an order in which each decision within a PKI can be made. The figure is a suggested approach; you can choose to set up your PKI from a different perspective.

**Figure 1** Deciding How to Set Up Your PKI

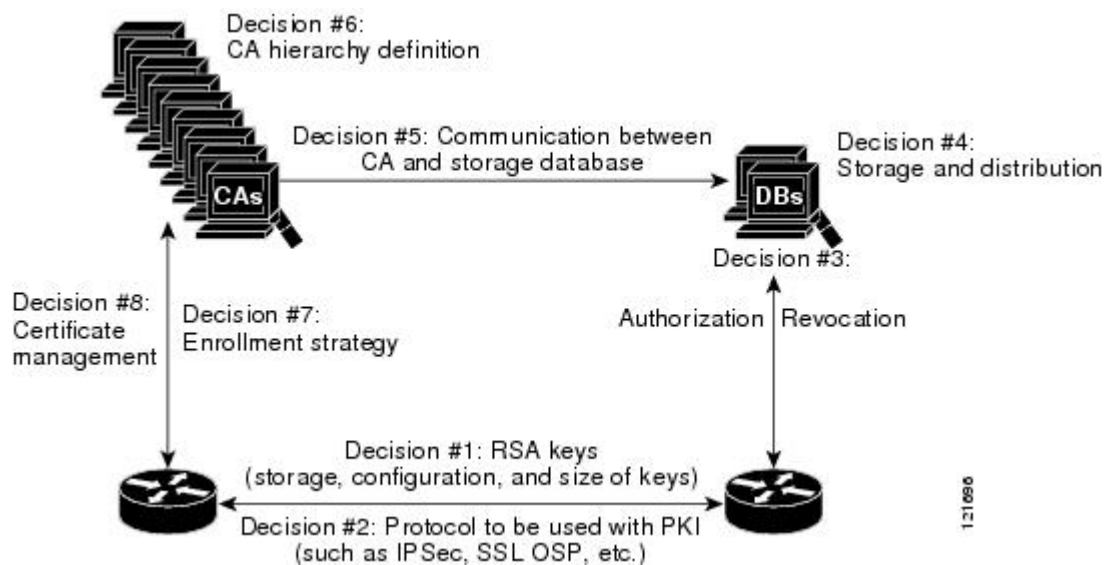

## RSA Keys Overview

An RSA key pair consists of a public key and a private key. When setting up your PKI, you must include the public key in the certificate enrollment request. After the certificate has been granted, the public key will be included in the certificate so that peers can use it to encrypt data that is sent to the router. The private key is kept on the router and used both to decrypt the data sent by peers and to digitally sign transactions when negotiating with peers.

RSA key pairs contain a key modulus value. The modulus determines the size of the RSA key. The larger the modulus, the more secure the RSA key. However, keys with large modulus values take longer to generate, and encryption and decryption operations take longer with larger keys.

## What Are CAs

A CA, also known as a trustpoint, manages certificate requests and issues certificates to participating network devices. These services (managing certificate requests and issuing certificates) provide centralized key management for the participating devices and are explicitly trusted by the receiver to validate identities and to create digital certificates. Before any PKI operations can begin, the CA generates its own public key pair and creates a self-signed CA certificate; thereafter, the CA can sign certificate requests and begin peer enrollment for the PKI.

You can use a CA provided by a third-party CA vendor, or you can use an “internal” CA, which is the Cisco IOS Certificate Server.


- [Hierarchical PKI Multiple CAs, page 3](#)

## Hierarchical PKI Multiple CAs

PKI can be set up in a hierarchical framework to support multiple CAs. At the top of the hierarchy is a root CA, which holds a self-signed certificate. The trust within the entire hierarchy is derived from the RSA key pair of the root CA. The subordinate CAs within the hierarchy can be enrolled with either the root CA or with another subordinate CA. These enrollment options are how multiple tiers of CAs are configured. Within a hierarchical PKI, all enrolled peers, can validate the certificate of one another if the peers share a trusted root CA certificate or a common subordinate CA.

The figure below shows the enrollment relationships among CAs within a three-tiered hierarchy.

**Figure 2** Three-Tiered CA Hierarchy Sample Topology

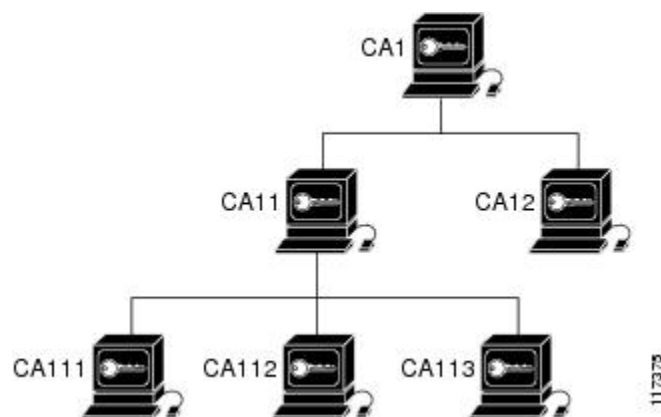

Each CA corresponds to a trustpoint. For example, CA11 and CA12 are subordinate CAs, holding CA certificates that have been issued by CA1; CA111, CA112, and CA113 are also subordinate CAs, but their CA certificates have been issued by CA11.

- [When to Use Multiple CAs, page 3](#)

## When to Use Multiple CAs

Multiple CAs provide users with added flexibility and reliability. For example, subordinate CAs can be placed in branch offices while the root CA is at the office headquarters. Also, different granting policies

can be implemented per CA, so you can set up one CA to automatically grant certificate requests while another CA within the hierarchy requires each certificate request to be manually granted.


Scenarios in which at least a two-tier CA is recommended are as follows:

- Large and very active networks in which a large number of certificates are revoked and reissued. A multiple tier CA helps to control the size of the CRLs.
- When online enrollment protocols are used, the root CA can be kept offline with the exception of issuing subordinate CA certificates. This scenario provides added security for the root CA.

## Certificate Enrollment How It Works

Certificate enrollment is the process of obtaining a certificate from a CA. Each end host that wants to participate in the PKI must obtain a certificate. Certificate enrollment occurs between the end host requesting the certificate and the CA. The figure below and the following steps describe the certificate enrollment process.

**Figure 3** Certificate Enrollment Process

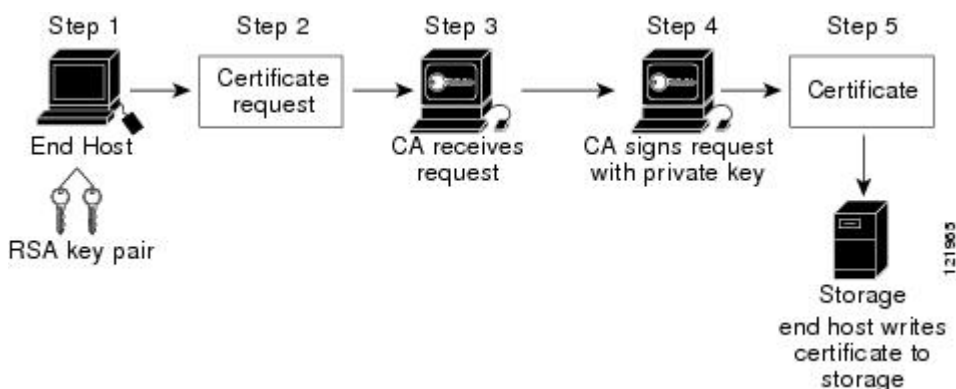

- 1 The end host generates an RSA key pair.
- 2 The end host generates a certificate request and forwards it to the CA (or the RA, if applicable).
- 3 The CA receives the certificate enrollment request, and, depending on your network configuration, one of the following options occurs:
  - a Manual intervention is required to approve the request.
  - b The end host is configured to automatically request a certificate from the CA. Thus, operator intervention is no longer required at the time the enrollment request is sent to the CA server.



### Note

If you configure the end host to automatically request certificates from the CA, you should have an additional authorization mechanism.

- 1 After the request is approved, the CA signs the request with its private key and returns the completed certificate to the end host.
  - 2 The end host writes the certificate to a storage area such as NVRAM.
- [Certificate Enrollment Via Secure Device Provisioning, page 5](#)

## Certificate Enrollment Via Secure Device Provisioning

Secure Device Provisioning (SDP) is a web-based certificate enrollment interface that can be used to easily deploy PKI between two end devices, such as a Cisco IOS client and a Cisco IOS certificate server.

SDP (also referred to as Trusted Transitive Introduction [TTI]) is a communication protocol that provides a bidirectional introduction between two end entities, such as a new network device and a Virtual Private Network (VPN). SDP involves the following three entities:

- **Introducer**--A mutually trusted device that introduces the petitioner to the registrar. The introducer can be a device user, such as a system administrator.
- **Petitioner**--A new device that is joined to the secure domain.
- **Registrar**--A certificate server or other server that authorizes the petitioner.

SDP is implemented over a web browser in three phases--welcome, introduction, and completion. Each phase is shown to the user via a web page. For more information on each phase and how SDP works, see the “Setting Up Secure Device Provisioning (SDP) for Enrollment in a PKI” module.

## Certificate Revocation Why It Occurs

After each participant has successfully enrolled in the PKI, the peers are ready to begin negotiations for a secure connection with each other. Thus, the peers present their certificates for validation followed by a revocation check. After the peer verifies that the other peer’s certificate was issued by an authenticated CA, the CRL or Online Certificate Status Protocol (OCSP) server is checked to ensure that the certificate has not been revoked by the issuing CA. The certificate usually contains a certificate distribution point (CDP) in the form of a URL. Cisco IOS software uses the CDP to locate and retrieve the CRL. If the CDP server does not respond, the Cisco IOS software reports an error, which may result in the peer’s certificate being rejected.

## Planning for a PKI

Planning for a PKI requires evaluating the requirements and expected use for each of the PKI components shown in [Planning for a PKI, page 5](#). It is recommended that you (or the network administrator) thoroughly plan the PKI before beginning any PKI configuration.

Although there are a number of approaches to consider when planning the PKI, this document begins with peer-to-peer communication and proceeds as shown in [Planning for a PKI, page 5](#). However you or the network administrator choose to plan the PKI, understand that certain decisions influence other decisions within the PKI. For example, the enrollment and deployment strategy could influence the planned CA hierarchy. Thus, it is important to understand how each component functions within the PKI and how certain component options are dependent upon decisions made earlier in the planning process.

## Where to Go Next

As suggested in [Where to Go Next, page 5](#), you begin to configure a PKI by setting up and deploying RSA keys. For more information, see the module “Deploying RSA Keys Within a PKI.”

## Additional References

### Related Documents

Related Topic	Document Title
PKI commands: complete command syntax, command mode, defaults, usage guidelines, and examples	Cisco IOS Security Command Reference
Certificate enrollment: supported methods, enrollment profiles, configuration tasks	Configuring Certificate Enrollment for a PKI module in the <i>Cisco IOS Security Configuration Guide: Secure Connectivity</i>
Certificate revocation and authorization: configuration tasks	Configuring Revocation and Authorization of Certificates in a PKI module in the <i>Cisco IOS Security Configuration Guide: Secure Connectivity</i>
Cisco IOS certificate server overview information and configuration tasks	Configuring and Managing a Cisco IOS Certificate Server for PKI Deployment module in the <i>Cisco IOS Security Configuration Guide: Secure Connectivity</i>
Secure Device Provisioning: functionality overview and configuration tasks	Setting Up Secure Device Provisioning (SDP) for Enrollment in a PKI module in the <i>Cisco IOS Security Configuration Guide: Secure Connectivity</i>
Storing RSA keys and certificates on a USB eToken	Storing PKI Credentials module in the <i>Cisco IOS Security Configuration Guide: Secure Connectivity</i>

### Standards

Standards	Title
None	--

### MIBs

MIBs	MIBs Link
None	To locate and download MIBs for selected platforms, Cisco IOS software releases, and feature sets, use Cisco MIB Locator found at the following URL:  <a href="http://www.cisco.com/go/mibs">http://www.cisco.com/go/mibs</a>

**RFCs**

<b>RFCs</b>	<b>Title</b>
RFC 2459	<a href="http://www.ietf.org/rfc/rfc2459.txt">http://www.ietf.org/rfc/rfc2459.txt</a> Internet X.509 Public Key Infrastructure Certificate and CRL Profile
RFC 2511	<a href="http://www.ietf.org/rfc/rfc2511.txt">http://www.ietf.org/rfc/rfc2511.txt</a> Internet X.509 Certificate Request Message Format
RFC 2527	<a href="http://www.ietf.org/rfc/rfc2527.txt">http://www.ietf.org/rfc/rfc2527.txt</a> Internet X.509 Public Key Infrastructure Certificate Policy and Certification Practices Framework
RFC 2528	<a href="http://www.ietf.org/rfc/rfc2528.txt">http://www.ietf.org/rfc/rfc2528.txt</a> Internet X.509 Public Key Infrastructure
RFC 2559	<a href="http://www.ietf.org/rfc/rfc2559.txt">http://www.ietf.org/rfc/rfc2559.txt</a> Internet X.509 Public Key Infrastructure Operational Protocols - LDAPv2
RFC 2560	<a href="http://www.ietf.org/rfc/rfc2560.txt">http://www.ietf.org/rfc/rfc2560.txt</a> X.509 Internet Public Key Infrastructure Online Certificate Status Protocol - OCSP
RFC 2585	<a href="http://www.ietf.org/rfc/rfc2585.txt">http://www.ietf.org/rfc/rfc2585.txt</a> Internet X.509 Public Key Infrastructure Operational Protocols: FTP and HTTP
RFC 2587	<a href="http://www.ietf.org/rfc/rfc2587.txt">http://www.ietf.org/rfc/rfc2587.txt</a> Internet X.509 Public Key Infrastructure LDAPv2 Schema
RFC 2875	<a href="http://www.ietf.org/rfc/rfc2875.txt">http://www.ietf.org/rfc/rfc2875.txt</a> Diffie-Hellman Proof-of-Possession Algorithms
RFC 3029	<a href="http://www.ietf.org/rfc/rfc3029.txt">http://www.ietf.org/rfc/rfc3029.txt</a> Internet X.509 Public Key Infrastructure Data Validation and Certification Server Protocols

**Technical Assistance**

<b>Description</b>	<b>Link</b>
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	<a href="http://www.cisco.com/cisco/web/support/index.html">http://www.cisco.com/cisco/web/support/index.html</a>



# Glossary

**CDP** --certificate distribution point. Field within a digital certificate containing information that describes how to retrieve the CRL for the certificate. The most common CDPs are HTTP and LDAP URLs. A CDP may also contain other types of URLs or an LDAP directory specification. Each CDP contains one URL or directory specification.

**certificates** --Electronic documents that bind a user's or device's name to its public key. Certificates are commonly used to validate a digital signature.

**CRL** --certificate revocation list. Electronic document that contains a list of revoked certificates. The CRL is created and digitally signed by the CA that originally issued the certificates. The CRL contains dates for when the certificate was issued and when it expires. A new CRL is issued when the current CRL expires.

**CA** --certification authority. Service responsible for managing certificate requests and issuing certificates to participating IPsec network devices. This service provides centralized key management for the participating devices and is explicitly trusted by the receiver to validate identities and to create digital certificates.

**peer certificate** --Certificate presented by a peer, which contains the peer's public key and is signed by the trustpoint CA.

**PKI** --public key infrastructure. System that manages encryption keys and identity information for components of a network that participate in secured communications.

**RA** --registration authority. Server that acts as a proxy for the CA so that CA functions can continue when the CA is offline. Although the RA is often part of the CA server, the RA could also be an additional application, requiring an additional device to run it.

**RSA keys** --Public key cryptographic system developed by Ron Rivest, Adi Shamir, and Leonard Adleman. An RSA key pair (a public and a private key) is required before you can obtain a certificate for your router.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.



## Deploying RSA Keys Within a PKI

---

This module explains how to set up and deploy Rivest, Shamir, and Adelman (RSA) keys within a public key infrastructure (PKI). An RSA key pair (a public and a private key) is required before you can obtain a certificate for your router; that is, the end host must generate a pair of RSA keys and exchange the public key with the certification authority (CA) to obtain a certificate and enroll in a PKI.



### Note

---

Security threats, as well as the cryptographic technologies to help protect against them, are constantly changing. For more information about the latest Cisco cryptographic recommendations, see the [Next Generation Encryption](#) (NGE) white paper.

---

- [Finding Feature Information](#), page 9
- [Prerequisites for Configuring RSA Keys for a PKI](#), page 9
- [Information About RSA Keys Configuration](#), page 10
- [How to Set Up and Deploy RSA Keys Within a PKI](#), page 12
- [Configuration Examples for RSA Key Pair Deployment](#), page 26
- [Where to Go Next](#), page 31
- [Additional References](#), page 31
- [Feature Information for RSA Keys Within a PKI](#), page 32

## Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table at the end of this module.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

## Prerequisites for Configuring RSA Keys for a PKI

- Before setting up and deploying RSA keys for a PKI, you should be familiar with the module Cisco IOS PKI Overview: Understanding and Planning a PKI .
- As of Cisco IOS Release 12.3(7)T, all commands that begin as “crypto ca” have been changed to begin as “crypto pki.” Although the router will still accept crypto ca commands, all output will be read back as crypto pki.

# Information About RSA Keys Configuration

- [RSA Keys Overview, page 10](#)
- [Reasons to Store Multiple RSA Keys on a Router, page 11](#)
- [Benefits of Exportable RSA Keys, page 11](#)
- [Passphrase Protection While Importing and Exporting RSA Keys, page 11](#)

## RSA Keys Overview

An RSA key pair consists of a public key and a private key. When setting up your PKI, you must include the public key in the certificate enrollment request. After the certificate has been granted, the public key will be included in the certificate so that peers can use it to encrypt data that is sent to the router. The private key is kept on the router and used both to decrypt the data sent by peers and to digitally sign transactions when negotiating with peers.

RSA key pairs contain a key modulus value. The modulus determines the size of the RSA key. The larger the modulus, the more secure the RSA key. However, keys with large modulus values take longer to generate, and encryption and decryption operations take longer with larger keys.



### Note

---

As of Cisco IOS Release 12.4(11)T, peer *public* RSA key modulus values up to 4096 bits are automatically supported. The largest private RSA key modulus is 4096 bits. Therefore, the largest RSA private key a router may generate or import is 4096 bits. However, RFC 2409 restricts the private key size to 2048 bits or less for RSA encryption. The recommended modulus value for a CA is 2048 bits; the recommended modulus value for a client is 1024 bits.

---

- [Usage RSA Keys Versus General-Purpose RSA Keys, page 10](#)
- [How RSA Key Pairs are Associated with a Trustpoint, page 10](#)

## Usage RSA Keys Versus General-Purpose RSA Keys

There are two mutually exclusive types of RSA key pairs--usage keys and general-purpose keys. When you generate RSA key pairs (via the **crypto key generate rsa** command), you will be prompted to select either usage keys or general-purpose keys.

### Usage RSA Keys

Usage keys consist of two RSA key pairs--one RSA key pair is generated and used for encryption and one RSA key pair is generated and used for signatures. With usage keys, each key is not unnecessarily exposed. (Without usage keys, one key is used for both authentication methods, increasing the exposure of that key.)

### General-Purpose RSA Keys

General-purpose keys consist of only one RSA key pair that used for both encryption and signatures. General-purpose key pairs are used more frequently than usage key pairs.

## How RSA Key Pairs are Associated with a Trustpoint

A trustpoint, also known as the certificate authority (CA), manages certificate requests and issues certificates to participating network devices. These services provide centralized key management for the

participating devices and are explicitly trusted by the receiver to validate identities and to create digital certificates. Before any PKI operations can begin, the CA generates its own public key pair and creates a self-signed CA certificate; thereafter, the CA can sign certificate requests and begin peer enrollment for the PKI.

## Reasons to Store Multiple RSA Keys on a Router

Configuring multiple RSA key pairs allows the Cisco IOS software to maintain a different key pair for each CA with which it is dealing or the software can maintain multiple key pairs and certificates with the same CA. As a result, the Cisco IOS software can match policy requirements for each CA without compromising the requirements specified by the other CAs, such as key length, key lifetime, and general-purpose versus usage keys.

Named key pairs (which are specified via the **label** *key-label* option) allow you to have multiple RSA key pairs, enabling the Cisco IOS software to maintain a different key pair for each identity certificate.

## Benefits of Exportable RSA Keys



### Caution

Exportable RSA keys should be carefully evaluated before use because using exportable RSA keys introduces the risk that these keys might be exposed. Any existing RSA keys are not exportable. New keys are generated as nonexportable by default. It is not possible to convert an existing nonexportable key to an exportable key.

As of Cisco IOS Release 12.2(15)T, users can share the private RSA key pair of a router with standby routers, therefore transferring the security credentials between networking devices. The key pair that is shared between two routers will allow one router to immediately and transparently take over the functionality of the other router. If the main router were to fail, the standby router could be dropped into the network to replace the failed router without the need to regenerate keys, reenroll with the CA, or manually redistribute keys.

Exporting and importing an RSA key pair also enables users to place the same RSA key pair on multiple routers so that all management stations using Secure Shell (SSH) can be configured with a single public RSA key.

### Exportable RSA Keys in PEM-Formatted Files

Using privacy-enhanced mail (PEM)-formatted files to import or export RSA keys can be helpful for customers who are running Cisco IOS software Release 12.3(4)T or later and who are using secure socket layer (SSL) or secure shell (SSH) applications to manually generate RSA key pairs and import the keys back into their PKI applications. PEM-formatted files allow customers to directly use existing RSA key pairs on their Cisco IOS routers instead of generating new keys.

## Passphrase Protection While Importing and Exporting RSA Keys

You have to include a passphrase to encrypt the PKCS12 file or the PEM file that will be exported, and when the PKCS12 or PEM file is imported, the same passphrase has to be entered to decrypt it. Encrypting the PKCS12 or PEM file when it is being exported, deleted, or imported protects the file from unauthorized access and use while it is being transported or stored on an external device.

The passphrase can be any phrase that is at least eight characters in length; it can include spaces and punctuation, excluding the question mark (?), which has special meaning to the Cisco IOS parser.

### How to Convert an Exportable RSA Key Pair to a Nonexportable RSA Key Pair

Passphrase protection protects the external PKCS12 or PEM file from unauthorized access and use. To prevent an RSA key pair from being exported, it must be labeled “nonexportable.” To convert an exportable RSA key pair into a nonexportable key pair, the key pair must be exported and then reimported without specifying the “exportable” keyword.

## How to Set Up and Deploy RSA Keys Within a PKI

- [Generating an RSA Key Pair, page 12](#)
- [Managing RSA Key Pairs and Trustpoint Certificates, page 13](#)
- [Exporting and Importing RSA Keys, page 18](#)
- [Encrypting and Locking Private Keys on a Router, page 22](#)
- [Removing RSA Key Pair Settings, page 25](#)

## Generating an RSA Key Pair

Perform this task to manually generate an RSA key pair.

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto key generate rsa** [**general-keys** | **usage-keys** | **signature** | **encryption**] [**label** *key-label*] [**exportable**] [**modulus** *modulus-size*] [**storage** *devicename:*] [**on** *devicename:*]
4. **exit**
5. **show crypto key mypubkey rsa**

### DETAILED STEPS

	Command or Action	Purpose
Step 1	<b>enable</b>  Example: Router> enable	Enables privileged EXEC mode.  • Enter your password if prompted.
Step 2	<b>configure terminal</b>  Example: Router# configure terminal	Enters global configuration mode.

Command or Action	Purpose
<p><b>Step 3</b> <code>crypto key generate rsa</code> [<b>general-keys</b>   <b>usage-keys</b>   <b>signature</b>   <b>encryption</b>] [<i>label key-label</i>] [<b>exportable</b>] [<i>modulus modulus-size</i>] [<b>storage devicename:</b>] [<b>on devicename:</b>]</p> <p><b>Example:</b></p> <pre>Router(config)# crypto key generate rsa general-keys modulus 360</pre>	<p>(Optional) Generates the RSA key pair for the certificate server.</p> <ul style="list-style-type: none"> <li>The <b>storage</b> keyword specifies the key storage location.</li> <li>When specifying a label name by specifying the <i>key-label</i> argument, you must use the same name for the label that you plan to use for the certificate server (through the <b>crypto pki server cs-label</b> command). If a <i>key-label</i> argument is not specified, the default value, which is the fully qualified domain name (FQDN) of the router, is used.</li> </ul> <p>If the exportable RSA key pair is manually generated after the CA certificate has been generated, and before issuing the <b>no shutdown</b> command, then use the <b>crypto ca export pkcs12</b> command to export a PKCS12 file that contains the certificate server certificate and the private key.</p> <ul style="list-style-type: none"> <li>By default, the modulus size of a CA key is 1024 bits. The recommended modulus for a CA key is 2048 bits. The range for a modulus size of a CA key is from 350 to 4096 bits.</li> <li>The <b>on</b> keyword specifies that the RSA key pair is created on the specified device, including a Universal Serial Bus (USB) token, local disk, or NVRAM. The name of the device is followed by a colon (:).</li> </ul> <p><b>Note</b> Keys created on a USB token must be 2048 bits or less.</p>
<p><b>Step 4</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(config)# exit</pre>	<p>Exits global configuration mode.</p>
<p><b>Step 5</b> <code>show crypto key mypubkey rsa</code></p> <p><b>Example:</b></p> <pre>Router# show crypto key mypubkey rsa</pre>	<p>(Optional) Displays the RSA public keys of your router.</p> <p>This step allows you to verify that the RSA key pair has been successfully generated.</p>

- [What to Do Next, page 13](#)

## What to Do Next

After you have successfully generated an RSA key pair, you can proceed to any of the additional tasks in this module to generate additional RSA key pairs, perform export and import of RSA key pairs, or configure additional security parameters for the RSA key pair (such as encrypting or locking the private key).

# Managing RSA Key Pairs and Trustpoint Certificates

Perform this task to configure the router to generate and store multiple RSA key pairs, associate the key pairs with a trustpoint, and get the certificates for the router from the trustpoint.

You must have already generated an RSA key pair as shown in the task “Generating an RSA Key Pair task.”

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto pki trustpoint** *name*
4. **rsa** *key-label* [*key-size* [*encryption-key-size*]]
5. **enrollment selfsigned**
6. **subject-alt-name** *name*
7. **exit**
8. **crypto pki enroll** *name*
9. **exit**
10. **show crypto key mypubkey rsa**

### DETAILED STEPS

	Command or Action	Purpose
Step 1	<p><b>enable</b></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
Step 2	<p><b>configure terminal</b></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
Step 3	<p><b>crypto pki trustpoint</b> <i>name</i></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki trustpoint TESTCA</pre>	<p>Creates a trustpoint and enters ca-trustpoint configuration mode.</p>

Command or Action	Purpose
<p><b>Step 4</b> <b>rsakeypair</b> <i>key-label</i> [<i>key-size</i> [<i>encryption-key-size</i>]]</p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# rsakeypair fancy-keys</pre>	<p>(Optional) The <i>key-label</i> argument specifies the name of the RSA key pair generated during enrollment (if it does not already exist or if the <b>auto-enroll regenerate</b> command is configured) to be used with the trustpoint certificate. By default, the fully qualified domain name (FQDN) key is used.</p> <ul style="list-style-type: none"> <li>(Optional) The <i>key-size</i> argument specifies the size of the RSA key pair.</li> <li>(Optional) The <i>encryption-key-size</i> argument specifies the size of the second key, which is used to request separate encryption, signature keys, and certificates.</li> </ul>
<p><b>Step 5</b> <b>enrollment selfsigned</b></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# enrollment selfsigned</pre>	<p>(Optional) Specifies self-signed enrollment for a trustpoint.</p>
<p><b>Step 6</b> <b>subject-alt-name</b> <i>name</i></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# subject-alt- name TESTCA</pre>	<p>(Optional) The <i>name</i> argument specifies the trustpoint's name in the Subject Alternative Name (subjectAltName) field in the X.509 certificate, which is contained in the trustpoint certificate. By default, the Subject Alternative Name field is not included in the certificate.</p> <p><b>Note</b> This X.509 certificate field is defined in RFC 2511.</p> <p>This option is used to create a self-signed trustpoint certificate for the router that contains the trustpoint name in the Subject Alternative Name (subjectAltName) field. This Subject Alternative Name can be used only when the <b>enrollment selfsigned</b> command is specified for self-signed enrollment in the trustpoint policy.</p>
<p><b>Step 7</b> <b>exit</b></p> <p><b>Example:</b></p> <pre>Router (ca-trustpoint)# exit</pre>	<p>Exits ca-trustpoint configuration mode.</p>



Command or Action	Purpose
<p><b>Step 8</b> <code>crypto pki enroll name</code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki enroll TESTCA</pre> <p><b>Example:</b></p> <pre>% Include the router serial number in the subject name? [yes/no]: no</pre> <p><b>Example:</b></p> <pre>% Include an IP address in the subject name? [no]:</pre> <p><b>Example:</b></p> <pre>Generate Self Signed Router Certificate? [yes/no]: yes</pre> <p><b>Example:</b></p> <pre>Router Self Signed Certificate successfully created</pre>	<p>Requests the certificates for the router from the trustpoint.</p> <p>The <i>name</i> argument specifies the trustpoint name. Once this command is entered, answer the prompts.</p> <p><b>Note</b> Use the same trustpoint name entered with the <b>crypto pki trustpoint</b> command.</p>
<p><b>Step 9</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(config)# exit</pre>	<p>Exits global configuration mode.</p>
<p><b>Step 10</b> <code>show crypto key mypubkey rsa</code></p> <p><b>Example:</b></p> <pre>Router# show crypto key mypubkey rsa</pre>	<p>(Optional) Displays the RSA public keys of your router.</p> <p>This step allows you to verify that the RSA key pair has been successfully generated.</p>

## Example

The following example shows how to create a self-signed trustpoint certificate for the router that contains the trustpoint name in the Subject Alternative Name (subjectAltName) field:

```
Router> enable
Router# configure terminal
Router(config)# crypto pki trustpoint TESTCA
Router(ca-trustpoint)# enrollment selfsigned
Router(ca-trustpoint)# subject-alt-name TESTCA
Router
(ca-trustpoint)#
exit
Router(config)# cypto pki enroll
TESTCA
% Include the router serial number in the subject name? [yes/no]: no
% Include an IP address in the subject name? [no]:
Generate Self Signed Router Certificate? [yes/no]: yes
Router Self Signed Certificate successfully created
Router(config)# exit
```

The following certificate is created:

```
Certificate:
Data:
  Version: 3 (0x2)
  Serial Number: 2 (0x2)
  Signature Algorithm: shaWithRSAEncryption
  Issuer: CN=TESTCA/unstructuredName=r1.cisco.com
  Validity
    Not Before: Mar 22 20:26:20 2010 GMT
    Not After : Jan  1 00:00:00 2020 GMT
  Subject: CN=TESTCA/unstructuredName=r1.cisco.com
  Subject Public Key Info:
    Public Key Algorithm: rsaEncryption
    RSA Public Key: (512 bit)
      Modulus (512 bit):
        00:8d:71:2e:3b:eb:a2:e2:f3:44:d9:bc:a9:85:88:
        f4:a9:bd:c9:7f:f0:69:f5:e7:75:8f:00:f2:8e:3e:
        2f:ca:5e:c5:08:43:95:8c:a2:6a:ae:ce:a0:ae:82:
        61:61:ff:4e:8c:8f:89:d1:56:d8:35:34:b7:95:93:
        1a:72:03:71:fb
      Exponent: 65537 (0x10001)
  X509v3 extensions:
    X509v3 Basic Constraints: critical
    CA:TRUE
    X509v3 Subject Alternative Name:
    DNS:TESTCA
    X509v3 Authority Key Identifier:
    keyid:F9:A4:95:87:5F:A4:CA:7D:65:FA:BE:38:20:55:18:F9:4C:6C:D5:F3
    X509v3 Subject Key Identifier:
    F9:A4:95:87:5F:A4:CA:7D:65:FA:BE:38:20:55:18:F9:4C:6C:D5:F3
  Signature Algorithm: shaWithRSAEncryption
    6d:92:e7:a8:a5:1a:5a:ef:13:58:02:1b:79:17:93:41:37:c9:
    2d:9f:1a:a3:f5:3a:73:05:cd:d1:02:84:43:7e:e0:84:07:46:
    55:f9:45:59:51:ba:25:48:6f:d8:e1:0d:35:44:07:5c:16:17:
    35:45:99:e2:80:6e:53:e5:35:76
-----BEGIN CERTIFICATE-----
MIIBszCCAV2gAwIBAgIBAjANBgkqhkiG9w0BAQQFADAUwDQYDVQQDEwZURVNU
Q0EExGzAZBgkqhkiG9w0BCQIWDHIXLmNpc2NvLmNvbTAeFw0xMDAzMjIyMjBa
Fw0yMDAxMDEwMDAwMDBaMC4xZDZANBgNVBAMTB1RFULRDQTEbMBkGCSqGSIb3DQEJ
AhYMcjEuY2lzMjY28uY29tMFwwDQYJKoZIhvcNAQEBBQADSwAwSAJBAlxLjvrouLz
RNm8qYWI9Km9yX/wafXndY8A8o4+L8pexQhdLYyiaq7OoK6CYWH/ToyPidFW2DU0
t5WTGnIDcfsCAwEAANmMGQwDwYDVR0TAQH/BAUwAwEB/zARBgNVHREECjAIGgZU
RVNUQ0EwHwYDVR0jBBgwFoAU+aSVh1+kyn1l+r44IFUY+Uxs1fMwHQYDVR0OBBYE
FPmklYdfpMp9Zfq+OCBVGP1MbNXzMA0GCSqGSIb3DQEBAUAA0EAbZLnqKUaWu8T
WA1beReTQTfJLZ8ao/U6cwXN0QKEQ37ghAdGVf1FWVG6JUHV2OENNUQHXYXNUWZ
4oBuU+Uldg==
-----END CERTIFICATE-----
```

## Exporting and Importing RSA Keys

This section contains the following tasks that can be used for exporting and importing RSA keys. Whether you are using PKCS12 files or PEM files, exportable RSA keys allow you to use existing RSA keys on Cisco IOS routers instead of having to generate new RSA keys if the main router were to fail.

- [Exporting and Importing RSA Keys in PKCS12 Files, page 18](#)
- [Exporting and Importing RSA Keys in PEM-Formatted Files, page 20](#)

### Exporting and Importing RSA Keys in PKCS12 Files

Exporting and importing RSA key pairs enables users to transfer security credentials between devices. The key pair that is shared between two devices allows one device to immediately and transparently take over the functionality of the other router.

You must generate an RSA key pair and mark it “exportable” as specified in the “Generating an RSA Key Pair” task.



#### Note

- You cannot export RSA keys that existed on the router before your system was upgraded to Cisco IOS Release 12.2(15)T or later. You have to generate new RSA keys and label them as “exportable” after you upgrade the Cisco IOS software.
- When you import a PKCS12 file that was generated by a third-party application, the PKCS12 file must include a CA certificate.
- If you want reexport an RSA key pair after you have already exported the key pair and imported them to a target router, you must specify the **exportable** keyword when you are importing the RSA key pair.
- The largest RSA key a router may import is 2048-bits.

>

#### SUMMARY STEPS

1. **crypto pki trustpoint** *name*
2. **rsa** *key-label* [*key-size* [*encryption-key-size*]]
3. **exit**
4. **crypto pki export** *trustpointname* **pkcs12** *destination-url* **password** *password-phrase*
5. **crypto pki import** *trustpointname* **pkcs12** *source-url* **password** *password-phrase*
6. **exit**
7. **show crypto key mypubkey rsa**

## DETAILED STEPS

Command or Action	Purpose
<p><b>Step 1</b> <code>crypto pki trustpoint <i>name</i></code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki trustpoint my-ca</pre>	<p>Creates the trustpoint name that is to be associated with the RSA key pair and enters ca-trustpoint configuration mode.</p>
<p><b>Step 2</b> <code>rsakeypair <i>key-label</i> [<i>key-size</i> [<i>encryption-key-size</i>]]</code></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# rsakeypair my- keys</pre>	<p>Specifies the key pair that is to be used with the trustpoint.</p>
<p><b>Step 3</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# exit</pre>	<p>Exits ca-trustpoint configuration mode.</p>
<p><b>Step 4</b> <code>crypto pki export <i>trustpointname</i> pkcs12 <i>destination-url</i> password <i>password-phrase</i></code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki export my- ca pkcs12 tftp://tftpserver/my-keys password mypassword123</pre>	<p>Exports the RSA keys through the trustpoint name.</p> <ul style="list-style-type: none"> <li>• The <i>trustpointname</i> argument enters the name of the trustpoint that issues the certificate that a user is going to export. When exporting the PKCS12 file, the trustpoint name is the RSA key name.</li> <li>• The <i>destination-url</i> argument enters the file system location of the PKCS12 file to which a user wants to import the RSA key pair. See the <a href="#">crypto pki export pkcs12 password</a> command page for more information.</li> <li>• The <i>password -phrase</i> argument must be entered to encrypt the PKCS12 file for export.</li> </ul>
<p><b>Step 5</b> <code>crypto pki import <i>trustpointname</i> pkcs12 <i>source-url</i> password <i>password-phrase</i></code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki import my- ca pkcs12 tftp://tftpserver/my-keys password mypassword123</pre>	<p>Imports the RSA keys to the target router.</p> <ul style="list-style-type: none"> <li>• The <i>trustpointname</i> argument enters the name of the trustpoint that issues the certificate that a user is going to export or import. When importing, the trustpoint becomes the RSA key name.</li> <li>• The <i>source-url</i> argument specifies the file system location of the PKCS12 file to which a user wants to export the RSA key pair. See the <a href="#">crypto pki import pkcs12 password</a> command page for more information.</li> <li>• The <i>password -phrase</i> must be entered to undo encryption when the RSA keys are imported.</li> </ul>

Command or Action	Purpose
<b>Step 6</b> <code>exit</code>  <b>Example:</b> <pre>Router(config)# exit</pre>	Exits global configuration mode.
<b>Step 7</b> <code>show crypto key mypubkey rsa</code>  <b>Example:</b> <pre>Router# show crypto key mypubkey rsa</pre>	(Optional) Displays the RSA public keys of your router.

## Exporting and Importing RSA Keys in PEM-Formatted Files

Perform this task to export or import RSA key pairs in PEM files.

You must generate an RSA key pair and mark it “exportable” as specified the “Generating an RSA Key Pair” task.



### Note

- You cannot export and import RSA keys that were generated without an exportable flag before your system was upgraded to Cisco IOS Release 12.3(4)T or a later release. You have to generate new RSA keys after you upgrade the Cisco IOS software.
- The largest RSA key a router may import is 2048 bits.



### Note

Security threats, as well as the cryptographic technologies to help protect against them, are constantly changing. For more information about the latest Cisco cryptographic recommendations, see the [Next Generation Encryption](#) (NGE) white paper.

## SUMMARY STEPS

1. `crypto key generate rsa {usage-keys | general-keys} label key-label [exportable]`
2. `crypto pki export trustpoint pem {terminal | url destination-url} {3des | des} password password-phrase`
3. `crypto pki import trustpoint pem [check | exportable | usage-keys] {terminal | url source-url} password password-phrase`
4. `exit`
5. `show crypto key mypubkey rsa`

## DETAILED STEPS

Command or Action	Purpose
<p><b>Step 1</b> <code>crypto key generate rsa {usage-keys   general-keys} label <i>key-label</i> [exportable]</code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto key generate rsa general-keys label mykey exportable</pre>	<p>Generates the RSA key pair.</p> <p>To use PEM files, the RSA key pair must be labeled exportable.</p>
<p><b>Step 2</b> <code>crypto pki export trustpoint pem {terminal   url <i>destination-url</i>} {3des   des} password <i>password-phrase</i></code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki export mycs pem url nvram: 3des password mypassword123</pre>	<p>Exports the certificates and RSA keys that are associated with a trustpoint in a PEM-formatted file.</p> <ul style="list-style-type: none"> <li>• Enter the <i>trustpoint</i> name that is associated with the exported certificate and RSA key pair. The trustpoint name must match the name that was specified through the <b>crypto pki trustpoint</b> command</li> <li>• Use the <b>terminal</b> keyword to specify the certificate and RSA key pair that is displayed in PEM format on the console terminal.</li> <li>• Use the <b>url</b> keyword and <i>destination -url</i> argument to specify the URL of the file system where your router should export the certificates and RSA key pair.</li> <li>• (Optional) the <b>3des</b> keyword exports the trustpoint using the Triple Data Encryption Standard (3DES) encryption algorithm.</li> <li>• (Optional) the <b>des</b> keyword exports the trustpoint using the DES encryption algorithm.</li> <li>• Use the <i>password-phrase</i> argument to specify the encrypted password phrase that is used to encrypt the PEM file for import.</li> </ul> <p><b>Tip</b> Be sure to keep the PEM file safe. For example, you may want to store it on another backup router.</p>

Command or Action	Purpose
<p><b>Step 3</b> <code>crypto pki import trustpoint pem [check   exportable   usage-keys] {terminal   url source-url} passwordpassword-phrase</code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki import myscs2 pem url nvram: password mypassword123</pre>	<p>Imports certificates and RSA keys to a trustpoint from PEM-formatted files.</p> <ul style="list-style-type: none"> <li>• Enter the <i>trustpoint</i> name that is associated with the imported certificate and RSA key pair. The trustpoint name must match the name that was specified through the <b>crypto pki trustpoint</b> command</li> <li>• (Optional) Use the <b>check</b> keyword to specify that an outdated certificate is not allowed.</li> <li>• (Optional) Use the <b>exportable</b> keyword to specify that the imported RSA key pair can be exported again to another Cisco device such as a router.</li> <li>• (Optional) Use the <i>usage-keys</i> argument to specify that two RSA special usage key pairs will be imported (that is, one encryption pair and one signature pair), instead of one general-purpose key pair.</li> <li>• Use the <i>source-url</i> argument to specify the URL of the file system where your router should import the certificates and RSA key pairs.</li> <li>• Use the <i>password-phrase</i> argument to specify the encrypted password phrase that is used to encrypt the PEM file for import.</li> </ul> <p><b>Note</b> The password phrase can be any phrase that is at least eight characters in length; it can include spaces and punctuation, excluding the question mark (?), which has special meaning to the Cisco IOS parser.</p> <p><b>Note</b> If you do not want the key to be exportable from your CA, import it back to the CA after it has been exported as a nonexportable key pair. Thus, the key cannot be taken off again.</p>
<p><b>Step 4</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(config)# exit</pre>	<p>Exits global configuration mode.</p>
<p><b>Step 5</b> <code>show crypto key mypubkey rsa</code></p> <p><b>Example:</b></p> <pre>Router# show crypto key mypubkey rsa</pre>	<p>(Optional) Displays the RSA public keys of your router.</p>

## Encrypting and Locking Private Keys on a Router

Digital signatures are used to authenticate one device to another device. To use digital signatures, private information (the private key) must be stored on the device that is providing the signature. The stored private information may aid an attacker who steals the hardware device that contains the private key; for example, a thief might be able to use the stolen router to initiate a secure connection to another site by using the RSA private keys stored in the router.

**Note**

RSA keys are lost during password recovery operations. If you lose your password, the RSA keys will be deleted when you perform the password recovery operation. (This function prevents an attacker from performing password recovery and then using the keys.)

To protect the private RSA key from an attacker, a user can encrypt the private key that is stored in NVRAM via a passphrase. Users can also “lock” the private key, which blocks new connection attempts from a running router and protects the key in the router if the router is stolen by an attempted attacker.

Perform this task to encrypt and lock the private key that is saved to NVRAM.

**Note**

The RSA keys must be unlocked while enrolling the CA. The keys can be locked while authenticating the router with the CA because the private key of the router is not used during authentication.

Before encrypting or locking a private key, you should perform the following tasks:

- Generate an RSA key pair as shown in the task “[Generating an RSA Key Pair, page 12.](#)”
- Optionally, you can authenticate and enroll each router with the CA server.

**Note****Backward Compatibility Restriction**

Any image prior to Cisco IOS Release 12.3(7)T does not support encrypted keys. To prevent your router from losing all encrypted keys, ensure that only unencrypted keys are written to NVRAM before booting an image prior to Cisco IOS Release 12.3(7)T.

If you must download an image prior to Cisco IOS Release 12.3(7)T, decrypt the key and immediately save the configuration so the downloaded image does not overwrite the configuration.

**Interaction with Applications**

An encrypted key is not effective after the router boots up until you manually unlock the key (via the **crypto key unlock rsa** command). Depending on which key pairs are encrypted, this functionality may adversely affect applications such as IP security (IPsec), SSH, and SSL; that is, management of the router over a secure channel may not be possible until the necessary key pair is unlocked.

>

**SUMMARY STEPS**

1. `crypto key encrypt [write] rsa [name key-name] passphrase passphrase`
2. `exit`
3. `show crypto key mypubkey rsa`
4. `crypto key lock rsa name key-name ] passphrase passphrase`
5. `show crypto key mypubkey rsa`
6. `crypto key unlock rsa [name key-name] passphrase passphrase`
7. `configure terminal`
8. `crypto key decrypt [write] rsa [namekey-name ] passphrase passphrase`



## DETAILED STEPS

Command or Action	Purpose
<p><b>Step 1</b> <code>crypto key encrypt [write] rsa [name key-name] passphrase passphrase</code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto key encrypt write rsa name pki.example.com passphrase password</pre>	<p>Encrypts the RSA keys.</p> <p>After this command is issued, the router can continue to use the key; the key remains unlocked.</p> <p><b>Note</b> If the <b>write</b> keyword is not issued, the configuration must be manually written to NVRAM; otherwise, the encrypted key will be lost next time the router is reloaded.</p>
<p><b>Step 2</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(config)# exit</pre>	<p>Exits global configuration mode.</p>
<p><b>Step 3</b> <code>show crypto key mypubkey rsa</code></p> <p><b>Example:</b></p> <pre>Router# show crypto key mypubkey rsa</pre>	<p>(Optional) Shows that the private key is encrypted (protected) and unlocked.</p> <p><b>Note</b> You can also use this command to verify that applications such as Internet Key Exchange (IKE) and SSH are properly working after the key has been encrypted.</p>
<p><b>Step 4</b> <code>crypto key lock rsa name <i>key-name</i> ] passphrase passphrase</code></p> <p><b>Example:</b></p> <pre>Router# crypto key lock rsa name pki.example.com passphrase password</pre>	<p>(Optional) Locks the encrypted private key on a running router.</p> <p><b>Note</b> After the key is locked, it cannot be used to authenticate the router to a peer device. This behavior disables any IPsec or SSL connections that use the locked key. Any existing IPsec tunnels created on the basis of the locked key will be closed. If all RSA keys are locked, SSH will automatically be disabled.</p>
<p><b>Step 5</b> <code>show crypto key mypubkey rsa</code></p> <p><b>Example:</b></p> <pre>Router# show crypto key mypubkey rsa</pre>	<p>(Optional) Shows that the private key is protected and locked.</p> <p>The output will also show failed connection attempts via applications such as IKE, SSH, and SSL.</p>
<p><b>Step 6</b> <code>crypto key unlock rsa [name <i>key-name</i>] passphrase passphrase</code></p> <p><b>Example:</b></p> <pre>Router# crypto key unlock rsa name pki.example.com passphrase password</pre>	<p>(Optional) Unlocks the private key.</p> <p><b>Note</b> After this command is issued, you can continue to establish IKE tunnels.</p>

Command or Action	Purpose
<b>Step 7</b> <code>configure terminal</code>  <b>Example:</b>  <pre>Router# configure terminal</pre>	Enters global configuration mode.
<b>Step 8</b> <code>crypto key decrypt [write] rsa [namekey-name ] passphrase <i>passphrase</i></code>  <b>Example:</b>  <pre>Router(config)# crypto key decrypt write rsa name pki.example.com passphrase password</pre>	(Optional) Deletes the encrypted key and leaves only the unencrypted key.  <b>Note</b> The <b>write</b> keyword immediately saves the unencrypted key to NVRAM. If the <b>write</b> keyword is not issued, the configuration must be manually written to NVRAM; otherwise, the key will remain encrypted the next time the router is reloaded.

## Removing RSA Key Pair Settings

An RSA key pair may need to be removed for one of the following reasons:

- During manual PKI operations and maintenance, old RSA keys can be removed and replaced with new keys.
- An existing CA is replaced and the new CA requires newly generated keys; for example, the required key size might have changed in an organization so you would have to delete the old 1024-bit keys and generate new 2048-bit keys.
- The peer router's public keys can be deleted in order to help debug signature verification problems in IKEv1 and IKEv2. Keys are cached by default with the lifetime of the certificate revocation list (CRL) associated with the trustpoint.

Perform this task to remove all RSA keys or the specified RSA key pair that has been generated by your router.

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. `crypto key zeroize rsa [key-pair-label]`
4. `crypto key zeroize pubkey-chain [index]`
5. **exit**
6. `show crypto key mypubkey rsa`

## DETAILED STEPS

Command or Action	Purpose
<p><b>Step 1</b> <code>enable</code></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
<p><b>Step 2</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> <code>crypto key zeroize rsa [key-pair-label]</code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto key zeroize rsa fancy-keys</pre>	<p>Deletes RSA key pairs from your router.</p> <ul style="list-style-type: none"> <li>If the <i>key-pair-label</i> argument is not specified, all RSA keys that have been generated by your router will be deleted.</li> </ul>
<p><b>Step 4</b> <code>crypto key zeroize pubkey-chain [index]</code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto key zeroize pubkey- chain</pre>	<p>Deletes the remote peer's public key from the cache.</p> <p>(Optional) Use the <i>index</i> argument to delete a particular public key index entry. If no index entry is specified, then all the entries are deleted. The acceptable range of index entries is from 1 to 65535.</p>
<p><b>Step 5</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(config)# exit</pre>	<p>Exits global configuration mode.</p>
<p><b>Step 6</b> <code>show crypto key mypubkey rsa</code></p> <p><b>Example:</b></p> <pre>Router# show crypto key mypubkey rsa</pre>	<p>(Optional) Displays the RSA public keys of your router.</p> <p>This step allows you to verify that the RSA key pair has been successfully generated.</p>

## Configuration Examples for RSA Key Pair Deployment

## Generating and Specifying RSA Keys Example

The following example is a sample trustpoint configuration that shows how to generate and specify the RSA key pair “exampleCAkeys”:

```
crypto key generate rsa general-purpose exampleCAkeys
crypto ca trustpoint exampleCAkeys
  enroll url http://exampleCAkeys/certsrv/mscep/mscep.dll
  rsakeypair exampleCAkeys 1024 1024
```

## Exporting and Importing RSA Keys Examples

### Exporting and Importing RSA Keys in PKCS12 Files Example

In the following example, an RSA key pair “mynewkp” is generated on Router A, and a trustpoint name “mynewtp” is created and associated with the RSA key pair. The trustpoint is exported to a TFTP server, so that it can be imported on Router B. By importing the trustpoint “mynewtp” to Router B, the user has imported the RSA key pair “mynewkp” to Router B.

#### Router A

```
crypto key generate rsa general label mykeys exportable
! The name for the keys will be:mynewkp
Choose the size of the key modulus in the range of 360 to 2048 for your
General Purpose Keys. Choosing a key modulus greater than 512 may take
a few minutes.
How many bits in the modulus [512]:
% Generating 512 bit RSA keys ...[OK]
!
crypto pki trustpoint mynewtp
  rsakeypair mykeys
  exit
crypto pki export mytp pkcs12 flash:myexport password mypassword123
Destination filename [myexport]?
Writing pkcs12 file to tftp://mytftpserver/myexport
CRYPTO_PKI:Exported PKCS12 file successfully.
Verifying checksum... OK (0x3307)
!
July 8 17:30:09 GMT:%CRYPTO-6-PKCS12EXPORT_SUCCESS:PKCS #12 Successfully Exported.
```

#### Router B

```
crypto pki import mynewtp pkcs12 flash:myexport password mypassword123
Source filename [myexport]?
CRYPTO_PKI:Imported PKCS12 file successfully.
!
July 8 18:07:50 GMT:%CRYPTO-6-PKCS12IMPORT_SUCCESS:PKCS #12 Successfully Imported.
```

### Exporting and Importing and RSA Keys in PEM Files Example

The following example shows the generation, exportation, and importation for the RSA key pair “mytp”, and verifies its status:

```
! Generate the key pair
!
Router(config)# crypto key generate rsa general-purpose label mytp exportable

The name for the keys will be: mytp
```

```

Choose the size of the key modulus in the range of 360 to 2048 for your
General Purpose Keys. Choosing a key modulus greater than 512 may take a few minutes.
How many bits in the modulus [512]: 1024
% Generating 1024 bit RSA keys ...[OK]
!
! Archive the key pair to a remote location, and use a good password.
!
Router(config)# crypto pki export mytp pem url nvram:mytp 3des password mypassword123

% Key name:mytp
Usage:General Purpose Key
Exporting public key...
Destination filename [mytp.pub]?
Writing file to nvram:mytp.pub
Exporting private key...
Destination filename [mytp.prv]?
Writing file to nvram:mytp.prv
!
! Import the key as a different name.
!
Router(config)# crypto pki import mytp2 pem url nvram:mytp2 password mypassword123

% Importing public key or certificate PEM file...
Source filename [mytp2.pub]?
Reading file from nvram:mytp2.pub
% Importing private key PEM file...
Source filename [mytp2.prv]?
Reading file from nvram:mytp2.prv% Key pair import succeeded.
!
! After the key has been imported, it is no longer exportable.
!
! Verify the status of the key.
!
Router# show crypto key mypubkey rsa

% Key pair was generated at:18:04:56 GMT Jun 6 2011
Key name:mycs
Usage:General Purpose Key
Key is exportable.
Key Data:
30819F30 0D06092A 864886F7 0D010101 05000381 8D003081 89028181 00E65253
9C30C12E 295AB73F B1DF9FAD 86F88192 7D4FA4D2 8BA7FB49 9045BAB9 373A31CB
A6B1B8F4 329F2E7E 8A50997E AADBCFAA 23C29E19 C45F4F05 DBB2FA51 4B7E9F79
A1095115 759D6BC3 5DFB5D7F BCF655BF 6317DB12 A8287795 7D8DC6A3 D31B2486
C9C96D2C 2F70B50D 3B4CDDAE F661041A 445AE11D 002EEF08 F2A627A0 5B020301 0001
% Key pair was generated at:18:17:25 GMT Jun 6 2011
Key name:mycs2
Usage:General Purpose Key
Key is not exportable.
Key Data:
30819F30 0D06092A 864886F7 0D010101 05000381 8D003081 89028181 00E65253
9C30C12E 295AB73F B1DF9FAD 86F88192 7D4FA4D2 8BA7FB49 9045BAB9 373A31CB
A6B1B8F4 329F2E7E 8A50997E AADBCFAA 23C29E19 C45F4F05 DBB2FA51 4B7E9F79
A1095115 759D6BC3 5DFB5D7F BCF655BF 6317DB12 A8287795 7D8DC6A3 D31B2486
C9C96D2C 2F70B50D 3B4CDDAE F661041A 445AE11D 002EEF08 F2A627A0 5B020301 0001

```

## Exporting Router RSA Key Pairs and Certificates from PEM Files Example

The following example shows how to generate and export the RSA key pair “aaa” and certificates of the router in PEM files that are associated with the trustpoint “mycs.” This example also shows PEM-formatted files, which include PEM boundaries before and after the base64-encoded data, that are used by other SSL and SSH applications.

```
Router(config)# crypto key generate rsa general-keys label aaa exportable
```

```

The name for the keys will be:aaa
Choose the size of the key modulus in the range of 360 to 2048 for your General Purpose
Keys. Choosing a key modulus greater than 512 may take a few minutes.
!
How many bits in the modulus [512]:

```

```

% Generating 512 bit RSA keys ...[OK]
!
Router(config)# crypto pki trustpoint mycs

Router(ca-trustpoint)# enrollment url http://mycs

Router(ca-trustpoint)#
rsakeypair aaa

Router(ca-trustpoint)# exit

Router(config)# crypto pki authenticate mycs

Certificate has the following attributes:
Fingerprint:C21514AC 12815946 09F635ED FBB6CF31
% Do you accept this certificate? [yes/no]: y
Trustpoint CA certificate accepted.
!
Router(config)# crypto pki enroll mycs

%
% Start certificate enrollment ..
% Create a challenge password. You will need to verbally provide this password to the CA
Administrator in order to revoke your certificate.
For security reasons your password will not be saved in the configuration.
Please make a note of it.
Password:
Re-enter password:
% The fully-qualified domain name in the certificate will be: Router
% The subject name in the certificate will be:host.example.com
% Include the router serial number in the subject name? [yes/no]: n
% Include an IP address in the subject name? [no]: n
Request certificate from CA? [yes/no]: y
% Certificate request sent to Certificate Authority
% The certificate request fingerprint will be displayed.
% The 'show crypto ca certificate' command will also show the fingerprint.
Router(config)# Fingerprint:8DA777BC 08477073 A5BE2403 812DD157
00:29:11:%CRYPTO-6-CERTRET:Certificate received from Certificate Authority
Router(config)# crypto ca export aaa pem terminal 3des password

% CA certificate:
-----BEGIN CERTIFICATE-----
MIICAzCCAa2gAwIBAgIBATANBgkqhkiG9w0BAQUFADBOMQswCQYDVQQGEwJVUzES
<snip>
waDeNOSI3WlDa0AWq5DkVBkxwgn0TqIJXJOcttjHnWHK1LMcMVGn
-----END CERTIFICATE-----
% Key name:aaa
Usage:General Purpose Key
-----BEGIN RSA PRIVATE KEY-----
Proc-Type:4,ENCRYPTED
DEK-Info:DES-EDE3-CBC,ED6B210B626BC81A
Urguv0jn jwOgowWVUQ2XR5nbzzYHI2vGLunpH/IxIsJuNjRVjbAAUpGk7VnPCT87
<snip>
kLCotxzEv7JHc72gMku9uUlrLsnFH5slzAtoC0czfU4=
-----END RSA PRIVATE KEY-----
% Certificate:
-----BEGIN CERTIFICATE-----
MIICTjCCAFigAwIBAgICIQUwDQYJKoZIhvcNAQEFBQAwTjELMAkGA1UEBhMCMVVMx
<snip>
6x1BaIsuMxnHmr89KkKkYlU6
-----END CERTIFICATE-----

```

## Importing Router RSA Key Pairs and Certificate from PEM Files Example

The following example shows how to import the RSA key pairs and certificate to the trustpoint “ggg” from PEM files via TFTP:

```

Router(config)# crypto pki import ggg pem url tftp://10.1.1.2/username/msca password

% Importing CA certificate...
Address or name of remote host [10.1.1.2]?

```

```

Destination filename [username/msca.ca]?
Reading file from tftp://10.1.1.2/username/msca.ca
Loading username/msca.ca from 10.1.1.2 (via Ethernet0):!
[OK - 1082 bytes]
% Importing private key PEM file...
Address or name of remote host [10.1.1.2]?
Destination filename [username/msca.prv]?
Reading file from tftp://10.1.1.2/username/msca.prv
Loading username/msca.prv from 10.1.1.2 (via Ethernet0):!
[OK - 573 bytes]
% Importing certificate PEM file...
Address or name of remote host [10.1.1.2]?
Destination filename [username/msca.crt]?
Reading file from tftp://10.1.1.2/username/msca.crt
Loading username/msca.crt from 10.1.1.2 (via Ethernet0):!
[OK - 1289 bytes]
% PEM files import succeeded.
Router(config)#

```

## Encrypting and Locking Private Keys on a Router Examples

### Configuring and Verifying an Encrypted Key Example

The following example shows how to encrypt the RSA key “pki-123.example.com.” Thereafter, the **show crypto key mypubkey rsa** command is issued to verify that the RSA key is encrypted (protected) and unlocked.

```

Router(config)# crypto key encrypt rsa name pki-123.example.com passphrase password
Router(config)# exit
Router# show crypto key mypubkey rsa

% Key pair was generated at:00:15:32 GMT Jun 25 2003

Key name:pki-123.example.com
Usage:General Purpose Key
*** The key is protected and UNLOCKED. ***
Key is not exportable.
Key Data:
305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00E0CC9A 1D23B52C
CD00910C ABD392AE BA6D0E3F FC47A0EF 8AFEE340 0EC1E62B D40E7DCC
23C4D09E
03018B98 E0C07B42 3CFD1A32 2A3A13C0 1FF919C5 8DE9565F 1F020301 0001
% Key pair was generated at:00:15:33 GMT Jun 25 2003
Key name:pki-123.example.com.server
Usage:Encryption Key
Key is exportable.
Key Data:
307C300D 06092A86 4886F70D 01010105 00036B00 30680261 00D3491E 2A21D383
854D7DA8 58AFBDAC 4E11A7DD E6C40AC6 66473A9F 0C845120 7C0C6EC8 1FFF5757
3A41CE04 FDCB40A4 B9C68B4F BC7D624B 470339A3 DE739D3E F7DDB549 91CD4DA4

```

```
DF190D26 7033958C 8A61787B D40D28B8 29BCD0ED 4E6275C0 6D020301 0001
```

```
Router#
```

## Configuring and Verifying a Locked Key Example

The following example shows how to lock the key “pki-123.example.com.” Thereafter, the **show crypto key mypubkey rsa** command is issued to verify that the key is protected (encrypted) and locked.

```
Router# crypto key lock rsa name pki-123.example.com passphrase password
!
Router# show crypto key mypubkey rsa

% Key pair was generated at:20:29:41 GMT Jun 20 2003
Key name:pki-123.example.com
Usage:General Purpose Key
*** The key is protected and LOCKED. ***
Key is exportable.
Key Data:
305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00D7808D C5FF14AC
0D2B55AC 5D199F2F 7CB4B355 C555E07B 6D0DECBE 4519B1F0 75B12D6F 902D6E9F
B6FDAD8D 654EF851 5701D5D7 EDA047ED 9A2A619D 5639DF18 EB020301 0001
```

## Where to Go Next

After you have generated an RSA key pair, you should set up the trustpoint. If you have already set up the trustpoint, you should authenticate and enroll the routers in a PKI. For information on enrollment, see the module “Configuring Certificate Enrollment for a PKI.”

## Additional References

### Related Documents

Related Topic	Document Title
Overview of PKI, including RSA keys, certificate enrollment, and CAs	Cisco IOS PKI Overview: Understanding and Planning a PKI
PKI commands: complete command syntax, command mode, defaults, usage guidelines, and examples	<i>Cisco IOS Security Command Reference</i>
Recommended cryptographic algorithms	<i>Next Generation Encryption</i>



**MIBs**

MIBs	MIBs Link
None	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: <a href="http://www.cisco.com/go/mibs">http://www.cisco.com/go/mibs</a>

**RFCs**

RFCs	Title
RFC 2409	<i>The Internet Key Exchange (IKE)</i>
RFC 2511	Internet X.509 Certificate Request Message Format

**Technical Assistance**

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	<a href="http://www.cisco.com/cisco/web/support/index.html">http://www.cisco.com/cisco/web/support/index.html</a>

## Feature Information for RSA Keys Within a PKI

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

**Table 1**      **Feature Information for RSA Keys Within a PKI**

Feature Name	Software Releases	Feature Configuration Information
Cisco IOS 4096-Bit Public Key Support	12.4(12)T	<p>This feature introduces Cisco IOS 4096-bit peer public key support.</p> <p>The following section provides information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">RSA Keys Overview, page 10</a></li> </ul>
Exporting and Importing RSA Keys	12.2(15)T	<p>This feature allows you to transfer security credentials between devices by exporting and importing RSA keys. The key pair that is shared between two devices will allow one device to immediately and transparently take over the functionality of the other router.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Benefits of Exportable RSA Keys, page 11</a></li> <li>• <a href="#">Exporting and Importing RSA Keys in PKCS12 Files, page 18</a></li> </ul> <p>The following commands were introduced or modified by this feature: <b>crypto ca export pkcs12</b>, <b>crypto ca import pkcs12</b>, <b>crypto key generate rsa (IKE)</b></p>

Feature Name	Software Releases	Feature Configuration Information
Import of RSA Key Pair and Certificates in PEM Format	12.3(4)T	<p>This feature allows customers to use PEM-formatted files to import or export RSA key pairs. PEM-formatted files allow customers to directly use existing RSA key pairs on their Cisco IOS routers instead of generating new keys.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Benefits of Exportable RSA Keys, page 11</a></li> <li>• <a href="#">Exporting and Importing RSA Keys in PEM-Formatted Files, page 20</a></li> </ul> <p>The following commands were introduced by this feature: <b>crypto ca export pem, crypto ca import pem, crypto key export pem, crypto key import pem</b></p>
Multiple RSA Key Pair Support	12.2(8)T	<p>This feature allows a user to configure a router to have multiple RSA key pairs. Thus, the Cisco IOS software can maintain a different key pair for each identity certificate.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Reasons to Store Multiple RSA Keys on a Router, page 11</a></li> <li>• <a href="#">Managing RSA Key Pairs and Trustpoint Certificates, page 13</a></li> </ul> <p>The following commands were introduced or modified by this feature: <b>crypto key generate rsa, crypto key zeroize rsa, rsakeypair</b></p>

Feature Name	Software Releases	Feature Configuration Information
Protected Private Key Storage	12.3(7)T	<p>This feature allows a user to encrypt and lock the RSA private keys that are used on a Cisco IOS router, thereby, preventing unauthorized use of the private keys.</p> <p>The following section provides information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Encrypting and Locking Private Keys on a Router, page 22</a></li> </ul> <p>The following commands were introduced or modified by this feature : <b>crypto key decrypt rsa, crypto key encrypt rsa, crypto key lock rsa, crypto key unlock rsa, show crypto key mypubkey rsa</b></p>
RSA 4096-bit Key Generation in Software Crypto Engine Support	15.1(1)T	<p>The range value for the <b>modulus</b> keyword value for the <b>crypto key generate rsa</b> command is extended from 360 to 2048 bits to 360 to 4096 bits.</p>

Feature Name	Software Releases	Feature Configuration Information
IOS PKI Performance Monitoring and Optimization	15.1(3)T	<p>The IOS Performance Monitoring and Optimization feature provides a way to characterize the performance within the Public Key Infrastructure (PKI) subsystem and debug and analyze PKI performance related issues. This feature is discussed in further detail in the IOS Performance Monitoring and Optimization feature document.</p> <p>This feature also includes the following enhancements that can be found in this document:</p> <ul style="list-style-type: none"> <li>• A self-signed trustpoint certificate can be created for the router that contains the trustpoint name in the Subject Alternative Name (subjectAltName) field.</li> <li>• A peer router's public keys can be deleted to help debug signature verification problems in IKE version 1 and IKE version 2 and optimize the peer router's performance as a result of taking this action.</li> </ul> <p>These features can be found in the following sections:</p> <p>The following commands were introduced or modified by this feature : <b>crypto key zeroize pubkey-chain, subject-alt-name</b></p>

Feature Name	Software Releases	Feature Configuration Information
PKI IPv6 Support for VPN Solutions	15.2(1)T	<p>The <b>crypto pki export pem</b> command was modified. Support was added in the CLI for hiding the password in an exported PEM-formatted file with the introduction of the <b>password</b> keyword followed by the <i>password-phrase</i> argument.</p> <p>The <b>crypto pki export pkcs12 password</b> command was modified. Support was added in the CLI for hiding the password in an exported PKCS12-formatted file with the introduction of the <b>password</b> keyword followed by the <i>password-phrase</i> argument.</p> <p>The <b>crypto pki import pem</b> command was modified. Support was added in the CLI for hiding the password in an imported PEM-formatted file with the introduction of the <b>password</b> keyword followed by the <i>password-phrase</i> argument.</p> <p>The <b>crypto pki import pkcs12 password</b> command was modified. Support was added in the CLI for hiding the password in an imported PKCS12-formatted file with the introduction of the <b>password</b> keyword followed by the <i>password-phrase</i> argument.</p>

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.





# Configuring Authorization and Revocation of Certificates in a PKI

This module describes how to configure authorization and revocation of certificates in a public key infrastructure (PKI). It includes information on high-availability support for the certificate server.



## Note

Security threats, as well as the cryptographic technologies to help protect against them, are constantly changing. For more information about the latest Cisco cryptographic recommendations, see the [Next Generation Encryption](#) (NGE) white paper.

- [Finding Feature Information](#), page 39
- [Prerequisites for Authorization and Revocation of Certificates](#), page 39
- [Restrictions for Authorization and Revocation of Certificates](#), page 40
- [Information About Authorization and Revocation of Certificates](#), page 40
- [How to Configure Authorization and Revocation of Certificates for Your PKI](#), page 48
- [Configuration Examples for Setting Up Authorization and Revocation of Certificates](#), page 74
- [Additional References](#), page 87
- [Feature Information for Certificate Authorization and Revocation](#), page 87

## Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table at the end of this module.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

## Prerequisites for Authorization and Revocation of Certificates



## Plan Your PKI Strategy



### Tip

It is strongly recommended that you plan your entire PKI strategy before you begin to deploy actual certificates.

Authorization and revocation can occur only after you or a network administrator have completed the following tasks:

- Configured the certificate authority (CA).
- Enrolled peer devices with the CA.
- Identified and configured the protocol (such as IP Security [IPsec] or secure socket layer [SSL]) that is to be used for peer-to-peer communication.

You should decide which authorization and revocation strategy you are going to configure before enrolling peer devices because the peer device certificates might have to contain authorization and revocation-specific information.

### “crypto ca” to “crypto pki” CLI Change

As of Cisco IOS Release 12.3(7)T, all commands that begin as “crypto ca” have been changed to begin as “crypto pki.” Although the router will still accept crypto ca commands, all output will be read back as crypto pki.

### High Availability

For high availability, IPsec-secured Stream Control Transmission Protocol (SCTP) must be configured on both the active and the standby routers. For synchronization to work, the redundancy mode on the certificate servers must be set to ACTIVE/STANDBY after you configure SCTP.

## Restrictions for Authorization and Revocation of Certificates

PKI High Availability (HA) support of intra-chassis stateful switchover (SSO) redundancy is currently not supported on all switches running the Cisco IOS Release 12.2 S software. See Cisco bug CSCtb59872 for more information.

## Information About Authorization and Revocation of Certificates

- [PKI Authorization, page 41](#)
- [PKI and AAA Server Integration for Certificate Status, page 41](#)
- [CRLs or OCSP Server Choosing a Certificate Revocation Mechanism, page 43](#)
- [When to Use Certificate-Based ACLs for Authorization or Revocation, page 45](#)
- [PKI Certificate Chain Validation, page 47](#)
- [High-Availability Support, page 48](#)

## PKI Authorization

PKI authentication does not provide authorization. Current solutions for authorization are specific to the router that is being configured, although a centrally managed solution is often required.

There is not a standard mechanism by which certificates are defined as authorized for some tasks and not for others. This authorization information can be captured in the certificate itself if the application is aware of the certificate-based authorization information. But this solution does not provide a simple mechanism for real-time updates to the authorization information and forces each application to be aware of the specific authorization information embedded in the certificate.

When the certificate-based ACL mechanism is configured as part of the trustpoint authentication, the application is no longer responsible for determining this authorization information, and it is no longer possible to specify for which application the certificate is authorized. In some cases, the certificate-based ACL on the router gets so large that it cannot be managed. Additionally, it is beneficial to retrieve certificate-based ACL indications from an external server. (For more information on using certificate-based ACLs for authentication, see the section “[When to Use Certificate-Based ACLs for Authorization or Revocation, page 45.](#)”)

Current solutions to the real-time authorization problem involve specifying a new protocol and building a new server (with associated tasks, such as management and data distribution).

## PKI and AAA Server Integration for Certificate Status

Integrating your PKI with an authentication, authorization, and accounting (AAA) server provides an alternative online certificate status solution that leverages the existing AAA infrastructure. Certificates can be listed in the AAA database with appropriate levels of authorization. For components that do not explicitly support PKI-AAA, a default label of “all” from the AAA server provides authorization. Likewise, a label of “none” from the AAA database indicates that the specified certificate is not valid. (The absence of any application label is equivalent, but “none” is included for completeness and clarity). If the application component does support PKI-AAA, the component may be specified directly; for example, the application component could be “ipsec,” “ssl,” or “osp.” (ipsec=IP Security, ssl=Secure Sockets Layer, and osp=Open Settlement Protocol.)



---

**Note**

Currently, no application component supports specification of the application label.

---

- There may be a time delay when accessing the AAA server. If the AAA server is not available, the authorization fails.
- [RADIUS or TACACS+ Choosing a AAA Server Protocol, page 41](#)
- [Attribute-Value Pairs for PKI and AAA Server Integration, page 42](#)

## RADIUS or TACACS+ Choosing a AAA Server Protocol

The AAA server can be configured to work with either the RADIUS or TACACS+ protocol. When you are configuring the AAA server for the PKI integration, you must set the RADIUS or TACACS attributes that are required for authorization.

If the RADIUS protocol is used, the password that is configured for the username in the AAA server should be set to “cisco,” which is acceptable because the certificate validation provides authentication and the AAA database is only being used for authorization. When the TACACS protocol is used, the password that

is configured for the username in the AAA server is irrelevant because TACACS supports authorization without requiring authentication (the password is used for authentication).

In addition, if you are using TACACS, you must add a PKI service to the AAA server. The custom attribute “cert-application=all” is added under the PKI service for the particular user or usergroup to authorize the specific username.

## Attribute-Value Pairs for PKI and AAA Server Integration

The table below lists the attribute-value (AV) pairs that are to be used when setting up PKI integration with a AAA server. (Note the values shown in the table are possible values.) The AV pairs must match the client configuration. If they do not match, the peer certificate is not authorized.



### Note

Users can sometimes have AV pairs that are different from those of every other user. As a result, a unique username is required for each user. The **all** parameter (within the **authorization username** command) specifies that the entire subject name of the certificate will be used as the authorization username.

**Table 2** AV Pairs That Must Match

AV Pair	Value
cisco-avpair=pki:cert-application=all	Valid values are “all” and “none.”
cisco-avpair=pki:cert-trustpoint=msca	<p>The value is a Cisco IOS command-line interface (CLI) configuration trustpoint label.</p> <p><b>Note</b> The cert-trustpoint AV pair is normally optional. If it is specified, the Cisco IOS router query must be coming from a certificate trustpoint that has a matching label, and the certificate that is authenticated must have the specified certificate serial number.</p>
cisco-avpair=pki:cert-serial=16318DB7000100001671	<p>The value is a certificate serial number.</p> <p><b>Note</b> The cert-serial AV pair is normally optional. If it is specified, the Cisco IOS router query must be coming from a certificate trustpoint that has a matching label, and the certificate that is authenticated must have the specified certificate serial number.</p>

AV Pair	Value
cisco-avpair=pki:cert-lifetime-end=1:00 jan 1, 2003	<p>The cert-lifetime-end AV pair is available to artificially extend a certificate lifetime beyond the time period that is indicated in the certificate itself. If the cert-lifetime-end AV pair is used, the cert-trustpoint and cert-serial AV pairs must also be specified. The value must match the following form: hours:minutes month day, year.</p> <p><b>Note</b> Only the first three characters of a month are used: Jan, Feb, Mar, Apr, May, Jun, Jul, Aug, Sep, Oct, Nov, Dec. If more than three characters are entered for the month, the remaining characters are ignored (for example Janxxxx).</p>

## CRLs or OCSP Server Choosing a Certificate Revocation Mechanism

After a certificate is validated as a properly signed certificate, a certificate revocation method is performed to ensure that the certificate has not been revoked by the issuing CA. Cisco IOS software supports two revocation mechanisms--certificate revocation lists (CRLs) and Online Certificate Status Protocol (OCSP). Cisco IOS software also supports AAA integration for certificate checking; however, additional authorization functionality is included. For more information on PKI and AAA certificate authorization and status check, see the PKI and AAA Server Integration for Certificate Status section.

The following sections explain how each revocation mechanism works:

- [What Is a CRL, page 43](#)
- [What Is OCSP, page 44](#)

### What Is a CRL

A certificate revocation list (CRL) is a list of revoked certificates. The CRL is created and digitally signed by the CA that originally issued the certificates. The CRL contains dates for when each certificate was issued and when it expires.

CAs publish new CRLs periodically or when a certificate for which the CA is responsible has been revoked. By default, a new CRL is downloaded after the currently cached CRL expires. An administrator may also configure the duration for which CRLs are cached in router memory or disable CRL caching completely. The CRL caching configuration applies to all CRLs associated with a trustpoint.

When the CRL expires, the router deletes it from its cache. A new CRL is downloaded when a certificate is presented for verification; however, if a newer version of the CRL that lists the certificate under examination is on the server but the router is still using the CRL in its cache, the router does not know that the certificate has been revoked. The certificate passes the revocation check even though it should have been denied.

When a CA issues a certificate, the CA can include in the certificate the CRL distribution point (CDP) for that certificate. Cisco IOS client devices use CDPs to locate and load the correct CRL. The Cisco IOS client supports multiple CDPs, but the Cisco IOS CA currently supports only one CDP; however, third-party vendor CAs may support multiple CDPs or different CDPs per certificate. If a CDP is not specified in the certificate, the client device uses the default Simple Certificate Enrollment Protocol (SCEP) method to retrieve the CRL. (The CDP location can be specified through the **cdp-url** command.)

When implementing CRLs, you should consider the following design considerations:

- CRL lifetimes and the security association (SA) and Internet Key Exchange (IKE) lifetimes.
  - The CRL lifetime determines the length of time between CA-issued updates to the CRL. The default CRL lifetime value, which is 168 hours [1 week], can be changed through the **lifetime crl** command.
  - The method of the CDP determines how the CRL is retrieved; some possible choices include HTTP, Lightweight Directory Access Protocol (LDAP), SCEP, or TFTP. HTTP, TFTP, and LDAP are the most commonly used methods. Although Cisco IOS software defaults to SCEP, an HTTP CDP is recommended for large installations using CRLs because HTTP can be made highly scalable.
  - The location of the CDP determines from where the CRL is retrieved; for example, you can specify the server and file path from which to retrieve the CRL.
- [Querying All CDPs During Revocation Check, page 44](#)

### Querying All CDPs During Revocation Check

When a CDP server does not respond to a request, the Cisco IOS software reports an error, which may result in the peer's certificate being rejected. To prevent a possible certificate rejection and if there are multiple CDPs in a certificate, the Cisco IOS software will attempt to use the CDPs in the order in which they appear in the certificate. The router will attempt to retrieve a CRL using each CDP URL or directory specification. If an error occurs using a CDP, an attempt will be made using the next CDP.



#### Note

Prior to Cisco IOS Release 12.3(7)T, the Cisco IOS software makes only one attempt to retrieve the CRL, even when the certificate contains more than one CDP.



#### Tip

Although the Cisco IOS software will make every attempt to obtain the CRL from one of the indicated CDPs, it is recommended that you use an HTTP CDP server with high-speed redundant HTTP servers to avoid application timeouts because of slow CDP responses.

## What Is OCSP

OCSP is an online mechanism that is used to determine certificate validity and provides the following flexibility as a revocation mechanism:

- OCSP can provide real-time certificate status checking.
- OCSP allows the network administrator to specify a central OCSP server, which can service all devices within a network.
- OCSP also allows the network administrator the flexibility to specify multiple OCSP servers, either per client certificate or per group of client certificates.
- OCSP server validation is usually based on the root CA certificate or a valid subordinate CA certificate, but may also be configured so that external CA certificates or self-signed certificates may be used. Using external CA certificates or self-signed certificates allows the OCSP servers certificate to be issued and validated from an alternative PKI hierarchy.

A network administrator can configure an OCSP server to collect and update CRLs from different CA servers. The devices within the network can rely on the OCSP server to check the certificate status without retrieving and caching each CRL for every peer. When peers have to check the revocation status of a certificate, they send a query to the OCSP server that includes the serial number of the certificate in question and an optional unique identifier for the OCSP request, or a nonce. The OCSP server holds a copy

of the CRL to determine if the CA has listed the certificate as being revoked; the server then responds to the peer including the nonce. If the nonce in the response from the OCSP server does not match the original nonce sent by the peer, the response is considered invalid and certificate verification fails. The dialog between the OCSP server and the peer consumes less bandwidth than most CRL downloads.

If the OCSP server is using a CRL, CRL time limitations will be applicable; that is, a CRL that is still valid might be used by the OCSP server although a new CRL has been issued by the CRL containing additional certificate revocation information. Because fewer devices are downloading the CRL information on a regular basis, you can decrease the CRL lifetime value or configure the OCSP server not to cache the CRL. For more information, check your OCSP server documentation.

- [When to Use an OCSP Server, page 45](#)

### When to Use an OCSP Server

OCSP may be more appropriate than CRLs if your PKI has any of the following characteristics:

- Real-time certificate revocation status is necessary. CRLs are updated only periodically and the latest CRL may not always be cached by the client device. For example, if a client does not yet have the latest CRL cached and a newly revoked certificate is being checked, that revoked certificate will successfully pass the revocation check.
- There are a large number of revoked certificates or multiple CRLs. Caching a large CRL consumes large portions of Cisco IOS memory and may reduce resources available to other processes.
- CRLs expire frequently, causing the CDP to handle a larger load of CRLs.



#### Note

As of Cisco IOS Release 12.4(9)T or later, an administrator may configure CRL caching, either by disabling CRL caching completely or setting a maximum lifetime for a cached CRL per trustpoint.

## When to Use Certificate-Based ACLs for Authorization or Revocation

Certificates contain several fields that are used to determine whether a device or user is authorized to perform a specified action.

Because certificate-based ACLs are configured on the device, they do not scale well for large numbers of ACLs; however, certificate-based ACLs do provide very granular control of specific device behavior. Certificate-based ACLs are also leveraged by additional features to help determine when PKI components such as revocation, authorization, or a trustpoint should be used. They provide a general mechanism allowing users to select a specific certificate or a group of certificates that are being validated for either authorization or additional processing.

Certificate-based ACLs specify one or more fields within the certificate and an acceptable value for each specified field. You can specify which fields within a certificate should be checked and which values those fields may or may not have.

There are six logical tests for comparing the field with the value--equal, not equal, contains, does not contain, less than, and greater than or equal. If more than one field is specified within a single certificate-based ACL, the tests of all of the fields within the ACL must succeed to match the ACL. The same field may be specified multiple times within the same ACL. More than one ACL may be specified, and ACL will be processed in turn until a match is found or all of the ACLs have been processed.

- [Ignore Revocation Checks Using a Certificate-Based ACL, page 46](#)

## Ignore Revocation Checks Using a Certificate-Based ACL

Certificate-based ACLs can be configured to instruct your router to ignore the revocation check and expired certificates of a valid peer. Thus, a certificate that meets the specified criteria can be accepted regardless of the validity period of the certificate, or if the certificate meets the specified criteria, revocation checking does not have to be performed. You can also use a certificate-based ACL to ignore the revocation check when the communication with a AAA server is protected with a certificate.

### Ignoring Revocation Lists

To allow a trustpoint to enforce CRLs except for specific certificates, enter the **match certificate** command with the **skip revocation-check** keyword. This type of enforcement is most useful in a hub-and-spoke configuration in which you also want to allow direct spoke-to-spoke connections. In pure hub-and-spoke configurations, all spokes connect only to the hub, so CRL checking is necessary only on the hub. For one spoke to communicate directly with another spoke, the **match certificate** command with the **skip revocation-check** keyword can be used for neighboring peer certificates instead of requiring a CRL on each spoke.

### Ignoring Expired Certificates

To configure your router to ignore expired certificates, enter the **match certificate** command with the **allow expired-certificate** keyword. This command has the following purposes:

- If the certificate of a peer has expired, this command may be used to “allow” the expired certificate until the peer can obtain a new certificate.
- If your router clock has not yet been set to the correct time, the certificate of a peer will appear to be not yet valid until the clock is set. This command may be used to allow the certificate of the peer even though your router clock is not set.



#### Note

---

If Network Time Protocol (NTP) is available only via the IPsec connection (usually via the hub in a hub-and-spoke configuration), the router clock can never be set. The tunnel to the hub cannot be “brought up” because the certificate of the hub is not yet valid.

---

- “Expired” is a generic term for a certificate that is expired or that is not yet valid. The certificate has a start and end time. An expired certificate, for purposes of the ACL, is one for which the current time of the router is outside the start and end times specified in the certificate.

### Skipping the AAA Check of the Certificate

If the communication with an AAA server is protected with a certificate, and you want to skip the AAA check of the certificate, use the **match certificate** command with the **skip authorization-check** keyword. For example, if a virtual private network (VPN) tunnel is configured so that all AAA traffic goes over that tunnel, and the tunnel is protected with a certificate, you can use the **match certificate** command with the **skip authorization-check** keyword to skip the certificate check so that the tunnel can be established.

The **match certificate** command and the **skip authorization-check** keyword should be configured after PKI integration with an AAA server is configured.

**Note**

---

If the AAA server is available only via an IPSec connection, the AAA server cannot be contacted until after the IPSec connection is established. The IPSec connection cannot be “brought up” because the certificate of the AAA server is not yet valid.

---

## PKI Certificate Chain Validation

A certificate chain establishes a sequence of trusted certificates --from a peer certificate to the root CA certificate. Within a PKI hierarchy, all enrolled peers can validate the certificate of one another if the peers share a trusted root CA certificate or a common subordinate CA. Each CA corresponds to a trustpoint.

When a certificate chain is received from a peer, the default processing of a certificate chain path continues until the first trusted certificate, or trustpoint, is reached. In Cisco IOS Release 12.4(6)T and later releases, an administrator may configure the level to which a certificate chain is processed on all certificates including subordinate CA certificates.

Configuring the level to which a certificate chain is processed allows for the reauthentication of trusted certificates, the extension of a trusted certificate chain, and the completion of a certificate chain that contains a gap.

### Reauthentication of Trusted Certificates

The default behavior is for the router to remove any trusted certificates from the certificate chain sent by the peer before the chain is validated. An administrator may configure certificate chain path processing so that the router does not remove CA certificates that are already trusted before chain validation, so that all certificates in the chain are re-authenticated for the current session.

### Extending the Trusted Certificate Chain

The default behavior is for the router to use its trusted certificates to extend the certificate chain if there are any missing certificates in the certificate chain sent by the peer. The router will validate only certificates in the chain sent by the peer. An administrator may configure certificate chain path processing so that the certificates in the peer’s certificate chain and the router’s trusted certificates are validated to a specified point.

### Completing Gaps in a Certificate Chain

An administrator may configure certificate chain processing so that if there is a gap in the configured Cisco IOS trustpoint hierarchy, certificates sent by the peer can be used to complete the set of certificates to be validated.

**Note**

---

If the trustpoint is configured to require parent validation and the peer does not provide the full certificate chain, the gap cannot be completed and the certificate chain is rejected and invalid.

---

**Note**

---

It is a configuration error if the trustpoint is configured to require parent validation and there is no parent trustpoint configured. The resulting certificate chain gap cannot be completed and the subordinate CA certificate cannot be validated. The certificate chain is invalid.

---



## High-Availability Support

High-availability support for the certificate server is provided by:

- Synchronizing revoke commands with the standby certificate server
- Sending serial-number commands when new certificates are issued

This means that the standby certificate server is ready to issue certificates and certificate revocation lists (CRLs) if it becomes active.

Further high-availability support is provided by the following synchronizations with the standby:

- Certificate-server configuration
- Pending requests
- Grant and reject commands
- For box-to-box high availability, which does not support configuration synchronization, a basic configuration synchronization mechanism is layered over a redundancy facility.
- Trustpoint configuration synchronization support.

## How to Configure Authorization and Revocation of Certificates for Your PKI

- [Configuring PKI Integration with a AAA Server, page 48](#)
- [Configuring a Revocation Mechanism for PKI Certificate Status Checking, page 53](#)
- [Configuring Certificate Authorization and Revocation Settings, page 56](#)
- [Configuring Certificate Chain Validation, page 64](#)
- [Configuring Certificate Servers for High Availability, page 66](#)

### Configuring PKI Integration with a AAA Server

Perform this task to generate a AAA username from the certificate presented by the peer and specify which fields within a certificate should be used to build the AAA database username.

**Note**

The following restrictions should be considered when using the **all** keyword as the subject name for the **authorization username** command:

- Some AAA servers limit the length of the username (for example, to 64 characters). As a result, the entire certificate subject name cannot be longer than the limitation of the server.
- Some AAA servers limit the available character set that may be used for the username (for example, a space [ ] and an equal sign [=] may not be acceptable). You cannot use the **all** keyword for a AAA server having such a character-set limitation.
- The **subject-name** command in the trustpoint configuration may not always be the final AAA subject name. If the fully qualified domain name (FQDN), serial number, or IP address of the router are included in a certificate request, the subject name field of the issued certificate will also have these components. To turn off the components, use the **fqdn**, **serial-number**, and **ip-address** commands with the **none** keyword.
- CA servers sometimes change the requested subject name field when they issue a certificate. For example, CA servers of some vendors switch the relative distinguished names (RDNs) in the requested subject names to the following order: CN, OU, O, L, ST, and C. However, another CA server might append the configured LDAP directory root (for example, O=cisco.com) to the end of the requested subject name.
- Depending on the tools you choose for displaying a certificate, the printed order of the RDNs in the subject name could be different. Cisco IOS software always displays the least significant RDN first, but other software, such as Open Source Secure Socket Layer (OpenSSL), does the opposite. Therefore, if you are configuring a AAA server with a full distinguished name (DN) (subject name) as the corresponding username, ensure that the Cisco IOS software style (that is, with the least significant RDN first) is used.

or

```
radius-server host hostname [key string]
```

**SUMMARY STEPS**

1. **enable**
2. **configure terminal**
3. **aaa new-model**
4. **aaa authorization network** *listname* [*method*]
5. **crypto pki trustpoint** *name*
6. **enrollment** [**mode**] [**retry period** *minutes*] [**retry count** *number*] **url** *url* [**pem**]
7. **revocation-check** *method*
8. **exit**
9. **authorization username** **subjectname** *subjectname*
10. **authorization list** *listname*
11. **tacacs-server host** *hostname* [**key string**]

## DETAILED STEPS

	Command or Action	Purpose
Step 1	<p><b>enable</b></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
Step 2	<p><b>configure terminal</b></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
Step 3	<p><b>aaa new-model</b></p> <p><b>Example:</b></p> <pre>Router(config)# aaa new-model</pre>	<p>Enables the AAA access control model.</p>
Step 4	<p><b>aaa authorization network <i>listname</i> [<i>method</i>]</b></p> <p><b>Example:</b></p> <pre>Router (config)# aaa authorization network maxaaa group tacacs+</pre>	<p>Sets the parameters that restrict user access to a network.</p> <ul style="list-style-type: none"> <li><i>method</i> --Can be <b>group radius</b>, <b>group tacacs+</b>, or <b>group group-name</b>.</li> </ul>
Step 5	<p><b>crypto pki trustpoint <i>name</i></b></p> <p><b>Example:</b></p> <pre>Route (config)# crypto pki trustpoint msca</pre>	<p>Declares the trustpoint and a given name and enters ca-trustpoint configuration mode.</p>

Command or Action	Purpose
<p><b>Step 6</b> <b>enrollment</b> [<b>mode</b>] [<b>retry period</b> <i>minutes</i>] [<b>retry count</b> <i>number</i>] <b>url</b> <i>url</i> [<b>pem</b>]</p> <p><b>Example:</b></p> <pre>Router (ca-trustpoint)# enrollment url http://caserver.myexample.com  - or-  Router (ca-trustpoint)# enrollment url http://[2001:DB8:1:1::1]:80</pre>	<p>Specifies the following enrollment parameters of the CA:</p> <ul style="list-style-type: none"> <li>• (Optional) The <b>mode</b> keyword specifies the registration authority (RA) mode, if your CA system provides an RA. By default, RA mode is disabled.</li> <li>• (Optional) The <b>retry period</b> keyword and <i>minutes</i> argument specifies the period, in minutes, in which the router waits before sending the CA another certificate request. Valid values are from 1 to 60. The default is 1.</li> <li>• (Optional) The <b>retry count</b> keyword and <i>number</i> argument specifies the number of times a router will resend a certificate request when it does not receive a response from the previous request. Valid values are from 1 to 100. The default is 10.</li> <li>• The <i>url</i> argument is the URL of the CA to which your router should send certificate requests. <ul style="list-style-type: none"> <li><b>Note</b> With the introduction of Cisco IOS Release 15.2(1)T, an IPv6 address can be added to the <b>http:</b> enrolment method. For example: <code>http://[ipv6-address]:80</code>. The IPv6 address must be enclosed in brackets in the URL. See the <a href="#">enrollment url (ca-trustpoint)</a> command page for more information on the other enrollment methods that can be used.</li> </ul> </li> <li>• (Optional) The <b>pem</b> keyword adds privacy-enhanced mail (PEM) boundaries to the certificate request.</li> </ul>
<p><b>Step 7</b> <b>revocation-check</b> <i>method</i></p> <p><b>Example:</b></p> <pre>Router (ca-trustpoint)# revocation-check crl</pre>	<p>(Optional) Checks the revocation status of a certificate.</p>
<p><b>Step 8</b> <b>exit</b></p> <p><b>Example:</b></p> <pre>Router (ca-trustpoint)# exit</pre>	<p>Exits ca-trustpoint configuration mode and returns to global configuration mode.</p>

Command or Action	Purpose
<p><b>Step 9</b> <code>authorization username subjectname</code> <i>subjectname</i></p> <p><b>Example:</b></p> <pre>Router (config)# authorization username subjectname serialnumber</pre>	<p>Sets parameters for the different certificate fields that are used to build the AAA username.</p> <p>The <i>subjectname</i> argument can be any of the following:</p> <ul style="list-style-type: none"> <li>• <b>all</b> --Entire distinguished name (subject name) of the certificate.</li> <li>• <b>commonname</b> --Certification common name.</li> <li>• <b>country</b> --Certificate country.</li> <li>• <b>email</b> --Certificate e-mail.</li> <li>• <b>ipaddress</b> --Certificate IP address.</li> <li>• <b>locality</b> --Certificate locality.</li> <li>• <b>organization</b> --Certificate organization.</li> <li>• <b>organizationalunit</b> --Certificate organizational unit.</li> <li>• <b>postalcode</b> --Certificate postal code.</li> <li>• <b>serialnumber</b> --Certificate serial number.</li> <li>• <b>state</b> --Certificate state field.</li> <li>• <b>streetaddress</b> --Certificate street address.</li> <li>• <b>title</b> --Certificate title.</li> <li>• <b>unstructuredname</b> --Certificate unstructured name.</li> </ul>
<p><b>Step 10</b> <code>authorization list listname</code></p> <p><b>Example:</b></p> <pre>Route (config)# authorization list maxaaa</pre>	<p>Specifies the AAA authorization list.</p>
<p><b>Step 11</b> <code>tacacs-server host hostname [key string]</code></p> <p><b>Example:</b></p> <pre>Router(config)# tacacs-server host 192.0.2.2 key a_secret_key</pre> <p><b>Example:</b></p> <pre>radius-server host hostname [key string]</pre> <p><b>Example:</b></p> <pre>Router(config)# radius-server host 192.0.2.1 key another_secret_key</pre>	<p>Specifies a TACACS+ host.</p> <p>or</p> <p>Specifies a RADIUS host.</p>

- [Troubleshooting Tips, page 52](#)

## Troubleshooting Tips

To display debug messages for the trace of interaction (message type) between the CA and the router, use the **debug crypto pki transactions** command. (See the sample output, which shows a successful PKI integration with AAA server exchange and a failed PKI integration with AAA server exchange.)

### Successful Exchange

```
Router# debug crypto pki transactions
Apr 22 23:15:03.695: CRYPTO_PKI: Found a issuer match
Apr 22 23:15:03.955: CRYPTO_PKI: cert revocation status unknown.
Apr 22 23:15:03.955: CRYPTO_PKI: Certificate validated without revocation check
```

Each line that shows “CRYPTO\_PKI\_AAA” indicates the state of the AAA authorization checks. Each of the AAA AV pairs is indicated, and then the results of the authorization check are shown.

```
Apr 22 23:15:04.019: CRYPTO_PKI_AAA: checking AAA authorization (ipsecca_script_aaalist,
PKIAAA-L, <all>)
Apr 22 23:15:04.503: CRYPTO_PKI_AAA: reply attribute ("cert-application" = "all")
Apr 22 23:15:04.503: CRYPTO_PKI_AAA: reply attribute ("cert-trustpoint" = "CA1")
Apr 22 23:15:04.503: CRYPTO_PKI_AAA: reply attribute ("cert-serial" = "15DE")
Apr 22 23:15:04.503: CRYPTO_PKI_AAA: authorization passed
Apr 22 23:12:30.327: CRYPTO_PKI: Found a issuer match
```

### Failed Exchange

```
Router# debug crypto pki transactions
Apr 22 23:11:13.703: CRYPTO_PKI_AAA: checking AAA authorization =
Apr 22 23:11:14.203: CRYPTO_PKI_AAA: reply attribute ("cert-application" = "all")
Apr 22 23:11:14.203: CRYPTO_PKI_AAA: reply attribute ("cert-trustpoint" = "CA1")
Apr 22 23:11:14.203: CRYPTO_PKI_AAA: reply attribute ("cert-serial" = "233D")
Apr 22 23:11:14.203: CRYPTO_PKI_AAA: parsed cert-lifetime-end as: 21:30:00
Apr 22 23:11:14.203: CRYPTO_PKI_AAA: timezone specific extended
Apr 22 23:11:14.203: CRYPTO_PKI_AAA: cert-lifetime-end is expired
Apr 22 23:11:14.203: CRYPTO_PKI_AAA: cert-lifetime-end check failed.
Apr 22 23:11:14.203: CRYPTO_PKI_AAA: authorization failed
```

In the above failed exchange, the certificate has expired.

## Configuring a Revocation Mechanism for PKI Certificate Status Checking

Perform this task to set up a CRL as the certificate revocation mechanism--CRLs or OCSP--that is used to check the status of certificates in a PKI.

- [The revocation-check Command, page 53](#)
- [Nonces and Peer Communications with OCSP Servers, page 53](#)

### The revocation-check Command

Use the **revocation-check** command to specify at least one method (OCSP, CRL, or skip the revocation check) that is to be used to ensure that the certificate of a peer has not been revoked. For multiple methods, the order in which the methods are applied is determined by the order specified via this command.

If your router does not have the applicable CRL and is unable to obtain one or if the OCSP server returns an error, your router will reject the peer’s certificate--unless you include the **none** keyword in your configuration. If the **none** keyword is configured, a revocation check will not be performed and the certificate will always be accepted.

### Nonces and Peer Communications with OCSP Servers

When using OCSP, nonces, unique identifiers for OCSP requests, are sent by default during peer communications with your OCSP server. The use of nonces offers a more secure and reliable communication channel between the peer and OCSP server.

If your OCSP server does not support nonces, you may disable the sending of nonces. For more information, check your OCSP server documentation.

- Before issuing any client certificates, the appropriate settings on the server (such as setting the CDP) should be configured.
- When configuring an OCSP server to return the revocation status for a CA server, the OCSP server must be configured with an OCSP response signing certificate that is issued by that CA server. Ensure that the signing certificate is in the correct format, or the router will not accept the OCSP response. See your OCSP manual for additional information.



#### Note

- OCSP transports messages over HTTP, so there may be a time delay when you access the OCSP server.
- If the OCSP server depends on normal CRL processing to check revocation status, the same time delay that affects CRLs will also apply to OCSP.

>

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto pki trustpoint *name***
4. **ocsp url *url***
5. **revocation-check *method1* [*method2 method3*]**
6. **ocsp disable-nonce**
7. **exit**
8. **exit**
9. **show crypto pki certificates**
10. **show crypto pki trustpoints [*status* | *label* [*status*]]**

### DETAILED STEPS

	Command or Action	Purpose
Step 1	<b>enable</b>  <b>Example:</b>  Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>

	Command or Action	Purpose
Step 2	<p><b>configure terminal</b></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	Enters global configuration mode.
Step 3	<p><b>crypto pki trustpoint <i>name</i></b></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki trustpoint hazel</pre>	Declares the trustpoint and a given name and enters ca-trustpoint configuration mode.
Step 4	<p><b>ocsp url <i>url</i></b></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# ocsp url http://ocsp-server</pre> <p>- or -</p> <pre>Router(ca-trustpoint)# ocsp url http://10.10.10.1:80</pre> <p>- or -</p> <pre>Router(ca-trustpoint)# ocsp url http://[2001DB8:1:1::2]:80</pre>	The <i>url</i> argument specifies the URL of an OCSP server so that the trustpoint can check the certificate status. This URL overrides the URL of the OCSP server (if one exists) in the Authority Info Access (AIA) extension of the certificate. All certificates associated with a configured trustpoint are checked by the OCSP server. The URL can be a hostname, IPv4 address, or an IPv6 address.
Step 5	<p><b>revocation-check <i>method1</i> [<i>method2 method3</i>]</b></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# revocation-check ocsp none</pre>	<p>Checks the revocation status of a certificate.</p> <ul style="list-style-type: none"> <li>• <b>crl</b> --Certificate checking is performed by a CRL. This is the default option.</li> <li>• <b>none</b> --Certificate checking is ignored.</li> <li>• <b>ocsp</b> --Certificate checking is performed by an OCSP server.</li> </ul> <p>If a second and third method are specified, each method will be used only if the previous method returns an error, such as a server being down.</p>
Step 6	<p><b>ocsp disable-nonce</b></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# ocsp disable-nonce</pre>	(Optional) Specifies that a nonce, or an OCSP request unique identifier, will not be sent during peer communications with the OCSP server.



	Command or Action	Purpose
Step 7	<b>exit</b>  <b>Example:</b> Router(ca-trustpoint)# exit	Returns to global configuration mode.
Step 8	<b>exit</b>  <b>Example:</b> Router(config)# exit	Returns to privileged EXEC mode.
Step 9	<b>show crypto pki certificates</b>  <b>Example:</b> Router# show crypto pki certificates	(Optional) Displays information about your certificates.
Step 10	<b>show crypto pki trustpoints [status   label [status]]</b>  <b>Example:</b> Router# show crypto pki trustpoints	Displays information about the trustpoint configured in router.

## Configuring Certificate Authorization and Revocation Settings

Perform this task to specify a certificate-based ACL, to ignore revocation checks or expired certificates, to manually override the default CDP location, to manually override the OCSP server setting, to configure CRL caching, or to set session acceptance or rejection based on a certificate serial number, as appropriate.

- [Configuring Certificate-Based ACLs to Ignore Revocation Checks, page 56](#)
- [Manually Overriding CDPs in a Certificate, page 57](#)
- [Manually Overriding the OCSP Server Setting in a Certificate, page 57](#)
- [Configuring CRL Cache Control, page 57](#)
- [Configuring Certificate Serial Number Session Control, page 58](#)
- [Troubleshooting Tips, page 64](#)

### Configuring Certificate-Based ACLs to Ignore Revocation Checks

To configure your router to use certificate-based ACLs to ignore revocation checks and expired certificates, perform the following steps:

- Identify an existing trustpoint or create a new trustpoint to be used when verifying the certificate of the peer. Authenticate the trustpoint if it has not already been authenticated. The router may enroll with this trustpoint if you want. Do not set optional CRLs for the trustpoint if you plan to use the **match certificate** command and **skip revocation-check** keyword.

- Determine the unique characteristics of the certificates that should not have their CRL checked and of the expired certificates that should be allowed.
- Define a certificate map to match the characteristics identified in the prior step.
- You can add the **match certificate** command and **skip revocation-check** keyword and the **match certificate command** and **allow expired-certificate** keyword to the trustpoint that was created or identified in the first step.

**Note**

---

Certificate maps are checked even if the peer's public key is cached. For example, when the public key is cached by the peer, and a certificate map is added to the trustpoint to ban a certificate, the certificate map is effective. This prevents a client with the banned certificate, which was once connected in the past, from reconnecting.

---

## Manually Overriding CDPs in a Certificate

Users can override the CDPs in a certificate with a manually configured CDP. Manually overriding the CDPs in a certificate can be advantageous when a particular server is unavailable for an extended period of time. The certificate's CDPs can be replaced with a URL or directory specification without reissuing all of the certificates that contain the original CDP.

## Manually Overriding the OCSP Server Setting in a Certificate

Administrators can override the OCSP server setting specified in the Authority Information Access (AIA) field of the client certificate or set by the issuing the **ocsp url** command. One or more OCSP servers may be manually specified, either per client certificate or per group of client certificates by the **match certificate override ocsp** command. The **match certificate override ocsp** command overrides the client certificate AIA field or the **ocsp url** command setting if a client certificate is successfully matched to a certificate map during the revocation check.

**Note**

---

Only one OCSP server can be specified per client certificate.

---

## Configuring CRL Cache Control

By default, a new CRL will be downloaded after the currently cached CRL expires. Administrators can either configure the maximum amount of time in minutes a CRL remains in the cache by issuing the **crl cache delete-after** command or disable CRL caching by issuing the **crl cache none** command. Only the **crl-cache delete-after** command or the **crl-cache none** command may be specified. If both commands are entered for a trustpoint, the last command executed will take effect and a message will be displayed.

Neither the **crl-cache none** command nor the **crl-cache delete-after** command affects the currently cached CRL. If you configure the **crl-cache none** command, all CRLs downloaded after this command is issued will not be cached. If you configure the **crl-cache delete-after** command, the configured lifetime will only affect CRLs downloaded after this command is issued.

This functionality is useful is when a CA issues CRLs with no expiration date or with expiration dates days or weeks ahead.

## Configuring Certificate Serial Number Session Control

A certificate serial number can be specified to allow a certificate validation request to be accepted or rejected by the trustpoint for a session. A session may be rejected, depending on certificate serial number session control, even if a certificate is still valid. Certificate serial number session control may be configured by using either a certificate map with the **serial-number** field or an AAA attribute, with the **cert-serial-not** command.

Using certificate maps for session control allows an administrator to specify a single certificate serial number. Using the AAA attribute allows an administrator to specify one or more certificate serial numbers for session control.

- The trustpoint should be defined and authenticated before attaching certificate maps to the trustpoint.
- The certificate map must be configured before the CDP override feature can be enabled or the **serial-number** command is issued.
- The PKI and AAA server integration must be successfully completed to use AAA attributes as described in “PKI and AAA Server Integration for Certificate Status.”

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto pki certificate map label sequence-number**
4. *field-name match-criteria match-value*
5. **exit**
6. **crypto pki trustpoint name**
7. Do one of the following:
  - **cr1-cache none**
  - **cr1-cache delete-after time**
8. **match certificate certificate-map-label [allow expired-certificate | skip revocation-check | skip authorization-check]**
9. **match certificate certificate-map-label override cdp {url | directory} string**
10. **match certificate certificate-map-label override ocsp [trustpoint trustpoint-label] sequence-number url ocs1-url**
11. **exit**
12. **aaa new-model**
13. **aaa attribute list list-name**
14. **attribute type {name} {value}**
15. **exit**
16. **exit**
17. **show crypto pki certificates**

## DETAILED STEPS

	Command or Action	Purpose
Step 1	<p><b>enable</b></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
Step 2	<p><b>configure terminal</b></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
Step 3	<p><b>crypto pki certificate map label sequence-number</b></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki certificate map Group 10</pre>	<p>Defines values in a certificate that should be matched or not matched and enters ca-certificate-map configuration mode.</p>

Command or Action	Purpose
<p><b>Step 4</b> <i>field-name match-criteria match-value</i></p> <p><b>Example:</b></p> <pre>Router(ca-certificate-map)# subject-name co MyExample</pre>	<p>Specifies one or more certificate fields together with their matching criteria and the value to match.</p> <p>The <i>field-name</i> is one of the following case-insensitive name strings or a date:</p> <ul style="list-style-type: none"> <li>• <b>alt-subject-name</b></li> <li>• <b>expires-on</b></li> <li>• <b>issuer-name</b></li> <li>• <b>name</b></li> <li>• <b>serial-number</b></li> <li>• <b>subject-name</b></li> <li>• <b>unstructured-subject-name</b></li> <li>• <b>valid-start</b></li> </ul> <p><b>Note</b> Date field format is dd mm yyyy hh:mm:ss or mmm dd yyyy hh:mm:ss.</p> <p>The <i>match-criteria</i> is one of the following logical operators:</p> <ul style="list-style-type: none"> <li>• <b>co</b> --contains (valid only for name fields and serial number field)</li> <li>• <b>eq</b> --equal (valid for name, serial number, and date fields)</li> <li>• <b>ge</b> --greater than or equal (valid only for date fields)</li> <li>• <b>lt</b> --less than (valid only for date fields)</li> <li>• <b>nc</b> --does not contain (valid only for name fields and serial number field)</li> <li>• <b>ne</b> --not equal (valid for name, serial number, and date fields)</li> </ul> <p>The <i>match-value</i> is the name or date to test with the logical operator assigned by <i>match-criteria</i>.</p> <p><b>Note</b> Use this command only when setting up a certificate-based ACL--not when setting up a certificate-based ACL to ignore revocation checks or expired certificates.</p>
<p><b>Step 5</b> <b>exit</b></p> <p><b>Example:</b></p> <pre>Router(ca-certificate-map)# exit</pre>	<p>Returns to global configuration mode.</p>
<p><b>Step 6</b> <b>crypto pki trustpoint</b> <i>name</i></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki trustpoint Access2</pre>	<p>Declares the trustpoint, given name and enters ca-trustpoint configuration mode.</p>

Command or Action	Purpose
<p><b>Step 7</b> Do one of the following:</p> <ul style="list-style-type: none"> <li>• <b>crl-cache none</b></li> <li>• <b>crl-cache delete-after <i>time</i></b></li> </ul> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# crl-cache none</pre> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# crl-cache delete-after 20</pre>	<p>(Optional) Disables CRL caching completely for all CRLs associated with the trustpoint.</p> <p>The <b>crl-cache none</b> command does not affect any currently cached CRLs. All CRLs downloaded after this command is configured will not be cached.</p> <p>(Optional) Specifies the maximum time CRLs will remain in the cache for all CRLs associated with the trustpoint.</p> <ul style="list-style-type: none"> <li>• <i>time</i> --The amount of time in minutes before the CRL is deleted.</li> </ul> <p>The <b>crl-cache delete-after</b> command does not affect any currently cached CRLs. The configured lifetime will only affect CRLs downloaded after this command is configured.</p>
<p><b>Step 8</b> <b>match certificate <i>certificate-map-label</i> [allow expired-certificate   skip revocation-check   skip authorization-check</b></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# match certificate Group skip revocation-check</pre>	<p>(Optional) Associates the certificate-based ACL (that was defined via the <b>crypto pki certificate map</b> command) to a trustpoint.</p> <ul style="list-style-type: none"> <li>• <i>certificate-map-label</i> --Must match the <i>label</i> argument specified via the <b>crypto pki certificate map</b> command.</li> <li>• <b>allow expired-certificate</b> --Ignores expired certificates.</li> <li>• <b>skip revocation-check</b> --Allows a trustpoint to enforce CRLs except for specific certificates.</li> <li>• <b>skip authorization-check</b> --Skips the AAA check of a certificate when PKI integration with an AAA server is configured.</li> </ul>
<p><b>Step 9</b> <b>match certificate <i>certificate-map-label</i> override cdp {url   directory} <i>string</i></b></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# match certificate Group1 override cdp url http://server.cisco.com</pre>	<p>(Optional) Manually overrides the existing CDP entries for a certificate with a URL or directory specification.</p> <ul style="list-style-type: none"> <li>• <i>certificate-map-label</i> --A user-specified label that must match the <i>label</i> argument specified in a previously defined <b>crypto pki certificate map</b> command.</li> <li>• <b>url</b> --Specifies that the certificate's CDPs will be overridden with an HTTP or LDAP URL.</li> <li>• <b>directory</b> --Specifies that the certificate's CDPs will be overridden with an LDAP directory specification.</li> <li>• <i>string</i> --The URL or directory specification.</li> </ul> <p><b>Note</b> Some applications may time out before all CDPs have been tried and will report an error message. The error message will not affect the router, and the Cisco IOS software will continue attempting to retrieve a CRL until all CDPs have been tried.</p>

Command or Action	Purpose
<p><b>Step 10</b> <b>match certificate</b> <i>certificate-map-label</i> <b>override ocs</b>p [<b>trustpoint</b> <i>trustpoint-label</i>] <i>sequence-number</i> <b>url</b> <i>ocsp-url</i></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# match certificate mycertmapname override ocs p trustpoint mytp 15 url http://192.0.2.2</pre>	<p>(Optional) Specifies an OCSP server, either per client certificate or per group of client certificates, and may be issued more than once to specify additional OCSP servers and client certificate settings including alternative PKI hierarchies.</p> <ul style="list-style-type: none"> <li>• <i>certificate-map-label</i> --The name of an existing certificate map.</li> <li>• <b>trustpoint</b> --The trustpoint to be used when validating the OCSP server certificate.</li> <li>• <i>sequence-number</i> --The order the <b>match certificate override ocs</b>p command statements apply to the certificate being verified. Matches are performed from the lowest sequence number to the highest sequence number. If more than one command is issued with the same sequence number, it overwrites the previous OCSP server override setting.</li> <li>• <b>url</b> --The URL of the OCSP server.</li> </ul> <p>When the certificate matches a configured certificate map, the AIA field of the client certificate and any previously issued <b>ocsp url</b> command settings are overwritten with the specified OCSP server.</p> <p>If no map-based match occurs, one of the following two cases will continue to apply to the client certificate.</p> <ul style="list-style-type: none"> <li>• If OCSP is specified as the revocation method, the AIA field value will continue to apply to the client certificate.</li> <li>• If the <b>ocsp url</b> configuration exists, the <b>ocsp url</b> configuration settings will continue to apply to the client certificates.</li> </ul>
<p><b>Step 11</b> <b>exit</b></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# exit</pre>	<p>Returns to global configuration mode.</p>
<p><b>Step 12</b> <b>aaa new-model</b></p> <p><b>Example:</b></p> <pre>Router(config)# aaa new-model</pre>	<p>(Optional) Enables the AAA access control model.</p>
<p><b>Step 13</b> <b>aaa attribute list</b> <i>list-name</i></p> <p><b>Example:</b></p> <pre>Router(config)# aaa attribute list crl</pre>	<p>(Optional) Defines an AAA attribute list locally on a router and enters config-attr-list configuration mode.</p>

Command or Action	Purpose
<p><b>Step 14</b> <code>attribute type {name}{value}</code></p> <p><b>Example:</b></p> <pre>Router(config-attr-list)# attribute type cert-serial-not 6C4A</pre>	<p>(Optional) Defines an AAA attribute type that is to be added to an AAA attribute list locally on a router.</p> <p>To configure certificate serial number session control, an administrator may specify a specific certificate in the <i>value</i> field to be accepted or rejected based on its serial number where <i>name</i> is set to <b>cert-serial-not</b>. If the serial number of the certificate matches the serial number specified by the attribute type setting, the certificate will be rejected.</p> <p>For a full list of available AAA attribute types, execute the <b>show aaa attributes</b> command.</p>
<p><b>Step 15</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# exit</pre> <p><b>Example:</b></p> <pre>Router(config-attr-list)# exit</pre>	<p>Returns to global configuration mode.</p>
<p><b>Step 16</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(config)# exit</pre>	<p>Returns to privileged EXEC mode.</p>
<p><b>Step 17</b> <code>show crypto pki certificates</code></p> <p><b>Example:</b></p> <pre>Router# show crypto pki certificates</pre>	<p>(Optional) Displays the components of the certificates installed on the router if the CA certificate has been authenticated.</p>

### Example

The following is a sample certificate. The OCSP-related extensions are shown using exclamation points.

```
Certificate:
  Data:
    Version: v3
    Serial Number: 0x14
    Signature Algorithm: SHAwithRSA - 1.2.840.113549.1.1.4
    Issuer: CN=CA server, OU=PKI, O=Cisco Systems
    Validity:
      Not Before: Thursday, August 8, 2002 4:38:05 PM PST
      Not After: Tuesday, August 7, 2003 4:38:05 PM PST
    Subject: CN=OCSP server, OU=PKI, O=Cisco Systems
    Subject Public Key Info:
      Algorithm: RSA - 1.2.840.113549.1.1.1
      Public Key:
        Exponent: 65537
```



```

Public Key Modulus:(2048 bits) :
  <snip>
Extensions:
  Identifier:Subject Key Identifier - 2.5.29.14
  Critical:no
  Key Identifier:
  <snip>
  Identifier:Authority Key Identifier - 2.5.29.35
  Critical:no
  Key Identifier:
  <snip>
!
  Identifier:OCSP NoCheck:- 1.3.6.1.5.5.7.48.1.5
  Critical:no
  Identifier:Extended Key Usage:- 2.5.29.37
  Critical:no
  Extended Key Usage:
  OCSPSigning
!
  Identifier:CRL Distribution Points - 2.5.29.31
  Critical:no
  Number of Points:1
  Point 0
  Distribution Point:
[URIName:ldap://CA-server/CN=CA server,OU=PKI,O=Cisco Systems]
Signature:
  Algorithm:SHAwithRSA - 1.2.840.113549.1.1.4
Signature:
  <snip>

```

The following example shows an excerpt of the running configuration output when adding a **match certificate override oosp** command to the beginning of an existing sequence:

```

match certificate map3 override oosp 5 url http://192.0.2.3/
show running-configuration
.
.
.
      match certificate map3 override oosp 5 url http://192.0.2.3/
      match certificate map1 override oosp 10 url http://192.0.2.1/
      match certificate map2 override oosp 15 url http://192.0.2.2/

```

The following example shows an excerpt of the running configuration output when an existing **match certificate override oosp** command is replaced and a trustpoint is specified to use an alternative PKI hierarchy:

```

match certificate map4 override oosp trustpoint tp4 10 url http://192.0.2.4/newvalue
show running-configuration
.
.
.
      match certificate map3 override oosp trustpoint tp3 5 url http://192.0.2.3/
      match certificate map1 override oosp trustpoint tp1 10 url http://192.0.2.1/
      match certificate map4 override oosp trustpoint tp4 10 url http://
192.0.2.4/newvalue
      match certificate map2 override oosp trustpoint tp2 15 url http://192.0.2.2/

```

## Troubleshooting Tips

If you ignored revocation check or expired certificates, you should carefully check your configuration. Verify that the certificate map properly matches either the certificate or certificates that should be allowed or the AAA checks that should be skipped. In a controlled environment, try modifying the certificate map and determine what is not working as expected.

## Configuring Certificate Chain Validation

Perform this task to configure the processing level for the certificate chain path of your peer certificates.

- The device must be enrolled in your PKI hierarchy.
- The appropriate key pair must be associated with the certificate.



**Note**

- A trustpoint associated with the root CA cannot be configured to be validated to the next level.

The **chain-validation** command is configured with the **continue** keyword for the trustpoint associated with the root CA, an error message will be displayed and the chain validation will revert to the default **chain-validation** command setting.

>

**SUMMARY STEPS**

1. enable
2. configure terminal
3. crypto pki trustpoint *name*
4. chain-validation [{stop | continue} [*parent-trustpoint*]]
5. exit

**DETAILED STEPS**

Command or Action	Purpose
<p><b>Step 1</b> enable</p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<p><b>Step 2</b> configure terminal</p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> crypto pki trustpoint <i>name</i></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki trustpoint ca-sub1</pre>	<p>Declares the trustpoint and a given name and enters ca-trustpoint configuration mode.</p>

Command or Action	Purpose
<p><b>Step 4</b> <code>chain-validation</code> [{<b>stop</b>   <b>continue</b>} [<i>parent-trustpoint</i>]]</p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# chain-validation continue ca-sub1</pre>	<p>Configures the level to which a certificate chain is processed on all certificates including subordinate CA certificates.</p> <ul style="list-style-type: none"> <li>Use the <b>stop</b> keyword to specify that the certificate is already trusted. This is the default setting.</li> <li>Use the <b>continue</b> keyword to specify that the subordinate CA certificate associated with the trustpoint must be validated.</li> <li>The <i>parent-trustpoint</i> argument specifies the name of the parent trustpoint the certificate must be validated against.</li> </ul>
<p><b>Step 5</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# exit</pre>	<p>Returns to global configuration mode</p>

## Configuring Certificate Servers for High Availability

You can configure certificate servers to synchronize revoke commands and send serial-number commands when new certificates are issued, preparing the standby certificate server to issue certificates and CRLs if it becomes active.

- [Prerequisites](#), page 66
- [Setting Redundancy Mode on Certificate Servers to ACTIVE STANDBY](#), page 66
- [Configuring SCTP on the Active and Standby Certificate Servers](#), page 70
- [Synchronizing the Active and Standby Certificate Servers](#), page 72

### Prerequisites

The following conditions must be met for high availability on certificate servers:

- IPsec-secured SCTP must be configured on both the active and the standby routers.
- For synchronization to work, the redundancy mode on the certificate servers must be set to ACTIVE/STANDBY after you configure SCTP.

This section contains the following subsections:

### Setting Redundancy Mode on Certificate Servers to ACTIVE STANDBY

Perform this task on the active router to enable synchronization by setting the redundancy mode on the certificate servers to ACTIVE/STANDBY.

- 1 **configure terminal**
- 2 **redundancy inter-device**
- 3 **scheme standby** *standby-group-name*
- 4 **exit**
- 5 **interface** *interface-name*
- 6 **ip address** *ip-address mask*

- 7 **no ip route-cache cef**
- 8 **no ip route-cache**
- 9 **standby ip** *ip-address*
- 10 **standby priority** *priority*
- 11 **standby name** *group-name*
- 12 **standby delay minimum** [*min-seconds*] **reload** [*reload-seconds*]
- 13 Repeat Steps 1-12 on the standby router, r, configuring the interface with a different IP address from that of the active router (Step 6).
- 14 **exit**
- 15 **exit**
- 16 **show crypto key mypubkey rsa**

**SUMMARY STEPS**

- 1. **configure terminal**
- 2. **redundancy inter-device**
- 3. **scheme standby** *standby-group-name*
- 4. **exit**
- 5. **interface** *interface-name*
- 6. **ip address** *ip-address mask*
- 7. **no ip route-cache cef**
- 8. **no ip route-cache**
- 9. **standby ip** *ip-address*
- 10. **standby priority** *priority*
- 11. **standby name** *group-name*
- 12. **standby delay minimum** [ *min-seconds* ] **reload** [*reload-seconds*]
- 13. Repeat Steps 1-12 on the standby router, configuring the interface with a different IP address from that of the interface on the active router (Step 6).
- 14. **exit**
- 15. **exit**
- 16. **show redundancy states**

**DETAILED STEPS**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<b>configure terminal</b>	Enters global configuration mode.
	<b>Example:</b>  Router# <code>configure terminal</code>	

Command or Action	Purpose
<p><b>Step 2</b> <code>redundancy inter-device</code></p> <p><b>Example:</b></p> <pre>Router(config)# redundancy inter-device</pre>	<p>Configures redundancy and enters interdevice configuration mode.</p>
<p><b>Step 3</b> <code>scheme standby <i>standby-group-name</i></code></p> <p><b>Example:</b></p> <pre>Router(config-red-interdevice)# scheme standby SB</pre>	<p>Defines the redundancy scheme that is to be used.</p> <ul style="list-style-type: none"> <li>• The only supported scheme is “standby.”</li> <li>• <i>standby-group-name</i> --Must match the standby name specified in the <b>standby name</b> interface configuration command. Also, the standby name must be the same on both routers.</li> </ul>
<p><b>Step 4</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(config-red-interdevice)# exit</pre>	<p>Exits interdevice configuration mode and returns to global configuration mode.</p>
<p><b>Step 5</b> <code>interface <i>interface-name</i></code></p> <p><b>Example:</b></p> <pre>Router(config) # interface gigabitethernet0/1</pre>	<p>Configures an interface type for the router and enters interface configuration mode.</p>
<p><b>Step 6</b> <code>ip address <i>ip-address mask</i></code></p> <p><b>Example:</b></p> <pre>Router(config-if) ip address 10.0.0.1 255.255.255.0</pre>	<p>Sets the local IP address for the interface.</p>
<p><b>Step 7</b> <code>no ip route-cache cef</code></p> <p><b>Example:</b></p> <pre>Router(config-if)# no ip route cache cef</pre>	<p>Disables Cisco Express Forwarding operation on the interface.</p>
<p><b>Step 8</b> <code>no ip route-cache</code></p> <p><b>Example:</b></p> <pre>Router(config-if)# no ip route cache</pre>	<p>Disables fast switching on the interface.</p>

	Command or Action	Purpose
<b>Step 9</b>	standby ip <i>ip-address</i>  <b>Example:</b>  Router(config-if)# standby ip 10.0.0.3	Activates the Hot Standby Router Protocol (HSRP),  <b>Note</b> Configure the same address on the active and the standby routers.
<b>Step 10</b>	standby priority <i>priority</i>  <b>Example:</b>  Router(config-if)# standby priority 50	Sets the HSRP priority to 50.  The priority range is from 1 to 255, where 1 denotes the lowest priority and 255 the highest. The router in the HSRP group with the highest priority value becomes the active router.
<b>Step 11</b>	standby name <i>group-name</i>  <b>Example:</b>  Router(config-if)# standby name SB	Configures the name of the standby group.  <ul style="list-style-type: none"> <li>The name specifies the HSRP group used. The HSRP group name must be unique on the router.</li> </ul>
<b>Step 12</b>	standby delay minimum [ <i>min-seconds</i> ] reload [ <i>reload-seconds</i> ]  <b>Example:</b>  Router(config-if)# standby delay minimum 30 reload 60	Sets a delay for HSRP group initialization as follows:  <ul style="list-style-type: none"> <li>The minimum delay after the interface comes up before initializing the HSRP groups is 30 seconds.</li> <li>The delay after the router has reloaded is 60 seconds.</li> </ul>
<b>Step 13</b>	Repeat Steps 1-12 on the standby router, configuring the interface with a different IP address from that of the interface on the active router (Step 6).	--
<b>Step 14</b>	exit  <b>Example:</b>  Router(config-if)# exit	Returns to global configuration mode.
<b>Step 15</b>	exit  <b>Example:</b>  Router(config)# exit	Returns to privileged EXEC mode.

Command or Action	Purpose
<b>Step 16</b> <code>show redundancy states</code>  <b>Example:</b>  Router# <code>show redundancy states</code>	(Optional) Verifies the redundancy states: standby or active.

## Configuring SCTP on the Active and Standby Certificate Servers

Perform this task on the active router to configure SCTP on both the active and the standby certificate server.

### SUMMARY STEPS

1. `configure terminal`
2. `ipc zone default`
3. `association association-ID`
4. `no shutdown`
5. `protocol sctp`
6. `local-port local-port-number`
7. `local-ip device-real-ip-address [device-real-ip-address2]`
8. `exit`
9. `remote-port remote-port-number`
10. `remote-ip peer-real-ip-address`
11. Repeat Steps 1 through 10 on the standby router, reversing the IP addresses of the local and remote peers specified in Steps 7 and 10.

### DETAILED STEPS

Command or Action	Purpose
<b>Step 1</b> <code>configure terminal</code>  <b>Example:</b>  Router# <code>configure terminal</code>	Enters global configuration mode.
<b>Step 2</b> <code>ipc zone default</code>  <b>Example:</b>  Router(config)# <code>ipc zone default</code>	Configures the interdevice communication protocol, Inter-Process Communication (IPC), and enters IPC zone configuration mode.  Use this command to initiate the communication link between the active router and the standby router.

	Command or Action	Purpose
<b>Step 3</b>	<b>association</b> <i>association-ID</i>  <b>Example:</b> <pre>Router(config-ipczone)# association 1</pre>	Configures an association between the two devices and enters IPC association configuration mode.
<b>Step 4</b>	<b>no shutdown</b>  <b>Example:</b> <pre>Router(config-ipczone-assoc)# no shutdown</pre>	Ensures that the server association is in the default (enabled) state.
<b>Step 5</b>	<b>protocol sctp</b>  <b>Example:</b> <pre>Router(config-ipczone-assoc)# protocol sctp</pre>	Configures SCTP as the transport protocol and enters SCTP protocol configuration mode.
<b>Step 6</b>	<b>local-port</b> <i>local-port-number</i>  <b>Example:</b> <pre>Router(config-ipc-protocol-sctp)# local-port 5000</pre>	Defines the local SCTP port number that is used to communicate with the redundant peer and enters IPC transport SCTP local configuration mode. <ul style="list-style-type: none"> <li>• <i>local-port-number</i> --There is not a default value. This argument must be configured for the local port to enable interdevice redundancy. Valid port values: 1 to 65535. The local port numbers should be the same as the remote port number on the peer router.</li> </ul>
<b>Step 7</b>	<b>local-ip</b> <i>device-real-ip-address [device-real-ip-address2]</i>  <b>Example:</b> <pre>Router(config-ipc-local-sctp)# local-ip 10.0.0.1</pre>	Defines at least one local IP address that is used to communicate with the redundant peer. <ul style="list-style-type: none"> <li>• The local IP addresses must match the remote IP addresses on the peer router. There can be either one or two IP addresses, which must be in global VPN routing and forwarding (VRF). A virtual IP address cannot be used.</li> </ul>
<b>Step 8</b>	<b>exit</b>  <b>Example:</b> <pre>Router(config-ipc-local-sctp)# exit</pre>	Exits IPC transport - SCTP local configuration mode.



Command or Action	Purpose
<p><b>Step 9</b> <code>remote-port</code> <i>remote-port-number</i></p> <p><b>Example:</b></p> <pre>Router(config-ipc-protocol-sctp)# remote-port 5000</pre>	<p>Defines the remote SCTP port number that is used to communicate with the redundant peer and enters IPC transport SCTP remote configuration mode.</p> <p><b>Note</b> <i>remote-port-number</i> --There is not a default value. This argument must be configured for the remote port to enable interdevice redundancy. Valid port values: 1 to 65535. The remote port number should be the same as the local port number on the peer router.</p>
<p><b>Step 10</b> <code>remote-ip</code> <i>peer-real-ip-address</i></p> <p><b>Example:</b></p> <pre>Router(config-ipc-remote-sctp)# remote-ip 10.0.0.2</pre>	<p>Defines a remote IP address of the redundant peer that is used to communicate with the local device.</p> <p>All remote IP addresses must refer to the same device.</p> <p>A virtual IP address cannot be used.</p>
<p><b>Step 11</b> Repeat Steps 1 through 10 on the standby router, reversing the IP addresses of the local and remote peers specified in Steps 7 and 10.</p>	<p>The virtual IP address (10.0.0.3) will be the same on both routers.</p>

## Synchronizing the Active and Standby Certificate Servers

Perform this task to synchronize the active and standby servers.

### SUMMARY STEPS

1. `configure terminal`
2. `crypto key generate rsa general-keys redundancy label` *key-labe modulus modulus-size*
3. `exit`
4. `show crypto key mypubkey rsa`
5. `configure terminal`
6. `ip http server`
7. `crypto pki server` *cs-label*
8. `redundancy`
9. `no shutdown`

### DETAILED STEPS

Command or Action	Purpose
<p><b>Step 1</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>

Command or Action	Purpose
<p><b>Step 2</b> <code>crypto key generate rsa general-keys redundancy label <i>key-label</i> modulus <i>modulus-size</i></code></p> <p><b>Example:</b></p> <pre>Router (config)# crypto key generate rsa general- keys redundancy label HA modulus 1024</pre>	<p>Generates an RSA key pair named HA for the certificate server.</p> <p><b>Note</b> Specifying the <b>redundancy</b> keyword means that the keys will be non-exportable.</p>
<p><b>Step 3</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(config)# exit</pre>	<p>Returns to privileged EXEC mode.</p>
<p><b>Step 4</b> <code>show crypto key mypubkey rsa</code></p> <p><b>Example:</b></p> <pre>Router# show crypto key mypubkey rsa</pre>	<p>Verifies that redundancy is enabled.</p>
<p><b>Step 5</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 6</b> <code>ip http server</code></p> <p><b>Example:</b></p> <pre>Router(config)# ip http server</pre>	<p>Enables the HTTP server on your system.</p>
<p><b>Step 7</b> <code>crypto pki server <i>cs-label</i></code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki server HA</pre>	<p>Specifies the RSA key pair generated in Step 2 as the label for the certificate server and enters certificate server configuration mode.</p>
<p><b>Step 8</b> <code>redundancy</code></p> <p><b>Example:</b></p> <pre>Router (cs-server)# redundancy</pre>	<p>Ensures that the server is synchronized to the standby server.</p>

Command or Action	Purpose
<b>Step 9</b> no shutdown  <b>Example:</b>  Router(cs-server)# no shutdown	Enables the certificate server.  <b>Note</b> If the router interface with the SCTP traffic is not secure, you should ensure that the SCTP traffic between the high-availability devices is secured with IPsec.

# Configuration Examples for Setting Up Authorization and Revocation of Certificates

## Configuring and Verifying PKI AAA Authorization Examples

This section provides configuration examples of PKI AAA authorizations:

### Router Configuration Example

The following **show running-config** command output shows the working configuration of a router that is set up to authorize VPN connections using the PKI Integration with AAA Server feature:

```

Router# show running-config
Building configuration...
!
version 12.3
!
hostname router7200router7200
!
aaa new-model
!
!
aaa authentication login default group tacacs+
aaa authentication login no_tacacs enable
aaa authentication ppp default group tacacs+
aaa authorization exec ACSLab group tacacs+
aaa authorization network ACSLab group tacacs+
aaa accounting exec ACSLab start-stop group tacacs+
aaa accounting network default start-stop group ACSLab
aaa session-id common
!
ip domain name example.com
!
crypto pki trustpoint EM-CERT-SERV
  enrollment url http://192.0.2.33:80
  serial-number
  crl optional
  rsakeypair STOREVPN 1024
  auto-enroll
  authorization list ACSLab
!
crypto pki certificate chain EM-CERT-SERV
certificate 04
  30820214 3082017D A0030201 02020104 300D0609 2A864886 F70D0101 04050030
  17311530 13060355 0403130C 454D2D43 4552542D 53455256 301E170D 30343031
  31393232 30323535 5A170D30 35303131 38323230 3235355A 3030312E 300E0603
  55040513 07314437 45424434 301C0609 2A864886 F70D0109 02160F37 3230302D
  312E6772 696C2E63 6F6D3081 9F300D06 092A8648 86F70D01 01010500 03818D00

```

```

30818902 818100BD F3B837AA D925F391 2B64DA14 9C2EA031 5A7203C4 92F8D6A8
7D2357A6 BCC8596F A38A9B10 47435626 D59A8F2A 123195BB BE5A1E74 B1AA5AE0
5CA162FF 8C3ACA4F B3EE9F27 8B031642 B618AE1B 40F2E3B4 F996BEFE 382C7283
3792A369 236F8561 8748AA3F BC41F012 B859BD9C DB4F75EE 3CEE2829 704BD68F
FD904043 0F555702 03010001 A3573055 30250603 551D1F04 1E301C30 1AA018A0
16861468 7474703A 2F2F3633 2E323437 2E313037 2E393330 0B060355 1D0F0404
030205A0 301F0603 551D2304 18301680 1420FC4B CF0B1C56 F5BD4C06 0AFD4E67
341AE612 D1300D06 092A8648 86F70D01 01040500 03818100 79E97018 FB955108
12F42A56 2A6384BC AC8E22FE F1D6187F DA5D6737 C0E241AC AAAEC75D 3C743F59
08DEEFF2 0E813A73 D79E0FA9 D62DC20D 8E2798CD 2C1DC3EC 3B2505A1 3897330C
15A60D5A 8A13F06D 51043D37 E56E45DF A65F43D7 4E836093 9689784D C45FD61D
EC1F160C 1ABC8D03 49FB11B1 DA0BED6C 463E1090 F34C59E4
quit
certificate ca 01
30820207 30820170 A0030201 02020101 300D0609 2A864886 F70D0101 04050030
17311530 13060355 0403130C 454D2D43 4552542D 53455256 301E170D 30333132
31363231 34373432 5A170D30 36313231 35323134 3734325A 30173115 30130603
55040313 0C454D2D 43455254 2D534552 5630819F 300D0609 2A864886 F70D0101
01050003 818D0030 81890281 8100C14D 833641CF D784F516 DA6B50C0 7B3CB3C9
589223AB 99A7DC14 04F74EF2 AAEE8F5 E3BFAE97 F2F980F7 D889E6A1 2C726C69
54A29870 7E7363FF 3CD1F991 F5A37CFF 3FFDD3D0 9E486C44 A2E34595 C2D078BB
E9DE981E B733B868 AA8916C0 A8048607 D34B83C0 64BDC101 161FC103 13C06500
22D6EE75 7D6CF133 7F1B515F 32830203 010001A3 63306130 0F060355 1D130101
FF040530 030101FF 300E0603 551D0F01 01FF0404 03020186 301D0603 551D0E04
16041420 FC4BCF0B 1C56F5BD 4C060AFD 4E67341A E612D130 1F060355 1D230418
30168014 20FC4BCF 0B1C56F5 BD4C060A FD4E6734 1AE612D1 300D0609 2A864886
F70D0101 04050003 81810085 D2E386F5 4107116B AD3AC990 CBE84063 5FB2A6B5
BD572026 528E92ED 02F3A0AE 1803F2AE AA4C0ED2 0F59F18D 7B50264F 30442C41
0AF19C4E 70BD3CB5 0ADD8DE8 8EF636BD 24410DF4 DB62DAFC 67DA6E58 3879AA3E
12AFB1C3 2E27CB27 EC74E1FC AEE2F5CF AA80B439 615AA8D5 6D6DEDC3 7F9C2C79
3963E363 F2989FB9 795BA8
quit
!
!
crypto isakmp policy 10
  encr aes
  group 14
!
!
crypto ipsec transform-set ISC_TS_1 esp-aes esp-sha-hmac
!
crypto ipsec profile ISC_IPSEC_PROFILE_2
  set security-association lifetime kilobytes 530000000
  set security-association lifetime seconds 14400
  set transform-set ISC_TS_1
!
!
controller ISA 1/1
!
!
interface Tunnel0
  description MGRE Interface provisioned by ISC
  bandwidth 10000
  ip address 192.0.2.172 255.255.255.0
  no ip redirects
  ip mtu 1408
  ip nhrp map multicast dynamic
  ip nhrp network-id 101
  ip nhrp holdtime 500
  ip nhrp server-only
  no ip split-horizon eigrp 101
  tunnel source FastEthernet2/1
  tunnel mode gre multipoint
  tunnel key 101
  tunnel protection ipsec profile ISC_IPSEC_PROFILE_2
!
interface FastEthernet2/0
  ip address 192.0.2.1 255.255.255.0
  duplex auto
  speed auto
!
interface FastEthernet2/1
  ip address 192.0.2.2 255.255.255.0

```

```

duplex auto
speed auto
!
!
tacacs-server host 192.0.2.55 single-connection
tacacs-server directed-request
tacacs-server key company lab
!
ntp master 1
!
end

```

## Debug of a Successful PKI AAA Authorization Example

The following **show debugging** command output shows a successful authorization using the PKI Integration with AAA Server feature:

```

Router# show debugging
General OS:
  TACACS access control debugging is on
  AAA Authentication debugging is on
  AAA Authorization debugging is on
Cryptographic Subsystem:
  Crypto PKI Trans debugging is on
Router#
May 28 19:36:11.117: CRYPTO_PKI: Trust-Point EM-CERT-SERV picked up
May 28 19:36:12.789: CRYPTO_PKI: Found a issuer match
May 28 19:36:12.805: CRYPTO_PKI: cert revocation status unknown.
May 28 19:36:12.805: CRYPTO_PKI: Certificate validated without revocation check
May 28 19:36:12.813: CRYPTO_PKI_AAA: checking AAA authorization (ACSLab,
POD5.example.com, <all>)
May 28 19:36:12.813: AAA/BIND(00000042): Bind i/f
May 28 19:36:12.813: AAA/AUTHOR (0x42): Pick method list 'ACSLab'
May 28 19:36:12.813: TPLUS: Queuing AAA Authorization request 66 for processing
May 28 19:36:12.813: TPLUS: processing authorization request id 66
May 28 19:36:12.813: TPLUS: Protocol set to None .....Skipping
May 28 19:36:12.813: TPLUS: Sending AV service=pki
May 28 19:36:12.813: TPLUS: Authorization request created for 66(POD5.example.com)
May 28 19:36:12.813: TPLUS: Using server 192.0.2.55
May 28 19:36:12.813: TPLUS(00000042)/0/NB_WAIT/203A4628: Started 5 sec timeout
May 28 19:36:12.813: TPLUS(00000042)/0/NB_WAIT: wrote entire 46 bytes request
May 28 19:36:12.813: TPLUS: Would block while reading pak header
May 28 19:36:12.817: TPLUS(00000042)/0/READ: read entire 12 header bytes (expect 27 bytes)
May 28 19:36:12.817: TPLUS(00000042)/0/READ: read entire 39 bytes response
May 28 19:36:12.817: TPLUS(00000042)/0/203A4628: Processing the reply packet
May 28 19:36:12.817: TPLUS: Processed AV cert-application=all
May 28 19:36:12.817: TPLUS: received authorization response for 66: PASS
May 28 19:36:12.817: CRYPTO_PKI_AAA: reply attribute ("cert-application" = "all")
May 28 19:36:12.817: CRYPTO_PKI_AAA: authorization passed
Router#
Router#
May 28 19:36:18.681: %DUAL-5-NBRCHANGE: IP-EIGRP(0) 101: Neighbor 192.0.2.171 (Tunnel0)
is up: new adjacency
Router#
Router# show crypto isakmp sa
dst          src          state          conn-id slot
192.0.2.22   192.0.2.102  QM_IDLE        84         0

```

## Debugs of a Failed PKI AAA Authorization Example

The following **show debugging** command output shows that the router is not authorized to connect using VPN. The messages are typical of those that you might see in such a situation.

In this example, the peer username was configured as not authorized, by moving the username to a Cisco Secure ACS group called VPN\_Router\_Disabled in Cisco Secure ACS. The router,

router7200.example.com, has been configured to check with a Cisco Secure ACS AAA server prior to establishing a VPN connection to any peer.

```

Router# show debugging
General OS:
  TACACS access control debugging is on
  AAA Authentication debugging is on
  AAA Authorization debugging is on
Cryptographic Subsystem:
  Crypto PKI Trans debugging is on

Router#
May 28 19:48:29.837: CRYPTO_PKI: Trust-Point EM-CERT-SERV picked up
May 28 19:48:31.509: CRYPTO_PKI: Found a issuer match
May 28 19:48:31.525: CRYPTO_PKI: cert revocation status unknown.
May 28 19:48:31.525: CRYPTO_PKI: Certificate validated without revocation check
May 28 19:48:31.533: CRYPTO_PKI_AAA: checking AAA authorization (ACSLab,
POD5.example.com, <all>)
May 28 19:48:31.533: AAA/BIND(00000044): Bind i/f
May 28 19:48:31.533: AAA/AUTHOR (0x44): Pick method list 'ACSLab'
May 28 19:48:31.533: TPLUS: Queuing AAA Authorization request 68 for processing
May 28 19:48:31.533: TPLUS: processing authorization request id 68
May 28 19:48:31.533: TPLUS: Protocol set to None .....Skipping
May 28 19:48:31.533: TPLUS: Sending AV service=pki
May 28 19:48:31.533: TPLUS: Authorization request created for 68(POD5.example.com)
May 28 19:48:31.533: TPLUS: Using server 192.0.2.55
May 28 19:48:31.533: TPLUS(00000044)/0/NB_WAIT/203A4C50: Started 5 sec timeout
May 28 19:48:31.533: TPLUS(00000044)/0/NB_WAIT: wrote entire 46 bytes request
May 28 19:48:31.533: TPLUS: Would block while reading pak header
May 28 19:48:31.537: TPLUS(00000044)/0/READ: read entire 12 header bytes (expect 6 bytes)
May 28 19:48:31.537: TPLUS(00000044)/0/READ: read entire 18 bytes response
May 28 19:48:31.537: TPLUS(00000044)/0/203A4C50: Processing the reply packet
May 28 19:48:31.537: TPLUS: received authorization response for 68: FAIL
May 28 19:48:31.537: CRYPTO_PKI_AAA: authorization declined by AAA, or AAA server not
found.
May 28 19:48:31.537: CRYPTO_PKI_AAA: No cert-application attribute found. Failing.
May 28 19:48:31.537: CRYPTO_PKI_AAA: authorization failed
May 28 19:48:31.537: CRYPTO_PKI: AAA authorization for list 'ACSLab', and user
'POD5.example.com' failed.
May 28 19:48:31.537: %CRYPTO-5-IKMP_INVALID_CERT: Certificate received from 192.0.2.162 is
bad: certificate invalid
May 28 19:48:39.821: CRYPTO_PKI: Trust-Point EM-CERT-SERV picked up
May 28 19:48:41.481: CRYPTO_PKI: Found a issuer match
May 28 19:48:41.501: CRYPTO_PKI: cert revocation status unknown.
May 28 19:48:41.501: CRYPTO_PKI: Certificate validated without revocation check
May 28 19:48:41.505: CRYPTO_PKI_AAA: checking AAA authorization (ACSLab,
POD5.example.com, <all>)
May 28 19:48:41.505: AAA/BIND(00000045): Bind i/f
May 28 19:48:41.505: AAA/AUTHOR (0x45): Pick method list 'ACSLab'
May 28 19:48:41.505: TPLUS: Queuing AAA Authorization request 69 for processing
May 28 19:48:41.505: TPLUS: processing authorization request id 69
May 28 19:48:41.505: TPLUS: Protocol set to None .....Skipping
May 28 19:48:41.505: TPLUS: Sending AV service=pki
May 28 19:48:41.505: TPLUS: Authorization request created for 69(POD5.example.com)
May 28 19:48:41.505: TPLUS: Using server 198.168.244.55
May 28 19:48:41.509: TPLUS(00000045)/0/IDLE/63B22834: got immediate connect on new 0
May 28 19:48:41.509: TPLUS(00000045)/0/WRITE/63B22834: Started 5 sec timeout
May 28 19:48:41.509: TPLUS(00000045)/0/WRITE: wrote entire 46 bytes request
May 28 19:48:41.509: TPLUS(00000045)/0/READ: read entire 12 header bytes (expect 6 bytes)
May 28 19:48:41.509: TPLUS(00000045)/0/READ: read entire 18 bytes response
May 28 19:48:41.509: TPLUS(00000045)/0/63B22834: Processing the reply packet
May 28 19:48:41.509: TPLUS: received authorization response for 69: FAIL
May 28 19:48:41.509: CRYPTO_PKI_AAA: authorization declined by AAA, or AAA server not
found.
May 28 19:48:41.509: CRYPTO_PKI_AAA: No cert-application attribute found. Failing.
May 28 19:48:41.509: CRYPTO_PKI_AAA: authorization failed
May 28 19:48:41.509: CRYPTO_PKI: AAA authorization for list 'ACSLab', and user
'POD5.example.com' failed.
May 28 19:48:41.509: %CRYPTO-5-IKMP_INVALID_CERT: Certificate received from 192.0.2.162 is
bad: certificate invalid
Router#
Router# show crypto iskmp sa

```

```
dst          src          state          conn-id slot
192.0.2.2    192.0.2.102    MM_KEY_EXCH    95      0
```

## Configuring a Revocation Mechanism Examples

This section contains the following configuration examples that can be used when specifying a revocation mechanism for your PKI:

### Configuring an OCSP Server Example

The following example shows how to configure the router to use the OCSP server that is specified in the AIA extension of the certificate:

```
Router(config)# crypto pki trustpoint mytp
Router(ca-trustpoint)# revocation-check ocsf
```

### Specifying a CRL and Then an OCSP Server Example

The following example shows how to configure the router to download the CRL from the CDP. If the CRL is unavailable, the OCSP server that is specified in the AIA extension of the certificate will be used. If both options fail, certificate verification will also fail.

```
Router(config)# crypto pki trustpoint mytp
Router(ca-trustpoint)# revocation-check crl ocsf
```

### Specifying an OCSP Server Example

The following example shows how to configure your router to use the OCSP server at the HTTP URL "http://myocspserver:81." If the server is down, the revocation check will be ignored.

```
Router(config)# crypto pki trustpoint mytp
Router(ca-trustpoint)# ocsf url http://myocspserver:81
Router(ca-trustpoint)# revocation-check ocsf none
```

### Disabling Nonces in Communications with the OCSP Server Example

The following example shows communications when a nonce, or a unique identifier for the OCSP request, is disabled for communications with the OCSP server:

```
Router(config)# crypto pki trustpoint mytp
Router(ca-trustpoint)# ocsf url http://myocspserver:81
Router(ca-trustpoint)# revocation-check ocsf none
Router(ca-trustpoint)# ocsf disable-nonce
```

## Configuring a Hub Router at a Central Site for Certificate Revocation Checks Example

The following example shows a hub router at a central site that is providing connectivity for several branch offices to the central site.

The branch offices are also able to communicate directly with each other using additional IPSec tunnels between the branch offices.

The CA publishes CRLs on an HTTP server at the central site. The central site checks CRLs for each peer when setting up an IPsec tunnel with that peer.

The example does not show the IPsec configuration--only the PKI-related configuration is shown.

### Home Office Hub Configuration

```
crypto pki trustpoint VPN-GW
enrollment url http://ca.home-office.com:80/certsrv/mscep/mscep.dll
serial-number none
fqdn none
ip-address none
subject-name o=Home Office Inc,cn=Central VPN Gateway
revocation-check crl
```

### Central Site Hub Router

```
Router# show crypto ca certificate
Certificate
  Status: Available
  Certificate Serial Number: 2F62BE1400000000CA0
  Certificate Usage: General Purpose
  Issuer:
    cn=Central Certificate Authority
    o=Home Office Inc
  Subject:
    Name: Central VPN Gateway
    cn=Central VPN Gateway
    o=Home Office Inc
  CRL Distribution Points:
    http://ca.home-office.com/CertEnroll/home-office.crl
  Validity Date:
    start date: 00:43:26 GMT Sep 26 2003
    end date: 00:53:26 GMT Sep 26 2004
    renew date: 00:00:00 GMT Jan 1 1970
  Associated Trustpoints: VPN-GW
CA Certificate
  Status: Available
  Certificate Serial Number: 1244325DE0369880465F977A18F61CA8
  Certificate Usage: Signature
  Issuer:
    cn=Central Certificate Authority
    o=Home Office Inc
  Subject:
    cn=Central Certificate Authority
    o=Home Office Inc
  CRL Distribution Points:
    http://ca.home-office.com/CertEnroll/home-office.crl
  Validity Date:
    start date: 22:19:29 GMT Oct 31 2002
    end date: 22:27:27 GMT Oct 31 2017
  Associated Trustpoints: VPN-GW
```

### Trustpoint on the Branch Office Router

```
crypto pki trustpoint home-office
enrollment url http://ca.home-office.com:80/certsrv/mscep/mscep.dll
serial-number none
fqdn none

ip-address none
subject-name o=Home Office Inc,cn=Branch 1
revocation-check crl
```

A certificate map is entered on the branch office router.

```
Router# configure terminal
```



```

Enter configuration commands, one per line. End with CNTL/Z.
branch1(config)# crypto pki certificate map central-site 10
branch1(ca-certificate-map)#

```

The output from the **show certificate** command on the central site hub router shows that the certificate was issued by the following:

```

cn=Central Certificate Authority
o=Home Office Inc

```

These two lines are combined into one line using a comma (,) to separate them, and the original lines are added as the first criteria for a match.

```

Router (ca-certificate-map)# issuer-name co cn=Central Certificate Authority, ou=Home Office Inc
!The above line wrapped but should be shown on one line with the line above it.

```

The same combination is done for the subject name from the certificate on the central site router (note that the line that begins with "Name:" is not part of the subject name and must be ignored when creating the certificate map criteria). This is the subject name to be used in the certificate map.

```

cn=Central VPN Gateway
o=Home Office Inc

```

```

Router (ca-certificate-map)# subject-name eq cn=central vpn gateway, o=home office inc

```

Now the certificate map is added to the trustpoint that was configured earlier.

```

Router (ca-certificate-map)# crypto pki trustpoint home-office
Router (ca-trustpoint)# match certificate central-site skip revocation-check
Router (ca-trustpoint)# exit
Router (config)# exit

```

The configuration is checked (most of configuration is not shown).

```

Router# write term
!Many lines left out
.
.
.
crypto pki trustpoint home-office
  enrollment url http://ca.home-office.com:80/certsrv/mscep/mscep.dll
  serial-number none
  fqdn none
  ip-address none
  subject-name o=Home Office Inc,cn=Branch 1
  revocation-check crl
  match certificate central-site skip revocation-check
!
!
crypto pki certificate map central-site 10
  issuer-name co cn = Central Certificate Authority, ou = Home Office Inc
  subject-name eq cn = central vpn gateway, o = home office inc
!many lines left out

```

Note that the issuer-name and subject-name lines have been reformatted to make them consistent for later matching with the certificate of the peer.

If the branch office is checking the AAA, the trustpoint will have lines similar to the following:

```

crypto pki trustpoint home-office
  auth list allow_list
  auth user subj commonname

```

After the certificate map has been defined as was done above, the following command is added to the trustpoint to skip AAA checking for the central site hub.

```
match certificate central-site skip authorization-check
```

In both cases, the branch site router has to establish an IPsec tunnel to the central site to check CRLs or to contact the AAA server. However, without the **match certificate** command and **central-site skip authorization-check (argument and keyword)**, the branch office cannot establish the tunnel until it has checked the CRL or the AAA server. (The tunnel will not be established unless the **match certificate** command and **central-site skip authorization-check** argument and keyword are used.)

The **match certificate** command and **allow expired-certificate** keyword would be used at the central site if the router at a branch site had an expired certificate and it had to establish a tunnel to the central site to renew its certificate.

### Trustpoint on the Central Site Router

```
crypto pki trustpoint VPN-GW
  enrollment url http://ca.home-office.com:80/certsrv/mscep/mscep.dll
  serial-number none
  fqdn none
  ip-address none
  subject-name o=Home Office Inc,cn=Central VPN Gateway
  revocation-check crl
```

### Trustpoint on the Branch 1 Site Router

```
Router# show crypto ca certificate
Certificate
  Status: Available
  Certificate Serial Number: 2F62BE1400000000CA0
  Certificate Usage: General Purpose
  Issuer:
    cn=Central Certificate Authority
    o=Home Office Inc
  Subject:
    Name: Branch 1 Site
    cn=Branch 1 Site
    o=Home Office Inc
  CRL Distribution Points:
    http://ca.home-office.com/CertEnroll/home-office.crl
  Validity Date:
    start date: 00:43:26 GMT Sep 26 2003
    end date: 00:53:26 GMT Oct 3 2003
    renew date: 00:00:00 GMT Jan 1 1970
  Associated Trustpoints: home-office
CA Certificate
  Status: Available
  Certificate Serial Number: 1244325DE0369880465F977A18F61CA8
  Certificate Usage: Signature
  Issuer:
    cn=Central Certificate Authority
    o=Home Office Inc
  Subject:
    cn=Central Certificate Authority
    o=Home Office Inc
  CRL Distribution Points:
    http://ca.home-office.com/CertEnroll/home-office.crl
  Validity Date:
    start date: 22:19:29 GMT Oct 31 2002
    end date: 22:27:27 GMT Oct 31 2017
  Associated Trustpoints: home-office
```

A certificate map is entered on the central site router.

```
Router# configure terminal
```

```

Enter configuration commands, one per line. End with CNTL/Z.
Router (config)# crypto pki certificate map branch1 10
Router (ca-certificate-map)# issuer-name co cn=Central Certificate Authority, ou=Home Office Inc
!The above line wrapped but should be part of the line above it.
Router (ca-certificate-map)# subject-name eq cn=Brahcn 1 Site,o=home office inc

```

The certificate map is added to the trustpoint.

```

Router (ca-certificate-map)# crypto pki trustpoint VPN-GW
Router (ca-trustpoint)# match certificate branch1 allow expired-certificate
Router (ca-trustpoint)# exit
Router (config) #exit

```

The configuration should be checked (most of the configuration is not shown).

```

Router# write term
!many lines left out
crypto pki trustpoint VPN-GW
  enrollment url http://ca.home-office.com:80/certsrv/mscep/mscep.dll
  serial-number none
  fqdn none
  ip-address none
  subject-name o=Home Office Inc,cn=Central VPN Gateway
  revocation-check crl
  match certificate branch1 allow expired-certificate
!
!
crypto pki certificate map central-site 10
  issuer-name co cn = Central Certificate Authority, ou = Home Office Inc
  subject-name eq cn = central vpn gateway, o = home office inc
! many lines left out

```

The **match certificate** command and **branch1 allow expired-certificate** (argument and keyword) and the certificate map should be removed as soon as the branch router has a new certificate.

## Configuring Certificate Authorization and Revocation Settings Examples

This section contains the following configuration examples that can be used when specifying a CRL cache control setting or certificate serial number session control:

### Configuring CRL Cache Control

The following example shows how to disable CRL caching for all CRLs associated with the CA1 trustpoint:

```

crypto pki trustpoint CA1
  enrollment url http://CA1:80
  ip-address FastEthernet0/0
  crl query ldap://ldap_CA1
  revocation-check crl
  crl-cache none

```

The current CRL is still cached immediately after executing the example configuration shown above:

```

Router# show crypto pki crls

```

```

CRL Issuer Name:
  cn=name Cert Manager,ou=pki,o=example.com,c=US
  LastUpdate: 18:57:42 GMT Nov 26 2005
  NextUpdate: 22:57:42 GMT Nov 26 2005
  Retrieved from CRL Distribution Point:
    ldap://ldap.example.com/CN=name Cert Manager,O=example.com

```

When the current CRL expires, a new CRL is then downloaded to the router at the next update. The **crl-cache none** command takes effect and all CRLs for the trustpoint are no longer cached; caching is disabled.

You can verify that no CRL is cached by executing the **show crypto pki crls** command. No output will be shown because there are no CRLs cached.

The following example shows how to configure the maximum lifetime of 2 minutes for all CRLs associated with the CA1 trustpoint:

```
crypto pki trustpoint CA1
  enrollment url http://CA1:80
  ip-address FastEthernet0/0
  crl query ldap://ldap_CA1
  revocation-check crl
  crl-cache delete-after 2
```

The current CRL is still cached immediately after executing the example configuration above for setting the maximum lifetime of a CRL:

Router# **show crypto pki crls**

```
CRL Issuer Name:
  cn=name Cert Manager,ou=pki,o=example.com,c=US
  LastUpdate: 18:57:42 GMT Nov 26 2005
  NextUpdate: 22:57:42 GMT Nov 26 2005
  Retrieved from CRL Distribution Point:
    ldap://ldap.example.com/CN=name Cert Manager,O=example.com
When the current CRL expires, a new CRL is downloaded to the router at the next update
and the crl-cache delete-after
command takes effect. This newly cached CRL and all subsequent CRLs will be deleted after
a maximum lifetime of 2 minutes.
You can verify that the CRL will be cached for 2 minutes by executing the show crypto pki
crls
command. Note that the NextUpdate time is 2 minutes after the LastUpdate time.
```

Router# **show crypto pki crls**

```
CRL Issuer Name:
  cn=name Cert Manager,ou=pki,o=example.com,c=US
  LastUpdate: 22:57:42 GMT Nov 26 2005

  NextUpdate: 22:59:42 GMT Nov 26 2005
  Retrieved from CRL Distribution Point:
    ldap://ldap.example.com/CN=name Cert Manager,O=example.com
```

## Configuring Certificate Serial Number Session Control

The following example shows the configuration of certificate serial number session control using a certificate map for the CA1 trustpoint:

```
crypto pki trustpoint CA1
  enrollment url http://CA1
  chain-validation stop
  crl query ldap://ldap_server
  revocation-check crl
  match certificate crl
  !
crypto pki certificate map crl 10
  serial-number co 279d
```



### Note

If the *match-criteria* value is set to **eq** (equal) instead of **co** (contains), the serial number must match the certificate map serial number exactly, including any spaces.

The following example shows the configuration of certificate serial number session control using AAA attributes. In this case, all valid certificates will be accepted if the certificate does not have the serial number “4ACA.”

```
crypto pki trustpoint CA1
  enrollment url http://CA1
  ip-address FastEthernet0/0
  crl query ldap://ldap_CA1
  revocation-check crl
  aaa new-model
!
aaa attribute list crl
attribute-type aaa-cert-serial-not 4ACA
```

The server log shows that the certificate with the serial number “4ACA” was rejected. The certificate rejection is shown using exclamation points.

```
.
.
.
Dec 3 04:24:39.051: CRYPTO_PKI: Trust-Point CA1 picked up
Dec 3 04:24:39.051: CRYPTO_PKI: locked trustpoint CA1, refcount is 1
Dec 3 04:24:39.051: CRYPTO_PKI: unlocked trustpoint CA1, refcount is 0
Dec 3 04:24:39.051: CRYPTO_PKI: locked trustpoint CA1, refcount is 1
Dec 3 04:24:39.135: CRYPTO_PKI: validation path has 1 certs
Dec 3 04:24:39.135: CRYPTO_PKI: Found a issuer match
Dec 3 04:24:39.135: CRYPTO_PKI: Using CA1 to validate certificate
Dec 3 04:24:39.135: CRYPTO_PKI: Certificate validated without revocation check
Dec 3 04:24:39.135: CRYPTO_PKI: Selected AAA username: 'PKIAAAA'
Dec 3 04:24:39.135: CRYPTO_PKI: Anticipate checking AAA list:'CRL'
Dec 3 04:24:39.135: CRYPTO_PKI_AAA: checking AAA authorization (CRL, PKIAAAA-L1, <all>)
Dec 3 04:24:39.135: CRYPTO_PKI_AAA: pre-authorization chain validation status (0x4)
Dec 3 04:24:39.135: AAA/BIND(00000021): Bind i/f
Dec 3 04:24:39.135: AAA/AUTHOR (0x21): Pick method list 'CRL'
.
.
.
Dec 3 04:24:39.175: CRYPTO_PKI_AAA: reply attribute ("cert-application" = "all")
Dec 3 04:24:39.175: CRYPTO_PKI_AAA: reply attribute ("cert-trustpoint" = "CA1")
!
Dec 3 04:24:39.175: CRYPTO_PKI_AAA: reply attribute ("cert-serial-not" = "4ACA")
Dec 3 04:24:39.175: CRYPTO_PKI_AAA: cert-serial doesn't match ("4ACA" != "4ACA")
!
Dec 3 04:24:39.175: CRYPTO_PKI_AAA: post-authorization chain validation status (0x7)
!
Dec 3 04:24:39.175: CRYPTO_PKI: AAA authorization for list 'CRL', and user 'PKIAAAA'
failed.
Dec 3 04:24:39.175: CRYPTO_PKI: chain cert was anchored to trustpoint CA1, and chain
validation result was: CRYPTO_PKI_CERT_NOT_AUTHORIZED
!
Dec 3 04:24:39.175: %CRYPTO-5-IKMP_INVALID_CERT: Certificate received from 192.0.2.43 is
bad: certificate invalid
Dec 3 04:24:39.175: %CRYPTO-6-IKMP_MODE_FAILURE: Processing of Main mode failed with peer
at 192.0.2.43
.
.
.
```

## Configuring Certificate Chain Validation Examples

This section contains the following configuration examples that can be used to specify the level of certificate chain processing for your device certificates:

### Configuring Certificate Chain Validation from Peer to Root CA

In the following configuration example, all of the certificates will be validated--the peer, SubCA11, SubCA1, and RootCA certificates.

```
crypto pki trustpoint RootCA
  enrollment terminal
  chain-validation stop
  revocation-check none
  rsaкеypair RootCA
crypto pki trustpoint SubCA1
  enrollment terminal
  chain-validation continue RootCA
  revocation-check none
  rsaкеypair SubCA1
crypto pki trustpoint SubCA11
  enrollment terminal
  chain-validation continue SubCA1
  revocation-check none
  rsaкеypair SubCA11
```

## Configuring Certificate Chain Validation from Peer to Subordinate CA

In the following configuration example, the following certificates will be validated--the peer and SubCA1 certificates.

```
crypto pki trustpoint RootCA
  enrollment terminal
  chain-validation stop
  revocation-check none
  rsaкеypair RootCA
crypto pki trustpoint SubCA1
  enrollment terminal
  chain-validation continue RootCA
  revocation-check none
  rsaкеypair SubCA1
crypto pki trustpoint SubCA11
  enrollment terminal
  chain-validation continue SubCA1
  revocation-check none
  rsaкеypair SubCA11
```

## Configuring Certificate Chain Validation Through a Gap

In the following configuration example, SubCA1 is not in the configured Cisco IOS hierarchy but is expected to have been supplied in the certificate chain presented by the peer.

If the peer supplies the SubCA1 certificate in the presented certificate chain, the following certificates will be validated--the peer, SubCA11, and SubCA1 certificates.

If the peer does not supply the SubCA1 certificate in the presented certificate chain, the chain validation will fail.

```
crypto pki trustpoint RootCA
  enrollment terminal
  chain-validation stop
  revocation-check none
  rsaкеypair RootCA
crypto pki trustpoint SubCA11
  enrollment terminal
  chain-validation continue RootCA
  revocation-check none
  rsaкеypair SubCA11
```

## Configuring Certificate Servers for High Availability Example

The following example shows the configuration of SCTP and redundancy on the active and the standby certificate server, and activation of synchronization between them:

### On the Active Router

```
ipc zone default
  association 1
  no shutdown
  protocol sctp
  local-port 5000
  local-ip 10.0.0.1
  exit
  remote-port 5000
  remote-ip 10.0.0.2
```

### On the Standby Router

```
ipc zone default
  association 1
  no shutdown
  protocol sctp
  local-port 5000
  local-ip 10.0.0.2
  exit
  remote-port 5000
  remote-ip 10.0.0.1
```

### On the Active Router

```
redundancy inter-device
  scheme standby SB
interface GigabitEthernet0/1
  ip address 10.0.0.1 255.255.255.0
  no ip route-cache cef
  no ip route-cache

  standby 0 ip 10.0.0.3
  standby 0 priority 50
  standby 0 name SB
  standby delay min 30 reload 60
```

### On the Standby Router

```
redundancy inter-device
  scheme standby SB
interface GigabitEthernet0/1
  ip address 10.0.0.2 255.255.255.0
  no ip route-cache cef
  no ip route-cache

  standby 0 ip 10.0.0.3
  standby 0 priority 50
  standby 0 name SB
  standby delay min 30 reload 60
```

### On the Active Router

```
crypto pki server mycertsaver
crypto pki server mycertsaver redundancy
```

## Additional References

### Related Documents

Related Topic	Document Title
PKI commands: complete command syntax, command mode, defaults, usage guidelines, and examples	<i>Cisco IOS Security Command Reference</i>
Overview of PKI, including RSA keys, certificate enrollment, and CAs	“Cisco IOS PKI Overview: Understanding and Planning a PKI” module
RSA key generation and deployment	“Deploying RSA Keys Within a PKI” module
Certificate enrollment: supported methods, enrollment profiles, configuration tasks	“Configuring Certificate Enrollment for a PKI” module
Cisco IOS certificate server overview information and configuration tasks	“Configuring and Managing a Cisco IOS Certificate Server for PKI Deployment” module
Recommended cryptographic algorithms	<i>Next Generation Encryption</i>

### Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	<a href="http://www.cisco.com/cisco/web/support/index.html">http://www.cisco.com/cisco/web/support/index.html</a>

## Feature Information for Certificate Authorization and Revocation

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.



**Table 3**      **Feature Information for PKI Certificate Authorization and Revocation**

Feature Name	Releases	Feature Information
Cache Control Enhancements for Certification Revocation Lists	12.4(9)T	<p>This feature provides users the ability to disable CRL caching or to specify the maximum lifetime for which a CRL will be cached in router memory. It also provides functionality to configure certificate serial number session control.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">What Is a CRL, page 43</a></li> <li>• <a href="#">Configuring Certificate Authorization and Revocation Settings, page 56</a></li> <li>• <a href="#">Configuring SCTP on the Active and Standby Certificate Servers, page 70</a></li> </ul> <p>The following commands were introduced or modified by this feature: <b>crl-cache delete-after</b>, <b>crl-cache none</b>, <b>crypto pki certificate map</b></p>
Certificate-Complete Chain Validation	12.4(6)T	<p>This feature provides users the ability to configure the level to which a certificate chain is processed on all certificates including subordinate CA certificates.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">PKI Certificate Chain Validation, page 47</a></li> <li>• <a href="#">Configuring Certificate Chain Validation, page 64</a></li> <li>• <a href="#">Configuring Certificate Chain Validation Examples, page 84</a></li> </ul> <p>The following command was introduced by this feature:</p> <p><b>chain-validation</b></p>

Feature Name	Releases	Feature Information
OCSP - Server Certification from Alternate Hierarchy	12.4(6)T	<p>This feature provides users with the flexibility to specify multiple OCSP servers, either per client certificate or per group of client certificates, and provides the capability for OCSP server validation based on external CA certificates or self-signed certificates.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"><li>• <a href="#">What Is OCSP, page 44</a></li><li>• <a href="#">Configuring Certificate Authorization and Revocation Settings, page 56</a></li></ul> <p>The following command was introduced by this feature: <b>match certificate override ocsp</b></p>
Optional OCSP Nonce	12.2(33)SR 12.4(4)T	<p>This feature provides users with the ability to configure the sending of a nonce, or unique identifier for an OCSP request, during OCSP communications.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"><li>• <a href="#">What Is OCSP, page 44</a></li><li>• <a href="#">Configuring a Revocation Mechanism for PKI Certificate Status Checking, page 53</a></li><li>• <a href="#">Disabling Nonces in Communications with the OCSP Server Example, page 78</a></li></ul>

Feature Name	Releases	Feature Information
Certificate Security Attribute-Based Access Control	12.2(15)T 1	<p data-bbox="1114 289 1471 730">Under the IPsec protocol, CA interoperability permits Cisco IOS devices and a CA to communicate so that the Cisco IOS device can obtain and use digital certificates from the CA. Certificates contain several fields that are used to determine whether a device or user is authorized to perform a specified action. This feature adds fields to the certificate that allow specifying an ACL, creating a certificate-based ACL.</p> <p data-bbox="1114 747 1446 802">The following sections provide information about this feature:</p> <ul data-bbox="1130 831 1446 1079" style="list-style-type: none"> <li data-bbox="1130 831 1446 953">• <a href="#">When to Use Certificate-Based ACLs for Authorization or Revocation, page 45</a></li> <li data-bbox="1130 961 1446 1079">• <a href="#">Configuring Certificate Authorization and Revocation Settings, page 56</a></li> </ul> <p data-bbox="1114 1108 1446 1262">The following commands were introduced or modified by this feature: <b>crypto pki certificate map</b>, <b>crypto pki trustpoint match certificate</b></p>

Feature Name	Releases	Feature Information
Online Certificate Status Protocol (OCSP)	12.3(2)T	<p>This feature allows users to enable OCSP instead of CRLs to check certificate status. Unlike CRLs, which provide only periodic certificate status, OCSP can provide timely information regarding the status of a certificate.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"><li>• <a href="#">CRLs or OCSP Server Choosing a Certificate Revocation Mechanism, page 43</a></li><li>• <a href="#">Configuring a Revocation Mechanism for PKI Certificate Status Checking, page 53</a></li></ul> <p>The following commands were introduced by this feature: <b>ocsp url, revocation-check</b></p>
PKI AAA Authorization Using the Entire Subject Name	12.3(11)T	<p>This feature provides users with the ability to query the AAA server using the entire subject name from the certificate as a unique AAA username.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"><li>• <a href="#">Attribute-Value Pairs for PKI and AAA Server Integration, page 42</a></li><li>• <a href="#">Configuring PKI Integration with a AAA Server, page 48</a></li></ul> <p>The following command was modified by this feature: <b>authorization username</b></p>

Feature Name	Releases	Feature Information
PKI Integration with AAA Server	12.3(1)	<p>This feature provides additional scalability for authorization by generating a AAA username from the certificate presented by the peer. A AAA server is queried to determine whether the certificate is authorized for use by the internal component. The authorization is indicated by a component-specified label that must be present in the AV pair for the user.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"><li>• <a href="#">PKI and AAA Server Integration for Certificate Status, page 41</a></li><li>• <a href="#">Configuring PKI Integration with a AAA Server, page 48</a></li></ul> <p>The following commands were introduced by this feature: <b>authorization list, authorization username</b></p>

Feature Name	Releases	Feature Information
PKI: Query Multiple Servers During Certificate Revocation Check	12.3(7)T	<p>This feature introduces the ability for Cisco IOS software to make multiple attempts to retrieve the CRL, allowing operations to continue when a particular server is not available. In addition, the ability to override the CDPs in a certificate with a manually configured CDP has been introduced. Manually overriding the CDPs in a certificate can be advantageous when a particular server is unavailable for an extended period of time. The certificate's CDPs can be replaced with a URL or directory specification without reissuing all of the certificates that contain the original CDP.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"><li>• <a href="#">Querying All CDPs During Revocation Check, page 44</a></li><li>• <a href="#">Manually Overriding CDPs in a Certificate, page 57</a></li></ul> <p>The following command was introduced by this feature: <b>match certificate override cdp</b></p>

Feature Name	Releases	Feature Information
Using Certificate ACLs to Ignore Revocation Check and Expired Certificates	12.3(4)T	<p>This feature allows a certificate that meets specified criteria to be accepted regardless of the validity period of the certificate, or if the certificate meets the specified criteria, revocation checking does not have to be performed. Certificate ACLs are used to specify the criteria that the certificate must meet to be accepted or to avoid revocation checking. In addition, if AAA communication is protected by a certificate, this feature provides for the AAA checking of the certificate to be ignored.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Ignore Revocation Checks Using a Certificate-Based ACL, page 46</a></li> <li>• <a href="#">Configuring Certificate-Based ACLs to Ignore Revocation Checks, page 56</a></li> </ul> <p>The following command was modified by this feature: <b>match certificate</b></p>
Query Mode Definition Per Trustpoint	Cisco IOS XE Release 2.1	This feature was introduced on the Cisco ASR 1000 series routers.
PKI High Availability	15.0(1)M	The following commands were introduced or modified: <b>crypto pki server</b> , <b>crypto pki server start</b> , <b>crypto pki server stop</b> , <b>crypto pki trustpoint</b> , <b>crypto key generate rsa</b> , <b>crypto key import pem</b> , <b>crypto key move rsa</b> , <b>show crypto key mypubkey rsa</b> .

Feature Name	Releases	Feature Information
PKI IPv6 Support for VPN Solutions	15.2(1)T	<p>The <b>enrollment url (ca-trustpoint)</b> command was modified to specify an IPv6 address in the CA URL.</p> <p>The <b>ocsp url</b> command was modified to specify the IPv6 address in a URL for the OCSP server.</p>

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.







## Configuring Certificate Enrollment for a PKI

---

This module describes the different methods available for certificate enrollment and how to set up each method for a participating PKI peer. Certificate enrollment, which is the process of obtaining a certificate from a certification authority (CA), occurs between the end host that requests the certificate and the CA. Each peer that participates in the public key infrastructure (PKI) must enroll with a CA.



### Note

---

Security threats, as well as the cryptographic technologies to help protect against them, are constantly changing. For more information about the latest Cisco cryptographic recommendations, see the [Next Generation Encryption \(NGE\)](#) white paper.

---

- [Finding Feature Information](#), page 97
- [Prerequisites for PKI Certificate Enrollment](#), page 97
- [Information About Certificate Enrollment for a PKI](#), page 98
- [How to Configure Certificate Enrollment for a PKI](#), page 102
- [Configuration Examples for PKI Certificate Enrollment Requests](#), page 126
- [Additional References](#), page 133
- [Feature Information for PKI Certificate Enrollment](#), page 134

## Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table at the end of this module.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

## Prerequisites for PKI Certificate Enrollment

Before configuring peers for certificate enrollment, you should have the following items:

- A generated Rivest, Shamir, and Adelman (RSA) key pair to enroll and a PKI in which to enroll.
- An authenticated CA.
- Familiarity with the module “Cisco IOS PKI Overview: Understanding and Planning a PKI.”

**Note**

As of Cisco IOS Release 12.3(7)T, all commands that begin with “**crypto ca**” have been changed to begin with “**crypto pki**.” Although the router will still accept **crypto ca** commands, all output will be displayed **crypto pki**.

## Information About Certificate Enrollment for a PKI

- [What Are CAs, page 98](#)
- [Framework for Multiple CAs, page 98](#)
- [Authentication of the CA, page 99](#)
- [Supported Certificate Enrollment Methods, page 99](#)
- [Registration Authorities, page 100](#)
- [Automatic Certificate Enrollment, page 100](#)
- [Certificate Enrollment Profiles, page 101](#)

## What Are CAs

A CA is an entity that issues digital certificates that other parties can use. It is an example of a trusted third party. CAs are characteristic of many PKI schemes.

A CA manages certificate requests and issues certificates to participating network devices. These services provide centralized key management for the participating devices to validate identities and to create digital certificates. Before any PKI operations can begin, the CA generates its own public key pair and creates a self-signed CA certificate; thereafter, the CA can sign certificate requests and begin peer enrollment for the PKI.

You can use the Cisco IOS certificate server or a CA provided by a third-party CA vendor.

## Framework for Multiple CAs

A PKI can be set up in a hierarchical framework to support multiple CAs. At the top of the hierarchy is a root CA, which holds a self-signed certificate. The trust within the entire hierarchy is derived from the RSA key pair of the root CA. The subordinate CAs within the hierarchy can be enrolled with either the root CA or with another subordinate CA. Multiple tiers of CAs are configured by either the root CA or with another subordinate CA. Within a hierarchical PKI, all enrolled peers can validate the certificate of one another if the peers share a trusted root CA certificate or a common subordinate CA.

### When to Use Multiple CAs

Multiple CAs provide users with added flexibility and reliability. For example, subordinate CAs can be placed in branch offices while the root CA is at the office headquarters. Also, different granting policies can be implemented per CA, so you can set up one CA to automatically grant certificate requests while another CA within the hierarchy requires each certificate request to be manually granted.

Scenarios in which at least a two-tier CA is recommended are as follows:

- Large and very active networks in which a large number of certificates are revoked and reissued. A multiple tier CA helps to control the size of the certificate revocation lists (CRLs).

- When online enrollment protocols are used, the root CA can be kept offline except to issue subordinate CA certificates. This scenario provides added security for the root CA.

## Authentication of the CA

The certificate of the CA must be authenticated before the device will be issued its own certificate and before certificate enrollment can occur. Authentication of the CA typically occurs only when you initially configure PKI support at your router. To authenticate the CA, issue the **crypto pki authenticate** command, which authenticates the CA to your router by obtaining the self-signed certificate of the CA that contains the public key of the CA.

### Authentication via the fingerprint Command

Cisco IOS Release 12.3(12) and later releases allow you to issue the **fingerprint** command to preenter a fingerprint that can be matched against the fingerprint of a CA certificate during authentication.

If a fingerprint is not preentered for a trustpoint, and if the authentication request is interactive, you must verify the fingerprint that is displayed during authentication of the CA certificate. If the authentication request is noninteractive, the certificate will be rejected without a preentered fingerprint.

**Note**

---

If the authentication request is made using the command-line interface (CLI), the request is an interactive request. If the authentication request is made using HTTP or another management tool, the request is a noninteractive request.

---

## Supported Certificate Enrollment Methods

Cisco IOS software supports the following methods to obtain a certificate from a CA:

- Simple Certificate Enrollment Protocol (SCEP)--A Cisco-developed enrollment protocol that uses HTTP to communicate with the CA or registration authority (RA). SCEP is the most commonly used method for sending and receiving requests and certificates.

**Note**

---

To take advantage of automated certificate and key rollover functionality, you must be running a CA that supports rollover and SCEP must be used as your client enrollment method. If you are running a Cisco IOS CA, you must be running Cisco IOS Release 12.4(2)T or a later release for rollover support.

---

- PKCS12--The router imports certificates in PKCS12 format from an external server.
- IOS File System (IFS)--The router uses any file system that is supported by Cisco IOS software (such as TFTP, FTP, flash, and NVRAM) to send a certificate request and to receive the issued certificate. Users may enable IFS certificate enrollment when their CA does not support SCEP.

**Note**

---

Prior to Cisco IOS Release 12.3(4)T, only the TFTP file system was supported within IFS.

---

- Manual cut-and-paste--The router displays the certificate request on the console terminal, allowing the user to enter the issued certificate on the console terminal. A user may manually cut-and-paste certificate requests and certificates when there is no network connection between the router and CA.

- Enrollment profiles--The router sends HTTP-based enrollment requests directly to the CA server instead of to the RA-mode certificate server (CS). Enrollment profiles can be used if a CA server does not support SCEP.
- Self-signed certificate enrollment for a trustpoint--The secure HTTP (HTTPS) server generates a self-signed certificate that is to be used during the secure socket layer (SSL) handshake, establishing a secure connection between the HTTPS server and the client. The self-signed certificate is then saved in the router's startup configuration (NVRAM). The saved, self-signed certificate can then be used for future SSL handshakes, eliminating the user intervention that was necessary to accept the certificate every time the router reloaded.

**Note**

To take advantage of autoenrollment and autoreenrollment, do not use either TFTP or manual cut-and-paste enrollment as your enrollment method. Both TFTP and manual cut-and-paste enrollment methods are manual enrollment processes, requiring user input.

- [Cisco IOS Suite-B Support for Certificate Enrollment for a PKI, page 100](#)

## Cisco IOS Suite-B Support for Certificate Enrollment for a PKI

Suite-B requirements comprise of four user interface suites of cryptographic algorithms for use with IKE and IPsec that are described in RFC 4869. Each suite consists of an encryption algorithm, a digital signature algorithm, a key agreement algorithm, and a hash or message digest algorithm.

Suite-B adds the following support for the certificate enrollment for a PKI:

- Elliptic Curve Digital Signature Algorithm (ECDSA) (256-bit and 384-bit curves) is used for the signature operation within X.509 certificates.
- PKI support for validation of for X.509 certificates using ECDSA signatures.
- PKI support for generating certificate requests using ECDSA signatures and for importing the issued certificates into IOS.

See the Configuring Security for VPNs with IPsec feature module for more detailed information about Cisco IOS Suite-B support.

## Registration Authorities

A Cisco IOS certificate server can be configured to run in RA mode. An RA offloads authentication and authorization responsibilities from a CA. When the RA receives a SCEP or manual enrollment request, the administrator can either reject or grant it on the basis of local policy. If the request is granted, it will be forwarded to the issuing CA, and the CA can be configured to automatically generate the certificate and return it to the RA. The client can later retrieve the granted certificate from the RA.

## Automatic Certificate Enrollment

Automatic certificate enrollment allows the CA client to automatically request a certificate from its CA sever. This automatic router request eliminates the need for operator intervention when the enrollment request is sent to the CA server. Automatic enrollment is performed on startup for any trustpoint CA that is configured and that does not have a valid client certificate. When the certificate expires, a new certificate is automatically requested.

**Note**

When automatic enrollment is configured, clients automatically request client certificates. The CA server performs its own authorization checks; if these checks include a policy to automatically issue certificates, all clients will automatically receive certificates, which is not very secure. Thus, automatic certificate enrollment should be combined with additional authentication and authorization mechanisms (such as Secure Device Provisioning (SDP), leveraging existing certificates, and one-time passwords).

**Automated Client Certificate and Key Rollover**

By default, the automatic certificate enrollment function requests a new client certificate and keys from the CS before the client's current certificate expires. Certificate and key rollover allows the certificate renewal rollover request to be made before the certificate expires by retaining the current key and certificate until the new, or rollover, certificate is available. After a specified amount of time, the rollover certificate and keys will become the active certificate and keys. The expired certificate and keys are immediately deleted upon rollover and removed from the certificate chain and CRL.

The setup for automatic rollover is twofold: CA clients must be automatically enrolled and the client's CAs must be automatically enrolled and have the **auto-rollover** command enabled. For more information on configuring your CA servers for automatic certificate rollover see the section "Automatic CA Certificate and Key Rollover" in the chapter "Configuring and Managing a Cisco IOS Certificate Server for PKI Deployment" of the *Public Key Infrastructure Configuration Guide*.

An optional renewal percentage parameter can be used with the **auto-enroll** command to allow a new certificate to be requested when a specified percentage of the lifetime of the certificate has passed. For example, if the renewal percentage is configured as 90 and the certificate has a lifetime of one year, a new certificate is requested 36.5 days before the old certificate expires. In order for automatic rollover to occur, the renewal percentage must be less than 100. The specified percent value must not be less than 10. If a client certificate is issued for less than the configured validity period due to the impending expiration of the CA certificate, the rollover certificate will be issued for the balance of that period. A minimum of 10 percent of the configured validity period, with an absolute minimum of 3 minutes, is required to allow rollover enough time to function.

**Tip**

If CA autoenrollment is not enabled, you may manually initiate rollover on an existing client with the **crypto pki enroll** command if the expiration time of the current client certificate is equal to or greater than the expiration time of the corresponding CA certificate. The client will initiate the rollover process, which occurs only if the server is configured for automated rollover and has an available rollover server certificate.

**Note**

A key pair is also sent if configured by the **auto-enroll re-generate** command and keyword. It is recommended that a new key pair be issued for security reasons.

## Certificate Enrollment Profiles

Certificate enrollment profiles allow users to specify certificate authentication, enrollment, and reenrollment parameters when prompted. The values for these parameters are referenced by two templates that make up the profile. One template contains parameters for the HTTP request that is sent to the CA

server to obtain the certificate of the CA (also known as certificate authentication); the other template contains parameters for the HTTP request that is sent to the CA for certificate enrollment.

Configuring two templates enables users to specify different URLs or methods for certificate authentication and enrollment; for example, authentication (getting the certificate of the CA) can be performed via TFTP (using the **authentication url** command) and enrollment can be performed manually (using the **enrollment terminal** command).

Prior to Cisco IOS Release 12.3(11)T, certificate requests could be sent only in a PKCS10 format; however, an additional parameter was added to the profile, allowing users to specify the PKCS7 format for certificate renewal requests.

**Note**

---

A single enrollment profile can have up to three separate sections for each task--certificate authentication, enrollment, and reenrollment.

---

## How to Configure Certificate Enrollment for a PKI

This section contains the following enrollment option procedures. If you configure enrollment or autoenrollment (the first task), you cannot configure manual certificate enrollment. Also, if you configure TFTP or manual cut-and-paste certificate enrollment, you cannot configure autoenrollment, autoreenrollment, an enrollment profile, nor can you utilize the automated CA certificate rollover capability.

- [Configuring Certificate Enrollment or Autoenrollment, page 102](#)
- [Configuring Manual Certificate Enrollment, page 107](#)
- [Configuring a Persistent Self-Signed Certificate for Enrollment via SSL, page 118](#)
- [Configuring a Certificate Enrollment Profile for Enrollment or Reenrollment, page 122](#)

## Configuring Certificate Enrollment or Autoenrollment

Perform this task to configure certificate enrollment or autoenrollment for clients participating in your PKI.

Before configuring automatic certificate enrollment requests, you should ensure that all necessary enrollment information is configured.

### Prerequisites for Enabling Automated Client Certificate and Key Rollover

CA client support for certificate rollover is automatically enabled when using autoenrollment. For automatic CA certificate rollover to run successfully, the following prerequisites are applicable:

- Your network devices must support shadow PKI.
- Your clients must be running Cisco IOS Release 12.4(2)T or a later release.
- The client's CS must support automatic rollover. See the section "Automatic CA Certificate and Key Rollover" in the chapter "Configuring and Managing a Cisco IOS Certificate Server for PKI Deployment" of the *Public Key Infrastructure Configuration Guide* for more information on CA server automatic rollover configuration.

### Prerequisites for Specifying Autoenrollment Initial Key Generation Location

To specify the location of the autoenrollment initial key generation, you must be running Cisco IOS Release 12.4(11)T or a later release.

**Note****RSA Key Pair Restriction for Autoenrollment**

Trustpoints configured to generate a new key pair using the **regenerate** command or the **regenerate** keyword of the **auto-enroll** command must not share key pairs with other trustpoints. To give each trustpoint its own key pair, use the **rsakeypair** command in ca-trustpoint configuration mode. Sharing key pairs among regenerating trustpoints is not supported and will cause loss of service on some of the trustpoints because of key and certificate mismatches.

**Restrictions for Automated Client Certificate and Key Rollover**

In order for clients to run automatic CA certificate rollover successfully, the following restrictions are applicable:

- SCEP must be used to support rollover. Any device that enrolls with the PKI using an alternative to SCEP as the certificate management protocol or mechanism (such as enrollment profiles, manual enrollment, or TFTP enrollment) will not be able to take advantage of the rollover functionality provided by SCEP.
- If the configuration cannot be saved to the startup configuration after a shadow certificate is generated, rollover will not occur.

&gt;

**SUMMARY STEPS**

1. **enable**
2. **configure terminal**
3. **crypto pki trustpoint** *name*
4. **enrollment** [*mode*] [**retry period** *minutes*] [**retry count** *number*] **url** *url* [**pem**]
5. **eckeypair** *label*
6. **subject-name** [*x.500-name*]
7. **vrf** *vrf-name*
8. **ip-address** {*ip-address* | *interface* | **none**}
9. **serial-number** [*none*]
10. **auto-enroll** [*percent*] [**regenerate**]
11. **usage** *method1* [*method2* [*method3*]]
12. **password** *string*
13. **rsakeypair** *key-label* *key-size* *encryption-key-size* ]]
14. **fingerprint** *ca-fingerprint*
15. **on** *devicename* :
16. **exit**
17. **crypto pki authenticate** *name*
18. **exit**
19. **copy system:running-config nvram:startup-config**
20. **show crypto pki certificates**



## DETAILED STEPS

	Command or Action	Purpose
Step 1	<p><b>enable</b></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
Step 2	<p><b>configure terminal</b></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
Step 3	<p><b>crypto pki trustpoint <i>name</i></b></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki trustpoint mytp</pre>	<p>Declares the trustpoint and a given name and enters ca-trustpoint configuration mode.</p>
Step 4	<p><b>enrollment [mode] [retry period <i>minutes</i>] [retry count <i>number</i>] url <i>url</i> [pem]</b></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# enrollment url http:// cat.example.com</pre>	<p>Specifies the URL of the CA on which your router should send certificate requests.</p> <ul style="list-style-type: none"> <li>• <b>mode</b> --Specifies RA mode if your CA system provides an RA.</li> <li>• <b>retry period <i>minutes</i></b> --Specifies the wait period between certificate request retries. The default is 1 minute between retries.</li> <li>• <b>retry count <i>number</i></b> -- Specifies the number of times a router will resend a certificate request when it does not receive a response from the previous request. (Specify from 1 to 100 retries.)</li> <li>• <b>url <i>url</i></b> -- URL of the file system where your router should send certificate requests. An IPv6 address can be added in the URL enclosed in brackets. For example: http:// [2001:DB8:1:1::1]:80. For more enrollment method options, see the <a href="#">enrollment url (ca-trustpoint)</a> command page.</li> <li>• <b>pem</b> -- Adds privacy-enhanced mail (PEM) boundaries to the certificate request.</li> </ul> <p><b>Note</b> An enrollment method other than TFTP or manual cut-and-paste must be configured to support autoenrollment.</p>
Step 5	<p><b>eckeypair <i>label</i></b></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# eckeypair Router_1_Key</pre>	<p>(Optional) Configures the trustpoint to use an Elliptic Curve (EC) key on which certificate requests are generated using ECDSA signatures. The <i>label</i> argument specifies the EC key label that is configured using the <b>crypto key generate rsa</b> or <b>crypto key generate ec keysizes</b> command in global configuration mode. See the <a href="#">Configuring Internet Key Exchange for IPsec VPNs</a> feature module for more information.</p> <p><b>Note</b> If an ECDSA signed certificate is imported without a trustpoint configuration, then the label defaults to the FQDN value.</p>

	Command or Action	Purpose
Step 6	<p><b>subject-name</b> [<i>x.500-name</i>]</p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# subject-name cat</pre>	<p>(Optional) Specifies the requested subject name that will be used in the certificate request.</p> <ul style="list-style-type: none"> <li><i>x.500-name</i> --If it is not specified, the fully qualified domain name (FQDN), which is the default subject name, will be used.</li> </ul>
Step 7	<p><b>vrf</b> <i>vrf-name</i></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# vrf myvrf</pre>	<p>(Optional) Specifies the the VRF instance in the public key infrastructure (PKI) trustpoint to be used for enrollment, certificate revocation list (CRL) retrieval, and online certificate status protocol (OCSP) status.</p>
Step 8	<p><b>ip-address</b> {<i>ip-address</i>   <i>interface</i>   <b>none</b>}</p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# ip address 192.168.1.66</pre>	<p>(Optional) Includes the IP address of the specified interface in the certificate request.</p> <ul style="list-style-type: none"> <li>Issue the <i>ip-address</i> argument to specify either an IPv4 or IPv6 address.</li> <li>Issue the <i>interface</i> argument to specify an interface on the router.</li> <li>Issue the <b>none</b> keyword if no IP address should be included.</li> </ul> <p><b>Note</b> If this command is enabled, you will not be prompted for an IP address during enrollment for this trustpoint.</p>
Step 9	<p><b>serial-number</b> [<b>none</b>]</p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# serial- number</pre>	<p>(Optional) Specifies the router serial number in the certificate request, unless the <b>none</b> keyword is issued.</p> <ul style="list-style-type: none"> <li>Issue the <b>none</b> keyword to specify that a serial number will not be included in the certificate request.</li> </ul>
Step 10	<p><b>auto-enroll</b> [<i>percent</i>] [<b>regenerate</b>]</p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# auto- enroll regenerate</pre>	<p>(Optional) Enables autoenrollment, allowing the client to automatically request a rollover certificate from the CA.</p> <ul style="list-style-type: none"> <li>If autoenrollment is not enabled, the client must be manually re-enrolled in your PKI upon certificate expiration.</li> <li>By default, only the Domain Name System (DNS) name of the router is included in the certificate.</li> <li>Use the <i>percent</i> argument to specify that a new certificate will be requested after the percentage of the lifetime of the current certificate is reached.</li> <li>Use the <b>regenerate</b> keyword to generate a new key for the certificate even if a named key already exists.</li> </ul> <p><b>Note</b> If the key pair being rolled over is exportable, the new key pair will also be exportable. The following comment will appear in the trustpoint configuration to indicate whether the key pair is exportable: “! RSA key pair associated with trustpoint is exportable.”</p> <p><b>Note</b> It is recommended that a new key pair be generated for security reasons.</p>

Command or Action	Purpose
<p><b>Step 11</b> <code>usage method1 [method2 [method3]]</code></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# usage ssl-client</pre>	<p>(Optional) Specifies the intended use for the certificate.</p> <ul style="list-style-type: none"> <li>Available options are <b>ike</b>, <b>ssl-client</b>, and <b>ssl-server</b>; the default is <b>ike</b>.</li> </ul>
<p><b>Step 12</b> <code>password string</code></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# password string1</pre>	<p>(Optional) Specifies the revocation password for the certificate.</p> <ul style="list-style-type: none"> <li>If this command is enabled, you will not be prompted for a password during enrollment for this trustpoint.</li> </ul> <p><b>Note</b> When SCEP is used, this password can be used to authorize the certificate request--often via a one-time password or similar mechanism.</p>
<p><b>Step 13</b> <code>rsakeypair key-label key-size encryption-key-size ]]</code></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# rsakeypair cat</pre>	<p>(Optional) Specifies which key pair to associate with the certificate.</p> <ul style="list-style-type: none"> <li>A key pair with the <i>key-label</i> argument will be generated during enrollment if it does not already exist or if the <b>auto-enroll regenerate</b> command was issued.</li> <li>Specify the <i>key-size</i> argument for generating the key, and specify the <i>encryption-key-size</i> argument to request separate encryption, signature keys, and certificates.</li> </ul> <p><b>Note</b> If this command is not enabled, the FQDN key pair is used.</p>
<p><b>Step 14</b> <code>fingerprint ca-fingerprint</code></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# fingerprint 12EF53FA 355CD23E 12EF53FA 355CD23E</pre>	<p>(Optional) Specifies a fingerprint that can be matched against the fingerprint of a CA certificate during authentication.</p> <p><b>Note</b> If the fingerprint is not provided and authentication of the CA certificate is interactive, the fingerprint will be displayed for verification.</p>
<p><b>Step 15</b> <code>on devicename :</code></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# on usbtoken0:</pre>	<p>(Optional) Specifies that RSA keys will be created on the specified device upon autoenrollment initial key generation.</p> <ul style="list-style-type: none"> <li>Devices that may be specified include NVRAM, local disks, and Universal Serial Bus (USB) tokens. USB tokens may be used as cryptographic devices in addition to a storage device. Using a USB token as a cryptographic device allows RSA operations such as key generation, signing, and authentication to be performed on the token.</li> </ul>
<p><b>Step 16</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# exit</pre>	<p>Exits ca-trustpoint configuration mode and returns to global configuration mode.</p>

Command or Action	Purpose
<p><b>Step 17</b> <code>crypto pki authenticate <i>name</i></code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki authenticate mytp</pre>	<p>Retrieves the CA certificate and authenticates it.</p> <ul style="list-style-type: none"> <li>• Check the certificate fingerprint if prompted.</li> </ul> <p><b>Note</b> This command is optional if the CA certificate is already loaded into the configuration.</p>
<p><b>Step 18</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(config)# exit</pre>	<p>Exits global configuration mode.</p>
<p><b>Step 19</b> <code>copy system:running-config nvram:startup-config</code></p> <p><b>Example:</b></p> <pre>Router# copy system:running-config nvram:startup-config</pre>	<p>(Optional) Copies the running configuration to the NVRAM startup configuration.</p> <p><b>Note</b> Autoenrollment will not update NVRAM if the running configuration has been modified but not written to NVRAM.</p>
<p><b>Step 20</b> <code>show crypto pki certificates</code></p> <p><b>Example:</b></p> <pre>Router# show crypto pki certificates</pre>	<p>(Optional) Displays information about your certificates, including any rollover certificates.</p>

## Configuring Manual Certificate Enrollment

Manual certificate enrollment can be set up via TFTP or the manual cut-and-paste method. Both options can be used if your CA does not support SCEP or if a network connection between the router and CA is not possible. Perform one of the following tasks to set up manual certificate enrollment:

- [PEM-Formatted Files for Certificate Enrollment Request, page 107](#)
- [Restrictions for Manual Certificate Enrollment, page 108](#)
- [Configuring Cut-and-Paste Certificate Enrollment, page 108](#)
- [Configuring TFTP Certificate Enrollment, page 110](#)
- [Certifying a URL Link for Secure Communication with a Trend Micro Server, page 113](#)

### PEM-Formatted Files for Certificate Enrollment Request

Using PEM-formatted files for certificate requests can be helpful for customers who are using terminal or profile-based enrollment to request certificates from their CA server. Customers using PEM-formatted files can directly use existing certificates on their routers.

## Restrictions for Manual Certificate Enrollment

### SCEP Restriction

We do not recommend switching URLs if SCEP is used; that is, if the enrollment URL is “http://myca,” do not change the enrollment URL after getting the CA certificate and before enrolling the certificate. A user can switch between TFTP and manual cut-and-paste.

### Key Regeneration Restriction

Do not regenerate the keys manually using the **crypto key generate** command; key regeneration will occur when the **crypto pki enroll** command is issued if the **regenerate** keyword is specified.

## Configuring Cut-and-Paste Certificate Enrollment

Perform this task to configure cut-and-paste certificate enrollment. This task helps you to configure manual certificate enrollment via the cut-and-paste method for peers participating in your PKI.

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto pki trustpoint** *name*
4. **enrollment terminal pem**
5. **fingerprint** *ca-fingerprint*
6. **exit**
7. **crypto pki authenticate** *name*
8. **crypto pki enroll** *name*
9. **crypto pki import** *name* *certificate*
10. **exit**
11. **show crypto pki certificates**

### DETAILED STEPS

	Command or Action	Purpose
Step 1	<b>enable</b>  <b>Example:</b> Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
Step 2	<b>configure terminal</b>  <b>Example:</b> Router# configure terminal	Enters global configuration mode.

	Command or Action	Purpose
Step 3	<b>crypto pki trustpoint <i>name</i></b>  <b>Example:</b>  <pre>Router(config)# crypto pki trustpoint mytp</pre>	Declares the trustpoint and a given name and enters ca-trustpoint configuration mode.
Step 4	<b>enrollment terminal pem</b>  <b>Example:</b>  <pre>Router(ca-trustpoint)# enrollment terminal</pre>	Specifies the manual cut-and-paste certificate enrollment method. <ul style="list-style-type: none"> <li>The certificate request will be displayed on the console terminal so that it may be manually copied (or cut).</li> <li><b>pem</b> --Configures the trustpoint to generate PEM-formatted certificate requests to the console terminal.</li> </ul>
Step 5	<b>fingerprint <i>ca-fingerprint</i></b>  <b>Example:</b>  <pre>Router(ca-trustpoint)# fingerprint 12EF53FA 355CD23E 12EF53FA 355CD23E</pre>	(Optional) Specifies a fingerprint that can be matched against the fingerprint of a CA certificate during authentication.  <b>Note</b> If the fingerprint is not provided, it will be displayed for verification.
Step 6	<b>exit</b>  <b>Example:</b>  <pre>Router(ca-trustpoint)# exit</pre>	Exits ca-trustpoint configuration mode and returns to global configuration mode.
Step 7	<b>crypto pki authenticate <i>name</i></b>  <b>Example:</b>  <pre>Router(config)# crypto pki authenticate mytp</pre>	Retrieves the CA certificate and authenticates it.
Step 8	<b>crypto pki enroll <i>name</i></b>  <b>Example:</b>  <pre>Router(config)# crypto pki enroll mytp</pre>	Generates certificate request and displays the request for copying and pasting into the certificate server. <ul style="list-style-type: none"> <li>You are prompted for enrollment information, such as whether to include the router FQDN and IP address in the certificate request. You are also given the choice about displaying the certificate request to the console terminal.</li> <li>The base-64 encoded certificate with or without PEM headers as requested is displayed.</li> </ul>

Command or Action	Purpose
<p><b>Step 9</b> <code>crypto pki import name certificate</code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki import mytp certificate</pre>	<p>Imports a certificate manually at the console terminal (pasting).</p> <ul style="list-style-type: none"> <li>The base-64 encoded certificate is accepted from the console terminal and inserted into the internal certificate database.</li> </ul> <p><b>Note</b> You must enter this command twice if usage keys, a signature key, and an encryption key are used. The first time the command is entered, one of the certificates is pasted into the router. The second time the command is entered, the other certificate is pasted into the router. It does not matter which certificate is pasted first.</p> <p><b>Note</b> Some CAs ignore the usage key information in the certificate request and issue general purpose usage certificates. If this applies to the certificate authority you are using, import the general purpose certificate. The router will not use one of the two key pairs generated.</p>
<p><b>Step 10</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(config)# exit</pre>	<p>Exits global configuration mode.</p>
<p><b>Step 11</b> <code>show crypto pki certificates</code></p> <p><b>Example:</b></p> <pre>Router# show crypto pki certificates</pre>	<p>(Optional) Displays information about your certificates, the certificates of the CA, and RA certificates.</p>

## Configuring TFTP Certificate Enrollment

Perform this task to configure TFTP certificate enrollment. This task helps you to configure manual certificate enrollment using a TFTP server.

- You must know the correct URL to use if you are configuring certificate enrollment via TFTP.
- The router must be able to write a file to the TFTP server for the **crypto pki enroll** command.
- If you are using a file specification with the **enrollment** command, the file must contain the CA certificate either in binary format or be base-64 encoded.
- You must know if your CA ignores key usage information in a certificate request and issues only a general purpose usage certificate.



### Caution

Some TFTP servers require that the file must exist on the server before it can be written. Most TFTP servers require files that can be written over. This requirement may pose a risk because any router or other device may write or overwrite the certificate request; thus, the replacement certificate request will not be used by the CA administrator, who must first check the enrollment request fingerprint before granting the certificate request.

**SUMMARY STEPS**

1. **enable**
2. **configure terminal**
3. **crypto pki trustpoint *name***
4. **enrollment [mode] [retry period minutes] [retry count number] url url [pem]**
5. **fingerprint *ca-fingerprint***
6. **exit**
7. **crypto pki authenticate *name***
8. **crypto pki enroll name**
9. **crypto pki import name certificate**
10. **exit**
11. **show crypto pki certificates**

**DETAILED STEPS**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<p><b>enable</b></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<b>Step 2</b>	<p><b>configure terminal</b></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<b>Step 3</b>	<p><b>crypto pki trustpoint <i>name</i></b></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki trustpoint mytp</pre>	<p>Declares the trustpoint and a given name and enters ca-trustpoint configuration mode.</p>
<b>Step 4</b>	<p><b>enrollment [mode] [retry period minutes] [retry count number] url url [pem]</b></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# enrollment url tftp://certserver/file_specification</pre>	<p>Specifies TFTP as the enrollment method to send the enrollment request and to retrieve the CA certificate and router certificate and any optional parameters.</p> <p><b>Note</b> For TFTP enrollment, the URL must be configured as a TFTP URL, tftp://example_tftp_url.</p> <ul style="list-style-type: none"> <li>• An optional file specification filename may be included in the TFTP URL. If the file specification is not included, the FQDN will be used. If the file specification is included, the router will append the extension “.ca” to the specified filename.</li> </ul>



Command or Action	Purpose
<p><b>Step 5</b> <b>fingerprint</b> <i>ca-fingerprint</i></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# fingerprint 12EF53FA 355CD23E 12EF53FA 355CD23E</pre>	<p>(Optional) Specifies the fingerprint of the CA certificate received via an out-of-band method from the CA administrator.</p> <p><b>Note</b> If the fingerprint is not provided, it will be displayed for verification.</p>
<p><b>Step 6</b> <b>exit</b></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# exit</pre>	<p>Exits ca-trustpoint configuration mode and returns to global configuration mode.</p>
<p><b>Step 7</b> <b>crypto pki authenticate</b> <i>name</i></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki authenticate mytp</pre>	<p>Retrieves the CA certificate and authenticates it from the specified TFTP server.</p>
<p><b>Step 8</b> <b>crypto pki enroll</b> <i>name</i></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki enroll mytp</pre>	<p>Generates certificate request and writes the request out to the TFTP server.</p> <ul style="list-style-type: none"> <li>You are prompted for enrollment information, such as whether to include the router FQDN and IP address in the certificate request. You are queried about whether to display the certificate request to the console terminal.</li> <li>The filename to be written is appended with the extension “.req”. For usage keys, a signature key and an encryption key, two requests are generated and sent. The usage key request filenames are appended with the extensions “-sign.req” and “-encr.req”, respectively.</li> </ul>
<p><b>Step 9</b> <b>crypto pki import</b> <i>name certificate</i></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki import mytp certificate</pre>	<p>Imports a certificate via TFTP at the console terminal, which retrieves the granted certificate.</p> <ul style="list-style-type: none"> <li>The router will attempt to retrieve the granted certificate via TFTP using the same filename used to send the request, except the extension is changed from “.req” to “.crt”. For usage key certificates, the extensions “-sign.crt” and “-encr.crt” are used.</li> <li>The router will parse the received files, verify the certificates, and insert the certificates into the internal certificate database on the router.</li> </ul> <p><b>Note</b> Some CAs ignore the usage key information in the certificate request and issue general purpose usage certificates. If your CA ignores the usage key information in the certificate request, only import the general purpose certificate. The router will not use one of the two key pairs generated.</p>

	Command or Action	Purpose
Step 10	<b>exit</b>  <b>Example:</b> Router(config)# exit	Exits global configuration mode.
Step 11	<b>show crypto pki certificates</b>  <b>Example:</b> Router# show crypto pki certificates	(Optional) Displays information about your certificates, the certificates of the CA, and RA certificates.

## Certifying a URL Link for Secure Communication with a Trend Micro Server

Perform this task to certify a link used in URL filtering that allows secure communication with a Trend Micro Server.



### Note

Security threats, as well as the cryptographic technologies to help protect against them, are constantly changing. For more information about the latest Cisco cryptographic recommendations, see the [Next Generation Encryption](#) (NGE) white paper.

**SUMMARY STEPS**

1. **enable**
2. **clock set** *hh : mm : ss date month year*
3. **configure terminal**
4. **clock timezone** *zone hours-offset [minutes-offset ]*
5. **ip http server**
6. **hostname** *name*
7. **ip domain-name** *name*
8. **crypto key generate rsa general-keys modulus** *modulus-size*
9. **crypto pki trustpoint** *name*
10. **enrollment terminal**
11. **crypto ca authenticate** *name*
12. Copy the following block of text containing the base 64 encoded CA certificate and paste it at the prompt.
13. Enter **yes** to accept this certificate.
14. **serial-number**
15. **revocation-check none**
16. **end**
17. **trm register**

**DETAILED STEPS**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<b>enable</b>  <b>Example:</b> <pre>Router&gt; enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<b>Step 2</b>	<b>clock set</b> <i>hh : mm : ss date month year</i>  <b>Example:</b> <pre>Router# clock set 23:22:00 22 Dec 2009</pre>	Sets the clock on the router.
<b>Step 3</b>	<b>configure terminal</b>  <b>Example:</b> <pre>Router# configure terminal</pre>	Enters global configuration mode.

	Command or Action	Purpose
Step 4	<p><b>clock timezone</b> <i>zone</i> <i>hours-offset</i> [<i>minutes-offset</i> ]</p> <p><b>Example:</b></p> <pre>Router(config)# clock timezone PST -08</pre>	<p>Sets the time zone.</p> <ul style="list-style-type: none"> <li>The <i>zone</i> argument is the name of the time zone (typically a standard acronym). The <i>hours-offset</i> argument is the number of hours the time zone is different from Universal Time Coordinated (UTC). The <i>minutes-offset</i> argument is the number of minutes the time zone is different from UTC.</li> </ul> <p><b>Note</b> The <i>minutes-offset</i> argument of the <b>clock timezone</b> command is available for those cases where a local time zone is a percentage of an hour different from UTC or Greenwich Mean Time (GMT). For example, the time zone for some sections of Atlantic Canada (AST) is UTC-3.5. In this case, the necessary command would be <b>clock timezone AST -3 30</b>.</p>
Step 5	<p><b>ip http server</b></p> <p><b>Example:</b></p> <pre>Router(config)# ip http server</pre>	<p>Enables the HTTP server.</p>
Step 6	<p><b>hostname</b> <i>name</i></p> <p><b>Example:</b></p> <pre>Router(config)# hostname hostname1</pre>	<p>Configures the hostname of the router.</p>
Step 7	<p><b>ip domain-name</b> <i>name</i></p> <p><b>Example:</b></p> <pre>Router(config)# ip domain-name example.com</pre>	<p>Defines the domain name for the router.</p>
Step 8	<p><b>crypto key generate rsa</b> <b>general-keys modulus</b> <i>modulus-size</i></p> <p><b>Example:</b></p> <pre>Router(config)# crypto key generate rsa general-keys modulus general</pre>	<p>Generates the crypto keys.</p> <ul style="list-style-type: none"> <li>The <b>general-keys</b> keyword specifies that a general purpose key pair is generated, which is the default.</li> <li>The <b>modulus</b> keyword and <i>modulus-size</i> argument specify the IP size of the key modulus. By default, the modulus of a CA key is 1024 bits. Choose the size of the key modulus in the range of 360 to 2048 for your general purpose keys. If you choose a key modulus value greater than 512, the router may require a few minutes to process the command.</li> </ul> <p><b>Note</b> The name for the general keys that are generated are based on the domain name that is configured in Step 7. For example, the keys will be called “example.com.”</p>

Command or Action	Purpose
<p><b>Step 9</b> <code>crypto pki trustpoint</code> <i>name</i></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki trustpoint mytp</pre>	<p>Declares the CA that your router should use and enters ca-trustpoint configuration mode.</p> <p><b>Note</b> Effective with Cisco IOS Release 12.3(8)T, the <code>crypto pki trustpoint</code> command replaced the <code>crypto ca trustpoint</code> command.</p>
<p><b>Step 10</b> <code>enrollment terminal</code></p> <p><b>Example:</b></p> <pre>Router(ca- trustpoint)# enrollment terminal</pre>	<p>Specifies the manual cut-and-paste certificate enrollment method.</p> <ul style="list-style-type: none"> <li>The certificate request will be displayed on the console terminal so that you may manually copy (or cut).</li> </ul>
<p><b>Step 11</b> <code>crypto ca authenticate</code> <i>name</i></p> <p><b>Example:</b></p> <pre>Router(ca- trustpoint)# crypto ca authenticate mytp</pre>	<p>Takes the name of the CA as the argument and authenticates it.</p> <ul style="list-style-type: none"> <li>The following command output displays:</li> </ul> <pre>Enter the base 64 encoded CA certificate. End with a blank line or the word "quit" on a line by itself.</pre>

Command or Action	Purpose
<p><b>Step 12</b> Copy the following block of text containing the base 64 encoded CA certificate and paste it at the prompt.</p>	<pre> MIIDIDCCAomgAwIBAgIENd70zzANBgkqhkiG9w0BAQUFADBOMQswCQYDVQQGEwJV UzEQMA4GA1UEChMHRXF1aWZheDEtMCsGA1UECxMkRXFlaWZheCBTZWN1cmUgQ2Vy dGlmawNhdGUGQXV0aG9yaXR5MB4XDtk4MDgyMjE2NDE1MVoXDTE4MDgyMjE2NDE1 MVowTjElMAkGA1UEBhMCVVMxEDAQOBgNVBAoTB0VxdWlmYXgxlTArBgNVBAsTJEVx dWlmYXggU2VjdXJlIEN1cnRpZmljYXRlIEF1dGhvcml0eTCBnzANBgkqhkiG9w0B AQEFAAOBjQAwgYkCgYEAwV2xWgcIYu6gmi0fCG2RFGiYCh7+2gRvE4RiIcPRfM6f BeC4AfBONoziiPUEZKzxa1NfBbPLZ4C/QgKO/t0BCezhABRP/PvwdN1Dulsr4R+A cJkV5MW8Q+XarfCaCmCzE1ZMKxRHjuvK9buY0V7xdlfUNLjUA86iOe/FP3gx7kC AwEAAaOCAQkwgEFMHAGA1UdHwRpmGcwZaBjoGGkXzBdMQswCQYDVQQGEwJVUzEQ MA4GA1UEChMHRXF1aWZheDEtMCsGA1UECxMkRXFlaWZheCBTZWN1cmUgQ2VydGlm aWNhdGUGQXV0aG9yaXR5MQ0wCwYDVQQDEwRDUkwMB0GA1UdEAQTMBGBDzIwMTgw ODIyMTY0MTUxWjALBgNVHQ8EBAMCAQYwHwYDVR0jBBgwFoAUSOZo+SvSspXXR9gj IBBPM5iQn9QWHQYDVR0OBByEFEjmaPkr0rKV10fYIYAQTzOYkKJ/UMAwGA1UdEwQF MAMBAf8wGgYJKoZIhvcZ9B0EABA0wCxsFVjMuMGMDAgbAMA0GCSqGSIb3DQEBBQUA A4GBAFjOKer89961zgK5F7WF0bnj4JXMJTENAKaSbn+2kmOeUJXRmm/kEd5jhW6Y 7qj/WsjTVbJmcVfewCHRPSqnI0kBBIZCe/zuf6IWUrVnZ9NA2zsmWLIodz2uFHdh lvoqZiegDfqnclzqcPGUIWVEX/r87yloqaKHee9570+sB3c4 </pre> <p>The following command output displays:</p> <pre> Certificate has the following attributes:      Fingerprint MD5: 67CB9DC0 13248A82 9BB2171E D11BECDA      Fingerprint SHA1: D23209AD 23D31423 2174E40D 7F9D6213 9786633A </pre>
<p><b>Step 13</b> Enter <b>yes</b> to accept this certificate.</p>	<pre> % Do you accept this certificate? [yes/no]: yes  The following command output displays:  Trustpoint CA certificate accepted.  % Certificate successfully imported </pre>

Command or Action	Purpose
<b>Step 14</b> <code>serial-number</code>  <b>Example:</b>  <pre>hostname1(ca-trustpoint)# serial-number</pre>	Specifies the router serial number in the certificate request.
<b>Step 15</b> <code>revocation-check none</code>  <b>Example:</b>  <pre>hostname1(ca-trustpoint)# revocation-check none</pre>  <b>Example:</b>	Specifies that certificate checking is ignored.
<b>Step 16</b> <code>end</code>  <b>Example:</b>  <pre>hostname1(ca-trustpoint)# end</pre>	Exits ca-trustpoint configuration mode and returns to privileged EXEC mode.
<b>Step 17</b> <code>trm register</code>  <b>Example:</b>  <pre>hostname1# trm register</pre>	Manually starts the Trend Micro Server registration process.

## Configuring a Persistent Self-Signed Certificate for Enrollment via SSL

This section contains the following tasks:



### Note

These tasks are optional because if you enable the HTTPS server, it generates a self-signed certificate automatically using default values.

- [Persistent Self-Signed Certificates Overview, page 119](#)
- [Restrictions, page 119](#)
- [Configuring a Trustpoint and Specifying Self-Signed Certificate Parameters, page 119](#)
- [Enabling the HTTPS Server, page 121](#)

## Persistent Self-Signed Certificates Overview

The SSL protocol can be used to establish a secure connection between an HTTPS server and a client (web browser). During the SSL handshake, the client expects the SSL server's certificate to be verifiable using a certificate the client already possesses.

If Cisco IOS software does not have a certificate that the HTTPS server can use, the server generates a self-signed certificate by calling a PKI application programming interface (API). When the client receives this self-signed certificate and is unable to verify it, intervention is needed. The client asks you if the certificate should be accepted and saved for future use. If you accept the certificate, the SSL handshake continues.

Future SSL handshakes between the same client and the server use the same certificate. However, if the router is reloaded, the self-signed certificate is lost. The HTTPS server must then create a new self-signed certificate. This new self-signed certificate does not match the previous certificate, so you are once again asked to accept it.

Requesting acceptance of the router's certificate each time that the router reloads may present an opportunity for an attacker to substitute an unauthorized certificate when you are being asked to accept the certificate. Persistent self-signed certificates overcome all these limitations by saving a certificate in the router's startup configuration.

## Restrictions

You can configure only one trustpoint for a persistent self-signed certificate.



### Note

Do not change the IP domain name or the hostname of the router after creating the self-signed certificate. Changing either name triggers the regeneration of the self-signed certificate and overrides the configured trustpoint. WebVPN ties the SSL trustpoint name to the WebVPN gateway configuration. If a new self-signed certificate is triggered, then the new trustpoint name does not match the WebVPN configuration, causing the WebVPN connections to fail.

## Configuring a Trustpoint and Specifying Self-Signed Certificate Parameters

Perform the following task to configure a trustpoint and specify self-signed certificate parameters.

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto pki trustpoint** name
4. **enrollment selfsigned**
5. **subject-name** [x.500-name]
6. **rsakeypair** key-label [key-size [encryption-key-size]]
7. **crypto pki enroll** name
8. **end**
9. **show crypto pki certificates** [trustpoint-name[verbose]]
10. **show crypto pki trustpoints** [status | label [status]]



## DETAILED STEPS

	Command or Action	Purpose
Step 1	<p><b>enable</b></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
Step 2	<p><b>configure terminal</b></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
Step 3	<p><b>crypto pki trustpoint name</b></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki trustpoint local</pre>	<p>Declares the CA that your router should use and enters ca-trustpoint configuration mode.</p> <p><b>Note</b> Effective with Cisco IOS Release 12.3(8)T, the <b>crypto pki trustpoint</b> command replaced the <b>crypto ca trustpoint</b> command.</p>
Step 4	<p><b>enrollment selfsigned</b></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# enrollment selfsigned</pre>	<p>Specifies self-signed enrollment.</p>
Step 5	<p><b>subject-name</b> [<i>x.500-name</i>]</p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# subject-name</pre>	<p>(Optional) Specifies the requested subject name to be used in the certificate request.</p> <ul style="list-style-type: none"> <li>If no value for the <i>x-500-name</i> argument is specified, the FQDN, which is the default subject name, is used.</li> </ul>
Step 6	<p><b>rsakeypair</b> <i>key-label</i> [<i>key-size</i> [<i>encryption-key-size</i>]]</p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# rsakeypair examplekeys 1024 1024</pre>	<p>(Optional) Specifies which key pair to associate with the certificate.</p> <ul style="list-style-type: none"> <li>The value for the <i>key-label</i> argument will be generated during enrollment if it does not already exist or if the <b>auto-enroll regenerate</b> command was issued.</li> <li>Specify a value for the <i>key-size</i> argument for generating the key, and specify a value for the <i>encryption-key-size</i> argument to request separate encryption, signature keys, and certificates.</li> </ul> <p><b>Note</b> If this command is not enabled, the FQDN key pair is used.</p>

	Command or Action	Purpose
Step 7	<b>crypto pki enroll name</b>  <b>Example:</b> <pre>Router(ca-trustpoint)# crypto pki enroll local</pre>	Tells the router to generate the persistent self-signed certificate.
Step 8	<b>end</b>  <b>Example:</b> <pre>Router(ca-trustpoint)# end</pre>	(Optional) Exits ca-trustpoint configuration mode. <ul style="list-style-type: none"> <li>Enter this command a second time to exit global configuration mode.</li> </ul>
Step 9	<b>show crypto pki certificates</b> [ <i>trustpoint-name</i> ][ <i>verbose</i> ]]  <b>Example:</b> <pre>Router# show crypto pki certificates local verbose</pre>	Displays information about your certificate, the certification authority certificate, and any registration authority certificates.
Step 10	<b>show crypto pki trustpoints</b> [ <i>status</i>   <i>label</i> [ <i>status</i> ]]  <b>Example:</b> <pre>Router# show crypto pki trustpoints status</pre>	Displays the trustpoints that are configured in the router.

## Enabling the HTTPS Server

Perform the following task to enable the HTTPS server.

To specify parameters, you must create a trustpoint and configure it. To use default values, delete any existing self-signed trustpoints. Deleting all self-signed trustpoints causes the HTTPS server to generate a persistent self-signed certificate using default values as soon as the server is enabled.

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **ip http secure-server**
4. **end**
5. **copy system:running-config nvram: startup-config**

## DETAILED STEPS

Command or Action	Purpose
<b>Step 1</b> <code>enable</code>  <b>Example:</b> <pre>Router&gt; enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
<b>Step 2</b> <code>configure terminal</code>  <b>Example:</b> <pre>Router# configure terminal</pre>	Enters global configuration mode.
<b>Step 3</b> <code>ip http secure-server</code>  <b>Example:</b> <pre>Router(config)# ip http secure-server</pre>	Enables the HTTPS web server.  <b>Note</b> A key pair (modulus 1024) and a certificate are generated.
<b>Step 4</b> <code>end</code>  <b>Example:</b> <pre>Router(config)# end</pre>	Exits global configuration mode.
<b>Step 5</b> <code>copy system:running-config nvram: startup-config</code>  <b>Example:</b> <pre>Router# copy system:running-config nvram: startup-config</pre>	Saves the self-signed certificate and the HTTPS server in enabled mode.

## Configuring a Certificate Enrollment Profile for Enrollment or Reenrollment

Perform this task to configure a certificate enrollment profile for enrollment or reenrollment. This task helps you to configure an enrollment profile for certificate enrollment or reenrollment of a router with a Cisco IOS CA that is already enrolled with a third-party vendor CA.

Enable a router that is enrolled with a third-party vendor CA to use its existing certificate to enroll with the Cisco IOS certificate server so the enrollment request is automatically granted. To enable this functionality, you must issue the **enrollment credential** command. Also, you cannot configure manual certificate enrollment.

Perform the following tasks at the client router before configuring a certificate enrollment profile for the client router that is already enrolled with a third-party vendor CA so that the router can reenroll with a Cisco IOS certificate server:

- Defined a trustpoint that points to the third-party vendor CA.

- Authenticated and enrolled the client router with the third-party vendor CA.



**Note**

- To use certificate profiles, your network must have an HTTP interface to the CA.
- If an enrollment profile is specified, an enrollment URL may not be specified in the trustpoint configuration. Although both commands are supported, only one command can be used at a time in a trustpoint.
- Because there is no standard for the HTTP commands used by various CAs, the user is required to enter the command that is appropriate to the CA that is being used.

>

**SUMMARY STEPS**

1. **enable**
2. **configure terminal**
3. **crypto pki trustpoint *name***
4. enrollment profile label
5. **exit**
6. **crypto pki profile enrollment *label***
7. Do one of the following:
  - **authentication url *url***
  - **authentication terminal**
8. **authentication command**
9. Do one of the following:
  - **enrollment url *url***
  - **enrollment terminal**
10. **enrollment credential *label***
11. **enrollment command**
12. **parameter *number* {value *value* | prompt *string*}**
13. **exit**
14. **show crypto pki certificates**

**DETAILED STEPS**

	Command or Action	Purpose
Step 1	enable	Enables privileged EXEC mode.
	<b>Example:</b>	
	Router> enable	<ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>

Command or Action	Purpose
<p><b>Step 2</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> <code>crypto pki trustpoint name</code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki trustpoint Entrust</pre>	<p>Declares the trustpoint and a given name and enters ca-trustpoint configuration mode.</p>
<p><b>Step 4</b> <code>enrollment profile label</code></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# enrollment profile E</pre>	<p>Specifies that an enrollment profile is to be used for certificate authentication and enrollment.</p>
<p><b>Step 5</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(ca-trustpoint)# exit</pre>	<p>Exits ca-trustpoint configuration mode.</p>
<p><b>Step 6</b> <code>crypto pki profile enrollment label</code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki profile enrollment E</pre>	<p>Defines an enrollment profile and enters ca-profile-enroll configuration mode.</p> <ul style="list-style-type: none"> <li><i>label</i> --Name for the enrollment profile; the enrollment profile name must match the name specified in the <b>enrollment profile</b> command.</li> </ul>
<p><b>Step 7</b> Do one of the following:</p> <ul style="list-style-type: none"> <li><b>authentication url url</b></li> <li><b>authentication terminal</b></li> </ul> <p><b>Example:</b></p> <pre>Router(ca-profile-enroll)# authentication url http://entrust:81</pre> <p><b>Example:</b></p> <pre>Router(ca-profile-enroll)# authentication terminal</pre>	<p>Specifies the URL of the CA server to which to send certificate authentication requests.</p> <ul style="list-style-type: none"> <li><i>url</i> --URL of the CA server to which your router should send authentication requests. If you are using HTTP, the URL should read “http://CA_name,” where CA_name is the host DNS name or IP address of the CA. If you are using TFTP, the URL should read “tftp://certserver/file_specification.” (If the URL does not include a file specification, the FQDN of the router will be used.)</li> </ul> <p>Specifies manual cut-and-paste certificate authentication.</p>

Command or Action	Purpose
<p><b>Step 8 authentication command</b></p> <p><b>Example:</b></p> <pre>Router(ca-profile-enroll)# authentication command</pre>	<p>(Optional) Specifies the HTTP command that is sent to the CA for authentication.</p>
<p><b>Step 9</b> Do one of the following:</p> <ul style="list-style-type: none"> <li>• <b>enrollment url</b> <i>url</i></li> <li>•</li> <li>• <b>enrollment terminal</b></li> </ul> <p><b>Example:</b></p> <pre>Router(ca-profile-enroll)# enrollment url http://entrust:81/cda-cgi/ clientcgi.exe</pre> <p><b>Example:</b></p> <p><b>Example:</b></p> <pre>Router(ca-profile-enroll)# enrollment terminal</pre>	<p>Specifies the URL of the CA server to which to send certificate enrollment requests via HTTP or TFTP.</p> <p>Specifies manual cut-and-paste certificate enrollment.</p>
<p><b>Step 10 enrollment credential</b> <i>label</i></p> <p><b>Example:</b></p> <pre>Router(ca-profile-enroll)# enrollment credential Entrust</pre>	<p>(Optional) Specifies the third-party vendor CA trustpoint that is to be enrolled with the Cisco IOS CA.</p> <p><b>Note</b> This command cannot be issued if manual certificate enrollment is being used.</p>
<p><b>Step 11 enrollment command</b></p> <p><b>Example:</b></p> <pre>Router(ca-profile-enroll)# enrollment command</pre>	<p>(Optional) Specifies the HTTP command that is sent to the CA for enrollment.</p>

Command or Action	Purpose
<p><b>Step 12</b> <code>parameter number {value value   prompt string}</code></p> <p><b>Example:</b></p> <pre>Router(ca-profile-enroll)# parameter 1 value aaaa-bbbb-cccc</pre>	<p>(Optional) Specifies parameters for an enrollment profile.</p> <ul style="list-style-type: none"> <li>This command can be used multiple times to specify multiple values.</li> </ul>
<p><b>Step 13</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router(ca-profile-enroll)# exit</pre>	<p>(Optional) Exits ca-profile-enroll configuration mode.</p> <ul style="list-style-type: none"> <li>Enter this command a second time to exit global configuration mode.</li> </ul>
<p><b>Step 14</b> <code>show crypto pki certificates</code></p> <p><b>Example:</b></p> <pre>Router# show crypto pki certificates</pre>	<p>(Optional) Displays information about your certificates, the certificates of the CA, and RA certificates.</p>

- [What to Do Next, page 126](#)

## What to Do Next

If you configured the router to reenroll with a Cisco IOS CA, you should configure the Cisco IOS certificate server to accept enrollment requests only from clients already enrolled with the specified third-party vendor CA trustpoint to take advantage of this functionality. For more information, see the module “Configuring and Managing a Cisco IOS Certificate Server for PKI Deployment.”

# Configuration Examples for PKI Certificate Enrollment Requests

## Configuring Certificate Enrollment or Autoenrollment Example

The following example shows the configuration for the “mytp-A” certificate server and its associated trustpoint, where RSA keys generated by the initial autoenrollment for the trustpoint will be stored on a USB token, “usbtoken0”:

```
crypto pki server mytp-A
  database level complete
  issuer-name CN=company, L=city, C=country
  grant auto
! Specifies that certificate requests will be granted automatically.
!
crypto pki trustpoint mytp-A
  revocation-check none
```

```

rsa-keypair myTP-A
storage usbtoken0:
! Specifies that keys will be stored on usbtoken0:
  on usbtoken0:

```

! Specifies that keys generated on initial auto enroll will be generated on and stored on ! usbtoken0:

## Configuring Autoenrollment Example

The following example shows how to configure the router to automatically enroll with a CA on startup, enabling automatic rollover, and how to specify all necessary enrollment information in the configuration:

```

crypto pki trustpoint trustpt1
enrollment url http://trustpt1.example.com//
subject-name OU=Spiral Dept., O=example.com
ip-address ethernet-0
serial-number none
usage ike
auto-enroll regenerate
password password1
rsa-key trustpt1 2048
!
crypto pki certificate chain trustpt1
certificate pki 0B
30820293 3082023D A0030201 0202010B 300D0609 2A864886 F70D0101 04050030
79310B30 09060355 04061302 5553310B 30090603 55040813 02434131 15301306
0355040A 130C4369 73636F20 53797374 656D3120 301E0603 55040B13 17737562
6F726420 746F206B 6168756C 75692049 50495355 31243022 06035504 03131B79
6E692D75 31302043 65727469 66696361 7465204D 616E6167 6572301E 170D3030
30373134 32303536 32355A17 0D303130 37313430 31323834 335A3032 310E300C
06035504 0A130543 6973636F 3120301E 06092A86 4886F70D 01090216 11706B69
2D343562 2E636973 636F2E63 6F6D305C 300D0609 2A864886 F70D0101 01050003
4B003048 024100B3 0512A201 3B4243E1 378A9703 8AC5E3CE F77AF987 B5A422C4
15E947F6 70997393 70CF34D6 63A86B9C 4347A81A 0551FC02 ABA62360 01EF7DD2
6C136AEB 3C6C3902 03010001 A381F630 81F3300B 0603551D 0F040403 02052030
1C060355 1D110415 30138211 706B692D 3435622E 63697363 6F2E636F 6D301D06
03551D0E 04160414 247D9558 169B9A21 23D289CC 2DDA2A9A 4F77C616 301F0603
551D2304 18301680 14BD742C E892E819 1D551D91 683F6DB2 D8847A6C 73308185
0603551D 1F047E30 7C307AA0 3CA03AA4 38303631 0E300C06 0355040A 13054369
73636F31 24302206 03550403 131B796E 692D7531 30204365 72746966 69636174
65204D61 6E616765 72A23AA4 38303631 0E300C06 0355040A 13054369 73636F31
24302206 03550403 131B796E 692D7531 30204365 72746966 69636174 65204D61
6E616765 72300D06 092A8648 86F70D01 01040500 03410015 BC7CECF9 696697DF
E887007F 7A8DA24F 1ED5A785 C5C60452 47860061 0C18093D 08958A77 5737246B
0A25550A 25910E27 8B8B428E 32F8D948 3DD1784F 954C70
quit

```



### Note

In this example, keys are neither regenerated nor rolled over.

## Configuring Certificate Autoenrollment with Key Regeneration Example

The following example shows how to configure the router to automatically enroll with the CA named “trustme1” on startup and enable automatic rollover. The **regenerate** keyword is issued, so a new key will be generated for the certificate and reissued when the automatic rollover process is initiated. The renewal percentage is configured as 90 so if the certificate has a lifetime of one year, a new certificate is requested 36.5 days before the old certificate expires. The changes made to the running configuration are saved to the NVRAM startup configuration because autoenrollment will not update NVRAM if the running configuration has been modified but not written to NVRAM.

```

crypto pki trustpoint trustme1
enrollment url http://trustme1.example.com/

```



```

subject-name OU=Spiral Dept., O=example.com
ip-address ethernet0
serial-number none
auto-enroll 90 regenerate
password password1
rsakeypair trustmel 2048
exit
crypto pki authenticate trustmel
copy system:running-config nvram:startup-config

```

## Configuring Cut-and-Paste Certificate Enrollment Example

The following example shows how to configure certificate enrollment using the manual cut-and-paste enrollment method:

```

Router(config)#
crypto pki trustpoint TP
Router(ca-trustpoint)#
enrollment terminal
Router(ca-trustpoint)#
crypto pki authenticate TP
Enter the base 64 encoded CA certificate.
End with a blank line or the word "quit" on a line by itself
-----BEGIN CERTIFICATE-----
MIICNDCCAd6gAwIBAgIQOscMxPvHwodKryRoqULV7jANBgkqhkiG9w0BAQUFADA5
MQswCQYDVQQGEwJVUzEWMBQGA1UEChMNQ2lzY28gU3lzZGVtczESMBAGA1UEAxMJ
bXNjYSlyb290MB4XDTAyMDIwNDYwMVoXDTA3MDIwNDYwNTQ0OFOwOTELMAKGA
A1UEBHMCMCVVxfjAUBGNVBAOjA0TDUNPc2NvIFN5c3RlbXN5c3RlbXN5c3RlbXN5
c3RlbXN5c3RlbXN5c3RlbXN5c3RlbXN5c3RlbXN5c3RlbXN5c3RlbXN5c3RlbXN5
cm9vdDcMA0GCSqGSIb3DQEBAQUAA0sAMEgCQCix8nIGFg+wvy3BjFbVi25wYoG
K2N0HWHhpqxFuFhgyBnIC00shIn9CtrdN3JvUNHr0NIKocEwNKUGYmPwWGTfAgMB
AAGjgcEwgb4wCwYDVR0PBAQDAgHGMA8GA1UdEwEB/wQFMAMBAf8wHQYDVR0OBBYE
FKIacs16dKAfuNDVQymlSp7esf8jMG0GA1UdHwRmMGQwL6AtoCuGKWh0dHA6Ly9t
c2NhLXJvb3QvQ2VydEVucm9sbC9tc2NhLXJvb3QvY3JzSMDGgL6AthitmaWx1Oi8v
XFxtc2NhLXJvb3RcQ2VydEVucm9sbFxtc2NhLXJvb3QvY3JzSMBAGCSsGAQQBjcV
AQQDAGEAMA0GCSqGSIb3DQEBAQUAA0EAeuZkZMX9qkoLHFETpVWjZPQBbMwNRA
oJDSdYdtL3BcI/ulL5q7EmODyGfLyMGxuhQYx5r/40aSQGLCqBg+yg==
-----END CERTIFICATE-----
Certificate has the following attributes:
Fingerprint: D6C12961 CD78808A 4E02193C 0790082A
% Do you accept this certificate? [yes/no]:
y
Trustpoint CA certificate accepted.
% Certificate successfully imported
Router(config)#
crypto pki enroll TP
% Start certificate enrollment.
% The subject name in the certificate will be:
Router.example.com
% Include the router serial number in the subject name? [yes/no]:
n
% Include an IP address in the subject name? [no]:
n
Display Certificate Request to terminal? [yes/no]:
y
Signature key certificate request -
Certificate Request follows:
MIIBhTCB7wIBADAlMSMwIQYJKoZIhvcNAQkCFhRTYw5kQmFnZ2ZVYmNmNjc2NvLmNv
bTCBnzANBgmG9w0BAQEFAAOvjQAwwYkCgYEAxdhXFDiWAn/hIzS9zfOtsSKA
daoWyu0ms9Fe/Pew0ldhl4vXdxgacstOs2Pr5wk6jL0Pxpvx0JPWyQM6ipLmyVxv
ojhyLTrVohrh6Dnqcvk+G/5ohss9o9R xvONwx042pQchFnx9EkMuZC7evwRxJEqr
mBHXBZ8GmP3jYQsjs8MCAwEAAAhMB8GCSqGSIb3DQEJJDjESMBAwDgYDVR0PAQH/
BAQDAgeAMA0GCSqGSIb3DQEBAQUAA4GBAMT6WtyFw95POY7U7F+YIYHIvRUf4SCq
hRIAGrljUEPLo9iTyPU1Pnt8JnIZ5P5BHU3MfgP8sqodaWub6mubkzaohJ1qd06
O87fnLCNid5Tov5jKogFHIki2EGGzxBosUw9lJlenQdNdDPbJc5LIWdfDvciA6jO
Nl8rOtKnt8Q+
!
!
!
Redisplay enrollment request? [yes/no]:
Encryption key certificate request -
Certificate Request follows:

```

```

MIIBhTCB7wIBADALMSMwIQYJKoZIHvcNAQkCFhRTYw5kQmFnZ2VyLmNpc2NvLmNv
bTCBnzANBqkqhkiG9w0BAQEFAAOBjQAwGyKCGYEAwG60QoJpDbzbKnyj8FyTiOcv
THkDP7XD4vLTlXaJ409z0gSIOGnIcdFtXhVlBwtPq3/09zYFXr1tH+BMCRQI3Lts
0IpxYa3D9iFPqev7SPXpsAIsY8a6FMq7TiwLobqiQjLKL4cbuV0Frj10Yuv5A/Z+
kqM0m7c+pWNWFDle9lScAwEAAAahMB8GCSqGS1b3DQeEJDjESMBawDgYDVORPAQH/
BAQDAgUgMA0GCSqGS1b3DQeEBAUAA4GBACF7feURj/fJMojPBlR6fa9Br1MJx+2F
H91YM/CIiz2n4mHTeWTKhLoT8wUfa9NGOk7y1+nF/F7035twLfqc6n2bSCTW4aem
8jLMmaeFwxkrV/ceQKrucmNCluVx+fBy9rhnKx8j60XE25tnp1U08r6om/pBQABU
eNPFhozcaQ/2
!
!
!
Redisplay enrollment request? [yes/no]:
n
Router(config)#
crypto pki import TP certificate
Enter the base 64 encoded certificate.
End with a blank line or the word "quit" on a line by itself
MIIDaJCCAxSgAwIBAgIKFN7C6QAAAAAMRzANBqkqhkiG9w0BAQUFADA5MQswCQYD
VQQGEwJVUzEWMBQGA1UEChMNQ21zY28gU31zdGVtczESMBAGA1UEAxMjBjbnJyS1y
b290MB4XDTAyMDYwODAxMTY0MloXDTAzMDYwODAxMjY0MlowJTEjMCEGCSqGS1b3
DQeEJAhMUU2FuZEJhZ2dldci5jaXNjby5jb20wgZ8wDQYJKoZIhvcNAQEBBQADgY0A
MIGJAoGBAMXYVxQ4lgJ/4SgbPc3zrbLCgHWqFmLrJrPRXvz3sNNXYdeL13cYgnLL
TrNj6+cJOoyzj8ab8TiTlSkDOoqS5slcb6I4ci061aIa4eg56nL5Phv+aIbLPaPu
cbzjcMdOnQUHIRZ8fRJDLMQu3r8EcSRKkZgRlWwFbPj942ELI0vDagMBAAGjggHM
MIIBYDALBgNVHQ8EBAMCB4AwHQYDVR0OBBYEF8Quz8dyz4EGIEkx9A8UMNHLE4s
MHAGA1UdIwRpmGeAFKIacs16dKAFuNDVQymlSp7esf8joT2kOzA5MQswCQYDVQQG
EwJVUzEWMBQGA1UEChMNQ21zY28gU31zdGVtczESMBAGA1UEAxMjBjbnJyS1y
b290ghA6wKZe1UfCh0qvJGipQtXumCIGA1UdEQEB/wQYMBaCFFNhbmcRYWdnZXIuY21z
Y28uY29tMG0GA1UdHwRmMGQwL6AtoCuGKWh0dHA6Ly9tc2NhLXJvb3QvQ2VydeVU
cm9sbC9tc2NhLXJvb3QuY3J3sMDGg16AthitmaWxlOi8vXFxtc2NhLXJvb3RcQ2Vy
dEVucm9sbFxtc2NhLXJvb3QuY3J3sMIGUBggrBgEFBQcBAQSBhZCBhDA/BggrBgEF
BQcAwOYzahr0cDovL21zY2Etc9vdc9DZXXJ0RW5yb2xsL21zY2Etc9vdf9tc2Nh
LXJvb3QuY3J0MEEGCCsGAQUFBzAchjVmaWxlOi8vXFxtc2NhLXJvb3RcQ2VydeVU
cm9sbFxtc2NhLXJvb3RfbXNjYs1yb290LmNydDANBgkqhkiG9w0BAQUFAANBAJo2
r6sHPGBdTX2EDoJpR/A2UHXXRYqVSHkFKZw0z31r5JzUM0oPNUETV7mnZ1YNVRZ
CSEX/G8boi3W0jz9wZo=
% Router Certificate successfully imported
Router(config)#
crypto pki import TP cert
Enter the base 64 encoded certificate.
End with a blank line or the word "quit" on a line by itself
MIIDaJCCAxSgAwIBAgIKFN7OBQAAAAAMSDANBqkqhkiG9w0BAQUFADA5MQswCQYD
VQQGEwJVUzEWMBQGA1UEChMNQ21zY28gU31zdGVtczESMBAGA1UEAxMjBjbnJyS1y
b290MB4XDTAyMDYwODAxMTY0NVVoXDTAzMDYwODAxMjY0NVVowJTEjMCEGCSqGS1b3
DQeEJAhMUU2FuZEJhZ2dldci5jaXNjby5jb20wgZ8wDQYJKoZIhvcNAQEBBQADgY0A
MIGJAoGBAMButEKI6Q282yp8o/Bck4jnL0x5Az+1w+Ly09V2ieNpc9IEiKbpyHHR
bV4VZQVraat/zvc2BV69br/gTAKUIty7bNCKcWgtw/YhT6nr+0j16baCLGPGuhTK
u04sCzm6okIyyi+HG7ldBa45dGLr+QP2fpKjDpu3PqVjVhXS3vZbAgMBAAGjggHM
MIIBYDALBgNVHQ8EBAMCBSAwHQYDVR0OBBYEFpDO29ord1EUSgBMg6jZR+YFRW1j
MHAGA1UdIwRpmGeAFKIacs16dKAFuNDVQymlSp7esf8joT2kOzA5MQswCQYDVQQG
EwJVUzEWMBQGA1UEChMNQ21zY28gU31zdGVtczESMBAGA1UEAxMjBjbnJyS1y
b290ghA6wKZe1UfCh0qvJGipQtXumCIGA1UdEQEB/wQYMBaCFFNhbmcRYWdnZXIuY21z
Y28uY29tMG0GA1UdHwRmMGQwL6AtoCuGKWh0dHA6Ly9tc2NhLXJvb3QvQ2VydeVU
cm9sbC9tc2NhLXJvb3QuY3J3sMDGg16AthitmaWxlOi8vXFxtc2NhLXJvb3RcQ2Vy
dEVucm9sbFxtc2NhLXJvb3QuY3J3sMIGUBggrBgEFBQcBAQSBhZCBhDA/BggrBgEF
BQcAwOYzahr0cDovL21zY2Etc9vdc9DZXXJ0RW5yb2xsL21zY2Etc9vdf9tc2Nh
LXJvb3QuY3J0MEEGCCsGAQUFBzAchjVmaWxlOi8vXFxtc2NhLXJvb3RcQ2VydeVU
cm9sbFxtc2NhLXJvb3RfbXNjYs1yb290LmNydDANBgkqhkiG9w0BAQUFAANBAHaU
hyCwLirUghNxCmLzXR7C3W1j0kSX7a4fX9OxKR/Z2SoMjdmNPPyApuh8SoT2zBP
ZKjZU2WjcZG/nZF4W5k=
% Router Certificate successfully imported
    
```

You can verify that the certificate was successfully imported by issuing the **show crypto pki certificates** command:

```

Router# show crypto pki certificates
Certificate
  Status: Available
  Certificate Serial Number: 14DECE050000000000C48
  Certificate Usage: Encryption
  Issuer:
    
```

```

    CN = TPCA-root
      O = Company
      C = US
  Subject:
    Name: Router.example.com
    OID.1.2.840.113549.1.9.2 = Router.example.com
  CRL Distribution Point:
    http://tpca-root/CertEnroll/tpca-root.crl
  Validity Date:
    start date: 18:16:45 PDT Jun 7 2002
    end   date: 18:26:45 PDT Jun 7 2003
    renew date: 16:00:00 PST Dec 31 1969
  Associated Trustpoints: TP
Certificate
  Status: Available
  Certificate Serial Number: 14DEC2E9000000000C47
  Certificate Usage: Signature
  Issuer:
    CN = tpca-root
      O = company
      C = US
  Subject:
    Name: Router.example.com
    OID.1.2.840.113549.1.9.2 = Router.example.com
  CRL Distribution Point:
    http://tpca-root/CertEnroll/tpca-root.crl
  Validity Date:
    start date: 18:16:42 PDT Jun 7 2002
    end   date: 18:26:42 PDT Jun 7 2003
    renew date: 16:00:00 PST Dec 31 1969
  Associated Trustpoints: TP
CA Certificate
  Status: Available
  Certificate Serial Number: 3AC0A65E9547C2874AAF2468A942D5EE
  Certificate Usage: Signature
  Issuer:
    CN = tpca-root
      O = Company
      C = US
  Subject:
    CN = tpca-root
      O = company
      C = US
  CRL Distribution Point:
    http://tpca-root/CertEnroll/tpca-root.crl
  Validity Date:
    start date: 16:46:01 PST Feb 13 2002
    end   date: 16:54:48 PST Feb 13 2007
  Associated Trustpoints: TP

```

## Configuring Manual Certificate Enrollment with Key Regeneration Example

The following example shows how to regenerate new keys with a manual certificate enrollment from the CA named “trustme2”:

```

crypto pki trustpoint trustme2
  enrollment url http://trustme2.example.com/
  subject-name OU=Spiral Dept., O=example.com
  ip-address ethernet0
  serial-number none
  regenerate
  password password1
  rsakeypair trustme2 2048s
  exit
crypto pki authenticate trustme2
crypto pki enroll trustme2

```

## Creating and Verifying a Persistent Self-Signed Certificate Example

The following example shows how to declare and enroll a trustpoint named “local” and generate a self-signed certificate with an IP address:

```
crypto pki trustpoint local
  enrollment selfsigned
end
configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
crypto pki enroll local
Nov 29 20:51:13.067: %SSH-5-ENABLED: SSH 1.99 has been enabled
Nov 29 20:51:13.267: %CRYPTO-6-AUTOGEN: Generated new 512 bit key pair
% Include the router serial number in the subject name? [yes/no]: yes
% Include an IP address in the subject name? [no]: yes
Enter Interface name or IP Address[]: ethernet 0
Generate Self Signed Router Certificate? [yes/no]: yes
Router Self Signed Certificate successfully created
```



### Note

A router can have only one self-signed certificate. If you attempt to enroll a trustpoint configured for a self-signed certificate and one already exists, you receive a notification and are asked if you want to replace it. If so, a new self-signed certificate is generated to replace the existing one.

## Enabling the HTTPS Server Example

The following example shows how to enable the HTTPS server and generate a default trustpoint because one was not previously configured:

```
configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
ip http secure-server
% Generating 1024 bit RSA keys ...[OK]
*Dec 21 19:14:15.421:%PKI-4-NOAUTOSAVE: Configuration was modified. Issue "write memory"
to save new certificate
Router(config)#
```



### Note

You need to save the configuration to NVRAM if you want to keep the self-signed certificate and have the HTTPS server enabled following router reloads.

The following message also appears:

```
*Dec 21 19:14:10.441:%SSH-5-ENABLED: SSH 1.99 has been enabled
```



### Note

Creation of the key pair used with the self-signed certificate causes the Secure Shell (SSH) server to start. This behavior cannot be suppressed. You may want to modify your Access Control Lists (ACLs) to permit or deny SSH access to the router. You can use the `ip ssh rsa keypair-name unexisting-key-pair-name` command to disable the SSH server.

## Verifying the Self-Signed Certificate Configuration Example

The following example displays information about the self-signed certificate that you just created:

```
Router# show crypto pki certificates
Router Self-Signed Certificate
  Status: Available
  Certificate Serial Number: 01
  Certificate Usage: General Purpose
  Issuer:
    cn=IOS-Self-Signed-Certificate-3326000105
  Subject:
    Name: IOS-Self-Signed-Certificate-3326000105
    cn=IOS-Self-Signed-Certificate-3326000105
  Validity Date:
    start date: 19:14:14 GMT Dec 21 2004
    end date: 00:00:00 GMT Jan 1 2020
  Associated Trustpoints: TP-self-signed-3326000105
```

**Note**

The number 3326000105 is the router's serial number and varies depending on the router's actual serial number.

The following example displays information about the key pair corresponding to the self-signed certificate:

```
Router# show crypto key mypubkey rsa
% Key pair was generated at: 19:14:10 GMT Dec 21 2004
Key name: TP-self-signed-3326000105
Usage: General Purpose Key
Key is not exportable.
Key Data:
 30819F30 0D06092A 864886F7 0D010101 05000381 8D003081 89028181 00B88F70
 6BC78B6D 67D6CFF3 135C1D91 8F360292 CA44A032 5AC1A8FD 095E4865 F8C95A2B
 BFD1C2B7 E64A3804 9BBB7326 207BD456 19BAB78B D075E78E 00D2560C B09289AE
 6DECB8B0 6672FB3A 5CDAEE92 9D4C4F71 F3BCB269 214F6293 4BA8FABF 9486BCFC
 2B941BCA 550999A7 2EFE12A5 6B7B669A 2D88AB77 39B38E0E AA23CB8C B7020301 0001
% Key pair was generated at: 19:14:13 GMT Dec 21 2004
Key name: TP-self-signed-3326000105.server
Usage: Encryption Key
Key is not exportable.
Key Data:
 307C300D 06092A86 4886F70D 01010105 00036B00 30680261 00C5680E 89777B42
 463E5783 FE96EA9E F446DC7B 70499AF3 EA266651 56EE29F4 5B003D93 2FC9F81D
 8A46E12F 3FBAC2F3 046ED9DD C5F27C20 1BBA6B9B 08F16E45 C34D6337 F863D605
 34E30F0E B4921BC5 DAC9EBBA 50C54AA0 BF551BDD 88453F50 61020301 0001
```

**Note**

The second key pair with the name TP-self-signed-3326000105.server is the SSH key pair and is generated when any key pair is created on the router and SSH starts up.

The following example displays information about the trustpoint named "local":

```
Router# show crypto pki trustpoints
Trustpoint local:
  Subject Name:
    serialNumber=C63EBBE9+ipaddress=10.3.0.18+hostname=test.example.com
    Serial Number: 01
  Persistent self-signed certificate trust point
```

## Configuring Direct HTTP Enrollment Example

The following example show how to configure an enrollment profile for direct HTTP enrollment with a CA server:

```
crypto pki trustpoint Entrust
```

```

enrollment profile E
serial
crypto pki profile enrollment E
authentication url http://entrust:81
authentication command GET /certs/cacert.der
enrollment url http://entrust:81/cda-cgi/clientcgi.exe
enrollment command POST reference_number=$P2&authcode=$P1
&retrievedAs=rawDER&action=getServerCert&pkcs10Request=$REQ
parameter 1 value aaaa-bbbb-cccc
parameter 2 value 5001

```

## Additional References

### Related Documents

Related Topic	Document Title
USB token RSA operations: Benefits of using USB tokens	“Storing PKI Credentials” module in the Cisco IOS Security Configuration Guide: Secure Connectivity
USB token RSA operations: Certificate server configuration	<p>“Configuring and Managing a Cisco IOS Certificate Server for PKI Deployment” chapter in the Cisco IOS Security Configuration Guide: Secure Connectivity</p> <p>See the “Generating a Certificate Server RSA Key Pair” section, the “Configuring a Certificate Server Trustpoint” section, and related examples.</p>
Overview of PKI, including RSA keys, certificate enrollment, and CAs	“Cisco IOS PKI Overview: Understanding and Planning a PKI” module in the Cisco IOS Security Configuration Guide: Secure Connectivity
Secure Device Provisioning: functionality overview and configuration tasks	“Setting Up Secure Device Provisioning (SDP) for Enrollment in a PKI” module in the Cisco IOS Security Configuration Guide: Secure Connectivity
RSA key generation and deployment	“Deploying RSA Keys Within a PKI” module in the Cisco IOS Security Configuration Guide: Secure Connectivity
Cisco IOS certificate server overview information and configuration tasks	“Configuring and Managing a Cisco IOS Certificate Server for PKI Deployment” module in the Cisco IOS Security Configuration Guide: Secure Connectivity
Setting up and using a USB token	“Storing PKI Credentials” module in the Cisco IOS Security Configuration Guide: Secure Connectivity
Cisco IOS security commands	<i>Cisco IOS Security Command Reference</i>
Suite-B ESP transforms	Configuring Security for VPNs with IPsec feature module.

Related Topic	Document Title
Suite-B SHA-2 family (HMAC variant) and Elliptic Curve (EC) key pair configuration.	Configuring Internet Key Exchange for IPsec VPNs feature module.
Suite-B Integrity algorithm type transform configuration.	Configuring Internet Key Exchange Version 2 (IKEv2) feature module.
Suite-B Elliptic Curve Digital Signature Algorithm (ECDSA) signature (ECDSA-sig) authentication method configuration for IKEv2.	Configuring Internet Key Exchange Version 2 (IKEv2) feature module.
Suite-B Elliptic curve Diffie-Hellman (ECDH) support for IPsec SA negotiation	Configuring Internet Key Exchange for IPsec VPNs and Configuring Internet Key Exchange Version 2 (IKEv2) feature modules.
Recommended cryptographic algorithms	<i>Next Generation Encryption</i>

### MIBs

MIB	MIBs Link
None.	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL:  <a href="http://www.cisco.com/go/mibs">http://www.cisco.com/go/mibs</a>

### Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	<a href="http://www.cisco.com/cisco/web/support/index.html">http://www.cisco.com/cisco/web/support/index.html</a>

## Feature Information for PKI Certificate Enrollment

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

**Table 4**      **Feature Information for PKI Certificate Enrollment**

Feature Name	Releases	Feature Information
Cisco IOS USB Token PKI Enhancements--Phase 2	12.4(11)T	<p data-bbox="1154 348 1520 562">This feature enhances USB token functionality by using the USB token as a cryptographic device. USB tokens may be used for RSA operations such as key generation, signing, and authentication.</p> <p data-bbox="1154 583 1487 642">The following section provides information about this feature:</p> <ul data-bbox="1154 663 1487 758" style="list-style-type: none"><li data-bbox="1154 663 1487 758">• <a href="#">Configuring Certificate Enrollment or Autoenrollment, page 102</a></li></ul> <p data-bbox="1154 779 1520 1125"><b>Note</b> This document describes the use of utilizing USB tokens for RSA operations during initial autoenrollment for a trustpoint. For other documents on this topic, see the “<a href="#">Feature Information for PKI Certificate Enrollment, page 134</a>” section.</p>



Feature Name	Releases	Feature Information
Certificate Authority Key Rollover	12.4(2)T	<p>This feature introduces the ability for root CAs to roll over expiring CA certificates and keys and to have these changes propagate through the PKI network without manual intervention.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Automatic Certificate Enrollment, page 100</a></li> <li>• <a href="#">Configuring Certificate Enrollment or Autoenrollment, page 102</a></li> </ul> <p>The following commands were introduced or modified by this feature: <b>auto-rollover</b>, <b>crypto pki certificate chain</b>, <b>crypto pki export pem</b>, <b>crypto pki server</b>, <b>crypto pki server info request</b>, <b>show crypto pki certificates</b>, <b>show crypto pki server</b>, <b>show crypto pki trustpoint</b>.</p>
Certificate Autoenrollment	12.2(8)T	<p>This feature introduces certificate autoenrollment, which allows the router to automatically request a certificate from the CA that is using the parameters in the configuration.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Automatic Certificate Enrollment, page 100</a></li> <li>• <a href="#">Configuring Certificate Enrollment or Autoenrollment, page 102</a></li> </ul> <p>The following commands were introduced by this feature: <b>auto-enroll</b>, <b>rsakeypair</b>, <b>show crypto ca timers</b>.</p>

Feature Name	Releases	Feature Information
Certificate Enrollment Enhancements	12.2(8)T	<p>This feature introduces five new <b>crypto ca trustpoint</b> commands that provide new options for certificate requests and allow users to specify fields in the configuration instead of having to go through prompts.</p> <p>The following section provides information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Configuring Certificate Enrollment or Autoenrollment, page 102</a></li> </ul> <p>The following commands were introduced by this feature: <b>ip-address(ca-trustpoint)</b>, <b>password(ca-trustpoint)</b>, <b>serial-number</b>, <b>subject-name</b>, <b>usage</b>.</p>
Direct HTTP Enrollment with CA Servers	12.3(4)T	<p>This feature allows users to configure an enrollment profile if their CA server does not support SCEP and they do not want to use an RA-mode CS. The enrollment profile allows users to send HTTP requests directly to the CA server instead of to an RA-mode CS.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Certificate Enrollment Profiles, page 101</a></li> <li>• <a href="#">Configuring a Certificate Enrollment Profile for Enrollment or Reenrollment, page 122</a></li> </ul> <p>The following commands were introduced by this feature: <b>authentication command</b>, <b>authentication terminal</b>, <b>authentication url</b>, <b>crypto ca profile enrollment</b>, <b>enrollment command</b>, <b>enrollment profile</b>, <b>enrollment terminal</b>, <b>enrollment url</b>, <b>parameter</b>.</p>

Feature Name	Releases	Feature Information
Import of RSA Key Pair and Certificates in PEM Format	12.3(4)T	<p>This feature allows customers to issue certificate requests and receive issued certificates in PEM-formatted files.</p> <p>The following section provides information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Configuring Manual Certificate Enrollment, page 107</a></li> </ul> <p>The following commands were modified by this feature: <b>enrollment, enrollment terminal.</b></p>
Key Rollover for Certificate Renewal	12.3(7)T	<p>This feature allows the certificate renewal request to be made before the certificate expires and retains the old key and certificate until the new certificate is available.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Automatic Certificate Enrollment, page 100</a></li> <li>• <a href="#">Configuring Certificate Enrollment or Autoenrollment, page 102</a></li> <li>• <a href="#">Configuring Manual Certificate Enrollment, page 107</a></li> </ul> <p>The following commands were introduced or modified by this feature: <b>auto-enroll, regenerate.</b></p>

Feature Name	Releases	Feature Information
Manual Certificate Enrollment (TFTP Cut-and-Paste)	12.2(13)T	<p>This feature allows users to generate a certificate request and accept CA certificates and the router's certificates via a TFTP server or manual cut-and-paste operations.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Supported Certificate Enrollment Methods</a>, page 99</li> <li>• <a href="#">Configuring Manual Certificate Enrollment</a>, page 107</li> </ul> <p>The following commands were introduced or modified by this feature: <b>crypto ca import</b>, <b>enrollment</b>, <b>enrollment terminal</b>.</p>
Multiple-Tier CA Hierarchy	12.2(15)T	<p>This enhancement enables users to set up a PKI in a hierarchical framework to support multiple CAs. Within a hierarchical PKI, all enrolled peers can validate the certificate of one another as long as the peers share a trusted root CA certificate or a common subordinate CA.</p> <p>The following section provides information about this enhancement:</p> <ul style="list-style-type: none"> <li>• <a href="#">Framework for Multiple CAs</a>, page 98</li> </ul> <p><b>Note</b> This is a minor enhancement. Minor enhancements are not typically listed in Feature Navigator.</p>

Feature Name	Releases	Feature Information
Persistent Self-Signed Certificates	12.2(33)SXH 12.2(33)SRA 12.3(14)T	<p>This feature allows the HTTPS server to generate and save a self-signed certificate in the router startup configuration. Thus, future SSL handshakes between the client and the HTTPS server can use the same self-signed certificate without user intervention.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">Supported Certificate Enrollment Methods</a>, page 99</li> <li>• <a href="#">Configuring a Persistent Self-Signed Certificate for Enrollment via SSL</a>, page 118</li> </ul> <p>The following commands were introduced or modified by this feature: <b>enrollment selfsigned</b>, <b>show crypto pki certificates</b>, <b>show crypto pki trustpoints</b>.</p>
PKI Status	12.3(11)T	<p>This enhancement adds the <b>status</b> keyword to the <b>show crypto pki trustpoints</b> command, which allows you to display the current status of the trustpoint. Prior to this enhancement, you had to issue the <b>show crypto pki certificates</b> and the <b>show crypto pki timers</b> commands for the current status.</p> <p>The following section provides information about this enhancement:</p> <ul style="list-style-type: none"> <li>• <a href="#">How to Configure Certificate Enrollment for a PKI</a>, page 102</li> </ul> <p><b>Note</b> This is a minor enhancement. Minor enhancements are not typically listed in Feature Navigator.</p>

Feature Name	Releases	Feature Information
Reenroll Using Existing Certificates	12.3(11)T	<p>This feature allows users to reenroll a router with a Cisco IOS CA via existing certificates from a third-party vendor CA.</p> <p>The following section provides information about this enhancement:</p> <ul style="list-style-type: none"><li>• <a href="#">Configuring a Certificate Enrollment Profile for Enrollment or Reenrollment, page 122</a></li></ul> <p>The following commands were introduced by this feature: <b>enrollment credential, grant auto trustpoint.</b></p>
Trustpoint CLI	12.2(8)T	<p>This feature introduces the <b>crypto pki trustpoint</b> command, which adds support for trustpoint CAs.</p>

Feature Name	Releases	Feature Information
Suite-B support in IOS SW crypto	15.1(2)T	<p>Suite-B adds the following support for certificate enrollment for a PKI:</p> <ul style="list-style-type: none"> <li>• Elliptic Curve Digital Signature Algorithm (ECDSA) (256 bit and 384 bit curves) is used for the signature operation within X.509 certificates.</li> <li>• PKI support for validation of for X.509 certificates using ECDSA signatures.</li> <li>• PKI support for generating certificate requests using ECDSA signatures and for importing the issued certificates into IOS.</li> </ul> <p>Suite-B requirements comprise of four user interface suites of cryptographic algorithms for use with IKE and IPsec that are described in RFC 4869. Each suite consists of an encryption algorithm, a digital signature algorithm, a key agreement algorithm, and a hash or message digest algorithm. See the Configuring Security for VPNs with IPsec feature module for more detailed information about Cisco IOS Suite-B support.</p>
Public Key Infrastructure (PKI) IPv6 Support for VPN Solutions	15.2(1)T	<p>The <b>enrollment url (ca-trustpoint)</b> command was modified to allow the specification of an IPv6 address in the URL for the CA.</p> <p>The <b>ip-address (ca-trustpoint)</b> command was modified to allow the specification of an IPv6 address that is included as “unstructuredAddress” in the certificate request.</p>

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks) . Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.







# Configuring and Managing a Cisco IOS Certificate Server for PKI Deployment

This module describes how to set up and manage a Cisco IOS certificate server for public key infrastructure (PKI) deployment. A certificate server embeds a simple certificate server, with limited certification authority (CA) functionality, into the Cisco IOS software. Thus, the following benefits are provided to the user:

- Easier PKI deployment by defining default behavior. The user interface is simpler because default behaviors are predefined. That is, you can leverage the scaling advantages of PKI without all of the certificate extensions that a CA provides, thereby allowing you to easily enable a basic PKI-secured network.
- Direct integration with Cisco IOS software.



## Note

Security threats, as well as the cryptographic technologies to help protect against them, are constantly changing. For more information about the latest Cisco cryptographic recommendations, see the *Next Generation Encryption* (NGE) white paper.

- [Finding Feature Information](#), page 145
- [Prerequisites for Configuring a Cisco IOS Certificate Server](#), page 146
- [Restrictions for Configuring a Cisco IOS Certificate Server](#), page 146
- [Information About Cisco IOS Certificate Servers](#), page 147
- [How to Set Up and Deploy a Cisco IOS Certificate Server](#), page 155
- [Configuration Examples for Using a Certificate Server](#), page 185
- [Where to Go Next](#), page 195
- [Additional References](#), page 195
- [Feature Information for the Cisco IOS Certificate Server](#), page 196

## Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table at the end of this module.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

# Prerequisites for Configuring a Cisco IOS Certificate Server

## Planning Your PKI Before Configuring the Certificate Server

Before configuring a Cisco IOS certificate server, it is important that you have planned for and chosen appropriate values for the settings you intend to use within your PKI (such as certificate lifetimes and certificate revocation list (CRL) lifetimes). After the settings have been configured in the certificate server and certificates have been granted, settings cannot be changed without having to reconfigure the certificate server and reenrolling the peers. For information on certificate server default settings and recommended settings, see the section “[Certificate Server Default Values and Recommended Values, page 172.](#)”

## Enabling an HTTP Server

The certificate server supports Simple Certificate Enrollment Protocol (SCEP) over HTTP. The HTTP server must be enabled on the router for the certificate server to use SCEP. (To enable the HTTP server, use the **ip http server** command.) The certificate server automatically enables or disables SCEP services after the HTTP server is enabled or disabled. If the HTTP server is not enabled, only manual PKCS10 enrollment is supported.



### Note

To take advantage of automatic CA certificate and key pair rollover functionality for all types of certificate servers, Cisco IOS Release 12.4(4)T or a later release must be used and SCEP must be used as the enrollment method.

## Configuring Reliable Time Services

Time services must be running on the router because the certificate server must have reliable time knowledge. If a hardware clock is unavailable, the certificate server depends on manually configured clock settings, such as Network Time Protocol (NTP). If there is not a hardware clock or the clock is invalid, the following message is displayed at bootup:

```
% Time has not been set. Cannot start the Certificate server.
```

After the clock has been set, the certificate server automatically switches to running status.

For information on manually configuring clock settings, see the section “Setting Time and Calendar Services” in the chapter “Performing Basic System Management” of the *Cisco IOS Network Management Configuration Guide*.

## “crypto ca” to “crypto pki” CLI Change

As of Cisco IOS Release 12.3(7)T, all commands that begin as “crypto ca” have been changed to begin as “crypto pki.” Although the router continues to accept crypto ca commands, all output is read back as crypto pki.

# Restrictions for Configuring a Cisco IOS Certificate Server

The certificate server does not provide a mechanism for modifying the certificate request that is received from the client; that is, the certificate that is issued from the certificate server matches the requested

certificate without modifications. If a specific certificate policy, such as name constraints, must be issued, the policy must be reflected in the certificate request.

## Information About Cisco IOS Certificate Servers

- [RSA Key Pair and Certificate of the Certificate Server, page 147](#)
- [Certificate Server Database, page 148](#)
- [Trustpoint of the Certificate Server, page 150](#)
- [Certificate Revocation Lists \(CRLs\), page 150](#)
- [Certificate Server Error Conditions, page 151](#)
- [Certificate Enrollment Using a Certificate Server, page 151](#)
- [Types of CA Servers Subordinate and Registration Authorities \(RAs\), page 152](#)
- [Automatic CA Certificate and Key Rollover, page 153](#)
- [Support for Specifying a Cryptographic Hash Function, page 154](#)

## RSA Key Pair and Certificate of the Certificate Server

The certificate server automatically generates a 1024-bit Rivest, Shamir, and Adelman (RSA) key pair. You must manually generate an RSA key pair if you prefer a different key pair modulus. For information on completing this task, see the section “[Generating a Certificate Server RSA Key Pair, page 155.](#)”



### Note

---

The recommended modulus for a certificate server key pair is 2048 bits.

---

The certificate server uses a regular Cisco IOS RSA key pair as its CA key. This key pair must have the same name as the certificate server. If you do not generate the key pair before the certificate server is created on the router, a general-purpose key pair is automatically generated during the configuration of the certificate server.

As of Cisco IOS Release 12.3(11)T and later releases, the CA certificate and CA key can be backed up automatically one time after they are generated by the certificate server. As a result, it is not necessary to generate an exportable CA key for backup purposes.

### What to Do with Automatically Generated Key Pairs in Cisco IOS Software Prior to Release 12.3(11)T

If the key pair is automatically generated, it is not marked as exportable. Thus, you must manually generate the key pair as exportable if you want to back up the CA key. For information on how to complete this task, see the section “[Generating a Certificate Server RSA Key Pair, page 155.](#)”

- [How the CA Certificate and CA Key Are Automatically Archived, page 147](#)

## How the CA Certificate and CA Key Are Automatically Archived

At initial certificate server setup, you can enable the CA certificate and the CA key to be automatically archived so that they may be restored later if either the original copy or the original configuration is lost.

When the certificate server is turned on the first time, the CA certificate and CA key is generated. If automatic archive is also enabled, the CA certificate and the CA key is exported (archived) to the server database. The archive can be in PKCS12 or privacy-enhanced mail (PEM) format.

**Note**

---

This CA key backup file is extremely important and should be moved immediately to another secured place.

---

- This archiving action occurs only one time. Only the CA key that is (1) manually generated and marked exportable or (2) automatically generated by the certificate server is archived (this key is marked nonexportable).
- Autoarchiving does not occur if you generate the CA key manually and mark it “nonexportable.”
- In addition to the CA certificate and CA key archive file, you should also regularly back up the serial number file (.ser) and the CRL file (.crl). The serial file and the CRL file are both critical for CA operation if you need to restore your certificate server.
- It is not possible to manually back up a server that uses nonexportable RSA keys or manually generated, nonexportable RSA keys. Although automatically generated RSA keys are marked as nonexportable, they are automatically archived once.

## Certificate Server Database

The Cisco IOS certificate server stores files for its own use and may publish files for other processes to use. Critical files generated by the certificate server that are needed for its ongoing operation are stored to only one location per file type for its exclusive use. The certificate server reads from and writes to these files. The critical certificate server files are the serial number file (.ser) and the CRL storage location file (.crl). Files that the certificate server writes to, but does not read from again, may be published and available for use by other processes. An example of a file that may be published is the issued certificates file (.crt).

Performance of your certificate server may be affected by the following factors, which should be considered when you choose storage options and publication options for your certificate server files.

- The storage or publish locations you choose may affect your certificate server performance. Reading from a network location takes more time than reading directly from a router’s local storage device.
- The number of files you choose to store or publish to a specific location may affect your certificate server performance. The local Cisco IOS file system may not always be suitable for a large number of files.
- The file types you choose to store or publish may affect your certificate server performance. Certain files, such as the .crl files, can become very large.

**Note**

---

It is recommended that you store .ser and .crl files to your local Cisco IOS file system and publish your .crt files to a remote file system.

---

- [Certificate Server Database File Storage, page 148](#)
- [Certificate Server Database File Publication, page 149](#)

## Certificate Server Database File Storage

The certificate server allows the flexibility to store different critical file types to different storage locations depending on the database level set (see the **database level** command for more information). When choosing storage locations, consider the file security needed and server performance. For instance, serial number files and archive files (.p12 or .pem) might have greater security restrictions than the issued certificates file storage location (.crt) or the name file storage location (.cnm).

The table below shows the critical certificate server file types by file extension that may be stored to a specific location.

**Table 5** *Certificate Server Storage Critical File Types*

File Extension	File Type
.ser	The main certificate server database file.
.crl	The CRL storage location.
.crt	The issued certificates storage location.
.cnm	The certificate name and expiration file storage location.
.p12	The certificate server certificate archive file location in PKCS12 format.
.pem	The certificate server certificate archive file location in PEM format.

Cisco IOS certificate server files may be stored to three levels of specificity:

- Default location, NVRAM
- Specified primary storage location for all critical files
- Specified storage location for specific critical file(s).

A more specific storage location setting overrides a more general storage location setting. For instance, if you have not specified any certificate server file storage locations, all certificate server files are stored to NVRAM. If you specify a storage location for the name file, only the name file is stored there; all other files continue to be stored to NVRAM. If you then specify a primary location, all files except the name file is now stored to this location, instead of NVRAM.



**Note**

You may specify either .p12 or .pem; you cannot specify both types of archive files.

## Certificate Server Database File Publication

A publish file is a copy of the original file and is available for other processes to use or for your use. If the certificate server fails to publish a file, it does cause the server to shut down. You may specify one publish location for the issued certificates file and name file and multiple publish locations for the CRL file. See the table below for files types available for publication. You may publish files regardless of the database level that is set.

**Table 6** *Certificate Server Publish File Types*

File Extension	File Type
.crl	The CRL publish location.
.crt	The issued certificates publish location.

File Extension	File Type
.cnm	The certificate name and expiration file publish location.

## Trustpoint of the Certificate Server

If the certificate server also has an automatically generated trustpoint of the same name, then the trustpoint stores the certificate of the certificate server. After the router detects that a trustpoint is being used to store the certificate of the certificate server, the trustpoint is locked so that it cannot be modified.

Before configuring the certificate server you can perform the following:

- Manually create and set up this trustpoint (using the **crypto pki trustpoint** command), which allows you to specify an alternative RSA key pair (using the **rsa keypair** command).
- Specify that the initial autoenrollment key pair is generated on a specific device, such as a configured and available USB token, using the **on** command.



### Note

The automatically generated trustpoint and the certificate server certificate are not available for the certificate server device identity. Thus, any command-line interface (CLI) (such as the **ip http secure-trustpoint** command) that is used to specify the CA trustpoint to obtain certificates and authenticate the connecting client's certificate must point to an additional trustpoint configured on the certificate server device.

If the server is a root certificate server, it uses the RSA key pairs and several other attributes to generate a self-signed certificate. The associated CA certificate has the following key usage extensions--Digital Signature, Certificate Sign, and CRL Sign.

After the CA certificate is generated, attributes can be changed only if the certificate server is destroyed.



### Note

A certificate server trustpoint must not be automatically enrolled using the **auto-enroll** command. Initial enrollment of the certificate server must be initiated manually and ongoing automatic rollover functionality may be configured with the **auto-rollover** command. For more information on automatic rollover functionality, see the section "[Automatic CA Certificate and Key Rollover, page 153.](#)"

## Certificate Revocation Lists (CRLs)

By default, CRLs are issued once every 168 hours (1 calendar week). To specify a value other than the default value for issuing the CRL, execute the **lifetime crl** command. After the CRL is issued, it is written to the specified database location as *ca-label.crl*, where *ca-label* is the name of the certificate server.

CRLs can be distributed through SCEP, which is the default method, or a CRL distribution point (CDP), if configured and available. If you set up a CDP, use the **cdp-url** command to specify the CDP location. If the **cdp-url** command is not specified, the CDP certificate extension is not included in the certificates that are issued by the certificate server. If the CDP location is not specified, Cisco IOS PKI clients automatically request a CRL from the certificate server with a SCEP GetCRL message. The CA then returns the CRL in a SCEP CertRep message to the client. Because all SCEP messages are enveloped and signed PKCS#7 data, the SCEP retrieval of the CRL from the certificate server is costly and not highly scalable. In very large

networks, an HTTP CDP provides better scalability and is recommended if you have many peer devices that check CRLs. You may specify the CDP location by a simple HTTP URL string for example,

```
cdp-url http://my-cdp.company.com/filename.crl
```

The certificate server supports only one CDP; thus, all certificates that are issued include the same CDP.

If you have PKI clients that are not running Cisco IOS software and that do not support a SCEP GetCRL request and wish to use a CDP you may set up an external server to distribute CRLs and configure the CDP to point to that server. Or, you can specify a non-SCEP request for the retrieval of the CRL from the certificate server by specifying the **cdp-url** command with the URL in the following format where *cs-addr* is the location of the certificate server:

```
cdp-url http://cs-addr/cgi-bin/pkiclient.exe?operation=GetCRL
```

**Note**

If your Cisco IOS CA is also configured as your HTTP CDP server, specify your CDP with the **cdp-url**`http://cs-addr/cgi-bin/pkiclient.exe?operation=GetCRL` command syntax.

It is the responsibility of the network administrator to ensure that the CRL is available from the location that is specified through the **cdp-url** command.

In order to force the parser to retain the embedded question mark within the specified location, enter Ctrl-v prior to the question mark. If this action is not taken, CRL retrieval through HTTP returns an error message.

The CDP location may be changed after the certificate server is running through the **cdp-url** command. New certificates contain the updated CDP location, but existing certificates are not reissued with the newly specified CDP location. When a new CRL is issued, the certificate server uses its current cached CRL to generate a new CRL. (When the certificate server is rebooted, it reloads the current CRL from the database.) A new CRL cannot be issued unless the current CRL has expired. After the current CRL expires, a new CRL is issued only after a certificate is revoked from the CLI.

## Certificate Server Error Conditions

At startup, the certificate server checks the current configuration before issuing any certificates. It reports the last known error conditions through the **show crypto pki server** command output. Example errors can include any of the following conditions:

- Storage inaccessible
- Waiting for HTTP server
- Waiting for time setting

If the certificate server experiences a critical failure at any time, such as failing to publish a CRL, the certificate server automatically enters a disabled state. This state allows the network administrator to fix the condition; thereafter, the certificate server returns to the previous normal state.

## Certificate Enrollment Using a Certificate Server

A certificate enrollment request functions as follows:

- The certificate server receives the enrollment request from an end user, and the following actions occur:
  - A request entry is created in the enrollment request database with the initial state. (See the table below for a complete list of certificate enrollment request states.)



- The certificate server refers to the CLI configuration (or the default behavior any time a parameter is not specified) to determine the authorization of the request. Thereafter, the state of the enrollment request is updated in the enrollment request database.
- At each SCEP query for a response, the certificate server examines the current request and performs one of the following actions:
  - Responds to the end user with a “pending” or “denied” state.
  - Generates and signs the appropriate certificate and stores the certificate in the enrollment request database.

If the connection of the client has closed, the certificate server waits for the client to request another certificate.

All enrollment requests transition through the certificate enrollment states that are defined in the table below. To see current enrollment requests, use the **crypto pki server request pkcs10** command.

**Table 7** *Certificate Enrollment Request State Descriptions*

Certificate Enrollment State	Description
authorized	The certificate server has authorized the request.
denied	The certificate server has denied the request for policy reasons.
granted	The CA core has generated the appropriate certificate for the certificate request.
initial	The request has been created by the SCEP server.
malformed	The certificate server has determined that the request is invalid for cryptographic reasons.
pending	The enrollment request must be manually accepted by the network administrator.

- [SCEP Enrollment, page 152](#)

## SCEP Enrollment

All SCEP requests are treated as new certificate enrollment requests, even if the request specifies a duplicate subject name or public key pair as a previous certificate request.

## Types of CA Servers Subordinate and Registration Authorities (RAs)

CA servers have the flexibility to be configured as a subordinate certificate server or an RA-mode certificate server.

### Why Configure a Subordinate CA?

A subordinate certificate server provides all the same features as a root certificate server. The root RSA key pairs are extremely important in a PKI hierarchy, and it is often advantageous to keep them offline or archived. To support this requirement, PKI hierarchies allow for subordinate CAs that have been signed by

the root authority. In this way, the root authority can be kept offline (except to issue occasional CRL updates), and the subordinate CA can be used during normal operation.

### Why Configure an RA-Mode Certificate Server?

A Cisco IOS certificate server can be configured to run in RA mode. An RA offloads authentication and authorization responsibilities from a CA. When the RA receives a SCEP or manual enrollment request, the administrator can either reject or grant it on the basis of local policy. If the request is granted, it is forwarded to the issuing CA, and the CA automatically generates the certificate and return it to the RA. The client can later retrieve the granted certificate from the RA.

An RA is the authority charged with recording or verifying some or all of the data required for the CA to issue certificates. In many cases the CA undertakes all of the RA functions itself, but where a CA operates over a wide geographical area or when there is security concern over exposing the CA to direct network access, it may be administratively advisable to delegate some of the tasks to an RA and leave the CA to concentrate on its primary tasks of signing certificates and CRLs.

### CA Server Compatibility

In Cisco IOS Release 15.1(2)T, new functionality was introduced that allows the IOS CA server in RA mode to interoperate with more than one type of CA server. See [Configuring a Certificate Server to Run in RA Mode](#), page 167 for more information.

## Automatic CA Certificate and Key Rollover

CAs--root CAs, subordinate CAs, and RA-mode CAs--like their clients, have certificates and key pairs with expiration dates that need to be reissued when the current certificate and key pair are about to expire. When a root CA's certificate and key pair are expiring it must generate a self-signed rollover certificate and key pair. If a subordinate CA or an RA-mode CA's certificate and key pair are expiring, it requests a rollover certificate and key pair from its superior CA, obtaining the superior CA's new self-signed rollover certificates at the same time. The CA must distribute the new CA rollover certificate and keys too all its peers. This process, called rollover, allows for continuous operation of the network while the CAs and their clients are switching from an expiring CA certificate and key pair to a new CA certificate and key pair.

Rollover relies on the PKI infrastructure requirements of trust relationships and synchronized clocks. The PKI trust relationships allow (1) the new CA certificate to be authenticated, and (2) the rollover to be accomplished automatically without the loss of security. Synchronized clocks allow the rollover to be coordinated throughout your network.

- [Automatic CA Certificate Rollover How It Works](#), page 153

### Automatic CA Certificate Rollover How It Works

The CA server must have rollover configured. All levels of CAs must be automatically enrolled and have **auto-rollover** enabled. CA clients support rollover automatically when automatically enrolled. For more information about clients and automatic rollover, see the section "Automatic Certificate Enrollment" in the chapter "Configuring Certificate Enrollment for a PKI".

After CAs have rollover enabled and their clients are automatically enrolled, there are three stages to the automatic CA certificate rollover process.

#### Stage One: Active CA Certificate and Key Pair Only

In stage one, there is an active CA certificate and key pair only.

### Stage Two: Rollover CA Certificate and Key Pair Generation and Distribution

In stage two, the rollover CA certificate and key pair are generated and distributed. The superior CA generates a rollover certificate and key pair. After the CA successfully saves its active configuration, the CA is ready to respond to client requests for the rollover certificate and key pair. When the superior CA receives a request for the new CA certificate and key pair from a client, the CA responds by sending the new rollover CA certificate and key pair to the requesting client. The clients store the rollover CA certificate and key pair.

**Note**

---

When a CA generates its rollover certificate and key pair, it must be able to save its active configuration. If the current configuration has been altered, saving of the rollover certificate and key pair does not happen automatically. In this case, the administrator must save the configuration manually or rollover information is lost.

---

### Stage Three: Rollover CA Certificate and Key Pair Become the Active CA Certificate and Key Pair

In stage three, the rollover CA certificate and key pair become the active CA certificate and key pair. All devices that have stored a valid rollover CA certificate rename the rollover certificate to the active certificate and the once-active certificate and key pair are deleted.

After the CA certificate rollover, you may observe the following deviation from usual certificate lifetime and renewal time:

- The lifetime of the certificates issued during rollover is lower than the preconfigured value.
- In specific conditions, the renew time may be inferior to the configured percentage of the actual lifetime. The difference observed can be of up to 20% in cases where the certificate lifetime is less than one hour.

These differences are normal, and result from **jitter** (random time fluctuation) introduced by the algorithm on the Certificate server. This task is performed to avoid the hosts participating to the PKI synchronize their enrollment timer, which could result in congestion on the Certificate Server.

**Note**

---

The lifetime fluctuations that occur do not affect proper functioning of the PKI, since the differences always result in a shorter lifetime, thus remaining within maximum configured lifetime for certificates.

---

## Support for Specifying a Cryptographic Hash Function

Secure Hash Algorithm (SHA) support allows a user to specify a cryptographic hash function for Cisco IOS certificate servers and clients. The cryptographic hash functions that can be specified are Message Digest algorithm 5 (MD5), SHA-1, SHA-256, SHA-384, or SHA-512.

**Note**

---

Cisco no longer recommends using MD5; instead, you should use SHA-256. For more information about the latest Cisco cryptographic recommendations, see the [Next Generation Encryption](#) (NGE) white paper.

---

See the “Configuring a Subordinate Certificate Server” task for more information on specifying the **hash** (ca-trustpoint) and **hash** (cs-server) commands that are used to implement this feature.

# How to Set Up and Deploy a Cisco IOS Certificate Server

- [Generating a Certificate Server RSA Key Pair](#), page 155
- [Configuring Certificate Servers](#), page 158
- [Configuring Certificate Server Functionality](#), page 171
- [Working with Automatic CA Certificate Rollover](#), page 175
- [Maintaining Verifying and Troubleshooting the Certificate Server Certificates and the CA](#), page 178

## Generating a Certificate Server RSA Key Pair

Perform this task to manually generate an RSA key pair for the certificate server. Manually generating a certificate server RSA key pair allows you to specify the type of key pair you want to generate, to create an exportable key pair for backup purposes, to specify the key pair storage location, or to specify the key generation location.

If you are running Cisco IOS Release 12.3(8)T or earlier releases, you may want to create an exportable certificate server key pair for backup, or archive purposes. If this task is not performed, the certificate server automatically generates a key pair, which is not marked as exportable. Automatic CA certificate archiving was introduced in Cisco IOS Release 12.3(11)T.

As of Cisco IOS Release 12.4(11)T and later releases, if your router has a USB token configured and available, the USB token can be used as cryptographic device in addition to a storage device. Using a USB token as a cryptographic device allows RSA operations such as key generation, signing, and authentication of credentials to be performed on a USB token. The private key never leaves the USB token and is not exportable. The public key is exportable. For titles of specific documents about configuring a USB token and making it available to use as a cryptographic device, see the “Related Documents” section.

**Note**

---

It is recommended that the private key be kept in a secure location and that you regularly archive the certificate server database.

---

**Note**

---

Security threats, as well as the cryptographic technologies to help protect against them, are constantly changing. For more information about the latest Cisco cryptographic recommendations, see the [Next Generation Encryption](#) (NGE) white paper.

---

### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto key generate rsa** [general-keys | usage-keys | signature | encryption] [label *key-label*] [exportable] [modulus *modulus-size*] [storage *devicename:*] [on *devicename:*]
4. **crypto key export rsa** *key-label* **pem** {terminal | url *url*} {3des | des} *passphrase*
5. **crypto key import rsa** *key-label* **pem** [usage-keys | signature | encryption] {terminal | url *url*} [exportable] [on *devicename:*] *passphrase*
6. **exit**
7. **show crypto key mypubkey rsa**

## DETAILED STEPS

Command or Action	Purpose
<p><b>Step 1</b> <code>enable</code></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<p><b>Step 2</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> <code>crypto key generate rsa [general-keys   usage-keys   signature   encryption] [label key-label] [exportable] [modulus modulus-size] [storage devicename:] [on devicename:]</code></p> <p><b>Example:</b></p> <pre>Router (config)# crypto key generate rsa label mycs exportable modulus 2048</pre>	<p>Generates the RSA key pair for the certificate server.</p> <ul style="list-style-type: none"> <li>• The <b>storage</b> keyword specifies the key storage location.</li> <li>• When specifying a label name by specifying the <i>key-label</i> argument, you must use the same name for the label that you plan to use for the certificate server (through the <b>crypto pki server cs-label</b> command). If a <i>key-label</i> argument is not specified, the default value, which is the fully qualified domain name (FQDN) of the router, is used.</li> </ul> <p>If the exportable RSA key pair is manually generated after the CA certificate has been generated, and before issuing the <b>no shutdown</b> command, then use the <b>crypto ca export pkcs12</b> command to export a PKCS12 file that contains the certificate server certificate and the private key.</p> <ul style="list-style-type: none"> <li>• By default, the modulus size of a CA key is 1024 bits. The recommended modulus for a CA key is 2048 bits. The range for a modulus size of a CA key is from 350 to 4096 bits.</li> <li>• The <b>on</b> keyword specifies that the RSA key pair is created on the specified device, including a Universal Serial Bus (USB) token, local disk, or NVRAM. The name of the device is followed by a colon (:).</li> </ul> <p><b>Note</b> Keys created on a USB token must be 2048 bits or less.</p>
<p><b>Step 4</b> <code>crypto key export rsa key-label pem {terminal   url url} {3des   des} passphrase</code></p> <p><b>Example:</b></p> <pre>Router (config)# crypto key export rsa mycs pem url nvram: 3des PASSWORD</pre>	<p>(Optional) Exports the generated RSA key pair.</p> <p>Allows you to export the generated keys.</p>

Command or Action	Purpose
<p><b>Step 5</b> <code>crypto key import rsa key-label pem [usage-keys   signature   encryption] {terminal   url url} [exportable] [on devicename:] passphrase</code></p> <p><b>Example:</b></p> <pre>Router (config)# crypto key import rsa mycs2 pem url nvram:mycs PASSWORD</pre>	<p>(Optional) Imports RSA key pair.</p> <p>To create the imported keys on a USB token, use the <b>on</b> keyword and specify the appropriate device location.</p> <p>If you exported the RSA keys using the <b>exportable</b> keyword and you want to change the RSA key pair to nonexportable, import the key back to the certificate server without the <b>exportable</b> keyword. The key cannot be exported again.</p>
<p><b>Step 6</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router (config)# exit</pre>	<p>Exits global configuration.</p>
<p><b>Step 7</b> <code>show crypto key mypubkey rsa</code></p> <p><b>Example:</b></p> <pre>Router# show crypto key mypubkey rsa</pre>	<p>Displays the RSA public keys of your router.</p>

**Example**

The following example generates a general usage 1024-bit RSA key pair on a USB token with the label “ms2” with crypto engine debugging messages shown:

```
Router(config)# crypto key generate rsa on usbtoken0 label ms2 modulus 1024
The name for the keys will be: ms2
% The key modulus size is 1024 bits
% Generating 1024 bit RSA keys, keys will be on-token, non-exportable...
Jan 7 02:41:40.895: crypto_engine: Generate public/private keypair [OK]
Jan 7 02:44:09.623: crypto_engine: Create signature
Jan 7 02:44:10.467: crypto_engine: Verify signature
Jan 7 02:44:10.467: CryptoEngine0: CRYPTO_ISA_RSA_CREATE_PUBKEY(hw)(ipsec)
Jan 7 02:44:10.467: CryptoEngine0: CRYPTO_ISA_RSA_PUB_DECRYPT(hw)(ipsec)
```

Now, the on-token keys labeled “ms2” may be used for enrollment.

The following example shows the successful import of an encryption key to a configured and available USB tokens:

```
Router#
configure terminal

Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
crypto key import rsa encryption on usbtoken0 url nvram:e password

% Importing public Encryption key or certificate PEM file...
filename [e-encr.pub]?
Reading file from nvram:e-encr.pub
% Importing private Encryption key PEM file...
Source filename [e-encr.prv]?
Reading file from nvram:e-encr.prv
% Key pair import succeeded.
```

## Configuring Certificate Servers

- [Prerequisites for Automatic CA Certificate Rollover, page 158](#)
- [Restrictions for Automatic CA Certificate Rollover, page 158](#)
- [Configuring a Certificate Server, page 158](#)
- [Configuring a Subordinate Certificate Server, page 161](#)
- [Configuring a Certificate Server to Run in RA Mode, page 167](#)
- [Configuring the Root Certificate Server to Delegate Enrollment Tasks to the RA Mode Certificate Server, page 170](#)
- [What to Do Next, page 171](#)

### Prerequisites for Automatic CA Certificate Rollover

When configuring a certificate server, for automatic CA certificate rollover to run successfully, the following prerequisites are applicable for your CA servers:

- You must be running Cisco IOS Release 12.4(2)T or a later release on your CA servers.
- Your CA server must be enabled and fully configured with a reliable time of day, an available key pair, a self-signed, valid CA certificate associated with the key pair, a CRL, an accessible storage device, and an active HTTP/SCEP server.
- CA clients must have successfully completed automatic enrollment and have autoenrollment enabled with the same certificate server.

**Note**

---

If you are running Cisco IOS 12.4(2)T or earlier releases, only your root CA supports automatic CA certificate rollover functionality. Cisco IOS 12.4(4)T or later releases support all CAs--root CAs, subordinate CAs, and RA-mode CAs.

---

### Restrictions for Automatic CA Certificate Rollover

When configuring a certificate server, in order for automatic CA certificate rollover to run successfully, the following restrictions are applicable:

- SCEP must be used to support rollover. Any device that enrolls with the PKI using an alternative to SCEP as the certificate management protocol or mechanism (such as enrollment profiles, manual enrollment, or TFTP enrollment) is not be able to take advantage of the rollover functionality provided by SCEP.
- If you have automatic archive configured on your network and the archive fails, rollover does not occur because the certificate server does not enter the rollover state, and the rollover certificate and key pair is not automatically saved.

### Configuring a Certificate Server

Perform this task to configure a Cisco IOS certificate server and enable automatic rollover.

**SUMMARY STEPS**

1. **enable**
2. **configure terminal**
3. **ip http server**
4. **crypto pki server *cs-label***
5. **no shutdown**
6. **auto-rollover [*time-period*]**

**DETAILED STEPS**

Command or Action	Purpose
<b>Step 1</b> <b>enable</b>  <b>Example:</b> Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<b>Step 2</b> <b>configure terminal</b>  <b>Example:</b> Router# configure terminal	Enters global configuration mode.
<b>Step 3</b> <b>ip http server</b>  <b>Example:</b> Router(config)# ip http server	Enables the HTTP server on your system.
<b>Step 4</b> <b>crypto pki server <i>cs-label</i></b>  <b>Example:</b> Router(config)# crypto pki server server-pki	Defines a label for the certificate server and enters certificate server configuration mode.  <b>Note</b> If you manually generated an RSA key pair, the <i>cs-label</i> argument must match the name of the key pair.
<b>Step 5</b> <b>no shutdown</b>  <b>Example:</b> Router(cs-server)# no shutdown	(Optional) Enables the certificate server.  <b>Note</b> Only use this command at this point if you want to use the preconfigured default functionality. That is, do not issue this command just yet if you plan to change any of the default settings as shown in the task “Configuring Certificate Server Functionality.”



Command or Action	Purpose
<b>Step 6</b> <code>auto-rollover [time-period]</code>	(Optional) Enables the automated CA certificate rollover functionality.
<b>Example:</b>	<ul style="list-style-type: none"> <li><code>time-period</code> --default is 30 days.</li> </ul>
Router(cs-server)# auto-rollover 90	

## Examples

The following example shows how to configure the certificate server “ca”:

```
Router(config)#
crypto pki server ca
Router(cs-server)#
no shutdown
% Once you start the server, you can no longer change some of
% the configuration.
Are you sure you want to do this? [yes/no]:
yes
% Generating 1024 bit RSA keys ...[OK]
% Certificate Server enabled.
Router(cs-server)#
end
!
Router#
show crypto pki server
Certificate Server ca:
  Status: enabled, configured
  CA cert fingerprint: 5A856122 4051347F 55E8C246 866D0AC3
  Granting mode is: manual
  Last certificate issued serial number: 0x1
  CA certificate expiration timer: 19:44:57 GMT Oct 14 2006

CRL NextUpdate timer: 19:45:25 GMT Oct 22 2003
Current storage dir: nvram:
Database Level: Complete - all issued certs written as <serialnum>.cer
```

The following example shows how to enable automated CA certificate rollover on the server mycs with the **auto-rollover** command. The **show crypto pki server** command shows that the automatic rollover has been configured on the server mycs with an overlap period of 25 days.

```
Router(config)# crypto pki server mycs
Router(cs-server)# auto-rollover 25
Router(cs-server)# no shut
%Some server settings cannot be changed after CA certificate generation.
% Generating 1024 bit RSA keys, keys will be non-exportable...[OK]
% Exporting Certificate Server signing certificate and keys...
% Certificate Server enabled.
Router(cs-server)#
Router# show crypto pki server
Certificate Server mycs:
  Status:enabled
  Server's configuration is locked (enter "shut" to unlock it)
  Issuer name:CN=mycs
  CA cert fingerprint:70AFECA9 211CDDCC 6AA9D7FF 3ADB03AE
  Granting mode is:manual
  Last certificate issued serial number:0x1
  CA certificate expiration timer:00:49:26 PDT Jun 20 2008
  CRL NextUpdate timer:00:49:29 PDT Jun 28 2005
  Current storage dir:nvram:
  Database Level:Minimum - no cert data written to storage
  Auto-Rollover configured, overlap period 25 days
  Autorollover timer:00:49:26 PDT May 26 2008
```

## Configuring a Subordinate Certificate Server

Perform this task to configure a subordinate certificate server to grant all or certain SCEP or manual certificate requests and to enable automatic rollover.



**Note**

- You must be running Cisco IOS Release 12.3(14)T or a later release. (Versions prior to Cisco IOS software Release 12.3(14)T support only one certificate server and no hierarchy; that is, subordinate certificate servers are not supported.)
- The root certificate server should be a Cisco IOS certificate server.



**Note**

Security threats, as well as the cryptographic technologies to help protect against them, are constantly changing. For more information about the latest Cisco cryptographic recommendations, see the [Next Generation Encryption](#) (NGE) white paper.

### SUMMARY STEPS

1. enable
2. configure terminal
3. crypto pki trustpoint *name*
4. enrollment [mode] [retry period *minutes*] [retry count *number*] url *url* [pem]
5. hash {md5 | sha1 | sha256 | sha384 | sha512}
6. exit
7. crypto pki server *cs-label*
8. issuer name *DN-string*
9. mode sub-cs
10. auto-rollover [*time-period*]
11. grant auto rollover {ca-cert | ra-cert}
12. hash {md5 | sha1 | sha256 | sha384 | sha512}
13. no shutdown

### DETAILED STEPS

	Command or Action	Purpose
Step 1	enable	Enables privileged EXEC mode.
	<b>Example:</b>	<ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
	Router> enable	

Command or Action	Purpose
<p><b>Step 2</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> <code>crypto pki trustpoint <i>name</i></code></p> <p><b>Example:</b></p> <pre>Router (config)# crypto pki trustpoint sub</pre>	<p>Declares the trustpoint that your subordinate certificate server should use and enters ca-trustpoint configuration mode.</p>
<p><b>Step 4</b> <code>enrollment [mode] [retry period <i>minutes</i>] [retry count <i>number</i>] url <i>url</i> [pem]</code></p> <p><b>Example:</b></p> <pre>Router (ca-trustpoint)# enrollment url http://caserver.myexample.com - or- Router (ca-trustpoint)# enrollment url http://[2001:DB8:1:1:1]:80</pre>	<p>Specifies the following enrollment parameters of the CA:</p> <ul style="list-style-type: none"> <li>• (Optional) The <b>mode</b> keyword specifies the registration authority (RA) mode, if your CA system provides an RA. By default, RA mode is disabled.</li> <li>• (Optional) The <b>retry period</b> keyword and <i>minutes</i> argument specifies the period, in minutes, in which the router waits before sending the CA another certificate request. Valid values are from 1 to 60. The default is 1.</li> <li>• (Optional) The <b>retry count</b> keyword and <i>number</i> argument specifies the number of times a router will resend a certificate request when it does not receive a response from the previous request. Valid values are from 1 to 100. The default is 10.</li> <li>• The <i>url</i> argument is the URL of the CA to which your router should send certificate requests. <ul style="list-style-type: none"> <li><b>Note</b> With the introduction of Cisco IOS Release 15.2(1)T, an IPv6 address can be added to the <b>http:</b> enrolment method. For example: <code>http://[ipv6-address]:80</code>. The IPv6 address must be enclosed in brackets in the URL. See the <a href="#">enrollment url (ca-trustpoint)</a> command page for more information on the other enrollment methods that can be used.</li> </ul> </li> <li>• (Optional) The <b>pem</b> keyword adds privacy-enhanced mail (PEM) boundaries to the certificate request.</li> </ul>

Command or Action	Purpose
<p><b>Step 5</b> <code>hash {md5   sha1   sha256   sha384   sha512}</code></p> <p><b>Example:</b></p> <pre>Router (ca-trustpoint)# hash sha384</pre>	<p>(Optional) Specifies the hash function for the signature that the Cisco IOS client uses to sign its self-signed certificates. The Cisco IOS client uses the MD5 cryptographic hash function for self-signed certificates by default.</p> <p>Any of the following command algorithm keyword options can be specified to over-ride the default setting for the trustpoint. This setting then becomes the default cryptographic hash algorithm function for self-signed certificates by default.</p> <ul style="list-style-type: none"> <li>• <b>md5</b> —Specifies that MD5, the default hash function, is used. (No longer recommended).</li> <li>• <b>sha1</b> —Specifies that the SHA-1 hash function is used as the default hash algorithm for RSA keys. (No longer recommended).</li> <li>• <b>sha256</b> —Specifies that the SHA-256 hash function is used as the hash algorithm for Elliptic Curve (EC) 256 bit keys.</li> <li>• <b>sha384</b> —Specifies that the SHA-384 hash function is used as the hash algorithm for EC 384 bit keys.</li> <li>• <b>sha512</b> —Specifies that the SHA-512 hash function is used as the hash algorithm for EC 512 bit keys.</li> </ul>
<p><b>Step 6</b> <code>exit</code></p> <p><b>Example:</b></p> <pre>Router (ca-trustpoint)# exit</pre>	<p>Exits ca-trustpoint configuration mode.</p>
<p><b>Step 7</b> <code>crypto pki server <i>cs-label</i></code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki server sub</pre>	<p>Enables a Cisco IOS certificate server and enters cs-server configuration mode.</p> <p><b>Note</b> The subordinate server must have the same name as the trustpoint that was created in Step 3 above.</p>
<p><b>Step 8</b> <code>issuer name <i>DN-string</i></code></p> <p><b>Example:</b></p> <pre>Router(cs-server) # issuer-name CN=sub CA, O=Cisco, C=us</pre>	<p>(Optional) Specifies the DN as the CA issuer name for the certificate server.</p>
<p><b>Step 9</b> <code>mode sub-cs</code></p> <p><b>Example:</b></p> <pre>Router(cs-server)# mode sub-cs</pre>	<p>Places the PKI server into sub-certificate server mode.</p>

Command or Action	Purpose
<p><b>Step 10</b> <code>auto-rollover [time-period]</code></p> <p><b>Example:</b></p> <pre>Router(cs-server)# auto-rollover 90</pre>	<p>(Optional) Enables the automated CA certificate rollover functionality.</p> <ul style="list-style-type: none"> <li><code>time-period</code> --default is 30 days.</li> </ul>
<p><b>Step 11</b> <code>grant auto rollover {ca-cert   ra-cert}</code></p> <p><b>Example:</b></p> <pre>Router(cs-server)# grant auto rollover ca-cert</pre>	<p>(Optional) Automatically grants reenrollment requests for subordinate CAs and RA-mode CAs without operator intervention.</p> <ul style="list-style-type: none"> <li><b>ca-cert</b> --Specifies that the subordinate CA rollover certificate is automatically granted.</li> <li><b>ra-cert</b> --Specifies that the RA-mode CA rollover certificate is automatically granted.</li> </ul> <p><b>Note</b> If this is the first time that a subordinate certificate server is enabled and enrolled, the certificate request must be manually granted.</p>
<p><b>Step 12</b> <code>hash {md5   sha1   sha256   sha384   sha512}</code></p> <p><b>Example:</b></p> <pre>Router(cs-server)# hash sha384</pre>	<p>(Optional) Sets the hash function for the signature that the Cisco IOS certificate authority (CA) uses to sign all of the certificates issued by the server.</p> <ul style="list-style-type: none"> <li><b>md5</b> —Specifies that MD5, the default hash function, is used. (No longer recommended).</li> <li><b>sha1</b> —Specifies that the SHA-1 hash function is used. (No longer recommended).</li> <li><b>sha256</b> —Specifies that the SHA-256 hash function is used.</li> <li><b>sha384</b> —Specifies that the SHA-384 hash function is used.</li> <li><b>sha512</b> —Specifies that the SHA-512 hash function is used.</li> </ul>
<p><b>Step 13</b> <code>no shutdown</code></p> <p><b>Example:</b></p> <pre>Router(cs-server)# no shutdown</pre>	<p>Enables or reenables the certificate server.</p> <p>If this is the first time that a subordinate certificate server is enabled, the certificate server generates the key and obtain its signing certificate from the root certificate server.</p>

- [Examples, page 164](#)

## Examples

If the certificate server fails to enable or if the certificate server has trouble handling the request that has been configured, you can use the **debug crypto pki server** command to troubleshoot your configuration as shown in the following examples (Clock Not Set and Trustpoint Not Configured):

```
Router# debug crypto pki server
```

### Clock Not Set

```
Router(config)# crypto pki server sub
```

```

Router(cs-server)# mode sub-cs
Router(cs-server)# no shutdown
%Some server settings cannot be changed after CA certificate generation.
% Please enter a passphrase to protect the private key % or type Return to exit
Password:
*Jan 6 20:57:37.667: CRYPTO_CS: enter FSM: input state initial, input signal no shut
Re-enter password:
% Generating 1024 bit RSA keys ...
*Jan 6 20:57:45.303: CRYPTO_CS: starting enabling checks
*Jan 6 20:57:45.303: CRYPTO_CS: key 'sub' does not exist; generated automatically[OK]
% Time has not been set. Cannot start the Certificate server

```

### Trustpoint Not Configured

```

Router(config)# crypto pki server sub
Router(cs-server)# mode sub-cs
Router(cs-server)# no shutdown
%Some server settings cannot be changed after CA certificate generation.
% Please enter a passphrase to protect the private key or type Return to exit
Password:
Jan 6 21:00:15.961: CRYPTO_CS: enter FSM: input state initial, input signal no shut.
Jan 6 21:03:34.309: CRYPTO_CS: enter FSM: input state initial, input signal time set.
Jan 6 21:03:34.313: CRYPTO_CS: exit FSM: new state initial.
Jan 6 21:03:34.313: CRYPTO_CS: cs config has been unlocked
Re-enter password:
% Generating 1024 bit RSA keys ...
Jan 6 21:03:44.413: CRYPTO_CS: starting enabling checks
Jan 6 21:03:44.413: CRYPTO_CS: associated trust point 'sub' does not exist; generated
automatically
Jan 6 21:03:44.417: CRYPTO_CS: key 'sub' does not exist; generated automatically[OK]
Jan 6 21:04:03.993: CRYPTO_CS: nvram filesystem
Jan 6 21:04:04.077: CRYPTO_CS: serial number 0x1 written.
You must specify an enrollment URL for this CA before you can authenticate it.
% Failed to authenticate the Certificate Authority

```

If the certificate server fails to obtain its signing certificate from the root certificate server, you can use the **debug crypto pki transactions** command to troubleshoot your configuration as shown in the following example:

```

Router# debug crypto pki transactions
Jan 6 21:07:00.311: CRYPTO_CS: enter FSM: input state initial, input signal time set
Jan 6 21:07:00.311: CRYPTO_CS: exit FSM: new state initial
Jan 6 21:07:00.311: CRYPTO_CS: cs config has been unlocked no sh
%Some server settings cannot be changed after CA certificate generation.
% Please enter a passphrase to protect the private key % or type Return to exit
Password:
Jan 6 21:07:03.535: CRYPTO_CS: enter FSM: input state initial, input signal no shut
Re-enter password:
% Generating 1024 bit RSA keys ...
Jan 6 21:07:10.619: CRYPTO_CS: starting enabling checks
Jan 6 21:07:10.619: CRYPTO_CS: key 'sub' does not exist; generated automatically[OK]
Jan 6 21:07:20.535: %SSH-5-ENABLED: SSH 1.99 has been enabled
Jan 6 21:07:25.883: CRYPTO_CS: nvram filesystem
Jan 6 21:07:25.991: CRYPTO_CS: serial number 0x1 written.
Jan 6 21:07:27.863: CRYPTO_CS: created a new serial file.
Jan 6 21:07:27.863: CRYPTO_CS: authenticating the CA 'sub'
Jan 6 21:07:27.867: CRYPTO_PKI: Sending CA Certificate Request:
GET /cgi-bin/pki/client.exe?operation=GetCACert&message=sub HTTP/1.0
User-Agent: Mozilla/4.0 (compatible; MSIE 5.0; Cisco PKI)
Jan 6 21:07:27.867: CRYPTO_PKI: can not resolve server name/IP address
Jan 6 21:07:27.871: CRYPTO_PKI: Using unresolved IP Address 192.0.2.6 Certificate has the
following attributes:
    Fingerprint MD5: 328ACC02 52B25DB8 22F8F104 B6055B5B
    Fingerprint SHA1: 02FD799D DD40C7A8 61DC53AB 1E89A3EA 2A729EE2
% Do you accept this certificate? [yes/no]:
Jan 6 21:07:30.879: CRYPTO_PKI: http connection opened
Jan 6 21:07:30.903: CRYPTO_PKI: HTTP response header:
    HTTP/1.1 200 OK
Date: Thu, 06 Jan 2005 21:07:30 GMT
Server: server-IOS
Content-Type: application/x-x509-ca-cert

```

```

Expires: Thu, 06 Jan 2005 21:07:30 GMT
Last-Modified: Thu, 06 Jan 2005 21:07:30 GMT
Cache-Control: no-store, no-cache, must-revalidate
Pragma: no-cache
Accept-Ranges: none
Content-Type indicates we have received a CA certificate.
Jan 6 21:07:30.903: Received 507 bytes from server as CA certificate:
Jan 6 21:07:30.907: CRYPTO_PKI: transaction GetCACert completed
Jan 6 21:07:30.907: CRYPTO_PKI: CA certificate received.
Jan 6 21:07:30.907: CRYPTO_PKI: CA certificate received.
Jan 6 21:07:30.927: CRYPTO_PKI: crypto_pki_authenticate_tp_cert()
Jan 6 21:07:30.927: CRYPTO_PKI: trustpoint sub authentication status = 0 y Trustpoint CA
certificate accepted.%
% Certificate request sent to Certificate Authority
% Enrollment in progress...
Router (cs-server)#
Jan 6 21:07:51.772: CRYPTO_CA: certificate not found
Jan 6 21:07:51.772: CRYPTO_CA: certificate not found
Jan 6 21:07:52.460: CRYPTO_CS: Publishing 213 bytes to crl file nvram:sub.crl
Jan 6 21:07:54.348: CRYPTO_CS: enrolling the server's trustpoint 'sub'
Jan 6 21:07:54.352: CRYPTO_CS: exit FSM: new state check failed
Jan 6 21:07:54.352: CRYPTO_CS: cs config has been locked
Jan 6 21:07:54.356: CRYPTO_PKI: transaction PKCSReq completed
Jan 6 21:07:54.356: CRYPTO_PKI: status:
Jan 6 21:07:55.016: CRYPTO_PKI: Certificate Request Fingerprint MD5: 1BA027DB 1C7860C7
EC188F65 64356C80
Jan 6 21:07:55.016: CRYPTO_PKI: Certificate Request Fingerprint SHA1: 840DB52C E17614CB
0C7BE187 0DFC884D D32CAA75
Jan 6 21:07:56.508: CRYPTO_PKI: can not resolve server name/IP address
Jan 6 21:07:56.508: CRYPTO_PKI: Using unresolved IP Address 192.0.2.6
Jan 6 21:07:56.516: CRYPTO_PKI: http connection opened
Jan 6 21:07:59.136: CRYPTO_PKI: received msg of 776 bytes
Jan 6 21:07:59.136: CRYPTO_PKI: HTTP response header:
HTTP/1.1 200 OK
Date: Thu, 06 Jan 2005 21:07:57 GMT
Server: server-IOS
Content-Type: application/x-pki-message
Expires: Thu, 06 Jan 2005 21:07:57 GMT
Last-Modified: Thu, 06 Jan 2005 21:07:57 GMT
Cache-Control: no-store, no-cache, must-revalidate
Pragma: no-cache
Accept-Ranges: none
Jan 6 21:07:59.324: The PKCS #7 message has 1 verified signers.
Jan 6 21:07:59.324: signing cert: issuer=cn=root1
Jan 6 21:07:59.324: Signed Attributes:
Jan 6 21:07:59.328: CRYPTO_PKI: status = 102: certificate request pending
Jan 6 21:08:00.788: CRYPTO_PKI: can not resolve server name/IP address
Jan 6 21:08:00.788: CRYPTO_PKI: Using unresolved IP Address 192.0.2.6
Jan 6 21:08:00.796: CRYPTO_PKI: http connection opened
Jan 6 21:08:11.804: CRYPTO_PKI: received msg of 776 bytes
Jan 6 21:08:11.804: CRYPTO_PKI: HTTP response header: HTTP/1.1 200 OK
Date: Thu, 06 Jan 2005 21:08:01 GMT
Server: server-IOS
Content-Type: application/x-pki-message
Expires: Thu, 06 Jan 2005 21:08:01 GMT
Last-Modified: Thu, 06 Jan 2005 21:08:01 GMT
Cache-Control: no-store, no-cache, must-revalidate
Pragma: no-cache
Accept-Ranges: none
Jan 6 21:08:11.992: The PKCS #7 message has 1 verified signers.
Jan 6 21:08:11.992: signing cert: issuer=cn=root1
Jan 6 21:08:11.996: Signed Attributes:
Jan 6 21:08:11.996: CRYPTO_PKI: status = 102: certificate request pending
Jan 6 21:08:21.996: CRYPTO_PKI: All sockets are closed for trustpoint sub.
Jan 6 21:08:31.996: CRYPTO_PKI: All sockets are closed for trustpoint sub.
Jan 6 21:08:41.996: CRYPTO_PKI: All sockets are closed for trustpoint sub.
Jan 6 21:08:51.996: CRYPTO_PKI: All sockets are closed for trustpoint sub.
Jan 6 21:09:01.996: CRYPTO_PKI: All sockets are closed for trustpoint sub.
Jan 6 21:09:11.996: CRYPTO_PKI: resend GetCertInitial, 1
Jan 6 21:09:11.996: CRYPTO_PKI: All sockets are closed for trustpoint sub.
Jan 6 21:09:11.996: CRYPTO_PKI: resend GetCertInitial for session: 0
Jan 6 21:09:11.996: CRYPTO_PKI: can not resolve server name/IP address
Jan 6 21:09:11.996: CRYPTO_PKI: Using unresolved IP Address 192.0.2.6

```

```

Jan 6 21:09:12.024: CRYPTO_PKI: http connection opened% Exporting Certificate Server
signing certificate and keys...
Jan 6 21:09:14.784: CRYPTO_PKI: received msg of 1611 bytes
Jan 6 21:09:14.784: CRYPTO_PKI: HTTP response header:
  HTTP/1.1 200 OK
  Date: Thu, 06 Jan 2005 21:09:13 GMT
  Server: server-IOS
  Content-Type: application/x-pki-message
  Expires: Thu, 06 Jan 2005 21:09:13 GMT
  Last-Modified: Thu, 06 Jan 2005 21:09:13 GMT
  Cache-Control: no-store, no-cache, must-revalidate
  Pragma: no-cache
  Accept-Ranges: none
Jan 6 21:09:14.972: The PKCS #7 message has 1 verified signers.
Jan 6 21:09:14.972: signing cert: issuer=cn=root1
Jan 6 21:09:14.972: Signed Attributes:
Jan 6 21:09:14.976: CRYPTO_PKI: status = 100: certificate is granted
Jan 6 21:09:15.668: The PKCS #7 message contains 1 certs and 0 crls.
Jan 6 21:09:15.688: Newly-issued Router Cert: issuer=cn=root serial=2
Jan 6 21:09:15.688: start date: 21:08:03 GMT Jan 6 2005
Jan 6 21:09:15.688: end date: 21:08:03 GMT Jan 6 2006
Jan 6 21:09:15.688: Router date: 21:09:15 GMT Jan 6 2005
Jan 6 21:09:15.692: Received router cert from CA
Jan 6 21:09:15.740: CRYPTO_CA: certificate not found
Jan 6 21:09:15.744: CRYPTO_PKI: All enrollment requests completed for trustpoint sub.
Jan 6 21:09:15.744: %PKI-6-CERTRET: Certificate received from Certificate Authority
Jan 6 21:09:15.744: CRYPTO_PKI: All enrollment requests completed for trustpoint sub.
Jan 6 21:09:15.744: CRYPTO_PKI: All enrollment requests completed for trustpoint sub.
Jan 6 21:09:15.748: CRYPTO_CS: enter FSM: input state check failed, input signal cert
configured
Jan 6 21:09:15.748: CRYPTO_CS: starting enabling checks
Jan 6 21:09:15.748: CRYPTO_CS: nvram filesystem
Jan 6 21:09:15.796: CRYPTO_CS: found existing serial file.
Jan 6 21:09:15.820: CRYPTO_CS: old router cert flag 0x4
Jan 6 21:09:15.820: CRYPTO_CS: new router cert flag 0x44
Jan 6 21:09:18.432: CRYPTO_CS: DB version 1
Jan 6 21:09:18.432: CRYPTO_CS: last issued serial number is 0x1
Jan 6 21:09:18.480: CRYPTO_CS: CRL file sub.crl exists.
Jan 6 21:09:18.480: CRYPTO_CS: Read 213 bytes from crl file sub.crl.
Jan 6 21:09:18.532: CRYPTO_CS: SCEP server started
Jan 6 21:09:18.532: CRYPTO_CS: exit FSM: new state enabled
Jan 6 21:09:18.536: CRYPTO_CS: cs config has been locked
Jan 6 21:09:18.536: CRYPTO_PKI: All enrollment requests completed for trustpoint sub.

```

If the certificate server fails to enable or if the certificate server has trouble handling the request that has been configured, you can use the **debug crypto pki server** command to troubleshoot the progress of an enrollment. This command can also be used to debug the root CA (turn it on at the root CA).

## Configuring a Certificate Server to Run in RA Mode

The Cisco IOS certificate server can act as an RA for a Cisco IOS CA or another third party CA. Read the details in Step 8 for more information about the **transparent** keyword option if a third-party CA is used.



**SUMMARY STEPS**

1. **enable**
2. **configure terminal**
3. **crypto pki trustpoint** *name*
4. **enrollment url** *url*
5. **subject-name** *x.500-name*
6. **exit**
7. **crypto pki server** *cs-label*
8. **mode ra** [**transparent**]
9. **auto-rollover** [*time-period*]
10. **grant auto rollover** {**ca-cert** | **ra-cert**}
11. **no shutdown**
12. **no shutdown**

**DETAILED STEPS**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<b>enable</b>  <b>Example:</b>  <pre>Router&gt; enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<b>Step 2</b>	<b>configure terminal</b>  <b>Example:</b>  <pre>Router# configure terminal</pre>	Enters global configuration mode.
<b>Step 3</b>	<b>crypto pki trustpoint</b> <i>name</i>  <b>Example:</b>  <pre>Router (config)# crypto pki trustpoint ra-server</pre>	Declares the trustpoint that your RA mode certificate server should use and enters ca-trustpoint configuration mode.
<b>Step 4</b>	<b>enrollment url</b> <i>url</i>  <b>Example:</b>  <pre>Router (ca-trustpoint)# enrollment url http://ca- server.company.com</pre>	Specifies the enrollment URL of the issuing CA certificate server (root certificate server).

	Command or Action	Purpose
Step 5	<p><b>subject-name</b> <i>x.500-name</i></p> <p><b>Example:</b></p> <pre>Router (ca-trustpoint)# subject-name cn=ioscs RA</pre>	<p>(Optional) Specifies the subject name the RA uses.</p> <p><b>Note</b> Include “cn=ioscs RA” or “ou=ioscs RA” in the subject name so that the issuing CA certificate server can recognize the RA (see Step 7 below).</p>
Step 6	<p><b>exit</b></p> <p><b>Example:</b></p> <pre>Router (ca-trustpoint)# exit</pre>	<p>Exits ca-trustpoint configuration mode.</p>
Step 7	<p><b>crypto pki server</b> <i>cs-label</i></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki server ra- server</pre>	<p>Enables a Cisco IOS certificate server and enters cs-server configuration mode.</p> <p><b>Note</b> The certificate server must have the same name as the trustpoint that was created in Step 3 above.</p>
Step 8	<p><b>mode ra</b> [<b>transparent</b>]</p> <p><b>Example:</b></p> <pre>Router(cs-server)# mode ra</pre>	<p>Places the PKI server into RA certificate server mode.</p> <p>Use the <b>transparent</b> keyword to allow the CA server in RA mode to interoperate with more than one type of CA server. When the <b>transparent</b> keyword is used, the original PKCS#10 enrollment message is not re-signed and is forwarded unchanged. This enrollment message makes the IOS RA certificate server work with CA servers like the Microsoft CA server.</p>
Step 9	<p><b>auto-rollover</b> [<i>time-period</i>]</p> <p><b>Example:</b></p> <pre>Router(cs-server)# auto-rollover 90</pre>	<p>(Optional) Enables the automatic CA certificate rollover functionality.</p> <ul style="list-style-type: none"> <li><i>time-period</i> --default is 30 days.</li> </ul>
Step 10	<p><b>grant auto rollover</b> { <b>ca-cert</b>   <b>ra-cert</b> }</p> <p><b>Example:</b></p> <pre>Router(cs-server)# grant auto rollover ra-cert</pre>	<p>(Optional) Automatically grants reenrollment requests for subordinate CAs and RA-mode CAs without operator intervention.</p> <ul style="list-style-type: none"> <li><b>ca-cert</b> --Specifies that the subordinate CA rollover certificate is automatically granted.</li> <li><b>ra-cert</b> --Specifies that the RA-mode CA rollover certificate is automatically granted.</li> </ul> <p>If this is the first time that a subordinate certificate server is enabled and enrolled, the certificate request must be manually granted.</p>

Command or Action	Purpose
<b>Step 11</b> <b>no shutdown</b>  <b>Example:</b> <pre>Router(cs-server)# no shutdown</pre>	Enables the certificate server.  <b>Note</b> After this command is issued, the RA automatically enrolls with the root certificate server. After the RA certificate has been successfully received, you must issue the <b>no shutdown</b> command again, which reenables the certificate server.
<b>Step 12</b> <b>no shutdown</b>  <b>Example:</b> <pre>Router(cs-server)# no shutdown</pre>	Reenables the certificate server.

## Configuring the Root Certificate Server to Delegate Enrollment Tasks to the RA Mode Certificate Server

Perform the following steps on the router that is running the issuing certificate server; that is, configure the root certificate server that is delegating enrollment tasks to the RA mode certificate server.



### Note

Granting enrollment requests for an RA is essentially the same process as granting enrollment requests for client devices--except that enrollment requests for an RA are displayed in the section "RA certificate requests" of the command output for the **crypto pki server info-requests** command.

### SUMMARY STEPS

1. **enable**
2. **crypto pki server *cs-label* info requests**
3. **crypto pki server *cs-label* grant *req-id***
4. **configure terminal**
5. **crypto pki server *cs-label***
6. **grant ra-auto**

### DETAILED STEPS

Command or Action	Purpose
<b>Step 1</b> <b>enable</b>  <b>Example:</b> <pre>Router &gt; enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>

Command or Action	Purpose
<p><b>Step 2</b> <code>crypto pki server <i>cs-label</i> info requests</code></p> <p><b>Example:</b></p> <pre>Router# crypto pki server root-server info requests</pre>	<p>Displays the outstanding RA certificate request.</p> <p><b>Note</b> This command is issued on the router that is running the issuing certificate server.</p>
<p><b>Step 3</b> <code>crypto pki server <i>cs-label</i> grant <i>req-id</i></code></p> <p><b>Example:</b></p> <pre>Router# crypto pki server root-server grant 9</pre>	<p>Grants the pending RA certificate request.</p> <p><b>Note</b> Because the issuing certificate server delegates the enrollment request verification task to the RA, you must pay extra attention to the RA certificate request before granting it.</p>
<p><b>Step 4</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 5</b> <code>crypto pki server <i>cs-label</i></code></p> <p><b>Example:</b></p> <pre>Router (config)# crypto pki server root-server</pre>	<p>Enables a Cisco IOS certificate server and enters cs-server configuration mode.</p>
<p><b>Step 6</b> <code>grant ra-auto</code></p> <p><b>Example:</b></p> <pre>Router(cs-server)# grant ra-auto</pre>	<p>(Optional) Specifies that all enrollment requests from an RA are to be granted automatically.</p> <p><b>Note</b> For the <code>grant ra-auto</code> command to work, you have to include “cn=ioscs RA” or “ou=ioscs RA” in the subject name of the RA certificate. (See Step 2 above.)</p>

## What to Do Next

After you have configured a certificate server, you can use the preconfigured default values or specify values through the CLI for the functionality of the certificate server. If you choose to specify values other than the defaults, see the following section, “[Configuring Certificate Server Functionality, page 171.](#)”

## Configuring Certificate Server Functionality

After you have enabled a certificate server and are in certificate server configuration mode, use any of the steps in this task to configure basic certificate server functionality values other than the default values.

- [Certificate Server Default Values and Recommended Values, page 172](#)
- [Certificate Server File Storage and Publication Locations, page 172](#)

## Certificate Server Default Values and Recommended Values

The default values for a certificate server are intended to address a relatively small network (of about ten devices). For example, the database settings are minimal (through the **database level minimal** command) and the certificate server handles all CRL requests through SCEP. For larger networks, it is recommended that you use either the database setting “names” or “complete” (as described in the **database level** command) for possible audit and revocation purposes. Depending on the CRL checking policy, you should also use an external CDP in a larger network.

## Certificate Server File Storage and Publication Locations

You have the flexibility to store file types to different storage and publication locations.

### SUMMARY STEPS

1. **database url** *root-url*
2. **database url** {**cnm** | **crl** | **crt** | **p12** | **pem** | **ser**} *root-url*
3. **database url** {**cnm** | **crl** | **crt**} **publish** *root-url*
4. **database level** {**minimal** | **names** | **complete**}
5. **database username** *username* [**password** [*encr-type*] *password*]
6. **database archive** {**pkcs12** | **pem**}[**password** *encr-type*] *password* ]
7. **issuer-name** *DN-string*
8. **lifetime** {**ca-certificate** | **certificate**} *time*
9. **lifetime crl** *time*
10. **lifetime enrollment-request** *time*
11. **cdp-url** *url*
12. **no shutdown**

### DETAILED STEPS

	Command or Action	Purpose
Step 1	<b>database url</b> <i>root-url</i>  <b>Example:</b>  <pre>Router (cs-server)# database url tftp://cert-svr-db.company.com</pre>	Specifies the primary location where database entries for the certificate server are written.  If this command is not specified, all database entries are written to NVRAM.
Step 2	<b>database url</b> { <b>cnm</b>   <b>crl</b>   <b>crt</b>   <b>p12</b>   <b>pem</b>   <b>ser</b> } <i>root-url</i>  <b>Example:</b>  <pre>Router (cs-server)# database url ser nvram:</pre>	Specifies certificate server critical file storage location by file type.  <b>Note</b> If this command is not specified, all critical files are stored to the primary location if specified. If the primary location is not specified, all critical files are stored to NVRAM.

Command or Action	Purpose
<p><b>Step 3</b> <b>database url { cnm   crl   crt } publish <i>root-url</i></b></p> <p><b>Example:</b></p> <pre>Router (cs-server)# database url crl publish tftp://csdb_specific_crl_files.company.com</pre>	<p>Specifies certificate server publish location by file type.</p> <p><b>Note</b> If this command is not specified, all publish files are stored to the primary location if specified. If the primary location is not specified, all publish files are stored to NVRAM.</p>
<p><b>Step 4</b> <b>database level { minimal   names   complete }</b></p> <p><b>Example:</b></p> <pre>Router (cs-server)# database level complete</pre>	<p>Controls what type of data is stored in the certificate enrollment database.</p> <ul style="list-style-type: none"> <li>• <b>minimal</b> --Enough information is stored only to continue issuing new certificates without conflict; the default value.</li> <li>• <b>names</b> --In addition to the information given in the minimal level, the serial number and subject name of each certificate.</li> <li>• <b>complete</b> --In addition to the information given in the minimal and names levels, each issued certificate is written to the database.</li> </ul> <p><b>Note</b> The <b>complete</b> keyword produces a large amount of information; if it is issued, you should also specify an external TFTP server in which to store the data through the <b>database url</b> command.</p>
<p><b>Step 5</b> <b>database username <i>username</i> [password [<i>encr-type</i>] <i>password</i>]</b></p> <p><b>Example:</b></p> <pre>Router (cs-server)# database username user password PASSWORD</pre>	<p>(Optional) Sets a username and password when a user is required to access a primary certificate enrollment database storage location.</p>
<p><b>Step 6</b> <b>database archive { pkcs12   pem } [password <i>encr-type</i>] <i>password</i> ]</b></p> <p><b>Example:</b></p> <pre>Router (cs-server)# database archive pem</pre>	<p>(Optional) Sets the CA key and CA certificate archive format and password to encrypt the file.</p> <p>The default value is <b>pkcs12</b>, so if this subcommand is not configured, autoarchiving continues, and the PKCS12 format is used.</p> <ul style="list-style-type: none"> <li>• The password is optional. If it is not configured, you are prompted for the password when the server is turned on for the first time.</li> </ul> <p><b>Note</b> It is recommended that you remove the password from the configuration after the archive is finished.</p>

Command or Action	Purpose
<p><b>Step 7</b> <code>issuer-name</code> <i>DN-string</i></p> <p><b>Example:</b></p> <pre>Router (cs-server)# issuer-name my-server</pre>	<p>(Optional) Sets the CA issuer name to the specified distinguished name (<i>DN-string</i>). The default value is as follows: <code>issuer-name cn={cs-label}</code>.</p>
<p><b>Step 8</b> <code>lifetime</code> {<code>ca-certificate</code>   <code>certificate</code>} <i>time</i></p> <p><b>Example:</b></p> <pre>Router (cs-server)# lifetime certificate 888</pre>	<p>(Optional) Specifies the lifetime, in days, of a CA certificate or a certificate.</p> <p>Valid values range from 1 day to 1825 days. The default CA certificate lifetime is 3 years; the default certificate lifetime is 1 year. The maximum certificate lifetime is 1 month less than the lifetime of the CA certificate.</p>
<p><b>Step 9</b> <code>lifetime crl</code> <i>time</i></p> <p><b>Example:</b></p> <pre>Router (cs-server)# lifetime crl 333</pre>	<p>(Optional) Defines the lifetime, in hours, of the CRL that is used by the certificate server.</p> <p>Maximum lifetime value is 336 hours (2 weeks). The default value is 168 hours (1 week).</p>
<p><b>Step 10</b> <code>lifetime enrollment-request</code> <i>time</i></p> <p><b>Example:</b></p> <pre>Router (cs-server)# lifetime enrollment-request 888</pre>	<p>(Optional) Specifies how long an enrollment request should stay in the enrollment database before being removed.</p> <p>Maximum lifetime is 1000 hours.</p>
<p><b>Step 11</b> <code>cdp-url</code> <i>url</i></p> <p><b>Example:</b></p> <pre>Router (cs-server)# cdp-url http://my-cdp.company.com</pre>	<p>(Optional) Defines the CDP location to be used in the certificates that are issued by the certificate server.</p> <ul style="list-style-type: none"> <li>The URL must be an HTTP URL.</li> </ul> <p>If you have PKI clients that are not running Cisco IOS software and that do not support a SCEP GetCRL request, use the following URL format:</p> <pre>http://server.company.com/certEnroll/filename.crl</pre> <p>Or, if your Cisco IOS certificate server is also configured as your CDP, use the following URL format</p> <pre>http://cs-addr/cgi-bin/pkiclient.exe?operation=GetCRL</pre> <p>where <i>cs-addr</i> is the location of the certificate server.</p> <p>In order to force the parser to retain the embedded question mark within the specified location, enter Ctrl-v prior to the question mark. If this action is not taken, CRL retrieval through HTTP returns an error message.</p> <p><b>Note</b> Although this command is optional, it is strongly recommended for any deployment scenario.</p>

Command or Action	Purpose
<b>Step 12</b> <code>no shutdown</code>  <b>Example:</b>  Router (cs-server)# no shutdown	Enables the certificate server.  You should issue this command only after you have completely configured your certificate server.

### Examples

The following example shows how to configure a CDP location where the PKI clients do not support SCEP GetCRL requests:

```
Router(config)# crypto pki server aaa
Router(cs-server)# database level minimum
Router(cs-server)# database url tftp://10.1.1.1/username1/
Router(cs-server)# issuer-name CN=aaa
```

```
Router(cs-server)# cdp-url http://server.company.com/certEnroll/aaa.crl
```

After a certificate server has been enabled on a router, the `show crypto pki server` command displays the following output:

```
Router# show crypto pki server
Certificate Server status:enabled, configured
Granting mode is:manual
Last certificate issued serial number:0x1
CA certificate expiration timer:19:31:15 PST Nov 17 2006
CRL NextUpdate timer:19:31:15 PST Nov 25 2003
Current storage dir:nvram:
Database Level:Minimum - no cert data written to storage
```

## Working with Automatic CA Certificate Rollover

- [Starting Automated CA Certificate Rollover Immediately](#), page 175
- [Requesting a Certificate Server Client Rollover Certificate](#), page 176
- [Exporting a CA Rollover Certificate](#), page 177

### Starting Automated CA Certificate Rollover Immediately

Use this task to initiate the automated CA certificate rollover process immediately on your root CA server.

#### SUMMARY STEPS

1. `enable`
2. `configure terminal`
3. `crypto pki server cs-label rollover cancel ]]`



## DETAILED STEPS

Command or Action	Purpose
<b>Step 1 enable</b>  <b>Example:</b> <pre>Router&gt; enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
<b>Step 2 configure terminal</b>  <b>Example:</b> <pre>Router# configure terminal</pre>	Enters global configuration mode.
<b>Step 3 crypto pki server <i>cs-label</i> rollover cancel ]]</b>  <b>Example:</b> <pre>Router(config)# crypto pki server mycs rollover</pre>	Immediately starts the CA certificate rollover process by generating a shadow CA certificate.  To delete the CA certificate rollover certificate and keys, use the <b>cancel</b> keyword.

## Requesting a Certificate Server Client Rollover Certificate

Use this task to request a certificate server client's rollover certificate.

## SUMMARY STEPS

- enable
- configure terminal
- crypto pki server *cs-label* rollover request pkcs10 terminal

## DETAILED STEPS

Command or Action	Purpose
<b>Step 1 enable</b>  <b>Example:</b> <pre>Router&gt; enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
<b>Step 2 configure terminal</b>  <b>Example:</b> <pre>Router# configure terminal</pre>	Enters global configuration mode.

Command or Action	Purpose
<p><b>Step 3</b> <code>crypto pki server <i>cs-label</i> rollover request pkcs10 terminal</code></p> <p><b>Example:</b></p> <pre>Router(config)# crypto pki server mycs rollover request pkcs10 terminal</pre>	<p>Requests a client rollover certificate from the server.</p>

**Example**

The following example shows a rollover certificate request being inputted into the server:

```
Router# crypto pki server mycs rollover request pkcs10 terminal

% Enter Base64 encoded or PEM formatted PKCS10 enrollment request.
% End with a blank line or "quit" on a line by itself.
-----BEGIN CERTIFICATE REQUEST-----
MIIBUTCBuwIBADASMRawDgYDVQQDEwdOZXdsb290MIGfMA0GCSqGSIb3DQEBAQUA
A4GNADCBiQKBgQDMHeev1ERSs320zbLQQk+3lhV/R2HpYQ/im6uT1jkJf5iy0UPR
wF/Xl6yUNmG+ObiGiW9fsASF0nxZw+f07d2X2yh1PakfvF2wbP27C/sgJNOw9uPf
sBxEc40Xe0d5FMh0YKOSAShfZYKOflnyQR2Drmm2x/33QGo15QyRvjkewQIDAQAB
oAAwDQYJKoZIhvcNAQEEBQADgYEALM90r4d79X6vxhd0qjuYJXfBCOvv4FNyFs jr
aBS/y6CnNVYySF8UBUohXYIGTWf4I4+s j6i8gYfoFUW1/L82djs18TLrUr6wpCOs
RqfAfps7HW1e4cizOfjAUU+C71NcobCAhwF1o6q2nIEjpQ/2yfk9O7sb3SCJZBfe
eW3tyCo=
-----END CERTIFICATE REQUEST-----
```

**Exporting a CA Rollover Certificate**

Use this task to export a CA rollover certificate.

**SUMMARY STEPS**

1. enable
2. configure terminal
3. `crypto pki export trustpoint pem {terminal | url url} [rollover]`

**DETAILED STEPS**

Command or Action	Purpose
<p><b>Step 1</b> <code>enable</code></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<p><b>Step 2</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Router# configure terminal</pre>	<p>Enters global configuration mode.</p>

Command or Action	Purpose
<b>Step 3</b> <code>crypto pki export trustpoint pem {terminal   url url} [rollover]</code>	Exports a CA shadow certificate.
<b>Example:</b>	
<pre>Router(config)# crypto pki export mycs pem terminal rollover</pre>	

## Maintaining Verifying and Troubleshooting the Certificate Server Certificates and the CA

- [Managing the Enrollment Request Database, page 178](#)
- [Removing Requests from the Enrollment Request Database, page 180](#)
- [Deleting a Certificate Server, page 181](#)
- [Verifying and Troubleshooting Certificate Server and CA Status, page 182](#)
- [Verifying CA Certificate Information, page 183](#)

### Managing the Enrollment Request Database

SCEP supports two client authentication mechanisms--manual and preshared key. Manual enrollment requires the administrator at the CA server to specifically authorize the enrollment requests; enrollment using preshared keys allows the administrator to preauthorize enrollment requests by generating a one-time password (OTP).

Use any of the optional steps within this task to help manage the enrollment request database by performing functions such as specifying enrollment processing parameters that are to be used by SCEP and by controlling the run-time behavior or the certificate server.

#### SUMMARY STEPS

1. `enable`
2. `crypto pki server cs-label grant all req-id`
3. `crypto pki server cs-label reject {all req-id`
4. `crypto pki server cs-label password generate minutes`
5. `crypto pki server cs-label revoke certificate-serial-number`
6. `crypto pki server cs-label request pkcs10 {url | terminal} [base64] pem`
7. `crypto pki server cs-label info crl`
8. `crypto pki server cs-label info requests`

## DETAILED STEPS

Command or Action	Purpose
<p><b>Step 1</b> <code>enable</code></p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
<p><b>Step 2</b> <code>crypto pki server <i>cs-label</i> grant all <i>req-id</i></code></p> <p><b>Example:</b></p> <pre>Router# crypto pki server mycs grant all</pre>	<p>Grants all or specific SCEP requests.</p>
<p><b>Step 3</b> <code>crypto pki server <i>cs-label</i> reject {all <i>req-id</i>}</code></p> <p><b>Example:</b></p> <p><b>Example:</b></p> <pre>Router# crypto pki server mycs reject all</pre>	<p>Rejects all or specific SCEP requests.</p>
<p><b>Step 4</b> <code>crypto pki server <i>cs-label</i> password generate <i>minutes</i></code></p> <p><b>Example:</b></p> <pre>Router# crypto pki server mycs password generate 75</pre>	<p>Generates a OTP for SCEP requests.</p> <ul style="list-style-type: none"> <li><i>minutes</i> --Length of time, in minutes, that the password is valid. Valid values range from 1 to 1440 minutes. The default is 60 minutes.</li> </ul> <p><b>Note</b> Only one OTP is valid at a time; if a second OTP is generated, the previous OTP is no longer valid.</p>
<p><b>Step 5</b> <code>crypto pki server <i>cs-label</i> revoke <i>certificate-serial-number</i></code></p> <p><b>Example:</b></p> <pre>Router# crypto pki server mycs revoke 3</pre>	<p>Revokes a certificate on the basis of its serial number.</p> <ul style="list-style-type: none"> <li><i>certificate-serial-number</i> --One of the following options: <ul style="list-style-type: none"> <li>A string with a leading 0x, which is treated as a hexadecimal value</li> <li>A string with a leading 0 and no x, which is treated as octal</li> <li>All other strings, which are treated as decimal</li> </ul> </li> </ul>

Command or Action	Purpose
<p><b>Step 6</b> <code>crypto pki server <i>cs-label</i> request pkcs10 {<i>url</i>   <i>terminal</i>} [<i>base64</i>] <i>pem</i></code></p> <p><b>Example:</b></p> <pre>Router# crypto pki server mycs request pkcs10 terminal pem</pre>	<p>Manually adds either a base64-encoded or PEM-formatted PKCS10 certificate enrollment request to the request database.</p> <p>After the certificate is granted, it is displayed on the console terminal using base64 encoding.</p> <ul style="list-style-type: none"> <li>• <b>pem</b> --Specifies the certificate that is returned with PEM headers automatically added to the certificate after the certificate is granted, regardless of whether PEM headers were used in the request.</li> <li>• <b>base64</b> --Specifies the certificate that is returned without privacy-enhanced mail (PEM) headers, regardless of whether PEM headers were used in the request.</li> </ul>
<p><b>Step 7</b> <code>crypto pki server <i>cs-label</i> info <i>crl</i></code></p> <p><b>Example:</b></p> <pre>Router# crypto pki server mycs info crl</pre>	<p>Displays information regarding the status of the current CRL.</p>
<p><b>Step 8</b> <code>crypto pki server <i>cs-label</i> info requests</code></p> <p><b>Example:</b></p> <pre>Router# crypto pki server mycs info requests</pre>	<p>Displays all outstanding certificate enrollment requests.</p>

## Removing Requests from the Enrollment Request Database

After the certificate server receives an enrollment request, the server can leave the request in a pending state, reject it, or grant it. The request stays in the enrollment request database for 1 week until the client polls the certificate server for the result of the request. If the client exits and never polls the certificate server, you can remove either individual requests or all requests from the database.

Use this task to remove requests from the database and allow the server to be returned to a clean slate with respect to the keys and transaction IDs. Also, you can use this task to help troubleshoot a SCEP client that may not be behaving properly.

### SUMMARY STEPS

1. `enable`
2. `crypto pki server cs-label remove {all | req-id}`

**DETAILED STEPS**

Command or Action	Purpose
<p><b>Step 1</b> enable</p> <p><b>Example:</b></p> <pre>Router&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
<p><b>Step 2</b> <code>crypto pki server <i>cs-label</i> remove {all   req-id}</code></p> <p><b>Example:</b></p> <pre>Router# crypto pki server mycs remove 15</pre>	<p>Removes enrollment requests from the enrollment request database.</p>

**Deleting a Certificate Server**

Users can delete a certificate server from the PKI configuration if they no longer want it on the configuration. Typically, a subordinate certificate server or an RA is being deleted. However, users may delete a root certificate server if they are moving it to another device through the archived RSA keys.

Perform this task to delete a certificate server from your PKI configuration.



**Note**

When a certificate server is deleted, the associated trustpoint and key are also deleted.

**SUMMARY STEPS**

- enable
- configure terminal
- no crypto pki server *cs-label*

**DETAILED STEPS**

Command or Action	Purpose
<p><b>Step 1</b> enable</p> <p><b>Example:</b></p> <pre>Router &gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>

Command or Action	Purpose
<b>Step 2</b> <code>configure terminal</code>  <b>Example:</b>  <pre>Router # configure terminal</pre>	Enters global configuration mode.
<b>Step 3</b> <code>no crypto pki server <i>cs-label</i></code>  <b>Example:</b>  <pre>Router (config)# no crypto pki server mycs</pre>	Deletes a certificate server and associated trustpoint and key.

## Verifying and Troubleshooting Certificate Server and CA Status

Use any of the following optional steps to verify the status of the certificate server or the CA.

### SUMMARY STEPS

1. `enable`
2. `debug crypto pki server`
3. `dir filesystem :`

### DETAILED STEPS

Command or Action	Purpose
<b>Step 1</b> <code>enable</code>  <b>Example:</b>  <pre>Router&gt; enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<b>Step 2</b> <code>debug crypto pki server</code>  <b>Example:</b>  <pre>Router# debug crypto pki server</pre>	Enables debugging for a crypto PKI certificate server. <ul style="list-style-type: none"> <li>• This command can be used for monitoring the progress of an enrollment and for troubleshooting if the certificate server fails to respond or if the certificate server has trouble handling the request that has been configured.</li> </ul>
<b>Step 3</b> <code>dir filesystem :</code>  <b>Example:</b>  <pre>Router# dir slot0:</pre>	Displays a list of files on a file system. <ul style="list-style-type: none"> <li>• This command can be used to verify the certificate server autoarchived file if the <b>database url</b> command was entered to point to a local file system. You should be able to at least see “<i>cs-label .ser</i>” and “<i>cs-label .crl</i>” files in the database.</li> </ul>

## Verifying CA Certificate Information

To obtain information relating to the CA certificates including the certificate server rollover process, rollover certificates, and timers, you may use any of the following commands.



### Note

These commands are not exclusive to shadow certificate information. If no shadow certificate exists, the following commands display the active certificate information.

### SUMMARY STEPS

1. The **crypto pki certificate chain** command can be used to view the certificate chain details and to distinguish the current active certificate from the rollover certificate in the certificate chain. The following example shows a certificate chain with an active CA certificate and a shadow, or rollover, certificate:
2. The **crypto pki server info requests** command displays all outstanding certificate enrollment requests. The following example shows the output for shadow PKI certificate information requests:
3. The **show crypto pki certificates** command displays information about your certificate, the certification authority certificate, shadow certificates, and any registration authority certificates. The following example displays the certificate of the router and the certificate of the CA. There is no shadow certificate available. A single, general-purpose RSA key pair was previously generated, and a certificate was requested but not received for that key pair. Note that the certificate status of the router shows “Pending.” After the router receives its certificate from the CA, the Status field changes to “Available” in the **show** output.
4. The **show crypto pki server** command displays the current state and configuration of the certificate server. The following example shows that the certificate server “routercs” has rollover configured. The CA auto-rollover time has occurred and the rollover, or shadow, PKI certificate is available. The status shows the rollover certificate fingerprint and rollover CA certificate expiration timer information.
5. The **show crypto pki trustpoints** command displays the trustpoints that are configured in the router. The following output shows that a shadow CA certificate is available and shows the SCEP capabilities reported during the last enrollment operation:

### DETAILED STEPS

#### Step 1

The **crypto pki certificate chain** command can be used to view the certificate chain details and to distinguish the current active certificate from the rollover certificate in the certificate chain. The following example shows a certificate chain with an active CA certificate and a shadow, or rollover, certificate:

#### Example:

```
Router(config)# crypto pki certificate chain mica
certificate 06
certificate ca 01
! This is the peer's shadow PKI certificate.
certificate rollover 0B
! This is the CA shadow PKI certificate
certificate rollover ca 0A
```

#### Step 2

The **crypto pki server info requests** command displays all outstanding certificate enrollment requests. The following example shows the output for shadow PKI certificate information requests:



**Example:**

```

Router# crypto pki server myca info requests
Enrollment Request Database:
RA certificate requests:
  ReqID  State      Fingerprint                               SubjectName
-----
RA rollover certificate requests:
  ReqID  State      Fingerprint                               SubjectName
-----
Router certificates requests:
  ReqID  State      Fingerprint                               SubjectName
-----
1      pending   A426AF07FE3A4BB69062E0E47198E5BF hostname=client
Router rollover certificates requests:
  ReqID  State      Fingerprint                               SubjectName
-----
2      pending   B69062E0E47198E5BFA426AF07FE3A4B hostname=client

```

**Step 3**

The **show crypto pki certificates** command displays information about your certificate, the certification authority certificate, shadow certificates, and any registration authority certificates. The following example displays the certificate of the router and the certificate of the CA. There is no shadow certificate available. A single, general-purpose RSA key pair was previously generated, and a certificate was requested but not received for that key pair. Note that the certificate status of the router shows “Pending.” After the router receives its certificate from the CA, the Status field changes to “Available” in the **show** output.

**Example:**

```

Router# show crypto pki certificates
Certificate
  Subject Name
    Name: myrouter.example.com
    IP Address: 192.0.2.1
    Serial Number: 04806682
    Status: Pending
    Key Usage: General Purpose
    Fingerprint: 428125BD A3419600 3F6C7831 6CD8FA95 00000000
CA Certificate
  Status: Available
  Certificate Serial Number: 3051DF7123BEE31B8341DFE4B3A338E5F
  Key Usage: Not Set

```

**Step 4**

The **show crypto pki server** command displays the current state and configuration of the certificate server. The following example shows that the certificate server “routercs” has rollover configured. The CA auto-rollover time has occurred and the rollover, or shadow, PKI certificate is available. The status shows the rollover certificate fingerprint and rollover CA certificate expiration timer information.

**Example:**

```

Router# show crypto pki server
Certificate Server routercs:
  Status: enabled, configured
  Issuer name: CN=walnutcs
  CA cert fingerprint: 800F5944 74337E5B C2DF6C52 9A7B1BDB
  Granting mode is: auto
  Last certificate issued serial number: 0x7
  CA certificate expiration timer: 22:10:29 GMT Jan 29 2007
  CRL NextUpdate timer: 21:50:56 GMT Mar 5 2004
  Current storage dir: nvram:
  Database Level: Minimum - no cert data written to storage
  Rollover status: available for rollover

```

```
Rollover CA cert fingerprint: 6AAF5944 74227A5B 23DF3E52 9A7F1FEF
Rollover CA certificate expiration timer: 22:10:29 GMT Jan 29 2017
```

**Step 5** The **show crypto pki trustpoints** command displays the trustpoints that are configured in the router. The following output shows that a shadow CA certificate is available and shows the SCEP capabilities reported during the last enrollment operation:

**Example:**

```
Router# show crypto pki trustpoints
Trustpoint vpn:
  Subject Name:
  cn=Cisco SSL CA
  o=Cisco Systems
  Serial Number: 0FFE8BDC1B6F6D9D0EA7875875E4C695
  Certificate configured.
  Rollover certificate configured.
  Enrollment Protocol:
  SCEPv1, PKI Rollover
```

## Configuration Examples for Using a Certificate Server

### Configuring Specific Storage and Publication Locations Examples

The following example shows the configuration of a minimal local file system, so that the certificate server can respond quickly to certificate requests. The .ser and .crl files are stored on the local Cisco IOS file system for fast access, and a copy of all of the .crt files are published to a remote location for long-term logging.

```
crypto pki server myserver
  !Pick your database level.
  database level minimum
  !Specify a location for the .crt files that is different than the default
local      !Cisco IOS file system.
  database url crt publish http://url username user1 password secret
```



**Note**

Free space on the local file system should be monitored, in case the .crl file becomes too large.

The following example shows the configuration of a primary storage location for critical files, a specific storage location for the critical file serial number file, the main certificate server database file, and a password protected file publication location for the CRL file:

```
Router(config)# crypto pki server mycs
Router(cs-server)# database url ftp://cs-db.company.com

!
% Server database url was changed. You need to move the
% existing database to the new location.
!
Router(cs-server)# database url ser nvram:
Router(cs-server)# database url crt publish ftp://crl.company.com username myname
password mypassword
```

```
Router(cs-server)# end
```

The following output displays the specified primary storage location and critical file storage locations specified:

```
Router# show
Sep  3 20:19:34.216: %SYS-5-CONFIG_I: Configured from console by user on console
Router# show crypto pki server
Certificate Server mycs:
  Status: disabled
  Server's configuration is unlocked (enter "no shut" to lock it)
  Issuer name: CN=mycs
  CA cert fingerprint: -Not found-
  Granting mode is: manual
  Last certificate issued serial number: 0x0
  CA certificate expiration timer: 00:00:00 GMT Jan 1 1970
  CRL not present.
  Current primary storage dir: ftp://cs-db.company.com
  Current storage dir for .ser files: nvram:
  Database Level: Minimum - no cert data written to storage
The following output displays all storage and publication locations. The serial number file (.ser) is stored in NVRAM. The CRL file will be published to ftp://crl.company.com with a username and password. All other critical files will be stored to the primary location, ftp://cs-db.company.com.
Router# show running-config

section crypto pki server
crypto pki server mycs shutdown database url ftp://cs-db.company.com
database url crl publish ftp://crl.company.com username myname password 7
12141C0713181F13253920
database url ser nvram:
Router#
```

## Removing Enrollment Requests from the Enrollment Request Database Examples

The following examples show both the enrollment requests that are currently in the enrollment request database and the result after one of the enrollment requests has been removed from the database.

### Enrollment Request Currently in the Enrollment Request Database

The following example shows that the **crypto pki server info requests** command has been used to display the enrollment requests that are currently in the Enrollment Request Database:

```
Router# crypto pki server myserver info requests
Enrollment Request Database:
RA certificate requests:
ReqID      State      Fingerprint                                     SubjectName
-----
Router certificates requests:
ReqID      State      Fingerprint                                     SubjectName
-----
2          pending   1B07F3021DAAB0F19F35DA25D01D8567             hostname=host1.company.com
1          denied    5322459D2DC70B3F8EF3D03A795CF636             hostname=host2.company.com
```

### crypto pki server remove Command Used to Remove One Enrollment Request

The following example shows that the **crypto pki server remove** command has been used to remove Enrollment Request 1:

```
Router# crypto pki server myserver remove 1
```

### Enrollment Request Database After the Removal of One Enrollment Request

The following example shows the result of the removal of Enrollment Request 1 from the Enrollment Request Database:

```
Router# crypto pki server mycs info requests
Enrollment Request Database:
RA certificate requests:
ReqID      State      Fingerprint                                     SubjectName
-----
Router certificates requests:
ReqID      State      Fingerprint                                     SubjectName
-----
2          pending    1B07F3021DAAB0F19F35DA25D01D8567             hostname=host1.company.com
```

## Autoarchiving the Certificate Server Root Keys Examples

The following output configurations and examples show what you might see if the **database archive** command has not been configured (that is, configured using the default value); if the **database archive** command has been configured to set the CA certificate and CA key archive format as PEM, without configuring a password; and if the **database archive** command has been configured to set the CA certificate and CA key archive format as PKCS12, with a password configured. The last example is sample content of a PEM-formatted archive file.

### database archive Command Not Configured



#### Note

The default is PKCS12, and the prompt for the password appears after the **no shutdown** command has been issued.

```
Router (config)# crypto pki server myserver
Router (cs-server)# no shutdown
% Generating 1024 bit RSA keys ...[OK]
% Ready to generate the CA certificate.
%Some server settings cannot be changed after CA certificate generation.
Are you sure you want to do this? [yes/no]: y
% Exporting Certificate Server signing certificate and keys...
! Note the next two lines, which are asking for a password.
% Please enter a passphrase to protect the private key.
Password:
% Certificate Server enabled.
Router (cs-server)# end
Router# dir nvram:
Directory of nvram:/
 125  -rw-          1693          <no date>  startup-config
 126  ----              5          <no date>  private-config
   1  -rw-           32          <no date>  myserver.ser
   2  -rw-          214          <no date>  myserver.crl
! Note the next line, which indicates PKCS12 format.
   3  -rw-         1499          <no date>  myserver.p12
```

### database archive Command and pem Keyword Configured



#### Note

The prompt for the password appears after the **no shutdown** command has been issued.

```
Router (config)# crypto pki server myserver
Router (cs-server)# database archive pem
Router (cs-server)# no shutdown
```

```

% Generating 1024 bit RSA keys ...[OK]
% Ready to generate the CA certificate.
%Some server settings cannot be changed after CA certificate generation.
Are you sure you want to do this? [yes/no]: y
% Exporting Certificate Server signing certificate and keys...
!Note the next two lines, which are asking for a password.
% Please enter a passphrase to protect the private key.
Password:
% Certificate Server enabled.
Router (cs-server)# end
Router# dir nvram
Directory of nvram:/
 125  -rw-          1693          <no date>  startup-config
 126  ----           5          <no date>  private-config
   1  -rw-          32          <no date>  myserver.ser
   2  -rw-         214          <no date>  myserver.crl
! Note the next line showing that the format is PEM.
   3  -rw-         1705          <no date>  myserver.pem

```

### database archive Command and pkcs12 Keyword (and Password) Configured



#### Note

When the password is entered, it is encrypted. However, it is recommended that you remove the password from the configuration after the archive has finished.

```

Router (config)# crypto pki server myserver
Router (cs-server)# database archive pkcs12 password cisco123
Router (cs-server)# no shutdown

% Generating 1024 bit RSA keys ...[OK]
% Ready to generate the CA certificate.
% Some server settings cannot be changed after CA certificate generation.
Are you sure you want to do this? [yes/no]: y
% Exporting Certificate Server signing certificate and keys...
! Note that you are not being prompted for a password.
% Certificate Server enabled.
Router (cs-server)# end
Router# dir nvram:
Directory of nvram:/
 125  -rw-          1693          <no date>  startup-config
 126  ----           5          <no date>  private-config
   1  -rw-          32          <no date>  myserver.ser
   2  -rw-         214          <no date>  myserver.crl
! Note that the next line indicates that the format is PKCS12.
   3  -rw-         1499          <no date>  myserver.p12

```

### PEM-Formatted Archive

The following sample output shows that autoarchiving has been configured in PEM file format. The archive consists of the CA certificate and the CA private key. To restore the certificate server using the backup, you would have to import the PEM-formatted CA certificate and CA key individually.



#### Note

In addition to the CA certificate and CA key archive files, you should also back up the serial file (.ser) and the CRL file (.crl) regularly. The serial file and the CRL file are both critical for CA operation if you need to restore your certificate server.

```

Router# more nvram:mycs.pem
-----BEGIN CERTIFICATE-----
MIIB9zCCAWCgAwIBAgIBATANBqkqhkiG9w0BAQQFADAPMQ0wCwYDVQQDEwRteWNz
MB4XDTA0MDgyNzAyMzI0N1oXDTA3MDgyNzAyMzI0N1owDzENMAsGAlUEAxMEbXlj
czCBnzANBqkqhkiG9w0BAQEFAAOBjQAwYkCgYEA1lZpKP4nGDJHgPkpYSkix7lD
nr23aMlZ9Kz5oo/qTBxeZ8mu jppjYcZ0T8AZvoOiCuDnYML796ZwpkMgjz1aZzBzL+

```

```
BtuVvllsEOfhC+u/Ol/vxfGG5xpshoz/F5J3xdg5ZZuWWuIDAUYu9+QbI5feuG04
Z/BiPIb4AmGTP4B2MM0CAwEAAAnjMGewDwYDVR0TAQH/BAUwAwEB/zAOBgNVHQ8B
Af8EBAMCAyYwHwYDVR0jBBgwFoAUKi/cuK6wkz+ZswVtb06vUJboEeEwHQYDVR0O
BBYEFcov3LiusJM/mbMFbW9Or1CW6BHhMA0GCSqGSIb3DQEBAUAUA4GBAKLOmoE2
4+NeOKEXMCXG1jcohK702HrkFfl/vpK0+q92PTnMUFhxL0qI8pWIq5CCqC7heace
OrTv2zcUAoH4rzz3Rc2USIXkDokWWQMLujsMm/SLIeHit0G5uj//GCcbgK20MAW6
ymf7+Tmb1SFljWzstoUXC2hLnsJIMq/Kffad
-----END CERTIFICATE-----
```

```
!The private key is protected by the password that is
configured in "database archive pem password pwd" or that
is entered when you are prompted for the password.
```

```
-----BEGIN RSA PRIVATE KEY-----
Proc-Type: 4,ENCRYPTED
DEK-Info: DES-EDE3-CBC,106CE91FFD0A075E
```

```
zyiFC8rKv8Cs+IKsQG2QpsVpvDBHqZqBSM4D528bvZv7jzr6WuHj8E6zO+6G8R/A
zjsfTALo+e+ZDg7KMzbryHARvjskbgFdOMLlVIYBhCeSElKsskWB6chOuyPHJInW
JwC5YzZdZwOqcyLBP/xOYXcvjzzNfPAXZzN12VR8vWDNq/kHT+3Lp1c8hY++ABMI
M+C9FB3dpNZu501BZCJg46bqbkuLaCCmScIDaVt0zDFZwWTSufiemNxxZBG4xS8
t5t+FEhmSfv8DAmwg4f/KVRFTm10phUArcLxQO38A10W5YHHORdACnuzVUvHgco7
VT4XUTj07qMhmJgFNWylpu49fbdS2NnOn5IoIyAq51k1KUPrz/WABWiCvLMylGnZ
kyMCwoamtgS/vdx74BBCj09yRZJnLMLIi6SDofjCNTDHFmFEVg4LsSWCd41P9OP8
0MqhP1D5VIx6PbMNwkWW12lpBbCCdesFRGHjZD2dOu96kHD7ItErX34CC8W04aG4
b7DLktUu6WNV6M8g3CAqJiC0V8ATlp+kvdHZVkJXovgND5IU00Jpsj0HhGzKAGpOY
KTGTUekUboISjVvki6efplv06temVL3Txg3KGhzWMJGrqlsnghE0KnV8tkddv/9N
d/tll+we9mrccTq50WNDnkEi/cwHI/0PKXg+NDNH3k3QGpAprsqGQmMPdq5ut0P
86i4cF9078QwWg4Tpay3uqNH1Zz6UN0tcarVvNmDupFESUxYw10qJrrEYVRadu74
rKAU4Ey4xkAftB2kuqvr21Av/L+jne4kkGIoZYdB+p/M98pQRgkYyg==
-----END RSA PRIVATE KEY-----
```

## Restoring a Certificate Server from Certificate Server Backup Files Examples

The following example shows that restoration is from a PKCS12 archive and that the database URL is NVRAM (the default).

```
Router# copy tftp://192.0.2.71/backup.ser nvram:myscs.ser
Destination filename [myscs.ser]?

32 bytes copied in 1.320 secs (24 bytes/sec)
Router# copy tftp://192.0.2.71/backup.crl nvram:myscs.crl
Destination filename [myscs.crl]?

214 bytes copied in 1.324 secs (162 bytes/sec)
Router# configure terminal
Router (config)# crypto pki import myscs pkcs12 tftp://192.0.2.71/backup.p12 cisco123
Source filename [backup.p12]?
CRYPTO_PKI: Imported PKCS12 file successfully.
Router (config)# crypto pki server myscs
! fill in any certificate server configuration here
Router (cs-server)# no shutdown
% Certificate Server enabled.
Router (cs-server)# end
Router# show crypto pki server

Certificate Server myscs:
  Status: enabled
  Server's current state: enabled
  Issuer name: CN=myscs
  CA cert fingerprint: 34885330 B13EAD45 196DA461 B43E813F
  Granting mode is: manual
  Last certificate issued serial number: 0x1
  CA certificate expiration timer: 01:49:13 GMT Aug 28 2007
  CRL NextUpdate timer: 01:49:16 GMT Sep 4 2004
  Current storage dir: nvram:
  Database Level: Minimum - no cert data written to storage
```

The following example shows that restoration is from a PEM archive and that the database URL is flash:

```

Router# copy tftp://192.0.2.71/backup.ser flash:mysc.ser
Destination filename [mysc.ser]?
32 bytes copied in 1.320 secs (24 bytes/sec)
Router# copy tftp://192.0.2.71/backup.crl flash:mysc.crl
Destination filename [mysc.crl]?
214 bytes copied in 1.324 secs (162 bytes/sec)
Router# configure terminal
! Because CA cert has Digital Signature usage, you need to import using the "usage-keys"
keyword
Router (config)# crypto ca import mysc pem usage-keys terminal cisco123
% Enter PEM-formatted CA certificate.
% End with a blank line or "quit" on a line by itself.
! Paste the CA cert from .pem archive.
-----BEGIN CERTIFICATE-----
MIIB9zCAAwCgAwIBAgIBATANBgkqhkiG9w0BAQQFADAPMQ0wCwYDVQQDEwRteWNz
MB4XDTA0MDkxMjI1N1oXDTA3MDkxMjI1N1owDzENMAsGAlUEAxMEbXl1j
czCBnzANBgkqhkiG9w0BAQEFAAOBjQAwYkCgYEAuGnnDXJbpDDQwCuKGS5Zg2rc
K7ZJauSUotTmWYQvNx+ZmWrUs5/j9Ee5FV2YonirGBQ9mc6ul63kNlrIPFck062L
GpahBhNmKdgod1o2PHTnRlZpEZNDIqU2D3hACgByxPjrY4vUnccV36ewLnQnYpp8
szEu7PYTJr5dU5ltAekCAwEAAANjMGEwDwYDVR0TAQH/BAUwAwEB/zAObgNVHQ8B
Af8EBAMCAYYwHwYDVR0jBBgwFoAUaEEQwYKcQ1dm9+wLYBKRTl1xaDIwHQYDVR00
BBYEFghBEMGCgkNXZvfsC2ASkU5c8WgyMA0GCSqGSIB3DQEBAUAA4GBAHyhiV2C
mH+vswkBjRAlFzZk8ttu9s5kwqG0dXp25QRUWsgLr9nsKPNdVkt3P7p0A/KochHe
eNiyglv+hDQ3FVnzsNv983le605jvAPxc17RO1BbfNhhqvEWMsXdnjHocUy7XerCo
+bdPcUf/eCiZueH/BEy/SZhd7yovzn2cdzBN
-----END CERTIFICATE-----
% Enter PEM-formatted encrypted private SIGNATURE key.
% End with "quit" on a line by itself.
! Paste the CA private key from .pem archive.
-----BEGIN RSA PRIVATE KEY-----
Proc-Type: 4, ENCRYPTED
DEK-Info: DES-EDE3-CBC,5053DC842B04612A

1Cnlf5Pqvd0zp2NLZ7iosxzTy6nDeXppNyJpxB5q+V29IuY8Apb6TlJCU7YrsEB/
nBTK7K76DCeGplLpcuyEI171QmkQJ2gA0QhC0LrRo09WrINVH+b4So/y7nffZkVb
p2yDpZwqoJ8cmRH94TieOYmzBtEh6ayOud11z53qbrsCnfSEwsztlxrWlMKrFZrk
/fTy6loHzGFz13BDj4r5gBecExwcPp74ldHO+Ld4Nc9egG8BYkeBCsZzOQNvHXLN
I0tODos6hP915zb6OrZFYv0NK6grTBO9D8hjNZ3U79jJzsSP7UNzIYHNTzRjiAyu
i56Oy/iHvkCSNUIK6zeIJQnW4bSoM1BqrbVPwHU6QaXUq1NzZ8SDtw7ZRZ/rHuiD
RTJMPbKquAzeuBss11320aAUJRStjPXgyZTUbccwB6zATNws2yijpDTR6sRHOQL
47wHMr2Yj8OVZGgkCSLAKL88ACz9TfUivFhtfl6xMC2yuFl+wrklXfF5VtWe5Zer
3Fn1DcBmlF7086XUkiSHP4EV0cI6n5ZMzVLx0XAUtdAl1gD94y1V+6p9PcQHLYQA
pGRmj5i1SFw90aLaFgCTbRbmC0ChIqHy91UFalub0130+yu7LsLGRlPmJ9NE61JR
bjRhlUXItRYWY7C4M3m/0wz6fmVQNSumJM08RHq61UB3olzIgGIz1ZkkoaESrLG0p
qq2AENfemCPF0uhyVS2humMHjWuRr+jedfc/IMl7sLEgAdqCVCfV3RZVEanXBud1
4QjkuTrwaTcRXVftrVioT/puyVULpA7+k7w+F5TzWuV08mwvUEqDw==
-----END RSA PRIVATE KEY-----
quit
% Enter PEM-formatted SIGNATURE certificate.
% End with a blank line or "quit" on a line by itself.
! Paste the CA cert from .pem archive again.
-----BEGIN CERTIFICATE-----
MIIB9zCAAwCgAwIBAgIBATANBgkqhkiG9w0BAQQFADAPMQ0wCwYDVQQDEwRteWNz
MB4XDTA0MDkxMjI1N1oXDTA3MDkxMjI1N1owDzENMAsGAlUEAxMEbXl1j
czCBnzANBgkqhkiG9w0BAQEFAAOBjQAwYkCgYEAuGnnDXJbpDDQwCuKGS5Zg2rc
K7ZJauSUotTmWYQvNx+ZmWrUs5/j9Ee5FV2YonirGBQ9mc6ul63kNlrIPFck062L
GpahBhNmKdgod1o2PHTnRlZpEZNDIqU2D3hACgByxPjrY4vUnccV36ewLnQnYpp8
szEu7PYTJr5dU5ltAekCAwEAAANjMGEwDwYDVR0TAQH/BAUwAwEB/zAObgNVHQ8B
Af8EBAMCAYYwHwYDVR0jBBgwFoAUaEEQwYKcQ1dm9+wLYBKRTl1xaDIwHQYDVR00
BBYEFghBEMGCgkNXZvfsC2ASkU5c8WgyMA0GCSqGSIB3DQEBAUAA4GBAHyhiV2C
mH+vswkBjRAlFzZk8ttu9s5kwqG0dXp25QRUWsgLr9nsKPNdVkt3P7p0A/KochHe
eNiyglv+hDQ3FVnzsNv983le605jvAPxc17RO1BbfNhhqvEWMsXdnjHocUy7XerCo
+bdPcUf/eCiZueH/BEy/SZhd7yovzn2cdzBN
-----END CERTIFICATE-----

% Enter PEM-formatted encrypted private ENCRYPTION key.
% End with "quit" on a line by itself.
! Because the CA cert only has Digital Signature usage, skip the encryption part.
quit
% PEM files import succeeded.

```

```

Router (config)# crypto pki server mycs
Router (cs-server)# database url flash:
! Fill in any certificate server configuration here.
Router (cs-server)# no shutdown
% Certificate Server enabled.
Router (cs-server)# end
Router # show crypto pki server
Certificate Server mycs:
  Status: enabled
  Server's current state: enabled
  Issuer name: CN=mycs
  CA cert fingerprint: F04C2B75 E0243FBC 19806219 B1D77412
  Granting mode is: manual
  Last certificate issued serial number: 0x2
  CA certificate expiration timer: 21:02:55 GMT Sep 2 2007
  CRL NextUpdate timer: 21:02:58 GMT Sep 9 2004
  Current storage dir: flash:
  Database Level: Minimum - no cert data written to storage

```

## Subordinate Certificate Server Example

The following configuration and output is typical of what you might see after configuring a subordinate certificate server:

```

Router (config)# crypto pki trustpoint sub
Router (ca-trustpoint)# enrollment url http://192.0.2.6
Router (ca-trustpoint)# exit
Router (config)# crypto pki server sub
Router (cs-server)# mode sub-cs
Router (ca-server)# no shutdown
%Some server settings cannot be changed after CA certificate generation.
% Please enter a passphrase to protect the private key
% or type Return to exit
Password:
Jan 6 22:32:22.698: CRYPTO_CS: enter FSM: input state initial, input signal no shut
Re-enter password:
% Generating 1024 bit RSA keys ...
Jan 6 22:32:30.302: CRYPTO_CS: starting enabling checks
Jan 6 22:32:30.306: CRYPTO_CS: key 'sub' does not exist; generated automatically [OK]
Jan 6 22:32:39.810: %SSH-5-ENABLED: SSH 1.99 has been enabled
Certificate has the following attributes:
  Fingerprint MD5: 328ACC02 52B25DB8 22F8F104 B6055B5B
  Fingerprint SHA1: 02FD799D DD40C7A8 61DC53AB 1E89A3EA 2A729EE2
% Do you accept this certificate? [yes/no]:
Jan 6 22:32:44.830: CRYPTO_CS: nvram filesystem
Jan 6 22:32:44.922: CRYPTO_CS: serial number 0x1 written.
Jan 6 22:32:46.798: CRYPTO_CS: created a new serial file.
Jan 6 22:32:46.798: CRYPTO_CS: authenticating the CA 'sub'y
Trustpoint CA certificate accepted.%
% Certificate request sent to Certificate Authority
% Enrollment in progress...
Router (cs-server)#
Jan 6 22:33:30.562: CRYPTO_CS: Publishing 213 bytes to crl file nvram:sub.crl
Jan 6 22:33:32.450: CRYPTO_CS: enrolling the server's trustpoint 'sub'
Jan 6 22:33:32.454: CRYPTO_CS: exit FSM: new state check failed
Jan 6 22:33:32.454: CRYPTO_CS: cs config has been locked
Jan 6 22:33:33.118: CRYPTO_PKI: Certificate Request Fingerprint MD5: CED89E5F 53B9C60E
> AA123413 CDDAD964
Jan 6 22:33:33.118: CRYPTO_PKI: Certificate Request Fingerprint SHA1: 70787C76 ACD7E67F
7D2C8B23 98CB10E7 718E84B1
% Exporting Certificate Server signing certificate and keys...
Jan 6 22:34:53.839: %PKI-6-CERTRET: Certificate received from Certificate Authority
Jan 6 22:34:53.843: CRYPTO_CS: enter FSM: input state check failed, input signal cert
configured
Jan 6 22:34:53.843: CRYPTO_CS: starting enabling checks
Jan 6 22:34:53.843: CRYPTO_CS: nvram filesystem
Jan 6 22:34:53.883: CRYPTO_CS: found existing serial file.
Jan 6 22:34:53.907: CRYPTO_CS: old router cert flag 0x4
Jan 6 22:34:53.907: CRYPTO_CS: new router cert flag 0x44
Jan 6 22:34:56.511: CRYPTO_CS: DB version
Jan 6 22:34:56.511: CRYPTO_CS: last issued serial number is 0x1

```



```

Jan  6 22:34:56.551: CRYPTO_CS: CRL file sub.crl exists.
Jan  6 22:34:56.551: CRYPTO_CS: Read 213 bytes from crl file sub.crl.
Jan  6 22:34:56.603: CRYPTO_CS: SCEP server started
Jan  6 22:34:56.603: CRYPTO_CS: exit FSM: new state enabled
Jan  6 22:34:56.603: CRYPTO_CS: cs config has been locked
Jan  6 22:35:02.359: CRYPTO_CS: enter FSM: input state enabled, input signal time set
Jan  6 22:35:02.359: CRYPTO_CS: exit FSM: new state enabled
Jan  6 22:35:02.359: CRYPTO_CS: cs config has been locked

```

## Root Certificate Server Differentiation Example

When issuing certificates, the root certificate server (or parent subordinate certificate server) differentiates the certificate request from “Sub CA,” “RA,” and peer requests, as shown in the following sample output:

```

Router# crypto pki server server1 info req
Enrollment Request Database:
RA certificate requests:
ReqID      State      Fingerprint
-----
Subordinate CS certificate requests:
ReqID      State      Fingerprint
-----
1          pending    CB9977AD8A73B146D3221749999B0F66 hostname=host-subcs.company.com
RA certificate requests:
ReqID      State      Fingerprint
-----
Router certificate requests:
ReqID      State      Fingerprint
-----

```

## Show Output for a Subordinate Certificate Server Example

The following `show crypto pki server` command output indicates that a subordinate certificate server has been configured:

```

Router# show crypto pki server
Certificate Server sub:
  Status: enabled
  Server's configuration is locked (enter "shut" to unlock it)
  Issuer name: CN=sub
  CA cert fingerprint: 11B586EE 3B354F33 14A25DDD 7BD39187
  Server configured in subordinate server mode
  Upper CA cert fingerprint: 328ACC02 52B25DB8 22F8F104 B6055B5B
  Granting mode is: manual
  Last certificate issued serial number: 0x1
  CA certificate expiration timer: 22:33:44 GMT Jan 6 2006
  CRL NextUpdate timer: 22:33:29 GMT Jan 13 2005
  Current storage dir: nvram:
  Database Level: Minimum - no cert data written to storage

```

## RA Mode Certificate Server Example

The following output is typical of what you might see after having configured an RA mode certificate server:

```

Router-ra (config)# crypto pki trustpoint myra
Router-ra (ca-trustpoint)# enrollment url http://192.0.2.17
! Include "cn=ioscs RA" or "ou=ioscs RA" in the subject-name.
Router-ra (ca-trustpoint)# subject-name cn=myra, ou=ioscs RA, o=company, c=us
Router-ra (ca-trustpoint)# exit
Router-ra (config)# crypto pki server myra
Router-ra (cs-server)# mode ra
Router-ra (cs-server)# no shutdown
% Generating 1024 bit RSA keys ...[OK]
Certificate has the following attributes:

```

```

Fingerprint MD5: 32661452 ODDA3CE5 8723B469 09AB9E85
Fingerprint SHA1: 9785BBCE 6C67D27C C950E8D0 718C7A14 C0FE9C38
% Do you accept this certificate? [yes/no]: yes
Trustpoint CA certificate accepted.
% Ready to request the CA certificate.
%Some server settings cannot be changed after the CA certificate has been requested.
Are you sure you want to do this? [yes/no]: yes
%
% Start certificate enrollment ..
% Create a challenge password. You will need to verbally provide this
  password to the CA administrator in order to revoke your certificate.
  For security reasons your password will not be saved in the configuration.
  Please make a note of it.
Password:
Re-enter password:
% The subject name in the certificate will include: cn=myra, ou=ioscs RA, o=company, c=us
% The subject name in the certificate will include: Router-ra.company.com
% Include the router serial number in the subject name? [yes/no]: no
% Include an IP address in the subject name? [no]: no
Request certificate from CA? [yes/no]: yes
% Certificate request sent to Certificate Authority
% The certificate request fingerprint will be displayed.
% The 'show crypto pki certificate' command will also show the fingerprint.
% Enrollment in progress...
Router-ra (cs-server)#
Sep 15 22:32:40.197: CRYPTO_PKI: Certificate Request Fingerprint MD5: 82B41A76 AF4EC87D
AAF093CD 07747D3A
Sep 15 22:32:40.201: CRYPTO_PKI: Certificate Request Fingerprint SHA1: 897CDF40 C6563EAA
0FED05F7 0115FD3A 4FFC5231
Sep 15 22:34:00.366: %PKI-6-CERTRET: Certificate received from Certificate Authority
Router-ra (cs-server)#
Router-ra(cs-server)# end
Router-ra# show crypto pki server
Certificate Server myra:
  Status: enabled
  Issuer name: CN=myra
  CA cert fingerprint: 32661452 ODDA3CE5 8723B469 09AB9E85
  ! Note that the certificate server is running in RA mode
  Server configured in RA mode
  RA cert fingerprint: C65F5724 0E63B3CC BE7AE016 BE0D34FE
  Granting mode is: manual
  Current storage dir: nvram:
  Database Level: Minimum - no cert data written to storage

```

The following output shows the enrollment request database of the issuing certificate server after the RA has been enabled:



#### Note

The RA certificate request is recognized by the issuing certificate server because "ou=ioscs RA" is listed in the subject name.

```

Router-ca# crypto pki server mycs info request
Enrollment Request Database:
Subordinate CA certificate requests:
ReqID  State      Fingerprint                               SubjectName
-----
! The request is identified as RA certificate request.
RA certificate requests:
ReqID  State      Fingerprint                               SubjectName
-----
12     pending   88F547A407FA0C90F97CDE8900A30CB0
hostname=Router-ra.company.com,cn=myra,ou=ioscs RA,o=company,c=us
Router certificates requests:
ReqID  State      Fingerprint                               SubjectName
-----
! Issue the RA certificate.
Router-ca# crypto pki server mycs grant 12

```

The following output shows that the issuing certificate server is configured to issue a certificate automatically if the request comes from an RA:

```
Router-ca(config)# crypto pki server mycs
Router-ca (cs-server)# grant ra-auto

% This will cause all certificate requests already authorized by known RAs to be
automatically granted.
Are you sure you want to do this? [yes/no]: yes
Router-ca (cs-server)# end
Router-ca# show crypto pki server
Certificate Server mycs:
  Status: enabled
  Server's current state: enabled
  Issuer name: CN=mycs
  CA cert fingerprint: 32661452 0DDA3CE5 8723B469 09AB9E85
  ! Note that the certificate server will issue certificate for requests from the RA.
  Granting mode is: auto for RA-authorized requests, manual otherwise
  Last certificate issued serial number: 0x2
  CA certificate expiration timer: 22:29:37 GMT Sep 15 2007
  CRL NextUpdate timer: 22:29:39 GMT Sep 22 2004
  Current storage dir: nvram:
  Database Level: Minimum - no cert data written to storage
```

The following example shows the configuration of “myra”, an RA server, configured to support automatic rollover from “myca”, the CA. After the RA server is configured, automatic granting of certificate reenrollment requests is enabled:

```
crypto pki trustpoint myra
  enrollment url
  http://myca
  subject-name ou=iosca RA
  rsakeypair myra
crypto pki server myra
  mode ra
  auto-rollover
crypto pki server mycs
  grant auto rollover ra-cert
  auto-rollover 25
```

## Enabling CA Certificate Rollover to Start Immediately Example

The following example shows how to enable automated CA certificate rollover on the server mycs with the **crypto pki server** command. The **show crypto pki server** command then shows the current state of the mycs server and that the rollover certificate is currently available for rollover.

```
Router(config)# crypto pki server mycs rollover
Jun 20 23:51:21.211:%PKI-4-NOSHADOWAUTOSAVE:Configuration was
modified. Issue "write memory" to save new IOS CA certificate
! The config has not been automatically saved because the config has been changed.
Router# show crypto pki server
Certificate Server mycs:
  Status:enabled
  Server's configuration is locked (enter "shut" to unlock it)
  Issuer name:CN=mycs
  CA cert fingerprint:E7A5FABA 5D7AA26C F2A9F7B3 03CE229A
  Granting mode is:manual
  Last certificate issued serial number:0x2
  CA certificate expiration timer:00:49:26 PDT Jun 20 2008
  CRL NextUpdate timer:00:49:29 PDT Jun 28 2005
  Current storage dir:nvram:
  Database Level:Minimum - no cert data written to storage
  Rollover status:available for rollover
  ! Rollover certificate is available for rollover.
  Rollover CA certificate fingerprint:9BD7A443 00A6DD74 E4D9ED5F B7931BE0
  Rollover CA certificate expiration time:00:49:26 PDT Jun 20 2011
  Auto-Rollover configured, overlap period 25 days
```

## Where to Go Next

After the certificate server is successfully running, you can either begin enrolling clients through manual mechanisms (as explained in the module “Configuring Certificate Enrollment for a PKI”) or begin configuring SDP, which is a web-based enrollment interface, (as explained in the module “Setting Up Secure Device Provisioning (SDP) for Enrollment in a PKI.”)

## Additional References

### Related Documents

Related Topic	Document Title
Cisco IOS commands	<a href="#">Cisco IOS Master Commands List, All Releases</a>
PKI and security commands	Cisco IOS Security Command Reference
USB Token RSA Operations: Using the RSA keys on a USB token for initial autoenrollment	“Configuring Certificate Enrollment for a PKI” chapter in the Cisco IOS Security Configuration Guide: Secure Connectivity. See the “ <a href="#">Configuring Certificate Servers, page 158</a> ” section.
USB Token RSA Operations: Benefits of using USB tokens	“Storing PKI Credentials” module in the Cisco IOS Security Configuration Guide: Secure Connectivity.
Certificate server client certificate enrollment, autoenrollment, and automatic rollover	“Configuring Certificate Enrollment for a PKI” module in the Cisco IOS Security Configuration Guide: <i>Secure Connectivity</i> .
Setting up and logging into a USB token	“Storing PKI Credentials” module in the Cisco IOS Security Configuration Guide: Secure Connectivity.
Web-based certificate enrollment	“Setting Up Secure Device Provisioning (SDP) for Enrollment in a PKI” module in the Cisco IOS Security Configuration Guide: <i>Secure Connectivity</i> .
RSA keys in PEM formatted files	“Deploying RSA Keys Within a PKI” module in the Cisco IOS Security Configuration Guide: Secure Connectivity.
Choosing a certificate revocation mechanism	“Configuring Authorization and Revocation of Certificates in a PKI” module in the Cisco IOS Security Configuration Guide: Secure Connectivity.
Recommended cryptographic algorithms	<a href="#">Next Generation Encryption</a>

### Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	<a href="http://www.cisco.com/cisco/web/support/index.html">http://www.cisco.com/cisco/web/support/index.html</a>

## Feature Information for the Cisco IOS Certificate Server

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

**Table 8**      **Feature Information for the Cisco IOS Certificate Server**

Feature Name	Releases	Feature Information
Cisco IOS USB Token PKI Enhancements-- Phase 2	12.4(11)T	<p>This feature enhances USB token functionality by using the USB token as a cryptographic device. USB tokens may be used for RSA operations such as key generation, signing, and authentication.</p> <p>The following sections in this document provide information about this feature:</p> <ul style="list-style-type: none"> <li>• <a href="#">RSA Key Pair and Certificate of the Certificate Server, page 147</a></li> <li>• <a href="#">Trustpoint of the Certificate Server, page 150</a></li> <li>• <a href="#">Generating a Certificate Server RSA Key Pair, page 155</a></li> </ul> <p><b>Note</b> This document covers the use of using USB tokens for RSA operations during certificate server configuration.</p>
IOS Certificate Server (CS) Split Database	12.4(4)T	<p>This feature allows the user to set storage locations and publish locations for specific certificate server file types.</p> <p>The following sections provide information about this feature:</p> <p>The following command was modified by this feature:</p> <p><b>database url</b></p>

Feature Name	Releases	Feature Information
Subordinate/RA Mode IOS Certificate Server (CS) Rollover	12.4(4)T	<p>This feature expands on Certificate Authority (CA) Key Rollover introduced in 12.4(2)T to allow CA certificate rollover for subordinate CAs and RA-mode CAs. This functionality allows the rollover expiring CA certificates and keys and to have these changes propagate through the PKI network without manual intervention.</p> <p>The following sections provide information about this feature:</p> <p>The following command was modified by this feature: <b>grant auto rollover</b></p>
Certificate Authority (CA) Key Rollover	12.4(2)T	<p>This feature introduces the ability for root or subordinate CAs to roll over expiring CA certificates and keys and to have these changes propagate through the PKI network without manual intervention.</p> <p>The following sections provide information about this feature:</p> <p>The following commands were introduced or modified by this feature: <b>auto-rollover, crypto pki certificate chain, crypto pki export pem, crypto pki server info request, crypto pki server, show crypto pki certificates, show crypto pki server, and show crypto pki trustpoint</b></p>
Cisco IOS Certificate Server	12.3(8)T	<p>This feature introduces support for the Cisco IOS certificate server, which offers users a CA that is directly integrated with Cisco IOS software to more easily deploy basic PKI networks.</p> <p>The following sections provide information about this feature:</p>

Feature Name	Releases	Feature Information
The Certificate Server Auto Archive Enhancement <sup>1</sup>	12.3(11)T	<p>This enhancement enables the CA certificate and CA key to be backed up automatically just once after they are generated by the certificate server. As a result, it is not necessary to generate an exportable CA key if CA backup is desirable.</p> <p>The following sections provide information about this feature:</p> <p>The following commands were introduced by this feature: <b>crypto pki server remote, database archive</b></p>
The Certificate Server Registration Authority (RA) Mode enhancement	12.3(7)T	<p>A certificate server can be configured to run in RA mode.</p> <p>The following section provides information about this feature:</p> <p>The following commands were introduced by this feature: <b>grant ra-auto, lifetime enrollment-requests</b></p>
PKI Status 1	12.3(11)T	<p>This enhancement provides a quick snapshot of current trustpoint status.</p> <p>The following section provides information about this enhancement:</p> <p>The following command was modified by this enhancement : <b>show crypto pki trustpoints</b></p>

<sup>1</sup> This is a minor enhancement. Minor enhancements are not typically listed in Feature Navigator.



Feature Name	Releases	Feature Information
Subordinate Certificate Server 1	12.3(14)T	<p>This enhancement allows you to configure a subordinate certificate server to grant all or certain SCEP or manual certificate requests.</p> <p>The following section provides information about this enhancement:</p> <p>The following command was introduced by this enhancement : <b>mode sub-cs</b></p>
RSA 4096-bit Key Generation in Software Crypto Engine Support	15.1(1)T	<p>The range value for the <b>modulus</b> keyword value for the <b>crypto key generate rsa</b> command is extended from 360 to 2048 bits to 360 to 4096 bits.</p>
IOS PKI Server RA Mode Support for Non-IOS CA Servers	15.1(2)T	<p>This enhancement allows the IOS CA server in RA mode to interoperate with more than one type of CA server.</p> <p>The following section provides information about this feature:</p> <p>The <b>transparent</b> keyword was added to the <b>mode ra</b> command to allow the CA server in RA mode to interoperate with more than one type of CA server.</p>
Public Key Infrastructure (PKI) IPv6 Support for VPN Solutions	15.2(1)T	<p>The <b>enrollment url (ca-trustpoint)</b> command was modified to allow the specification of an IPv6 address in the URL for the CA.</p>

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.







## Storing PKI Credentials

---

Public key infrastructure (PKI) credentials, such as Rivest, Shamir, and Adelman (RSA) keys and certificates can be stored in a specific location on the router, such as NVRAM and flash memory or on a USB eToken 64 KB smart card. USB tokens provide secure configuration distribution, RSA operations such as on-token key generation, signing, and authentication, and the storage of Virtual Private Network (VPN) credentials for deployment.

- [Finding Feature Information, page 203](#)
- [Prerequisites for Storing PKI Credentials, page 203](#)
- [Restrictions for Storing PKI Credentials, page 204](#)
- [Information About Storing PKI Credentials, page 204](#)
- [How to Configure PKI Storage, page 207](#)
- [Configuration Examples for PKI Storage, page 221](#)
- [Additional References, page 223](#)
- [Feature Information for Storing PKI Credentials, page 224](#)

## Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table at the end of this module.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

## Prerequisites for Storing PKI Credentials

### Prerequisites for Specifying a Local Certificate Storage Location

Before you can specify the local certificate storage location, your system should meet the following requirements:

- A Cisco IOS Release 12.4(2)T PKI-enabled image or a later image
- A platform that supports storing PKI credentials as separate files
- A configuration that contains at least one certificate
- An accessible local file system

### Prerequisites for Specifying USB Token Storage for PKI Credentials

Before you can use a USB token, your system should meet the following requirements:

- A Cisco 871 router, Cisco 1800 series, Cisco 2800 series, a Cisco 3800 series router, or a Cisco 7200VXR NPE-G2 platform
- At least a Cisco IOS Release 12.3(14)T image running on any of the supported platforms
- A Cisco supported USB token (Safenet/Aladdin eToken PRO 32 KB or 64 KB)
- A k9 image

## Restrictions for Storing PKI Credentials

### Restrictions for Specifying a Local Certificate Storage Location

When storing certificates to a local storage location, the following restrictions are applicable:

- Only local file systems may be used. An error message will be displayed if a remote file system is selected, and the command will not take effect.
- A subdirectory may be specified if supported by the local file system. NVRAM does not support subdirectories.

### Restrictions for Specifying USB Token Storage

When using a USB token to store PKI data, the following restrictions are applicable:

- USB token support requires a 3DES (k9) Cisco IOS software image, which provides secure file storage.
- You cannot boot an image from a USB token. (However, you can boot a configuration from a USB token.)
- USB hubs are currently not supported. Thus, the number of supported devices is limited to the number of available USB ports.

## Information About Storing PKI Credentials

- [Storing Certificates to a Local Storage Location, page 204](#)
- [PKI Credentials and USB Tokens, page 205](#)

## Storing Certificates to a Local Storage Location

Certificates are stored to NVRAM by default; however, some routers do not have the required amount of NVRAM to successfully store certificates.

All Cisco platforms support NVRAM and flash local storage. Depending on your platform, you may have other supported local storage options including bootflash, slot, disk, USB flash, or USB token.

During run time, you can specify what active local storage device you would like to use to store certificates.

## PKI Credentials and USB Tokens

To use a secure USB token on your router, you should understand the following concepts:

- [How a USB Token Works, page 205](#)
- [Benefits of USB Tokens, page 206](#)

### How a USB Token Works

A smart card is a small plastic card, containing a microprocessor and memory that allows you to store and process data. A USB token is a smart card with a USB interface. The token can securely store any type of file within its available storage space (32 KB). Configuration files that are stored on the USB token can be encrypted and accessed only via a user PIN. The device does not load the configuration file unless the proper PIN has been configured for secure deployment of device configuration files.

After you plug the USB token into the device, you must log into the USB token; thereafter, you can change default settings, such as the user PIN (default: 1234567890) and the allowed number of failed login attempts (default: 15 attempts) before future logins are refused. For more information on accessing and configuring the USB token, see the section “Logging Into and Setting Up the USB Token.”

After you have successfully logged into the USB token, you can copy files from the device on to the USB token via the **copy** command. USB token RSA keys and associated IPsec tunnels remain available until the device is reloaded. To specify the length of time before the keys are removed and the IPsec tunnels are torn down, issue the **crypto pki token removal timeout** command. The default timeout is zero, which causes the RSA keys to be removed automatically after the eToken is removed from the device. The default appears in the running configuration as:

```
crypto pki token default removal timeout 0
```

The table below highlights the capabilities of the USB token.

**Table 9**      **Functionality Highlights for USB Tokens**

Function	USB Token
Accessibility	Used to securely store and transfer digital certificates, preshared keys, and device configurations from the USB token to the device.
Storage Size	32 KB or 64 KB
File Types	<ul style="list-style-type: none"> <li>• Typically used to store digital certificates, preshared keys, and device configurations for IPsec VPNs.</li> <li>• USB tokens cannot store Cisco IOS images.</li> </ul>
Security	<ul style="list-style-type: none"> <li>• Files can be encrypted and accessed only with a user PIN.</li> <li>• Files can also be stored in a nonsecure format.</li> </ul>

Function	USB Token
Boot Configurations	<ul style="list-style-type: none"> <li>The device can use the configuration stored in the USB token during boot time.</li> <li>The device can use the secondary configuration stored in the USB token during boot time. (A secondary configuration allows users to load their IPsec configuration.)</li> </ul>

## Benefits of USB Tokens

USB token support on a Cisco router provides the following application benefits:

### Removable Credentials: Provide or Store VPN Credentials on an External Device for Deployment

A USB token can use smart card technology to store a digital certificate and configuration for IPsec VPN deployment. This ability enhances the capability of the router to generate RSA public keys to authenticate at least one IPsec tunnel. (Because a router can initiate multiple IPsec tunnels, the USB token can contain several certificates, as appropriate.)

Storing VPN credentials on an external device reduces the threat of compromising secure data.

### PIN Configuration for Secure File Deployment

A USB token can store a configuration file that can be used for enabling encryption on the router via a user-configured PIN. (That is, no digital certificates, preshared keys, or VPNs are used.)

### Touchless or Low Touch Configuration

The USB token can provide remote software configuration and provisioning with little or no human interaction. Configuration is set up as an automated process. That is, the USB token can store a bootstrap configuration that the router can use to boot from after the USB token has been inserted into the router. The bootstrap configuration connects the router to a TFTP server, which contains a configuration that completely configures the router.

### RSA Operations

A USB token may be used as a cryptographic device in addition to a storage device. Using a USB token as a cryptographic device allows RSA operations such as key generation, signing, and authentication to be performed on the token.

General-purpose, special-usage, encryption, or signature RSA key pairs with a modulus of 2048 bits or less may be generated from credentials located on your token storage device. Private keys are not distributed and remain on the token by default, however you may configure the private key storage location.

Keys that reside on a USB token are saved to persistent token storage when they are generated. Key deletion will remove the keys stored on the token from persistent storage immediately. (Keys that do not reside on a token are saved to or deleted from non-token storage locations when the **write memory** or a similar command is issued.)

### Remote Device Configuration and Provisioning in a Secure Device Provisioning (SDP) Environment

SDP may be used to configure a USB token. The configured USB token may be transported to provision a device at a remote location. That is, a USB token may be used to transfer cryptographic information from

one network device to another remote network device providing a solution for a staged USB token deployment.

For information about using USB tokens with SDP, see document titles in the “Additional References” section.

## How to Configure PKI Storage

- [Specifying a Local Storage Location for Certificates, page 207](#)
- [Setting Up and Using USB Tokens on Cisco Devices, page 208](#)
- [Troubleshooting USB Tokens, page 217](#)

### Specifying a Local Storage Location for Certificates

#### SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto pki certificate storage** *location-name*
4. **exit**
5. **copy** *source-url destination-url*
6. **show crypto pki certificates storage**

#### DETAILED STEPS

Command or Action	Purpose
<p><b>Step 1</b> <b>enable</b></p> <p><b>Example:</b></p> <pre>Device&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<p><b>Step 2</b> <b>configure terminal</b></p> <p><b>Example:</b></p> <pre>Device# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 3</b> <b>crypto pki certificate storage</b> <i>location-name</i></p> <p><b>Example:</b></p> <pre>Device(config)# crypto pki certificate storage flash:/certs</pre>	<p>Specifies the local storage location for certificates.</p>



Command or Action	Purpose
<b>Step 4</b> <code>exit</code>  <b>Example:</b>  <pre>Device(config)# exit</pre>	Exits global configuration mode.
<b>Step 5</b> <code>copy source-url destination-url</code>  <b>Example:</b>  <pre>Device# copy system:running-config nvram:startup-config</pre>	(Optional) Saves the running configuration to the startup configuration.  <b>Note</b> Settings will only take effect when the running configuration is saved to the startup configuration.
<b>Step 6</b> <code>show crypto pki certificates storage</code>  <b>Example:</b>  <pre>Device# show crypto pki certificates storage</pre>	(Optional) Displays the current setting for the PKI certificate storage location.

**Example**

The following is sample output from the **show crypto pki certificates storage** command, which shows that the certificates are stored in the certs subdirectory of disk0:

```
Device# show crypto pki certificates storage
Certificates will be stored in disk0:/certs/
```

## Setting Up and Using USB Tokens on Cisco Devices

- [Storing the Configuration on a USB Token, page 208](#)
- [Logging Into and Setting Up the USB Token, page 209](#)
- [Configuring the USB Token, page 211](#)
- [Setting Administrative Functions on the USB Token, page 214](#)

### Storing the Configuration on a USB Token

**SUMMARY STEPS**

1. `enable`
2. `configure terminal`
3. `boot config usbtoken[0-9]:filename`

## DETAILED STEPS

Command or Action	Purpose
<b>Step 1</b> <code>enable</code>  <b>Example:</b> <pre>Device&gt; enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>Enter your password if prompted.</li> </ul>
<b>Step 2</b> <code>configure terminal</code>  <b>Example:</b> <pre>Device# configure terminal</pre>	Enters global configuration mode.
<b>Step 3</b> <code>boot config usbtoken[0-9]:filename</code>  <b>Example:</b> <pre>Device(config)# boot config usbtoken0:file</pre>	Specifies that the startup configuration file is stored in a secure USB token.

## Logging Into and Setting Up the USB Token

- [How RSA Keys are Used with a USB Token, page 209](#)
- [Automatic Login, page 209](#)
- [Configuring the Device for Manual Login, page 210](#)
- [What to Do Next, page 210](#)

### How RSA Keys are Used with a USB Token

- RSA keys are loaded after the USB token is successfully logged into the router.
- By default, newly generated RSA keys are stored on the most recently inserted USB token. Regenerated keys should be stored in the same location where the original RSA key was generated.

### Automatic Login

Automatic login allows the router to completely come back up without any user or operator intervention. The PIN is stored in the private NVRAM, so it is not visible in the startup or running configuration.



#### Note

A hand-generated startup configuration can contain the automatic login command for deployment purposes, but the **copy system:running-config nvram: startup-config** command must be issued to put the hand-generated configuration in the private configuration.

## Configuring the Device for Manual Login

Unlike automatic login, manual login requires that the user know the actual USB token PIN.



**Note** Either the manual or automatic login is required.

Manual login can be used when storing a PIN on the device is not desirable. Manual login may also be suitable for some initial deployment or hardware replacement scenarios for which the device is obtained from the local supplier or drop-shipped to the remote site. Manual login can be executed with or without privileges, and it creates files and RSA keys on the USB token available to the Cisco IOS software. If a secondary configuration file is configured, it is executed only with the privileges of the user who is performing the login. Thus, if you want to use manual login and set up the secondary configuration on the USB token to perform anything useful, you need to enable privileges.

Manual login can also be used in recovery scenarios for which the device configuration has been lost. If the scenario contains a remote site that normally connects to the core network with a VPN, the loss of the configuration and RSA keys requires out-of-band services that the USB token can provide. The USB token can contain a boot configuration, a secondary configuration, or both, and RSA keys to authenticate the connection.

### SUMMARY STEPS

1. **enable**
2. **crypto pki token** *token-name* [**admin**] **login** [*pin*]
3. **show usbtoken** *0-9:filename*

### DETAILED STEPS

	Command or Action	Purpose
Step 1	<b>enable</b>  <b>Example:</b> Device> enable	Enables privileged EXEC mode.  <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
Step 2	<b>crypto pki token</b> <i>token-name</i> [ <b>admin</b> ] <b>login</b> [ <i>pin</i> ]  <b>Example:</b> Device# crypto pki token usbtoken0 admin login 5678	Manually logs into the USB token.  If the <b>admin</b> keyword is not specified initially you can re-enter the <b>crypto pki token</b> command again with this keyword option.
Step 3	<b>show usbtoken</b> <i>0-9:filename</i>  <b>Example:</b> Device# show usbtoken0:usbfile	(Optional) Verifies whether the USB token has been logged on to the device.

### What to Do Next

After you have logged into the USB token, it is available for use.

- To further configure the USB token, see the “Configuring the USB Token” section.
- To perform USB token administrative tasks, such as changing the user PIN, copying files from the router to the USB token set key storage location, and changing USB tokens, see the “Setting Administrative Functions on the USB Token” section.

## Configuring the USB Token

After you have set up automatic login, you may perform this task to further configure the USB token.

- [PINs and Passphrases, page 211](#)
- [Unlocking and Locking the USB Token, page 211](#)
- [Secondary Configuration and Unconfiguration Files, page 211](#)
- [What to Do Next, page 214](#)

### PINs and Passphrases

For additional PIN security with automatic login, you may encrypt your PIN stored in NVRAM and set up a passphrase for your USB token. Establishing a passphrase allows you to keep your PIN secure; another user needs only to know the passphrase, not the PIN.

When the USB token is inserted into the device, the passphrase is needed to decrypt the PIN. Once the PIN is decrypted, the device can then use the PIN to log in to the USB token.



---

**Note**

The user needs a privilege level of 1 to log in.

---

### Unlocking and Locking the USB Token

The USB token itself can be locked (encrypted) or unlocked (decrypted).

Unlocking the USB token allows it to be used. Once unlocked, Cisco IOS software treats the token as if it were automatically logged in. Any keys on the USB token are loaded, and if a secondary configuration file is on the token, it is executed with full user privileges (privilege level 15) independent of the privilege level of the logged-in user.

Locking the token, unlike logging out of the token, deletes any RSA keys loaded from the token and runs the secondary unconfiguration file, if configured.

### Secondary Configuration and Unconfiguration Files

Configuration files that exist on a USB token are called secondary configuration files. If you create and configure a secondary configuration file, it is executed after the token is logged in. The existence of a secondary configuration file is determined by the presence of a secondary configuration file option in the Cisco IOS configuration stored in NVRAM. When the token is removed or logged out and the removal timer expires, a separate secondary unconfiguration file is processed to remove all secondary configuration elements from the running configuration. Secondary configuration and secondary unconfiguration files are executed at privilege level 15 and are not dependent on the level of the user logged in.

**SUMMARY STEPS**

1. **enable**
2. **crypto pki token *token-name* unlock [*pin*]**
3. **configure terminal**
4. **crypto pki token *token-name* encrypted-user-pin [*write*]**
5. **crypto pki token *token-name* secondary unconfig *file***
6. **exit**
7. **crypto pki token *token-name* lock [*pin*]**

**DETAILED STEPS**

Command or Action	Purpose
<p><b>Step 1</b> <b>enable</b></p> <p><b>Example:</b></p> <pre>Device&gt; enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<p><b>Step 2</b> <b>crypto pki token <i>token-name</i> unlock [<i>pin</i>]</b></p> <p><b>Example:</b></p> <pre>Device# crypto pki token mytoken unlock mypin</pre>	<p>(Optional) Allows the token to be used if the USB token has been locked.</p> <p>Once unlocked, Cisco IOS software treats the token as if it has been automatically logged in. Any keys on the token are loaded and if a secondary configuration file exists, it is executed.</p>
<p><b>Step 3</b> <b>configure terminal</b></p> <p><b>Example:</b></p> <pre>Device# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 4</b> <b>crypto pki token <i>token-name</i> encrypted-user-pin [<i>write</i>]</b></p> <p><b>Example:</b></p> <pre>Device(config)# crypto pki token mytoken encrypted-user-pin write</pre>	<p>(Optional) Encrypts the stored PIN in NVRAM.</p>
<p><b>Step 5</b> <b>crypto pki token <i>token-name</i> secondary unconfig <i>file</i></b></p> <p><b>Example:</b></p> <pre>Device(config)# crypto pki token mytoken secondary unconfig configs/myunconfigfile.cfg</pre>	<p>(Optional) Specifies the secondary configuration file and its location.</p>

Command or Action	Purpose
<b>Step 6</b> <code>exit</code>  <b>Example:</b> Device(config)# <code>exit</code>	Enters privileged EXEC mode.
<b>Step 7</b> <code>crypto pki token <i>token-name</i> lock [<i>pin</i>]</code>  <b>Example:</b> Device# <code>crypto pki token mytoken lock mypin</code>	(Optional) Deletes any RSA keys loaded from the token and runs the secondary unconfiguration file, if it exists.

### Examples

The following example shows both the configuration and encryption of a user PIN and then the device reloading and the user PIN being unlocked:

```

! Configuring the user PIN

Enter configuration commands, one per line. End with CNTL/Z.
Device(config)# crypto pki token usbtoken0: userpin
Enter password: mypassword
! Encrypt the user PIN
Device(config)# crypto pki token usbtoken0: encrypted-user-pin
Enter passphrase: mypassphrase
Device(config)# exit
Device#
Sep 20 21:51:38.076: %SYS-5-CONFIG_I: Configured from console by console
Device# show running config
crypto pki token usbtoken0 user-pin *encrypted*
! Reloading the router.
Device> enable
Password:
! Decrypting the user pin.
Device# crypto pki token usbtoken0: unlock
Token eToken is usbtoken0
Enter passphrase: mypassphrase
Token login to usbtoken0(eToken) successful
Device#
Sep 20 22:31:13.128: %CRYPTO-6-TOKENLOGIN: Cryptographic Token eToken
Login Successful

```

The following example shows how a secondary unconfiguration file might be used to remove secondary configuration elements from the running configuration. For example, a secondary configuration file might be used to set up a PKI trustpoint. A corresponding unconfiguration file, named `mysecondaryunconfigfile.cfg`, might contain this command line:

```
no crypto pki trustpoint token-tp
```

If the token were removed and the following commands executed, the trustpoint and associated certificates would be removed from the device's running configuration:

```
Device# configure terminal
Device(config)# no crypto pki token mytoken secondary unconfig mysecondaryunconfigfile.cfg
```

## What to Do Next

After you have logged into and configured the USB token, it is available for use. If you want to perform USB token administrative tasks, such as changing the user PIN, copying files from the router to the USB token set key storage location, and changing USB tokens, see the “Setting Administrative Functions on the USB Token” section.

## Setting Administrative Functions on the USB Token

Perform this task to change default settings, such as the user PIN, the maximum number of failed attempts on the USB token, or the credential storage location.

### SUMMARY STEPS

1. **enable**
2. **crypto pki token** *token-name* **admin** ] **change-pin** [*pin*]
3. **crypto pki token** *token-name* *device-name*: **label** *token-label*
4. **configure terminal**
5. **crypto key storage** *device-name*:
6. **crypto key generate rsa** [**general-keys** | **usage-keys** | **signature** | **encryption**] [*label* *key-label*] [**exportable**] [**modulus** *modulus-size*] [**storage** *device-name*:] [**redundancy**] [**on** *device-name*]:
7. **crypto key move rsa** *keylabel* [**non-exportable** | [**on** | **storage**]] *location*
8. **crypto pki token** {*token-name* | **default**} **removal timeout** [*seconds*]
9. **crypto pki token** {*token-name* | **default**} **max-retries** [*number*]
10. **exit**
11. **copy usbflash**[*0-9*]:*filename* *destination-url*
12. **show usbtokens**[*0-9*]:*filename*
13. **crypto pki token** *token-name* **logout**

### DETAILED STEPS

	Command or Action	Purpose
Step 1	<b>enable</b>	Enables privileged EXEC mode.
	<b>Example:</b>	
	Device> enable	<ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>

Command or Action	Purpose
<p><b>Step 2</b> <code>crypto pki token <i>token-name</i> admin ]</code>  <code>change-pin [<i>pin</i>]</code></p> <p><b>Example:</b></p> <pre>Device# crypto pki token usbtoken0 admin change-pin</pre>	<p>(Optional) Changes the user PIN number on the USB token.</p> <ul style="list-style-type: none"> <li>If the PIN is not changed, the default PIN 1234567890 is used.</li> </ul> <p><b>Note</b> After the PIN has been changed, you must reset the login failure count to zero (via the <code>crypto pki token max-retries</code> command). The maximum number of allowable login failures is set (by default) to 15.</p>
<p><b>Step 3</b> <code>crypto pki token <i>token-name</i> <i>device-name</i>:</code>  <code>label <i>token-label</i></code></p> <p><b>Example:</b></p> <pre>Device# crypto pki token mytoken usb0: label newlabel</pre>	<p>(Optional) Sets or changes the name of the USB token.</p> <ul style="list-style-type: none"> <li>The value of the <i>token-label</i> argument may be up to 31 alphanumeric characters in length including dashes and underscores.</li> </ul> <p><b>Tip</b> This command is useful when configuring multiple USB tokens for automatic login, secondary configuration files, or other token specific settings.</p>
<p><b>Step 4</b> <code>configure terminal</code></p> <p><b>Example:</b></p> <pre>Device# configure terminal</pre>	<p>Enters global configuration mode.</p>
<p><b>Step 5</b> <code>crypto key storage <i>device-name</i>:</code></p> <p><b>Example:</b></p> <pre>Device(config)# crypto key storage usbtoken0:</pre>	<p>(Optional) Sets the default RSA key storage location for newly created keys.</p> <p><b>Note</b> Regardless of configuration settings, existing keys are stored on the device from where they were originally loaded.</p>



Command or Action	Purpose
<p><b>Step 6</b> <code>crypto key generate rsa [general-keys   usage-keys   signature   encryption] [label key-label] [exportable] [modulus modulus-size] [storage device-name:] [redundancy] [on device-name]:</code></p> <p><b>Example:</b></p> <pre>Device(config)# crypto key generate rsa label tokenkey1 storage usbtoken0:</pre>	<p>(Optional) Generates the RSA key pair for the certificate server.</p> <ul style="list-style-type: none"> <li>The <b>storage</b> keyword specifies the key storage location.</li> <li>When specifying a label name by specifying the <i>key-label</i> argument, you must use the same name for the label that you plan to use for the certificate server (through the <b>crypto pki server cs-label</b> command). If a <i>key-label</i> argument is not specified, the default value, which is the fully qualified domain name (FQDN) of the device, is used.</li> </ul> <p>If the exportable RSA key pair is manually generated after the CA certificate has been generated, and before issuing the <b>no shutdown</b> command, then use the <b>crypto ca export pkcs12</b> command to export a PKCS12 file that contains the certificate server certificate and the private key.</p> <ul style="list-style-type: none"> <li>By default, the modulus size of a CA key is 1024 bits. The recommended modulus for a CA key is 2048 bits. The range for a modulus size of a CA key is from 350 to 4096 bits.</li> <li>The <b>on</b> keyword specifies that the RSA key pair is created on the specified device, including a Universal Serial Bus (USB) token, local disk, or NVRAM. The name of the device is followed by a colon (:).</li> </ul> <p><b>Note</b> Keys created on a USB token must be 2048 bits or less.</p>
<p><b>Step 7</b> <code>crypto key move rsa keylabel [non-exportable   [on   storage]] location</code></p> <p><b>Example:</b></p> <pre>Device(config)# crypto key move rsa keypairname non-exportable on token</pre>	<p>(Optional) Moves existing Cisco IOS credentials from the current storage location to the specified storage location.</p> <p>By default, the RSA key pair remains stored on the current device.</p> <p>Generating the key on the device and moving it to the token takes less than a minute. Generating a key on the token, using the <b>on</b> keyword could take five to ten minutes, and is dependent on hardware key generation routines available on the USB token.</p> <p>When an existing RSA key pair is generated in Cisco IOS, stored on a USB token, and used for an enrollment, it may be necessary to move those existing RSA key pairs to an alternate location for permanent storage.</p> <p>This command is useful when using SDP with USB tokens to deploy credentials.</p>
<p><b>Step 8</b> <code>crypto pki token {token-name   default} removal timeout [seconds]</code></p> <p><b>Example:</b></p> <pre>Device(config)# crypto pki token usbtoken0 removal timeout 60</pre>	<p>(Optional) Sets the time interval, in seconds, that the device waits before removing the RSA keys that are stored in the USB token after the USB token has been removed from the device.</p> <p><b>Note</b> If this command is not issued, all RSA keys and IPsec tunnels associated with the USB token are torn down immediately after the USB token is removed from the device.</p>

	Command or Action	Purpose
Step 9	<p><b>crypto pki token</b> <i>{token-name   default}</i>  <b>max-retries</b> <i>[number]</i></p> <p><b>Example:</b></p> <pre>Device(config)# crypto pki token usbtoken0 max-retries 20</pre>	<p>(Optional) Sets the maximum number of consecutive failed login attempts allowed before access to the USB token is denied.</p> <ul style="list-style-type: none"> <li>By default, the value is set at 15.</li> </ul>
Step 10	<p><b>exit</b></p> <p><b>Example:</b></p> <pre>Device(config)# exit</pre>	<p>Exits global configuration mode.</p>
Step 11	<p><b>copy usbflash[0-9]:filename destination-url</b></p> <p><b>Example:</b></p> <pre>Device# copy usbflash0:file1 nvram:</pre>	<p>Copies files from USB token to the device.</p> <ul style="list-style-type: none"> <li><i>destination-url</i>—See the <b>copy</b> command page documentation for a list of supported options.</li> </ul>
Step 12	<p><b>show usbtokens[0-9]:filename</b></p> <p><b>Example:</b></p> <pre>Device# show usbtokens:usbfile</pre>	<p>(Optional) Displays information about the USB token. You can use this command to verify whether the USB token has been logged in to the device.</p>
Step 13	<p><b>crypto pki token token-name logout</b></p> <p><b>Example:</b></p> <pre>Device# crypto pki token usbtoken0 logout</pre>	<p>Logs the device out of the USB token.</p> <p><b>Note</b> If you want to save any data to the USB token, you must log back into the token.</p>

## Troubleshooting USB Tokens

This section contains descriptions of the following Cisco IOS commands that can be used to help troubleshoot possible problems that may arise while using a USB token:

- [Troubleshooting the USB Port Connection, page 217](#)
- [Determining if a USB Token is Supported by Cisco, page 218](#)
- [Determining USB Token Device Problems, page 219](#)
- [Displaying USB Token Information, page 220](#)

## Troubleshooting the USB Port Connection

Use the **show file systems** command to determine whether the router recognizes that there is a USB module plugged into a USB port. The USB module should appear on the list of file systems. If the module does not appear on the list, it can indicate any of the following problems:

- A connection problem with the USB module.
- The Cisco IOS image running on the router does not support a USB module.
- A hardware problem with the USB module itself.

Sample output from the **show file systems** command showing a USB token appears below. The USB module listing appears in the last line of the examples.

```
Device# show file systems
File Systems:
      Size(b)      Free(b)      Type  Flags  Prefixes
      -          -          -     -     -
      -          -          opaque rw   archive:
      -          -          opaque rw   system:
      -          -          opaque rw   null:
      -          -          network rw   tftp:
* 129880064      69414912     disk  rw   flash:#
      491512      486395      nvram rw   nvram:
      -          -          opaque wo   syslog:
      -          -          opaque rw   xmodem:
      -          -          opaque rw   ymodem:
      -          -          network rw   rcp:
      -          -          network rw   pram:
      -          -          network rw   ftp:
      -          -          network rw   http:
      -          -          network rw   scp:
      -          -          network rw   https:
      -          -          opaque ro   cns:
      63158272    33037312    usbflash rw   usbflash0:
      32768      858        usbtoken rw   usbtoken1:
```

## Determining if a USB Token is Supported by Cisco

Use the **show usb device** command to determine if a USB token is supported by Cisco. The following output from this command indicates whether or not the module is supported is bold in the sample output below:

```
Router# show usb device
Host Controller:1
Address:0x11
Device Configured:YES
Device Supported:YES
Description:eToken Pro 4254
Manufacturer:AKS
Version:1.0
Serial Number:
Device Handle:0x1010000
USB Version Compliance:1.0
Class Code:0xFF
Subclass Code:0x0
Protocol:0x0
Vendor ID:0x529
Product ID:0x514
Max. Packet Size of Endpoint Zero:8
Number of Configurations:1
Speed:Low
Selected Configuration:1
Selected Interface:0
Configuration:
  Number:1
  Number of Interfaces:1
  Description:
  Attributes:None
  Max Power:60 mA
```

```

Interface:
  Number:0
  Description:
  Class Code:255
  Subclass:0
  Protocol:0
  Number of Endpoints:0

```

## Determining USB Token Device Problems

Use the **show usb controllers** command to determine if there is a hardware problem with a USB flash module. If the **show usb controllers** command displays an error, the error indicates a hardware problem in the USB module.

You can also use the **show usb controllers** command to verify that copy operations onto a USB flash module are occurring successfully. Issuing the **show usb controllers** command after performing a file copy should display successful data transfers.

The following sample output for the **show usb controllers** command displays a working USB flash module:

```

Router# show usb controllers
Name:1362HCD
Controller ID:1
Controller Specific Information:
  Revision:0x11
  Control:0x80
  Command Status:0x0
  Hardware Interrupt Status:0x24
  Hardware Interrupt Enable:0x80000040
  Hardware Interrupt Disable:0x80000040
  Frame Interval:0x27782EDF
  Frame Remaining:0x13C1
  Frame Number:0xDA4C
  LSThreshold:0x628
  RhDescriptorA:0x19000202
  RhDescriptorB:0x0
  RhStatus:0x0
  RhPort1Status:0x100103
  RhPort2Status:0x100303
  Hardware Configuration:0x3029
  DMA Configuration:0x0
  Transfer Counter:0x1
  Interrupt:0x9
  Interrupt Enable:0x196
  Chip ID:0x3630
  Buffer Status:0x0
  Direct Address Length:0x80A00
  ATL Buffer Size:0x600
  ATL Buffer Port:0x0
  ATL Block Size:0x100
  ATL PTD Skip Map:0xFFFFFFFF
  ATL PTD Last:0x20
  ATL Current Active PTD:0x0
  ATL Threshold Count:0x1
  ATL Threshold Timeout:0xFF
Int Level:1
Transfer Completion Codes:
  Success                :920          CRC                :0
  Bit Stuff              :0          Stall              :0
  No Response            :0          Overrun            :0
  Underrun               :0          Other              :0
  Buffer Overrun          :0          Buffer Underrun    :0
Transfer Errors:
  Canceled Transfers    :2          Control Timeout    :0
Transfer Failures:
  Interrupt Transfer    :0          Bulk Transfer      :0
  Isochronous Transfer  :0          Control Transfer   :0
Transfer Successes:

```

```

        Interrupt Transfer      :0
        Isochronous Transfer   :0
USB D Failures:
    Enumeration Failures      :0
    Power Budget Exceeded:0
USB MSCD SCSI Class Driver Counters:
    Good Status Failures      :3
    Good Status Timed out:0
    Device Never Opened       :0
    Illegal App Handle        :0
    Invalid Unit Number       :0
    Application Overflow      :0
    Control Pipe Stall        :0
    Device Stalled            :0
    Device Detached           :0
    Invalid Logic Unit Num:0
USB Aladdin Token Driver Counters:
    Token Inserted            :1
    Send Insert Msg Fail      :0
    Dev Entry Add Fail        :0
    Dev Entry Remove Fail:0
    Response Txn Fail         :0
    Txn Invalid Dev Handle:0
USB Flash File System Counters:
    Flash Disconnected        :0
    Flash Device Fail         :0
    Flash startstop Fail      :0
USB Secure Token File System Counters:
    Token Inserted            :1
    Token FS success          :1
    Token Max Inserted        :0
    Token Event               :0
    Watched Boolean Create Failures:0
        Bulk Transfer          :26
        Control Transfer:894
        No Class Driver Found:0
        Command Fail           :0
        Device not Found:0
        Drive Init Fail        :0
        Bad API Command        :0
        Invalid Argument:0
        Device in use          :0
        Malloc Error           :0
        Bad Command Code:0
        Unknown Error          :0
        Token Removed          :0
        Response Txns          :434
        Request Txns           :434
        Request Txn Fail:0
        Command Txn Fail:0
        Flash Connected        :1
        Flash Ok                :1
        Flash FS Fail          :0
        Token Detached         :0
        Token FS Fail          :0
        Create Talker Failures:0
        Destroy Talker Failures:0

```

## Displaying USB Token Information

Use the **dir** command with the **filesystem** keyword option **usbtoken0-9:** to display all files, directories, and their permission strings on the USB token.

The following sample output displays directory information for the USB token:

```

Device# dir usbtoken1:
Directory of usbtoken1:/
  2 d---          64 Dec 22 2032 05:23:40 +00:00 1000
  5 d---         4096 Dec 22 2032 05:23:40 +00:00 1001
  8 d---          0 Dec 22 2032 05:23:40 +00:00 1002
 10 d---          512 Dec 22 2032 05:23:42 +00:00 1003
 12 d---          0 Dec 22 2032 05:23:42 +00:00 5000
 13 d---          0 Dec 22 2032 05:23:42 +00:00 6000
 14 d---          0 Dec 22 2032 05:23:42 +00:00 7000
 15 ----          940 Jun 27 1992 12:50:42 +00:00 mystartup-config
 16 ----         1423 Jun 27 1992 12:51:14 +00:00 myrunning-config
32768 bytes total (858 bytes free)

```

The following sample output displays directory information for all devices to which the device is aware:

```

Device# dir all-filestystems
Directory of archive:/
No files in directory
No space information available
Directory of system:/
  2 drwx          0 <no date> its
 115 dr-x         0 <no date> lib
 144 dr-x         0 <no date> memory
  1 -rw-         1906 <no date> running-config
 114 dr-x         0 <no date> vfiles
No space information available
Directory of flash:/
  1 -rw-         30125020 Dec 22 2032 03:06:04 +00:00 c3825-entservicesk9-mz.123-14.T
129880064 bytes total (99753984 bytes free)

```

```

Directory of nvram:/
 476 -rw-      1947          <no date>  startup-config
 477 ----      46          <no date>  private-config
 478 -rw-      1947          <no date>  underlying-config
  1 -rw-        0          <no date>  ifIndex-table
  2 ----        4          <no date>  rf_cold_starts
  3 ----       14          <no date>  persistent-data
491512 bytes total (486395 bytes free)
Directory of usbflash0:/
  1 -rw-    30125020 Dec 22 2032 05:31:32 +00:00  c3825-entservicesk9-mz.123-14.T
63158272 bytes total (33033216 bytes free)
Directory of usbtoken1:/
  2 d---        64 Dec 22 2032 05:23:40 +00:00  1000
  5 d---    4096 Dec 22 2032 05:23:40 +00:00  1001
  8 d---        0 Dec 22 2032 05:23:40 +00:00  1002
 10 d---    512 Dec 22 2032 05:23:42 +00:00  1003
 12 d---        0 Dec 22 2032 05:23:42 +00:00  5000
 13 d---        0 Dec 22 2032 05:23:42 +00:00  6000
 14 d---        0 Dec 22 2032 05:23:42 +00:00  7000
 15 ----    940 Jun 27 1992 12:50:42 +00:00  mystartup-config
 16 ----   1423 Jun 27 1992 12:51:14 +00:00  myrunning-config
32768 bytes total (858 bytes free)

```

## Configuration Examples for PKI Storage

### Example: Storing Certificates to a Specific Local Storage Location

The following configuration example shows how to store certificates to the certs subdirectory. The certs subdirectory does not exist and is automatically created.

```

Router# dir nvram:
 114 -rw-      4687          <no date>  startup-config
 115 ----     5545          <no date>  private-config
 116 -rw-      4687          <no date>  underlying-config
  1 ----       34          <no date>  persistent-data
  3 -rw-       707          <no date>  iosscaroot#7401CA.cer
  9 -rw-       863          <no date>  msca-root#826E.cer
 10 -rw-       759          <no date>  msca-root#1BA8CA.cer
 11 -rw-       863          <no date>  msca-root#75B8.cer
 24 -rw-     1149          <no date>  storagename#6500CA.cer
 26 -rw-       863          <no date>  msca-root#83EE.cer
129016 bytes total (92108 bytes free)
Router# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)# crypto pki certificate storage disk0:/certs
Requested directory does not exist -- created
Certificates will be stored in disk0:/certs/
Router(config)# end
Router# write
*May 27 02:09:00:%SYS-5-CONFIG_I:Configured from console by consolemem
Building configuration...
[OK]
Router# directory disk0:/certs
Directory of disk0:/certs/
 14 -rw-       707 May 27 2005 02:09:02 +00:00  iosscaroot#7401CA.cer
 15 -rw-       863 May 27 2005 02:09:02 +00:00  msca-root#826E.cer
 16 -rw-       759 May 27 2005 02:09:02 +00:00  msca-root#1BA8CA.cer
 17 -rw-       863 May 27 2005 02:09:02 +00:00  msca-root#75B8.cer
 18 -rw-     1149 May 27 2005 02:09:02 +00:00  storagename#6500CA.cer
 19 -rw-       863 May 27 2005 02:09:02 +00:00  msca-root#83EE.cer
47894528 bytes total (20934656 bytes free)
! The certificate files are now on disk0/certs:

```

## Example: Logging Into a USB Token and Saving RSA Keys to the USB Token

The following configuration example shows to how log in to the USB token, generate RSA keys, and store the RSA keys on the USB token:

```

! Configure the router to automatically log into the eToken
configure terminal
 crypto pki token default user-pin 0 1234567890
! Generate RSA keys and enroll certificates with the CA.
crypto pki trustpoint IOSCA
 enrollment url http://10.23.2.2
 exit
crypto ca authenticate IOSCA
Certificate has the following attributes:
  Fingerprint MD5:23272BD4 37E3D9A4 236F7E1A F534444E
  Fingerprint SHA1:D1B4D9F8 D603249A 793B3CAF 8342E1FE 3934EB7A
% Do you accept this certificate? [yes/no]:yes
Trustpoint CA certificate accepted.
crypto pki enroll
crypto pki enroll IOSCA
%
% Start certificate enrollment ..
% Create a challenge password. You will need to verbally provide this
password to the CA Administrator in order to revoke your certificate.
For security reasons your password will not be saved in the configuration.
Please make a note of it.
Password:
Re-enter password:
% The subject name in the certificate will include:c2851-27.cisco.com
% Include the router serial number in the subject name? [yes/no]:no
% Include an IP address in the subject name? [no]:no
Request certificate from CA? [yes/no]:yes
% Certificate request sent to Certificate Authority
% The 'show crypto ca certificate IOSCA verbose' command will show the fingerprint.
*Jan 13 06:47:19.413:CRYPTO_PKI: Certificate Request Fingerprint MD5:E6DDAB1B
0E30EFE6 54529D8A DA787DBA
*Jan 13 06:47:19.413:CRYPTO_PKI: Certificate Request Fingerprint SHA1:3B0F33B
7 57C02A10 3935042B C4B6CD3D 61039251
*Jan 13 06:47:21.021:%PKI-6-CERTRET:Certificate received from Certificate Authority
! Issue the write memory command, which will automatically save the RSA keys to the
eToken ! instead of private NVRAM.
Router# write memory
Building configuration...
[OK]
*Jan 13 06:47:29.481:%CRYPTO-6-TOKENSTOREKEY:Key c2851-27.cisco.com stored on
Cryptographic Token eToken Successfully

```

The following sample output from the **show crypto key mypubkey rsa** command displays stored credentials after they are successfully loaded from the USB token. Credentials that are stored on the USB token are in the protected area. When storing the credentials on the USB token, the files are stored in a directory called /keystore. However, the key files are hidden from the command-line interface (CLI).

```

Router#
show crypto key mypubkey rsa
% Key pair was generated at:06:37:26 UTC Jan 13 2005
Key name:c2851-27.cisco.com
Usage:General Purpose Key
Key is not exportable.
Key Data:
 305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00E3C644 43AA7DDD
 732E0F4E 3CA0CDAB 387ABF05 EB8F22F2 2431F1AE 5D51FEE3 FCDEA934 7FBD3603
 7C977854 B8E999BF 7FC93021 7F46ABF8 A4BA2ED6 172D3D09 B5020301 0001
% Key pair was generated at:06:37:27 UTC Jan 13 2005
Key name:c2851-27.cisco.com.server
Usage:Encryption Key
Key is not exportable.
Key Data:
 307C300D 06092A86 4886F70D 01010105 00036B00 30680261 00DD96AE 4BF912EB

```

2C261922 4784EF98 2E70E837 774B3778 7F7AEB2D 87F5669B BF5DDFBC F0D521A5  
 56AB8FDC 9911968E DE347FB0 A514A856 B30EAFF4 D1F453E1 003CFE65 0CCC6DC7  
 21FBE3AC 2F8DEA16 126754BC 1433DEF9 53266D33 E7338C95 BB020301 0001

## Additional References

### Related Documents

Related Topic	Document Title
Connecting the USB modules to the router	<a href="#">Cisco Access Router USB Flash Module and USB eToken Hardware Installation Guide</a>
eToken and USB flash data sheet	<a href="#">USB eToken and USB Flash Features Support</a>
RSA keys	Deploying RSA Keys Within a PKI
File management (loading, copying, and rebooting files)	<i>Cisco Configuration Fundamentals Configuration Guide on Cisco.com</i>
USB Token RSA Operations: Certificate server configuration	“Configuring and Managing a Cisco IOS Certificate Server for PKI Deployment” feature document.  See the “Generating a Certificate Server RSA Key Pair” section, the “Configuring a Certificate Server Trustpoint” section, and related examples.
USB Token RSA Operations: Using USB tokens for RSA operations upon initial autoenrollment	See the “Configuring Certificate Enrollment or Autoenrollment” section of the “Configuring Certificate Enrollment for a PKI ” feature document.
SDP setup, configuration and use with USB tokens	See the feature information section for the feature names on using SDP and USB tokens to deploy PKI credentials in the “Setting Up Secure Device Provisioning (SDP) for Enrollment in a PKI” feature document.

### Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	<a href="http://www.cisco.com/cisco/web/support/index.html">http://www.cisco.com/cisco/web/support/index.html</a>



## Feature Information for Storing PKI Credentials

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

**Table 10**      *Feature Information for Storing PKI Credentials*

Feature Name	Releases	Feature Information
USB Token and Secure Device Provisioning (SDP) Integration	12.4(15)T	<p>This feature provides the ability to provision remote devices with USB tokens using SDP.</p> <p>The following sections in this document provide information about this feature:</p> <ul style="list-style-type: none"> <li>• Benefits of USB Tokens</li> <li>• Setting Administrative Functions on the USB Token</li> </ul> <p>The following commands were introduced by this feature: <b>binary file</b>, <b>crypto key move rsa</b>, <b>template file</b>.</p> <p><b>Note</b> This document introduces the benefits of using USB tokens and SDP for a deployment solution.</p>

Feature Name	Releases	Feature Information
Cisco IOS USB Token PKI Enhancements -- Phase 2	12.4(11)T	<p>This feature enhances USB token functionality by using the USB token as a cryptographic device. USB tokens may be used for RSA operations such as key generation, signing, and authentication.</p> <p>The following sections in this document provide information about this feature:</p> <ul style="list-style-type: none"> <li>• Benefits of USB Tokens</li> <li>• Logging Into and Setting Up the USB Token</li> <li>• Setting Administrative Functions on the USB Token</li> </ul> <p><b>Note</b> This document introduces the benefits of using USB tokens and the keys on the token for RSA operations.</p>
USB Storage PKI Enhancements	12.4(4)T 12.4(11)T	<p>This feature enhances the USB token PIN security for automatic login and increases the flexibility of USB token configuration and the RSA key storage.</p> <p>Cisco IOS Release 12.4(11)T introduced support for USB Storage on NPE-G2.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• Configuring the USB Token</li> <li>• Setting Administrative Functions on the USB Token</li> </ul> <p>The following commands were introduced or modified by this feature: <b>crypto key storage</b>, <b>crypto pki generate rsa</b>, <b>crypto pki token encrypted-user-pin</b>, <b>crypto pki token label</b>, <b>crypto pki token lock</b>, <b>crypto pki token secondary unconfig</b>, <b>crypto pki token unlock</b></p>

Feature Name	Releases	Feature Information
Certificate -- Storage Location Specification	12.2(33)SXH 12.2(33)SRA 12.4(2)T	<p>This feature allows you to specify the storage location of local certificates for platforms that support storing certificates as separate files. All Cisco platforms support NVRAM, which is the default location, and flash local storage. Depending on your platform, you may have other supported local storage options including bootflash, slot, disk, USB flash, or USB token.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• Storing Certificates to a Local Storage Location</li> <li>• Specifying a Local Storage Location for Certificates</li> <li>• Storing Certificates to a Specific Local Storage Location Example</li> </ul> <p>The following commands were introduced by this feature: <b>crypto pki certificate storage</b>, <b>show crypto pki certificates storage</b></p>

Feature Name	Releases	Feature Information
USB Storage	12.3(14)T 12.4(11)T	<p>This feature enables certain models of Cisco routers to support USB tokens. USB tokens provide secure configuration distribution and allow users to VPN credentials for deployment.</p> <p>Cisco IOS Release 12.4(11)T introduced support for USB Storage on NPE-G2.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> <li>• PKI Credentials and USB Tokens</li> <li>• Setting Up and Using USB Tokens on Cisco Routers</li> <li>• Troubleshooting USB Tokens</li> <li>• Logging Into a USB Token and Saving RSA Keys to the USB Token Example</li> </ul> <p>The following commands were introduced or modified by this feature: <b>copy</b>, <b>crypto pki token change-pin</b>, <b>crypto pki token login</b>, <b>crypto pki token logout</b>, <b>crypto pki token max-retries</b>, <b>crypto pki token removal timeout</b>, <b>crypto pki token secondary config</b>, <b>crypto pki token user-pin</b>, <b>debug usb driver</b>, <b>dir</b>, <b>show usb controllers</b>, <b>show usb device</b>, <b>show usb driver</b>, <b>show usbtokens</b></p>
RSA 4096-bit Key Generation in Software Crypto Engine Support	15.1(1)T	<p>The range value for the <b>modulus</b> keyword value for the <b>crypto key generate rsa</b> command is extended from 360 to 2048 bits to 360 to 4096 bits.</p>

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.



# Source Interface Selection for Outgoing Traffic with Certificate Authority

---

The Source Interface Selection for Outgoing Traffic with Certificate Authority feature allows the IP address of an interface to be specified and used as the source address for all outgoing TCP connections associated with that trustpoint when a designated trustpoint has been configured.

- [Finding Feature Information, page 229](#)
- [Information About Source Interface Selection for Outgoing Traffic with Certificate Authority, page 229](#)
- [How to Configure Source Interface Selection for Outgoing Traffic with Certificate Authority, page 230](#)
- [Configuration Examples for Source Interface Selection for Outgoing Traffic with Certificate Authority, page 234](#)
- [Additional References, page 234](#)
- [Feature Information for Source Interface Selection for Outgoing Traffic with Certificate Authority, page 235](#)
- [Glossary, page 236](#)

## Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table at the end of this module.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

## Information About Source Interface Selection for Outgoing Traffic with Certificate Authority

- [Certificates That Identify an Entity, page 230](#)
- [Source Interface for Outgoing TCP Connections Associated with a Trustpoint, page 230](#)

## Certificates That Identify an Entity

Certificates can be used to identify an entity. A trusted server, known as the certification authority (CA), issues the certificate to the entity after determining the identity of the entity. A router that is running Cisco IOS software obtains its certificate by making a network connection to the CA. Using the Simple Certificate Enrollment Protocol (SCEP), the router transmits its certificate request to the CA and receives the granted certificate. The router obtains the certificate of the CA in the same manner using SCEP. When validating a certificate from a remote device, the router may again contact the CA or a Lightweight Directory Access Protocol (LDAP) or HTTP server to determine whether the certificate of the remote device has been revoked. (This process is known as checking the certificate revocation list [CRL].)

In some configurations, the router may make the outgoing TCP connection using an interface that does not have a valid or IP address that can be routed. The user must specify that the address of a different interface be used as the source IP address for the outgoing connection. Cable modems are a specific example of this requirement because the outgoing cable interface (the RF interface) usually does not have an IP address that can be routed. However, the user interface (usually Ethernet) does have a valid IP address.

## Source Interface for Outgoing TCP Connections Associated with a Trustpoint

The **crypto ca trustpoint** command is used to specify a trustpoint. The **source interface** command is used along with the **crypto ca trustpoint** command to specify the address of the interface that is to be used as the source address for all outgoing TCP connections associated with that trustpoint.



### Note

---

If the interface address is not specified using the **source interface** command, the address of the outgoing interface is used.

---

## How to Configure Source Interface Selection for Outgoing Traffic with Certificate Authority

- [Configuring the Interface for All Outgoing TCP Connections Associated with a Trustpoint](#), page 230

## Configuring the Interface for All Outgoing TCP Connections Associated with a Trustpoint

Perform this task to configure the interface that you want to use as the source address for all outgoing TCP connections associated with a trustpoint.

**SUMMARY STEPS**

1. **enable**
2. **configure terminal**
3. **crypto ca trustpoint** *name*
4. **enrollment** [*mode*] [**retry period** *minutes*] [**retry count** *number*] **url** *url* [**pem**]
5. **source interface** *interface-address*
6. **interface** *type slot / port*
7. **description** *string*
8. **ip address** *ip-address mask*
9. **interface** *type slot/port*
10. **description** *string*
11. **ip address** *ip-address mask*
12. **crypto map** *map-name*

**DETAILED STEPS**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<b>enable</b>  <b>Example:</b> Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<b>Step 2</b>	<b>configure terminal</b>  <b>Example:</b> Router# configure terminal	Enters global configuration mode.
<b>Step 3</b>	<b>crypto ca trustpoint</b> <i>name</i>  <b>Example:</b> Router (config)# crypto ca trustpoint ms-ca	Declares the Certificate Authority (CA) that your router should use and enters ca-trustpoint configuration mode.



Command or Action	Purpose
<p><b>Step 4</b> <b>enrollment</b> [<b>mode</b>] [<b>retry period</b> <i>minutes</i>] [<b>retry count</b> <i>number</i>] <b>url</b> <i>url</i> [<b>pem</b>]</p> <p><b>Example:</b></p> <pre>Router (ca-trustpoint)# enrollment url http:// caserver.myexample.com</pre> <p>- or -</p> <pre>Router (ca-trustpoint)# enrollment url http:// [2001:DB8:1:1::1]:80</pre>	<p>Specifies the following enrollment parameters of the CA:</p> <ul style="list-style-type: none"> <li>• (Optional) The <b>mode</b> keyword specifies the registration authority (RA) mode, if your CA system provides an RA. By default, RA mode is disabled.</li> <li>• (Optional) The <b>retry period</b> keyword and <i>minutes</i> argument specifies the period, in minutes, in which the router waits before sending the CA another certificate request. Valid values are from 1 to 60. The default is 1.</li> <li>• (Optional) The <b>retry count</b> keyword and <i>number</i> argument specifies the number of times a router will resend a certificate request when it does not receive a response from the previous request. Valid values are from 1 to 100. The default is 10.</li> <li>• The <i>url</i> argument is the URL of the CA to which your router should send certificate requests. <ul style="list-style-type: none"> <li><b>Note</b> With the introduction of Cisco IOS Release 15.2(1)T, an IPv6 address can be added to the <b>http:</b> enrolment method. For example: <code>http://[ipv6-address]:80</code>. The IPv6 address must be enclosed in brackets in the URL. See the <a href="#">enrollment url (ca-trustpoint)</a> command page for more information on the other enrollment methods that can be used.</li> </ul> </li> <li>• (Optional) The <b>pem</b> keyword adds privacy-enhanced mail (PEM) boundaries to the certificate request.</li> </ul>
<p><b>Step 5</b> <b>source interface</b> <i>interface-address</i></p> <p><b>Example:</b></p> <pre>Router (ca-trustpoint)# interface ethernet 0</pre>	<p>Interface to be used as the source address for all outgoing TCP connections associated with that trustpoint.</p>
<p><b>Step 6</b> <b>interface</b> <i>type slot / port</i></p> <p><b>Example:</b></p> <pre>Router (ca-trustpoint)# interface ethernet 1</pre>	<p>Configures an interface type and enters interface configuration mode.</p>
<p><b>Step 7</b> <b>description</b> <i>string</i></p> <p><b>Example:</b></p> <pre>Router (config-if)# description inside interface</pre>	<p>Adds a description to an interface configuration.</p>

	Command or Action	Purpose
Step 8	<p><b>ip address</b> <i>ip-address mask</i></p> <p><b>Example:</b></p> <pre>Router (config-if)# ip address 10.1.1.1 255.255.255.0</pre>	Sets a primary or secondary IP address for an interface.
Step 9	<p><b>interface</b> <i>type slot/port</i></p> <p><b>Example:</b></p> <pre>Router (config-if)# interface ethernet1/0</pre>	Configures an interface type.
Step 10	<p><b>description</b> <i>string</i></p> <p><b>Example:</b></p> <pre>Router (config-if)# description outside interface 10.1.1.205 255.255.255.0</pre>	Adds a description to an interface configuration.
Step 11	<p><b>ip address</b> <i>ip-address mask</i></p> <p><b>Example:</b></p> <pre>Router (config-if)# ip address 10.2.2.205 255.255.255.0</pre>	Sets a primary or secondary IP address for an interface.
Step 12	<p><b>crypto map</b> <i>map-name</i></p> <p><b>Example:</b></p> <pre>Router (config-if)# crypto map mymap</pre>	Applies a previously defined crypto map set to an interface.

- [Troubleshooting Tips, page 233](#)

## Troubleshooting Tips

Ensure that the interface specified in the command has a valid address. Attempt to ping the router using the address of the specified interface from another device (possibly the HTTP or LDAP server that is serving the CRL). You can do the same thing by using a traceroute to the router from the external device.

You can also test connectivity between the router and the CA or LDAP server by using Cisco IOS command-line interface (CLI). Enter the **ping ip** command and respond to the prompts. If you answer “yes” to the “Extended commands [n]:” prompt, you can specify the source address or interface.

In addition, you can use Cisco IOS CLI to input a **traceroute** command. If you enter the **traceroute ip** command (in EXEC mode), you are prompted for the destination and source address. You should specify the CA or LDAP server as the destination and the address of the interface that you specified in the “source interface” as the source address.

# Configuration Examples for Source Interface Selection for Outgoing Traffic with Certificate Authority

## Source Interface Selection for Outgoing Traffic with Certificate Authority Example

In the following example, the router is located in a branch office. The router uses IP Security (IPSec) to communicate with the main office. Ethernet 1 is the “outside” interface that connects to the Internet Service Provider (ISP). Ethernet 0 is the interface connected to the LAN of the branch office. To access the CA server located in the main office, the router must send its IP datagrams out interface Ethernet 1 (address 10.2.2.205) using the IPSec tunnel. Address 10.2.2.205 is assigned by the ISP. Address 10.2.2.205 is not a part of the branch office or main office.

The CA cannot access any address outside the company because of a firewall. The CA sees a message coming from 10.2.2.205 and cannot respond (that is, the CA does not know that the router is located in a branch office at address 10.1.1.1, which it is able to reach).

Adding the **source interface** command tells the router to use address 10.1.1.1 as the source address of the IP datagram that it sends to the CA. The CA is able to respond to 10.1.1.1.

This scenario is configured using the **source interface** command and the interface addresses as described above.

```
crypto ca trustpoint ms-ca
  enrollment url http://ms-ca:80/certsrv/mscep/mscep.dll
  source interface ethernet0
!
interface ethernet 0
  description inside interface
  ip address 10.1.1.1 255.255.255.0
!
interface ethernet 1
  description outside interface
  ip address 10.2.2.205 255.255.255.0
  crypto map main-office
```

## Additional References

### Related Documents

Related Topic	Document Title
Cisco IOS commands	<a href="#">Cisco IOS Master Commands List, All Releases</a>
Configuring IPSec and certification authority	Security for VPNs with IPsec
IPSec and certification authority commands	<i>Cisco IOS Security Command Reference</i>

**MIBs**

<b>MIBs</b>	<b>MIBs Link</b>
None.	To locate and download MIBs for selected platforms, Cisco software releases, and feature sets, use Cisco MIB Locator found at the following URL: <a href="http://www.cisco.com/go/mibs">http://www.cisco.com/go/mibs</a>

**Technical Assistance**

<b>Description</b>	<b>Link</b>
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	<a href="http://www.cisco.com/cisco/web/support/index.html">http://www.cisco.com/cisco/web/support/index.html</a>

## Feature Information for Source Interface Selection for Outgoing Traffic with Certificate Authority

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

**Table 11** Feature Information for Source Interface Selection for Outgoing Traffic with Certificate Authority

Feature Name	Releases	Feature Information
Source Interface Selection for Outgoing Traffic with Certificate Authority	12.2(15)T	<p>This feature allows the IP address of an interface to be specified and used as the source address for all outgoing TCP connections associated with that trustpoint when a designated trustpoint has been configured.</p> <p>This feature was introduced in Cisco IOS Release 12.2(15)T.</p> <p>The following command was introduced or modified: <b>source interface</b> .</p>
PKI IPv6 Support for VPN Solutions	15.2(1)T	The <b>enrollment url (ca-trustpoint)</b> command was modified to specify an IPv6 address in the CA URL.

## Glossary

**authenticate**--To prove the identity of an entity using the certificate of an identity and a secret that the identity poses (usually the private key corresponding to the public key in the certificate).

**CA** --Certificate Authority. A CA is an entity that issues digital certificates (especially X.509 certificates) and vouches for the binding between the data items in a certificate.

**CA authentication** --The user manually approves a certificate from a root CA. Usually a fingerprint of the certificate is presented to the user, and the user is asked to accept the certificate based on the fingerprint. The certificate of a root CA is signed by itself (self-signed) so that it cannot be automatically authenticated using the normal certificate verification process.

**CRL** --certificate revocation list. A CRL is a data structure that enumerates digital certificates that have been invalidated by their issuer prior to when they were scheduled to expire.

**enrollment** --A router receives its certificate through the enrollment process. The router generates a request for a certificate in a specific format (known as PKCS #10). The request is transmitted to a CA, which grants the request and generates a certificate encoded in the same format as the request. The router receives the granted certificate and stores it in an internal database for use during normal operations.

**certificate**--A data structure defined in International Organization for Standardization (ISO) standard X.509 to associate an entity (machine or human) with the public key of that entity. The certificate contains specific fields, including the name of the entity. The certificate is normally issued by a CA on behalf of the entity. In this case the router acts as its own CA. Common fields within a certificate include the distinguished name (DN) of the entity, the DN of the authority issuing the certificate, and the public key of the entity.

**LDAP** --Lightweight Directory Access Protocol. A LDAP is a protocol that provides access for management and browser applications that provide read-and-write interactive access to the X.500 directory.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

