



Asynchronous Transfer Mode Configuration Guide, Cisco IOS XE 16 (Cisco ASR 920 Series)

First Published: 2019-07-31

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

The documentation set for this product strives to use bias-free language. For purposes of this documentation set, bias-free is defined as language that does not imply discrimination based on age, disability, gender, racial identity, ethnic identity, sexual orientation, socioeconomic status, and intersectionality. Exceptions may be present in the documentation due to language that is hardcoded in the user interfaces of the product software, language used based on standards documentation, or language that is used by a referenced third-party product.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2019 Cisco Systems, Inc. All rights reserved.



CONTENTS

CHAPTER 1

Configuring ATM 1

Configuring ATM 1

Information About Configuring ATM Interface 1

ATM Interface 1

Restrictions for Clear Channel ATM 1

Information About Clear Channel ATM 2

How to Configure ATM 2

Configuring ATM on a T1 or E1 Controller 2

Configuring ATM on OC-3 IM with SDH Framing 4

Configuring ATM on OC-3 IM with SONET Framing 5

Configuring the ATM Interface on OC-3 IM 6

Configuring ATM Interface on TDM IMs 7

Configuring PVCs 8

Creating a Permanent Virtual Circuit 8

Verifying a Multipoint PVC Configuration 10

Mapping a Protocol Address to a PVC 11

Configuring the AAL and Encapsulation Type 11

Configuring PVC Traffic Parameters 12

Enabling Inverse ARP 12

Configuring Broadcast on a PVC 13

Configuring a PVC on a Multipoint Subinterface 13

Customizing the ATM Interface 16

Configuring MTU Size 16

How to Configure Clear Channel ATM 16

Configuring Clear Channel ATM on OC-3 IM with SONET Framing 16

Configuring Clear Channel ATM in OC-3 Mode with SDH Framing 17

ATM Configuration Examples 19

- Example: Configuring Supported ATM Interface Types 19
- Example Creating a PVC 19
- PVCs in a Fully Meshed Network Example 19
- Enabling Inverse ARP Example 20
- PVC on a Point-to-Point Subinterface Configuration Example 21

Monitoring and Maintaining the ATM Interface 21

Additional References 22

CHAPTER 2

Configuring AAL5 L3 Termination 25

- Information About AAL5 L3 Termination 25
 - Restrictions for AAL5 L3 Termination 25
 - Scale Supported for AAL5 L3 Termination 26
- How to Configure AAL5 L3 Termination 26
 - Configuring Layer 3 Terminated VCs 26
 - Configuring Layer2 QoS on the ATM Interface 28
 - Configuring Protocol IP Broadcast on ATM L3 Interface 32
 - Configuring VRF Enabled ATM L3 Interface 34
- Configuration Examples for AAL5 L3 Termination 37
 - Example: Configuring SONET mode on OC-3 IM 37
 - Example: Configuring SDH mode on OC-3 IM 37
 - Example: Configuring Layer2 QoS 37
 - Example: Configuring Protocol IP Broadcast in the Layer3 ATM Interface 38
 - Example: Configuring VRF Enabled ATM L3 Interface 38
- Verifying AAL5 L3 Termination 38
- Additional References 39

CHAPTER 3

ATM Hierarchical Shaping ATM VC into VP Shaping 41

- ATM Hierarchical Shaping ATM VC into VP Shaping 41
 - Restrictions for ATM Hierarchical Shaping 41
 - Information About ATM Hierarchical Shaping 41
 - ATM Hierarchical Shaping 41
- How to Configure ATM Hierarchical Shaping 42
 - Configuring ATM Hierarchical Shaping 42

Configuration Examples for ATM Hierarchical Shaping	43
Example Configuring ATM Hierarchical Shaping	43
Additional References	43

CHAPTER 4**N:1 PVC Mapping to PWE with Nonunique VPIs 45**

N:1 PVC Mapping to PWE with Nonunique VPIs	45
Restrictions for N:1 PVC Mapping to PWE with Nonunique VPIs	45
Information About N:1 PVC Mapping to PWE with Nonunique VPIs	46
N:1 PVC Mapping to PWE with Nonunique VPIs Feature Description	46
How to Configure N:1 PVC Mapping to PWE with Nonunique VPIs	46
Configuring N:1 PVC Mapping to PWE with Nonunique VPIs	46
Configuring N:1 PVC Mapping to PWE with Nonunique VPIs using the commands associated with the L2VPN Protocol-Based CLIs feature	48
Configuration Examples for N:1 PVC Mapping to PWE with Nonunique VPIs	50
Example: Configuring N:1 PVC Mapping to PWE with Nonunique VPIs	50
Example: Configuring N:1 PVC Mapping to PWE with Nonunique VPIs using the commands associated with the L2VPN Protocol-Based CLIs feature	51
Verifying the N:1 PVC Mapping to PWE with Nonunique VPIs Configuration	51
Additional References	52

CHAPTER 5**Configuring Pseudowire 53**

Configuring Pseudowire	53
Pseudowire Overview	53
Asynchronous Transfer Mode over MPLS	53
Configuring ATM IMA	54
Configuring an ATM over MPLS Pseudowire	56
Configuring the Controller	57
Configuring an IMA Interface	57
Configuring the ATM over MPLS Pseudowire Interface	58
Configuring 1-to-1 VCC Cell Transport Pseudowire	59
Mapping a Single PVC to a Pseudowire	59
Configuring N-to-1 VCC Cell Transport Pseudowire	60
Configuring 1-to-1 VPC Cell Transport	60
Configuring ATM AAL5 SDU VCC Transport	61

Configuring Cell Packing (Optional) 62

Example: ATM IMA Configuration 62

Example: ATM over MPLS 63

Configuring ATM AAL5 over MPLS Pseudowire on a Sonet Controller 70

Configuring ATM AAL5 over MPLS Pseudowire on T1 Controller 71

Configuring Service Classes on a PVC 72

Example QoS Exp Marking on ATM Layer 2 Interfaces 73



CHAPTER 1

Configuring ATM

- [Configuring ATM, on page 1](#)
- [How to Configure ATM, on page 2](#)
- [How to Configure Clear Channel ATM, on page 16](#)
- [ATM Configuration Examples, on page 19](#)
- [Monitoring and Maintaining the ATM Interface, on page 21](#)
- [Additional References, on page 22](#)

Configuring ATM

This chapter describes how to configure ATM on the Cisco ASR 920 Series Aggregation Services Routers. Effective Cisco IOS-XE Release 3.18, Clear Channel ATM is supported on Cisco ASR-920-24SZ-IM and Cisco ASR-920-12SZ-IM Aggregation Services Router.

Information About Configuring ATM Interface

ATM Interface

Asynchronous Transfer Mode (ATM) uses one Virtual Circuit (VC) to carry all traffic to the next hop address. Even with VC multiplexing, a single VC carries all traffic of the same protocol to the next hop address. Though Weighted Random Early Discard (Per-VC (D)WRED) and WFQ can classify and prioritize the packets, they all share one single Quality of Service (QoS) VC.

Restrictions for Clear Channel ATM

- Operation, Administration, and Maintenance (OAM) is not supported.
- Access Circuit Redundancy (ACR) is not supported.
- Automatic Protection Switching (APS) is not supported.
- Optical Carrier level 12 (OC-12) mode is not supported.
- Clear Channel ATM is not supported for layer 3 on the routers.

Information About Clear Channel ATM

When the clear channel ATM feature is enabled, the entire payload rate over Synchronous Optical Network (SONET) or the Synchronous Digital Hierarchy (SDH) line is used as a single flow of cells or packets. An STS-3c/VC4 container is used to represent the OC-3/STM-1 concatenation types (OC-3 clear channels). Up to four OC-3/STM-1 are supported.

Clear channel ATM supports the following Layer 1 features:

- Framing configuration between SONET and SDH
- Local (diagnostic) and line (network) loopback
- Alarm detection and reporting capabilities
- System, local and line timing options

Effective Cisco IOS-XE Release 3.18, Clear Channel ATM on OC-3/STM-1 is supported on Cisco ASR-920-24SZ-IM, ASR-920-24SZ-M, ASR-920-24TZ-M Aggregation Services Router .

Clear channel ATM Pseudowire supports the following Layer 2 features:

- Permanent Virtual Path (PVP)

For configuration examples, see the "Configuring Pseudowire, Time Division Multiplexing Configuration Guide" chapter.

- QoS experimental bits (Exp) marking on ATM Layer 2 interfaces

For configuration examples, see the "Configuring Pseudowire, Time Division Multiplexing Configuration Guide" chapter.

How to Configure ATM

This section explains how to configure ATM on T1, E1, OC-3, and OC-12 interfaces.

Configuring ATM on a T1 or E1 Controller

To configure ATM on a T1 or E1 controller, follow these steps:

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: Router# configure terminal	Enters the global configuration mode.
Step 2	card type {t1 e1} slot subslot Example: Router(config)# card type t1 0 1	Specifies the slot and subslot number of the T1 or E1 interface.

	Command or Action	Purpose
Step 3	controller t1 <i>slot/subslot/port</i> Example: Router(config)# controller t1 0/1/0	Enters controller configuration mode to configure the T1 interface.
Step 4	framing esf Example: Router(config-controller)# framing esf	Selects the framing type as Extended Super Frame.
Step 5	linecode b8zs Example: Router(config-controller)# linecode b8zs	Selects the linecode type as binary 8-zero substitution (B8ZS).
Step 6	cablelength long <i>db-loss-value</i> Example: Router(config-controller)# cablelength long 0db	Number of decibels by which the transmit signal is decreased.
Step 7	atm Example: Router(config-controller)# atm	Configures the interface for ATM.
Step 8	exit Example: Router(config-controller)# exit	Enters global configuration mode.
Step 9	interface atm <i>slot/subslot/port</i> Example: Router(config)# interface ATM 0/1/0	Specifies the ATM interface.
Step 10	no ip address Example: Router(config-if)# no ip address	Removes the interface IP address.
Step 11	no atm enable-ilmi-trap Example: Router(config-if)# atm enable-ilmi-trap	Disables Integrated Local Management Interface traps.
Step 12	interface atm <i>slot/subslot/port.subinterface</i> point-to-point Example: Router(config)# interface atm 0/1/1.1 point-to-point	Enters subinterface configuration mode and creates a point-to-point subinterface.
Step 13	pvc <i>vpi/vci l2transport</i> Example:	Assigns a VPI and virtual channel identifier (VCI).

	Command or Action	Purpose
	<code>Router(config-subif)# pvc 10/100 l2transport</code>	
Step 14	encapsulation aal5 Example: <code>(cfg-if-atm-l2trans-pvc)# encapsulation aal5</code>	Sets the encapsulation type as aal5.
Step 15	xconnect <i>peer-router-id</i> vcid encapsulation mpls Example: <code>Router(cfg-if-atm-l2trans-pvc)# xconnect 10.1.2.3 1 encapsulation mpls</code>	Binds the attachment circuit to a pseudowire VC.

Configuring ATM on OC-3 IM with SDH Framing

To configure ATM on OC-3 interface module with SDH framing, perform these steps:

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: <code>Router# configure terminal</code>	Enters the global configuration mode.
Step 2	controller sonet <i>slot/subslot/port</i> Example: <code>Router(config)#controller sonet 0/1/0</code>	Enters controller configuration mode to configure SDH.
Step 3	framing sdh Example: <code>Router(config-controller)#framing sdh</code>	Specifies the framing type as SDH.
Step 4	aug mapping au-4 Example: <code>Router(config-controller)#aug mapping au-4</code>	Configures the AUG to be derived from AU-4.
Step 5	au-4 <i>au-4-number</i> tug-3 <i>tug-3-number</i> Example: <code>Router(config-controller)#au-4 1 tug-3 1</code>	Specifies the Administrative Unit type 4 (AU-4) and Tributary Unit group type 3 (TUG-3) numbers.
Step 6	tug-2 <i>tug-2-number</i> e1 <i>e1-line-number</i> atm Example:	Creates an ATM group for the AU-4.

	Command or Action	Purpose
	<pre>Router(config-ctrlr-tug3)# tug-2 1 e1 1 atm</pre>	
Step 7	interface ATM <i>slot/subslot/port.au-4/tug-3/tug-2/e1 .subint</i> <i>point-to-point</i> Example: <pre>Router(config)# interface ATM 0/1/0.1/1/1/1.1 point-to-point</pre>	Specifies the ATM interface as the point-to-point interface type.
Step 8	pvc vpi/vci l2transport Example: <pre>Router(config-subif)#pvc 10/100 l2transport</pre>	Assigns a VPI and virtual channel identifier (VCI).
Step 9	encapsulation aal5 Example: <pre>Router(cfg-if-atm-vc)#encapsulation aal5</pre>	Sets the PVC encapsulation type to AAL5.
Step 10	xconnect remote-ip-address vc-id encapsulation mpls Example: <pre>Router(cfg-if-atm-vc)#xconnect 10.1.1.101 100 encapsulation mpls</pre>	Binds the attachment circuit to the ATM interface to create a pseudowire.

Configuring ATM on OC-3 IM with SONET Framing

To configure ATM on OC-3 interface module with SONET framing, perform these steps:

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: <pre>Router# configure terminal</pre>	Enters the global configuration mode.
Step 2	controller sonet slot/subslot/port Example: <pre>Router(config)#controller sonet 0/1/0</pre>	Enters controller configuration mode to configure SONET.
Step 3	framing sonet Example: <pre>Router(config-controller)# framing sonet</pre>	Specifies the framing type as SONET.

	Command or Action	Purpose
Step 4	sts-1 { 1 - 12 1 - 3 4 - 6 7 - 9 10 - 12 } Example: <pre>Router(config-controller)# sts-1 1</pre>	Configures the Synchronous Transport Signal (STS) (level)-1 in the SONET hierarchy. For OC-3 interfaces, this value is 1. Note The 1-12 value is supported only in OC-12 mode.
Step 5	vtg vtg_number t1 t1_line_number atm Example: <pre>Router(config-ctrlr-sts)# vtg 1 t1 1 atm</pre>	Configures the T1 on the VTG . For SONET framing, values are 1 to 7
Step 6	interface ATM <i>slot/subslot/port.sts-1/vtg/t1 .subint .point-to-point</i> Example: <pre>Router(config)# interface ATM 0/1/0.1/1/1.1 point-to-point</pre>	Specifies the ATM interface as the point-to-point interface type.
Step 7	pvc vpi/vci l2transport Example: <pre>Router(config-subif)#pvc 10/100 l2transport</pre>	Assigns a VPI and virtual channel identifier (VCI).
Step 8	encapsulation aal5 Example: <pre>Router(cfg-if-atm-vc)#encapsulation aal5</pre>	Sets the PVC encapsulation type to AAL5.
Step 9	xconnect remote-ip-address vc-id encapsulation mpls Example: <pre>Router(cfg-if-atm-vc)#xconnect 10.1.1.101 100 encapsulation mpls</pre>	Binds the attachment circuit to the ATM interface to create a pseudowire.

Configuring the ATM Interface on OC-3 IM

This section describes how to configure an ATM interface.

Perform the following task to enable the ATM interface:

Procedure

	Command or Action	Purpose
Step 1	configure terminal	Enters global configuration mode from the terminal.

	Command or Action	Purpose
Step 2	interface atm <i>slot/subslot/port.subport</i> Example: interface atm 0/5/0.1/1/1.1	Specifies the ATM interface using the appropriate format of the interface atm command.
Step 3	no shutdown	Changes the shutdown state to up and enables the ATM interface, thereby beginning the segmentation and reassembly (SAR) operation on the interface. <ul style="list-style-type: none"> The no shutdown command passes an enable command to the ATM interface, which then begins segmentation and reassembly (SAR) operations. It also causes the ATM interface to configure itself based on the previous configuration commands sent.

Configuring ATM Interface on TDM IMs

To configure ATM interface on TDM IMs, follow these steps:

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: Router# configure terminal	Enters the global configuration mode.
Step 2	card type {t1 e1} slot subslot Example: Router(config)# card type t1 0 1	Specifies the slot and subslot number of the T1 or E1 interface.
Step 3	controller t1 slot/subslot/port Example: Router(config)# controller t1 0/1/0	Enters controller configuration mode to configure the T1 interface.
Step 4	atm Example: Router(config-controller)# atm	Configures the interface for ATM.
Step 5	exit Example: Router(config-controller)# exit	Enters global configuration mode.

	Command or Action	Purpose
Step 6	interface atm <i>slot/subslot/port.subinterface</i> point-to-point Example: <pre>Router(config)# interface atm 0/1/1.1 point-to-point</pre>	Enters subinterface configuration mode and creates a point-to-point subinterface.
Step 7	pvc <i>vpi/vci</i> l2transport Example: <pre>Router(config-subif)# pvc 10/100 l2transport</pre>	Assigns a VPI and virtual channel identifier (VCI).
Step 8	encapsulation aal5 Example: <pre>(cfg-if-atm-l2trans-pvc)# encapsulation aal5</pre>	Sets the encapsulation type as aal5.
Step 9	xconnect <i>peer-router-id vcid</i> encapsulation mpls Example: <pre>Router(cfg-if-atm-l2trans-pvc)# xconnect 10.1.2.3 1 encapsulation mpls</pre>	Binds the attachment circuit to a pseudowire VC.

Configuring PVCs

To use a permanent virtual circuit (PVC), you must configure the PVC into both the router and the ATM switch. PVCs remain active until the circuit is removed from either configuration.

When a PVC is configured, all the configuration options are passed on to the ATM interface. These PVCs are writable into the nonvolatile RAM (NVRAM) as part of the Route Processor (RP) configuration and are used when the RP image is reloaded.

Some ATM switches might have point-to-multipoint PVCs that do the equivalent of broadcasting. If a point-to-multipoint PVC exists, then that PVC can be used as the sole broadcast PVC for all multicast requests.

To configure a PVC, perform the tasks in the following sections.

Creating a Permanent Virtual Circuit

To use a permanent virtual circuit (PVC), configure the PVC in both the router and the ATM switch. PVCs remain active until the circuit is removed from either configuration. To create a PVC on the ATM interface and enter interface ATM VC configuration mode, perform the following procedure beginning in global configuration mode:

Procedure

	Command or Action	Purpose
Step 1	Device(config)# interface atm <i>slot/subslot/port</i> [<i>,subinterface-number</i> { multipoint point-to-point }]	<p>Enters subinterface configuration mode for the specified port on the ATM Interface Module (IM), where:</p> <ul style="list-style-type: none"> • <i>slot</i>—Specifies the chassis slot number in the Cisco ASR 920 Series Router where the SIP is installed. • <i>subslot</i>—Specifies the secondary slot of the SIP where the IM is installed. • <i>port</i>—Specifies the number of the individual interface port on an IM. • <i>subinterface</i>—Specifies the number of the subinterface.
Step 2	Device(config-if)# atm tx-latency <i>milliseconds</i>	(Optional) Configures the default transmit latency for VCs on this ATM IM interface. The valid range for <i>milliseconds</i> is from 1 to 200, with a default of 100 milliseconds.
Step 3	Device(config-if)# pvc [<i>name</i>] <i>vpi /vci</i>	<p>Configures a new ATM PVC by assigning its VPI/VCI numbers and enters ATM VC configuration mode. The valid values for <i>vpi /vci</i> are:</p> <ul style="list-style-type: none"> • <i>name</i>—(Optional) An arbitrary string that identifies this PVC. • <i>vpi</i>—Specifies the VPI ID. The valid range is 0 to 255. • <i>vci</i>—Specifies the VCI ID. The valid range is 32 to 65535. Values 1 to 31 are reserved and should not be used, except for 5 for the QSAAL PVC and 16 for the ILMI PVC. ILMI is not supported on the Cisco ASR 920 Series Routers. <p>Note When using the pvc command, remember that the <i>vpi /vci</i> combination forms a unique identifier for the interface and all of its subinterfaces. If you specify a <i>vpi /vci</i> combination that has been used on another subinterface, the Cisco IOS software assumes that you want to modify that PVC's configuration and automatically switches to its parent subinterface.</p>

	Command or Action	Purpose
Step 4	Device(config-if-atm-vc)# protocol <i>protocol</i> { <i>protocol-address</i> inarp } [[no] broadcast] Example:	Configures the PVC for a particular protocol and maps it to a specific <i>protocol-address</i> . <ul style="list-style-type: none"> • <i>protocol</i>—Typically set to ipor pppoe, but other values are possible. <p>Note PPP is not supported on the Cisco ASR 920 Series Routers.</p> <ul style="list-style-type: none"> • <i>protocol-address</i>—Destination address or virtual interface template for this PVC (if appropriate for the <i>protocol</i>). • inarp—Specifies that the PVC uses Inverse ARP to determine its address. • [no] broadcast—(Optional) Specifies that this mapping should (or should not) be used for broadcast packets.
Step 5	Device(config-if-atm-vc)# inarp <i>minutes</i>	(Optional) If using Inverse ARP, configures how often the PVC transmits Inverse ARP requests to confirm its address mapping. The valid range is 1 to 60 minutes, with a default of 15 minutes.
Step 6	Device(config-if-atm-vc)# encapsulation { aal0 aal5 aal5snap }	(Optional) Configures the ATM adaptation layer (AAL) and encapsulation type.
Step 7	Device(config-if-atm-vc)# tx-limit <i>buffers</i>	(Optional) Specifies the number of transmit buffers for this VC. The valid range is from 1 to 57343, with a default value that is based on the current VC line rate and on the latency value that is configured with the atmtx-latency command. <p>Note Repeat Step 4 through Step 7 for each PVC to be configured on this interface.</p>
Step 8	Device(config-if-atm-vc)# end	Exits ATM VC configuration mode and returns to privileged EXEC mode.

Verifying a Multipoint PVC Configuration

To verify the configuration of a particular PVC, use the **show atm pvc** command:

```
Device# show atm pvc 1/120
```



```

ATM3/1/0.120: VCD: 1, VPI: 1, VCI: 120
UBR, PeakRate: 149760
AAL5-LLC/SNAP, etype:0x0, Flags: 0xC20, VCmode: 0x0
OAM frequency: 0 second(s), OAM retry frequency: 1 second(s)
OAM up retry count: 3, OAM down retry count: 5
OAM Loopback status: OAM Disabled
OAM VC status: Not Managed
ILMI VC status: Not Managed
InARP frequency: 15 minutes(s)
Transmit priority 3
InPkts: 1394964, OutPkts: 1395069, InBytes: 1833119, OutBytes: 1838799
InPProc: 1, OutPProc: 1, Broadcasts: 0
InFast: 0, OutFast: 0, InAS: 94964, OutAS: 95062
InPktDrops: 0, OutPktDrops: 0
CrcErrors: 0, SarTimeOuts: 0, OverSizedSDUs: 0, LengthViolation: 0, CPICErrors: 0
Out CLP=1 Pkts: 0
OAM cells received: 0
F5 InEndloop: 0, F5 InSegloop: 0, F5 InAIS: 0, F5 InRDI: 0
F4 InEndloop: 0, F4 InSegloop: 0, F4 InAIS: 0, F4 InRDI: 0
OAM cells sent: 0
F5 OutEndloop: 0, F5 OutSegloop: 0, F5 OutRDI: 0
F4 OutEndloop: 0, F4 OutSegloop: 0, F4 OutRDI: 0
OAM cell drops: 0
Status: UP

```



Note To verify the configuration and current status of all PVCs on a particular interface, you can also use the **show atm vc interface** command.

Mapping a Protocol Address to a PVC

The ATM interface supports a static mapping scheme that identifies the network address of remote hosts or routers. This section describes how to map a PVC to an address, which is a required task for configuring a PVC.



Note If you enable or disable broadcasting directly on a PVC using the **protocol** command, this configuration will take precedence over any direct configuration using the **broadcast** command.

See examples of PVC configurations in the section "[ATM Configuration Examples, on page 19](#)".

To map a protocol address to a PVC, use the following command in interface-ATM-VC configuration mode:

Command	Purpose
Router(config-if-atm-vc)# protocol <i>protocol protocol-address</i> [[no] broadcast]	Maps a protocol address to a PVC.

Configuring the AAL and Encapsulation Type

To configure the ATM adaptation layer (AAL) and encapsulation type, use the following command beginning in interface-ATM-VC configuration mode:

Command	Purpose
<pre>Router(config-if-atm-vc)# encapsulation aal5 encap</pre>	<p>Configures the ATM adaptation layer (AAL) and encapsulation type.</p> <ul style="list-style-type: none"> For a list of AAL types and encapsulations supported for the <i>aal-encap</i> argument, refer to the encapsulation aal5 command in the "ATM Commands" chapter of the <i>Cisco IOS Wide-Area Networking Command Reference</i>. The global default is AAL5 with SNAP encapsulation.

Configuring PVC Traffic Parameters

The supported traffic parameters are part of the following service categories: Constant Bit Rate (CBR), Unspecified Bit Rate (UBR), Variable Bit Rate Non Real-Time (VBR-NRT), and real-time Variable Bit Rate (VBR). Only one of these categories can be specified per PVC connection so if a new one is entered, it will replace the existing one.

The *-pcr* and *-mcr* arguments are the peak cell rate and minimum cell rate, respectively. The *-scr* and *-mbs* arguments are the sustainable cell rate and maximum burst size, respectively.

For a description of how to configure traffic parameters in a VC class and apply the VC class to an ATM interface or subinterface, refer to the section *Configuring VC Classes*.

To configure PVC traffic parameters, use one of the following commands beginning in interface-ATM-VC configuration mode:

Command	Purpose
<pre>Router(config-if-atm-vc)# cbr peak_cell_rate_KBPS</pre>	Configures the Constant Bit Rate (CBR).
<pre>Router(config-if-atm-vc)# ubr output-pcr</pre>	Configures the Unspecified Bit Rate (UBR).
<pre>Router(config-if-atm-vc)# vbr-nrt output-pcr output-scr output-mbs</pre>	Configures the Variable Bit Rate-Non Real Time (VBR-NRT) QOS.
<pre>Router(config-if-atm-vc)# vbr-rt peak-rate average-rate burst</pre>	Configures the real-time Variable Bit Rate (VBR). (Cisco MC3810 and Multiport T1/E1 ATM Network Module only.)

Enabling Inverse ARP

Inverse ARP is enabled by default when you create a PVC using the **pvc** command. Once configured, a protocol mapping between an ATM PVC and a network address is learned dynamically as a result of the exchange of ATM Inverse ARP packets.

Inverse ARP is supported on PVCs running IP or IPX and no static map is configured. If a static map is configured, Inverse ARP will be disabled.

When PVC discovery is enabled on an active PVC and the router terminates that PVC, the PVC will generate an ATM Inverse ARP request. This allows the PVC to resolve its own network addresses without configuring a static map.

Address mappings learned through Inverse ARP are aged out. However, mappings are refreshed periodically. This period is configurable using the **inarp** command, which has a default of 15 minutes.

You can also enable Inverse ARP using the **protocol** command. This is necessary only if you disabled Inverse ARP using the **no protocol** command. For more information about this command, refer to the "ATM Commands" chapter in the *Cisco IOS Asynchronous Transfer Mode Command Reference*.

For an example of configuring Inverse ARP, see the section "Example Enabling Inverse ARP" at the end of this chapter.

To enable Inverse ARP on an ATM PVC, use the following commands beginning in global configuration mode:

Procedure

	Command or Action	Purpose
Step 1	interface atm <i>slot/subslot/port.subinterface</i> { multipoint point-to-point } Example: Router(config)# interface atm <i>0/5/0.1/1/1/1.1</i> { multipoint point-to-point }	Specifies the ATM interface using the appropriate format of the interface atm command. ¹
Step 2	pvc [<i>name</i>] <i>vpi / vci</i>	Specifies an ATM PVC by name (optional) and VPI/VCI numbers.
Step 3	encapsulation aal5snap	Configures AAL5 LLC-SNAP encapsulation if it is not already configured.
Step 4	inarp <i>minutes</i>	(Optional) Adjusts the Inverse ARP time period.

Configuring Broadcast on a PVC

To send duplicate broadcast packets for all protocols configured on a PVC, use the following command in interface-ATM-VC configuration mode:



Note If you enable or disable broadcasting directly on a PVC using the **protocol** command, this configuration will take precedence over any direct configuration using the **broadcast** command.

Command	Purpose
Router(config-if-atm-vc)# broadcast	Sends duplicate broadcast packets for all protocols configured on a PVC.

Configuring a PVC on a Multipoint Subinterface

Creating a multipoint subinterface allows you to create a point-to-multipoint PVC that can be used as a broadcast PVC for all multicast requests. To create a PVC on a multipoint subinterface, use the following procedure beginning in global configuration mode:

Procedure

	Command or Action	Purpose
Step 1	Router(config)# interface atm <i>slot/subslot/port.subinterface multipoint</i>	Creates the specified point-to-multipoint subinterface on the given port on the specified ATM SPA, and enters subinterface configuration mode, where: <ul style="list-style-type: none"> • <i>slot</i> —Specifies the chassis slot number where the SIP is installed. • <i>subslot</i> —Specifies the secondary slot of the SIP where the SPA is installed. • <i>port</i> —Specifies the number of the individual interface port on a SPA. • <i>subinterface</i> —Specifies the number of the subinterface.
Step 2	Router(config-subif)# ip address <i>address mask</i>	Assigns the specified IP address and subnet mask to this subinterface.
Step 3	Router(config-subif)# no ip directed-broadcast	(Optional) Disables the forwarding of IP directed broadcasts, which are sometimes used in denial of service (DOS) attacks.
Step 4	Router(config-subif)# pvc [<i>name</i>] <i>vpi /vci</i>	Configures a new ATM PVC by assigning its VPI/VCI numbers and enters ATM VC configuration mode. The valid values for <i>vpi /vci</i> are: <ul style="list-style-type: none"> • <i>name</i> —(Optional) An arbitrary string that identifies this PVC. • <i>vpi</i> —Specifies the VPI ID. The valid range is 0 to 255. • <i>vci</i> —Specifies the VCI ID. The valid range is 32 to 65535. Values 1 to 31 are reserved and should not be used, except for 5 for the QSAAL PVC and 16 for the ILMI PVC. ILMI is not supported on the Cisco ASR 920 Series Routers.

	Command or Action	Purpose
		<p>Note When using the pvc command, remember that the <i>vpi /vci</i> combination forms a unique identifier for the interface and all of its subinterfaces. If you specify a <i>vpi /vci</i> combination that has been used on another subinterface, the Cisco IOS XE software assumes that you want to modify that PVC's configuration and automatically switches to its parent subinterface.</p>
Step 5	Router(config-if-atm-vc)# protocol <i>protocol</i> { <i>protocol-address</i> inarp } broadcast	<p>Configures the PVC for a particular protocol and maps it to a specific <i>protocol-address</i> .</p> <ul style="list-style-type: none"> • <i>protocol</i> —Typically set to ip or pppoe, but other values are possible. <p>Note PPP is not supported on the Cisco ASR 920 Series Routers</p> <ul style="list-style-type: none"> • <i>protocol-address</i> —Destination address or virtual template interface for this PVC (if appropriate for the <i>protocol</i>). • inarp —Specifies that the PVC uses Inverse ARP to determine its address. • broadcast — Specifies that this mapping should be used for multicast packets.
Step 6	Router(config-if-atm-vc)# inarp <i>minutes</i>	(Optional) If using Inverse ARP, configures how often the PVC transmits Inverse ARP requests to confirm its address mapping. The valid range is 1 to 60 minutes, with a default of 15 minutes.
Step 7	Router(config-if-atm-vc)# encapsulation { aal0 aal5 aal5snap }	<p>(Optional) Configures the ATM adaptation layer (AAL) and encapsulation type.</p> <p>Note Repeat Step 1 through Step 7 for each multipoint subinterface to be configured on this ATM SPA.</p>
Step 8	Router(config-if-atm-vc)# end	Exits interface configuration mode and returns to privileged EXEC mode.

Customizing the ATM Interface

You can customize the ATM interface. The features you can customize have default values that will most likely suit your environment and probably need not be changed. However, you might need to enter configuration commands, depending upon the requirements for your system configuration and the protocols you plan to route on the interface.

Configuring MTU Size

Each interface has a default maximum packet size or maximum transmission unit (MTU) size. For ATM interfaces, this number defaults to 4470 bytes.

To set the maximum MTU size, use the following command in interface configuration mode:

Command	Purpose
Router(config-subif)# mtu <i>bytes</i>	Sets the maximum MTU size on the subinterface. Note The MTU size can be changed for an ATM Layer 3 subinterface only.

How to Configure Clear Channel ATM

This section explains how to configure clear channel ATM on an OC-3 IM.

Configuring Clear Channel ATM on OC-3 IM with SONET Framing

To configure ATM on an OC-3 IM with SONET framing, perform these steps:

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: Router# <code>configure terminal</code>	Enters global configuration mode.
Step 2	controller sonet slot/subslot/port Example: Router(config)# <code>controller sonet 0/1/0</code>	Enters controller configuration mode to configure SONET. <ul style="list-style-type: none"> <i>slot/subslot/port</i>—Specifies the location of the controller. For OC-3, valid ports are from 0 to 3.
Step 3	framing sonet Example: Router(config-controller)# <code>framing sonet</code>	Specifies the framing type as SONET.

	Command or Action	Purpose
Step 4	<p>sts-1 sts-identifier atm</p> <p>Example:</p> <pre>Router(config-controller)# sts-1 1 - 3 atm</pre>	<p>Configures Synchronous Transport Signal (STS) (level)-1 in the SONET hierarchy.</p> <ul style="list-style-type: none"> • sts-1— Specifies the SONET STS level. • sts-identifier—For OC-3, valid <i>sts-identifier</i> is from 1 to 3. • atm—Specifies clear channel ATM mode for STS.
Step 5	<p>interface ATM slot/subslot/port:sts-1-num</p> <p>Example:</p> <p>(for main interface)</p> <pre>Router(config-controller)# interface ATM 0/1/0:1</pre> <p>(for sub-interface)</p> <pre>Router(config-controller)# interface ATM 0/1/0:1.1 point-to-point</pre>	<p>Enters clear channel ATM mode.</p> <ul style="list-style-type: none"> • <i>slot/subslot/port:sts-1-num</i>—Specifies the location of the clear channel ATM.
Step 6	<p>pvc vpi/vci l2transport</p> <p>Example:</p> <pre>Router(config-subif)#pvc 10/100 l2transport</pre>	<p>Assigns a virtual path identifier (VPI) and virtual channel identifier (VCI).</p> <ul style="list-style-type: none"> • <i>vpi/vci</i>—Specifies VPI and VCI. • l2transport—Specifies that the PVC is a switched PVC instead of a terminated PVC.
Step 7	<p>encapsulation aal5</p> <p>Example:</p> <pre>Router(cfg-if-atm-l2trans-pvc)#encapsulation aal5</pre>	<p>Sets the PVC encapsulation type to AAL5.</p>
Step 8	<p>xconnect remote-ip-address vc-id encapsulation mpls</p> <p>Example:</p> <pre>Router(cfg-if-atm-l2trans-pvc)#xconnect 10.1.1.101 100 encapsulation mpls</pre>	<p>Binds the attachment circuit to the ATM interface to create a pseudowire.</p>

Configuring Clear Channel ATM in OC-3 Mode with SDH Framing

To configure clear channel ATM in OC-3 mode with SDH framing, perform these steps:

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: Router# configure terminal	Enters global configuration mode.
Step 2	controller sonet slot/subslot/port Example: Router(config)#controller sonet 0/1/0	Enters controller configuration mode to configure SDH. <ul style="list-style-type: none"> • <i>slot/subslot/port</i>—Specifies the location of the controller. For OC-3, valid ports are from 0 to 3.
Step 3	framing sdh Example: Router(config-controller)#framing sdh	Specifies the framing type as SDH.
Step 4	aug mapping au-4 Example: Router(config-controller)#aug mapping au-4	Configures the AUG to be derived from AU-4.
Step 5	au-4 au-4-number atm Example: Router(config-controller)#au-4 1 atm	Specifies the Administrative Unit type 4 (AU-4) numbers and enters clear channel ATM mode.
Step 6	interface ATM <i>slot/subslot/port:au-4-num.subint</i> <i>point-to-point</i> Example: Router(config-controller)# interface ATM ATM0/1/0:1.1 point-to-point	Specifies the ATM interface as the point-to-point interface type.
Step 7	pvc vpi/vci l2transport Example: Router(config-subif)#pvc 10/100 l2transport	Assigns a virtual path identifier (VPI) and virtual channel identifier (VCI). <ul style="list-style-type: none"> • <i>vpi/vci</i>—Specifies VPI and VCI. • l2transport—Specifies that the PVC is a switched PVC instead of a terminated PVC.
Step 8	encapsulation aal5 Example: Router(cfg-if-atm-l2trans-pvc)#encapsulation aal5	Sets the PVC encapsulation type to AAL5.

	Command or Action	Purpose
Step 9	xconnect remote-ip-address vc-id encapsulation mpls Example: <pre>Router(cfg-if-atm-l2trans-pvc) #xconnect 10.1.1.101 100 encapsulation mpls</pre>	Binds the attachment circuit to the ATM interface to create a pseudowire.

ATM Configuration Examples

The examples in the following sections illustrate how to configure ATM for the features described in this chapter. The examples below are presented in the same order as the corresponding configuration task sections:

Example: Configuring Supported ATM Interface Types

The following example shows how to configure main ATM interface:

```
enable
configure terminal
interface atm 0/0/0
no shutdown
```

Example Creating a PVC


The following example shows how to create a PVC on an ATM main interface with AAL5 encapsulation configured and a VBR-NRT QOS specified. For further information, refer to the sections *Creating a PVC* and *Configuring PVC Traffic Parameters* earlier in this chapter.

```
interface 0/5/0.1/1/1/1 point-to-point
pvc 1/40
encapsulation aal5
vbr-nrt 100000 50000 20vbr-nrt 1000 500 50
exit
```

PVCs in a Fully Meshed Network Example

The figure below illustrates a fully meshed network. The configurations for routers A, B, and C follow the figure. In this example, the routers are configured to use PVCs. Fully meshed indicates that any workstation can communicate with any other workstation. Note that the two **protocol** statements configured in router A identify the ATM addresses of routers B and C. The two **protocol** statements in router B identify the ATM addresses of routers A and C. The two **protocol** statements in router C identify the ATM addresses of routers A and B. For further information, refer to the sections “Creating a PVC” and “Mapping a Protocol Address to a PVC”.

Figure 1: Fully Meshed ATM Configuration Example

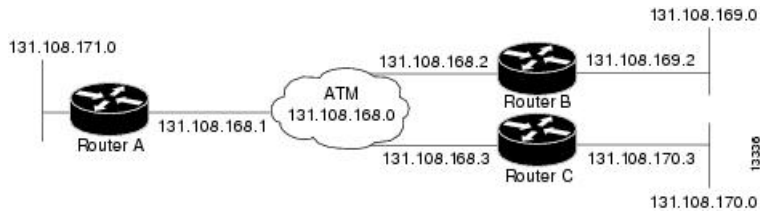

Router A

```
ip routing
!
interface atm 0/5/0.1/1/1/1
 ip address 131.108.168.1 255.255.255.0
 pvc 0/32
  protocol ip 131.108.168.2 broadcast
 exit
!
 pvc 0/33
  protocol ip 131.108.168.3 broadcast
 exit
```

Router B

```
ip routing
!
interface atm 0/5/0.1/1/1/1.1
 ip address 131.108.168.2 255.255.255.0
 pvc 0/32
  protocol ip 131.108.168.1 broadcast
 exit
!
 pvc 0/34
  protocol ip 131.108.168.3 broadcast
 exit
```

Router C

```
ip routing
!
interface atm 0/5/0.1/1/1/1.1
 ip address 131.108.168.3 255.255.255.0
 pvc 0/33
  protocol ip 131.108.168.1 broadcast
 exit
!
 pvc 0/34
  protocol ip 131.108.168.2 broadcast
 exit
```

Enabling Inverse ARP Example

The following example shows how to enable Inverse ARP on an ATM interface and specifies an Inverse ARP time period of 10 minutes. For further information, refer to the section *Enabling Inverse ARP*.

```
interface atm 2/0/0.1
 pvc 1/32
  inarp 10
 exit
```

PVC on a Point-to-Point Subinterface Configuration Example

```
interface ATM 0/0/0.9 point-to-point
 mtu 4470
 bandwidth 34000
 ip vrf forwarding vrfexample
 ip address 192.0.2.1 255.255.255.0
 ip mtu 4470
 pvc 11/105
 ubr 38
 oam-pvc manage
 encapsulation aal5snap
 !
 interface ATM 0/0/0.11 point-to-point
 mtu 4470
 bandwidth 7000
 ip address 192.0.2.2 255.255.255.0
 ip mtu 4470
 pvc 100/50
  cbr 7000
 encapsulation aal5snap
 max-reserved-bandwidth 100
```

Monitoring and Maintaining the ATM Interface

After configuring an ATM interface, you can display its status. You can also display the current state of the ATM network and connected virtual circuits. To show current virtual circuits and traffic information, use the following commands in EXEC mode:

Command	Purpose
Router# show arp	Displays entries in the ARP table.
Router# show atm class-links {vpi / vci name}	Displays PVC parameter configurations and where the parameter values are inherited from.
Router# show atm interface atm slot /0 Router# show atm interface atm slot / port-adapter /0 Router# show atm interface atm number	Displays ATM-specific information about the ATM interface using the appropriate format of the show atm interface atm command. ²
Router# show atm map	Displays the list of all configured ATM static maps to remote hosts on an ATM network.

Command	Purpose
Router# show atm pvc [<i>vpi / vci name interface atm interface_number</i>]	Displays all active ATM PVCs and traffic information.
Router# show atm traffic	Displays global traffic information to and from all ATM networks connected to the router and a list of counters of all ATM traffic on this router.
Router# show atm vc [<i>vcd-number [range lower-limit-vcd upper-limit-vcd] [interface ATM interface-number] [detail [prefix {vpi/vci vcd interface vc_name}]] [connection-name] signalling [freed-svcs cast-type {p2mp p2p}] [detail [interface ATM interface-number]] summary ATM interface-number</i>]	Displays all active ATM virtual circuits (PVCs) and traffic information. Note The SVCs and the signalling keyword are not supported on the Cisco ASR 920 series routers.
Router# show interfaces atm <i>controller.port-channels.subinterface</i>	Displays statistics for the ATM interface using the appropriate format of the show interfaces atm command.
Router# show network-clocks synchronization	Displays the clock signal sources and priorities that you established on the router.

² To determine the correct form of the interface atm command, consult your ATM network module, port adapter, or router documentation.

Additional References

Related Documents

Related Topic	Document Title
ATM commands	<i>Cisco IOS Asynchronous Transfer Mode Command Reference</i>

Standards

Standard	Title
No new or modified standards are supported by this feature, and support for existing standards has not been modified by this feature.	--

MIBs

MIB	MIBs Link
<ul style="list-style-type: none"> • Cisco PVC trap MIB - CISCO-IETF-ATM2-PVCTRAP-MIB 	To locate and download MIBs for selected platforms, Cisco IOS XE software releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFC	Title
No new or modified RFCs are supported by this feature, and support for existing RFCs has not been modified by this feature.	--

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	http://www.cisco.com/techsupport



CHAPTER 2

Configuring AAL5 L3 Termination

This feature enables the Asynchronous Transfer Mode Adaptation Layer 5 (AAL5) layer 3 termination on the interface module (IM) (T1/E1 and OC-3) cards on the Cisco ASR 903 Router.

- [Information About AAL5 L3 Termination, on page 25](#)
- [How to Configure AAL5 L3 Termination, on page 26](#)
- [Configuration Examples for AAL5 L3 Termination, on page 37](#)
- [Verifying AAL5 L3 Termination, on page 38](#)
- [Additional References, on page 39](#)

Information About AAL5 L3 Termination

When ATM feature is enabled, IMs can be deployed for ATM service that delivers high-performance interconnectivity, metro, and intra-point of presence (POP) applications between service POPs for IP/Multiprotocol Label Switching (IP/MPLS) transport (Figure 1).

AAL5 L3 termination can also be deployed at customer premises equipment (CPE) to provide the data component for the service provider networks. The ATM service allows service providers to effectively manage the bandwidth at the edges of the network while implementing value-added Layer 3 service.

Restrictions for AAL5 L3 Termination

- Main interface cannot be configured as layer 3 Asynchronous Transfer Mode (ATM) interface. Therefore you cannot create layer 3 Permanent Virtual Circuits (PVC) under main interface.
- Point-to-multipoint sub-interface is *not* supported.
- Quadrature Amplitude Modulation (QAM) is *not* supported on ATM L3 Interface.
- Operations, administration, and maintenance (OAM) is *not* supported on ATM L3 interface.
- You *cannot* swap from layer 2 transport ATM to layer 3 ATM interface without deleting ATM sub-interface.
- ATM layer 3 Permanent Virtual Path (PVP) is *not* supported.
- Inverse Multiplexing for ATM is *not* supported.
- ATM adaptation layer 5 Subnetwork Access Protocol SNAP (AAL5SNAP) protocol is supported. AAL0 is *not* supported.
- ATM L3 QoS is *not* supported.
- One port of an interface module (IM) supports only one interface configuration. For example, one OC-3 port can support one of the following configurations and not a combination of configurations:

- CEM (CESoP or SAToP)
- ATM
- IMA
- DS3

Different interface configurations can be configured on different ports of the same IM.

- Half-duplex VRF is *not* supported on this router.

Scale Supported for AAL5 L3 Termination

- IMs:
 - A900-IMA16D: The 16 port T1/E1 card supports a maximum of 350 virtual circuits (VCs per port and on the T1/E1).
 - A900-IMA40S: Only 900 VCs can be configured per OC3 IM. 500 VCs are supported in per port on the OC-3 IM.
- Up to 4000 layer 3 interfaces, including Serial interfaces, can be configured.

How to Configure AAL5 L3 Termination

Configuring Layer 3 Terminated VCs

A VC is a point-to-point connection between two ATM devices. A VC is established for each ATM end node with which the router communicates. The characteristics of the VC are established when it is created and include the following for the time-division multiplexing (TDM) IMs:

- AAL mode
- Encapsulation type logical link controller (LLC)/SNAP

PVCs configured on the router remain active until the circuit is removed from the configuration. All virtual circuit characteristics apply to PVCs. When a PVC is configured, all configuration options are passed to the TDM IMs. These PVCs are written to the nonvolatile RAM (NVRAM) as part of the configuration and are used when the Cisco IOS image is reloaded.

When you create a PVC, you create a virtual circuit descriptor (VCD) and attach it to the VPI and VCI. The VCD tells the card which VPI/VCI to use for a particular packet. The TDM IM card requires this feature to manage the packets for transmission. The number chosen for the VCD is independent of the virtual path identifier/virtual channel identifier (VPI/VCI) used.

Procedure

	Command or Action	Purpose
Step 1	enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.

	Command or Action	Purpose
Step 2	configure terminal Example: Router# configure terminal	Enters global configuration mode.
Step 3	controller { t1 e1 } <i>slot/bay/port</i> Example: Router(config)# controller t1 0/1/0	Specifies the controller that you want to configure. <ul style="list-style-type: none"> • t1—Specifies the T1 controller. • e1—Specifies the E1 controller. • <i>slot</i>—Chassis slot number, which is always 0. • <i>bay</i>—Card interface bay number in a slot. The range is from 0 to 5. • <i>port</i>—Port or interface number. The range is from 0 to 7 for Gigabit Ethernet.
Step 4	atm Example: Router(config-controller)# atm	Provisions an interface to function with ATM capabilities.
Step 5	interface atm interface-number [. <i>subinterface-number</i> point-to-point] Example: OC-3 interface Router(config-controller)# interface atm0/1/0.10 point-to-point	Specifies an ATM point-to-point sub-interface. <ul style="list-style-type: none"> • <i>interface-number</i>—Specifies a (physical) ATM interface. • <i>subinterface-number</i>—(Optional) Specifies a subinterface number for OC-3 interface. A dot (.) must be used to separate the interface-number from the subinterface-number (for example 2/0.1). • point-to-point—(Optional) Specifies point-to-point as the interface type for which a subinterface is to be created.
Step 6	ip address ip-addressip-address-mask Example: Router(config-subif)# ip-address 192.168.0.1 255.255.255.0	Configures an IP address on the sub-interface. <ul style="list-style-type: none"> • <i>ip-address</i>—Specifies a the IP address. • <i>ip-address-mask</i>— Specifies a the IP address mask.
Step 7	pvc [name] vpi vci Example: Router(config-subif)# pvc 10/100	Configures the PVC. <ul style="list-style-type: none"> • name—(Optional) The name of the PVC or map. The name can be up to 15 characters long.

	Command or Action	Purpose
		<ul style="list-style-type: none"> • <i>vpi</i>—ATM network virtual path identifier (VPI) for this PVC. The absence of the "/" and a <i>vpi</i> value defaults the <i>vpi</i> value to 0. A value that is out of range is interpreted as a string and is treated as the connection ID. • <i>vci</i>—ATM network virtual channel identifier (VCI) for this PVC. This value ranges from 0 to 1 less than the maximum value set for this interface by the <code>atm vc-per-vp</code> command. Typically, lower values 0 to 31 are reserved for specific traffic (for example, F4 OAM, SVC signalling, ILMI, and so on) and should <i>not</i> be used. The VCI is a 16-bit field in the header of the ATM cell. The VCI value is unique only on a single link, not throughout the ATM network, because it has local significance only. A value that is out of range causes an unrecognized command error message. <p>The arguments <i>vpi</i> and <i>vci</i> cannot both be set to 0; if one is 0, the other cannot be 0.</p>
Step 8	encapsulation aal5snap Example: <pre>Router(config-if-atm-vc)# encapsulation aal5snap</pre>	Specifies AAL5 SNAP for ATM encapsulation on the PVC.
Step 9	end Example: <pre>Router(config-if-atm-vc)# end</pre>	Returns to privileged EXEC mode.

Configuring Layer2 QoS on the ATM Interface

Procedure

	Command or Action	Purpose
Step 1	enable Example: <pre>Router> enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.

	Command or Action	Purpose
Step 2	configure terminal Example: Router# configure terminal	Enters global configuration mode.
Step 3	controller {t1 e1slot/bay/port} Example: Router (config)# controller t1 0/1/0	Specifies the controller that you want to configure. <ul style="list-style-type: none"> • t1—Specifies the T1 controller. • e1—Specifies the E1 controller. • <i>slot</i>—Chassis slot number, which is always 0. • <i>bay</i>—Card interface bay number in a slot. The range is from 0 to 5. • <i>port</i>—Port or interface number. The range is from 0 to 7 for Gigabit Ethernet.
Step 4	atm Example: Router (config-controller)# atm	Provisions an interface to function with ATM capabilities.
Step 5	interfaceinterface-number atm [.subinterface-number point-to-point] Example: Router (config-controller)# interface atm0/1/0.10 point-to-point	Specifies an ATM point-to-point sub-interface. <ul style="list-style-type: none"> • <i>interface-number</i>—Specifies a (physical) ATM interface. • <i>subinterface-number</i>—(Optional) Specifies a subinterface number. A dot (.) must be used to separate the interface-number from the subinterface-number (for example 2/0.1). • point-to-point—(Optional) Specifies point-to-point as the interface type for which a subinterface is to be created.
Step 6	ip address ip-address ip-address-mask Example: Router (config-subif)# ip address 192.168.0.1 255.255.255.0	Configures an IP address on the sub-interface.
Step 7	no atm enable-ilmi-trap Example:	Disables the ILMI traps.

	Command or Action	Purpose
	<pre>Router (config-subif) # atm enable-ilmi-trap</pre>	
Step 8	<p>pvc [name] vpi vci</p> <p>Example:</p> <pre>Router (config-subif) # pvc 10/100</pre>	<p>Configures the PVC.</p> <ul style="list-style-type: none"> • name—(Optional) The name of the PVC or map. The name can be up to 15 characters long. • vpi—ATM network virtual path identifier (VPI) for this PVC. The absence of the "/" and a vpi value defaults the vpi value to 0. A value that is out of range is interpreted as a string and is treated as the connection ID. • vci—ATM network virtual channel identifier (VCI) for this PVC. This value ranges from 0 to 1 less than the maximum value set for this interface by the atm vc-per-vp command. Typically, lower values 0 to 31 are reserved for specific traffic (for example, F4 OAM, SVC signalling, ILMI, and so on) and should not be used. The VCI is a 16-bit field in the header of the ATM cell. The VCI value is unique only on a single link, not throughout the ATM network, because it has local significance only. A value that is out of range causes an unrecognized command error message. <p>The arguments vpi and vci cannot both be set to 0; if one is 0, the other cannot be 0.</p>
Step 9	<p>Do one of the following:</p> <ul style="list-style-type: none"> • ubr<i>output-pcr</i> [<i>input-pcr</i>] • cbrate • vbr-rt <i>peak-rate average-rate burst</i> • vbr-nrt <i>output-pcr output-scr output-maxburstsize</i> • ubr+output-pcr output-mcr [<i>input-pcr</i>] [<i>input-mcr</i>] <p>Example:</p> <pre>Router (config-subif) # ubr 100</pre> <p>Example:</p> <pre>Router (config-subif) # cbr 1000</pre>	<ul style="list-style-type: none"> • Configure unspecified bit rate (UBR) quality of service (QoS) and specify the output peak cell rate (PCR) for an ATM permanent virtual circuit (PVC), PVC range. <ul style="list-style-type: none"> • <i>output-pcr</i>—Output peak cell rate (PCR) in kilobytes per second (kbps). • <i>input-pcr</i>—(Optional for SVCs only) The input PCR in kbps. If this value is omitted, the value of input-pcr argument will equal the value of output-pcr argument.

Command or Action	Purpose
<p>Example:</p> <pre>Router(config-subif) # vbr-rt 1000 600 20</pre> <p>Example:</p> <pre>Router(config-subif) # vbr-rt 1500 1000 10</pre> <p>Example:</p> <pre>Router(config-subif) # ubr+ 1000 100</pre>	<ul style="list-style-type: none"> • Configure the constant bit rate (CBR) for the ATM circuit emulation service (CES) for an ATM permanent virtual circuit (PVC). <ul style="list-style-type: none"> • <i>rate</i>—Constant bit rate (also known as the average cell rate) for ATM CES. • Configures the real-time variable bit rate (VBR) for VoATM voice connections. <ul style="list-style-type: none"> • <i>peak-rate</i>—Peak information rate (PIR) for the voice connection, in kilobytes per second (kbps). If it does not exceed your carrier's line rate, set it to the line rate. Range is from 56 to 10000. • <i>average-rate</i>—Average information rate (AIR) for the voice connection, in kbps. • <i>burst</i>—Burst size, in number of cells. • Configures the variable bit rate-nonreal time (VBR-NRT) quality of service (QoS) for an ATM permanent virtual circuit (PVC). <ul style="list-style-type: none"> • <i>output-pcr</i>—output PCR, in kilobytes per second (kbps). • <i>output-scr</i>—Output SCR, in kbps. • <i>output-maxburstsize</i>—The output maximum burst cell size, expressed in number of cells. • Configures unspecified bit rate (UBR) quality of service (QoS) for an ATM permanent virtual circuit (PVC). <ul style="list-style-type: none"> • <i>output-pcr</i>—Output peak cell rate (PCR) in kbps. • <i>output-mcr</i>—Output minimum guaranteed cell rate in kbps. • <i>input-pcr</i>—(Optional for SVCs only) The input PCR in kbps.

	Command or Action	Purpose
		<ul style="list-style-type: none"> • <i>input-mcr</i>—(Optional for SVCs only) The input minimum guaranteed cell rate in kbps.
Step 10	encapsulation aal5snap Example: <pre>Router(config-if-atm-vc) # encapsulation aal5snap</pre>	Specifies AAL5 SNAP for ATM encapsulation on the PVC.
Step 11	end Example: <pre>Router(config-if-atm-vc) # end</pre>	Returns to privileged EXEC mode.

Configuring Protocol IP Broadcast on ATM L3 Interface

Procedure

	Command or Action	Purpose
Step 1	enable Example: <pre>Router> enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: <pre>Router# configure terminal</pre>	Enters global configuration mode.
Step 3	controller {t1 e1} slot/bay/port Example: <pre>Router(config)# controller t1 0/1/0</pre>	Specifies the controller that you want to configure. <ul style="list-style-type: none"> • t1—Specifies the T1 controller. • e1—Specifies the E1 controller. • <i>slot</i>—Chassis slot number, which is always 0. • <i>bay</i>—Card interface bay number in a slot. The range is from 0 to 5. • <i>port</i>—Port or interface number. The range is from 0 to 7 for Gigabit Ethernet.

	Command or Action	Purpose
Step 4	atm Example: Router(config-controller) # atm	Provisions an interface to function with ATM capabilities.
Step 5	interface interface-number atm [.subinterface-number point-to-point] Example: Router(config-controller) # interface atm 0/1/0.10 point-to-point	Specifies an ATM point-to-point sub-interface. <ul style="list-style-type: none"> • <i>interface-number</i>—Specifies a (physical) ATM interface. • <i>subinterface-number</i>—(Optional) Specifies a subinterface number. A dot (.) must be used to separate the interface-number from the subinterface-number (for example 2/0.1). • point-to-point—(Optional) Specifies point-to-point as the interface type for which a subinterface is to be created.
Step 6	ip address ip-address ip-address-mask Example: Router(config-subif) # ip-address 192.168.0.1 255.255.255.0	Configures an IP address on the sub-interface.
Step 7	no atm enable-ilmi-trap Example: Router(config-subif) # no atm enable-ilmi-trap	Disables the ILMI traps.
Step 8	pvc [name] vpi vci Example: Router(config-subif) # pvc 10/100	Configures the PVC. <ul style="list-style-type: none"> • name—(Optional) The name of the PVC or map. The name can be up to 15 characters long. • <i>vpi</i>—ATM network virtual path identifier (VPI) for this PVC. The absence of the "/" and a vpi value defaults the vpi value to 0. A value that is out of range is interpreted as a string and is treated as the connection ID. • <i>vci</i>—ATM network virtual channel identifier (VCI) for this PVC. This value ranges from 0 to 1 less than the maximum value set for this interface by the atm vc-per-vp command. Typically, lower values 0 to 31 are reserved for specific

	Command or Action	Purpose
		<p>traffic (for example, F4 OAM, SVC signalling, ILMI, and so on) and should not be used. The VCI is a 16-bit field in the header of the ATM cell. The VCI value is unique only on a single link, not throughout the ATM network, because it has local significance only. A value that is out of range causes an "unrecognized command" error message.</p> <p>The arguments vpi and vci cannot both be set to 0; if one is 0, the other cannot be 0.</p>
Step 9	<p>protocol ip <i>protocol-address</i> [no] broadcast</p> <p>Example:</p> <pre>Router(config-subif)# protocol ip 192.168.0.2 broadcast</pre>	<p>Configures a static map for an ATM permanent virtual circuit (PVC), switched virtual circuit (SVC), or virtual circuit (VC) class.</p> <ul style="list-style-type: none"> • <i>protocol-address</i>—remote end circuit IP being mapped to same PVC. • no broadcast—Indicates that this map entry is used when the corresponding protocol sends broadcast packets to the interface.
Step 10	<p>encapsulation aal5snap</p> <p>Example:</p> <pre>Router(config-if-atm-vc)# encapsulation aal5snap</pre>	<p>Specifies AAL5 SNAP for ATM encapsulation on the PVC.</p>
Step 11	<p>end</p> <p>Example:</p> <pre>Router(config-if-atm-vc)# end</pre>	<p>Returns to privileged EXEC mode.</p>

Configuring VRF Enabled ATM L3 Interface

Virtual Routing and Forwarding (VRF) is an IP technology that allows multiple instances of a routing table to exist in the same router at the same time. VRF can be enabled on ATM L3 interface.

Procedure

	Command or Action	Purpose
Step 1	<p>enable</p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> • E <p>Enter your password if prompted.</p>

	Command or Action	Purpose
Step 2	configure terminal Example: Router# configure terminal	Enters global configuration mode.
Step 3	controller {t1 e1} slot/bay/port Example: Router (config)# controller t1 0/1/0	Specifies the controller that you want to configure. <ul style="list-style-type: none"> • t1—Specifies the T1 controller. • e1—Specifies the E1 controller. • <i>slot</i>—Chassis slot number, which is always 0. • <i>bay</i>—Card interface bay number in a slot. The range is from 0 to 5. • <i>port</i>—Port or interface number. The range is from 0 to 7 for Gigabit Ethernet.
Step 4	atm Example: Router (config-controller)# atm	Provisions an interface to function with ATM capabilities.
Step 5	interface interface-numberatm [.subinterface-number point-to-point] Example: Router (config-controller)# interface atm0/1/0.10 point-to-point	Specifies an ATM point-to-point sub-interface. <ul style="list-style-type: none"> • <i>interface-number</i>—Specifies a (physical) ATM interface. • <i>subinterface-number</i>—(Optional) Specifies a subinterface number. A dot (.) must be used to separate the interface-number from the subinterface-number (for example 2/0.1). • point-to-point—(Optional) Specifies point-to-point as the interface type for which a subinterface is to be created.
Step 6	ip vrf forwarding vrf-name Example: Router (config-controller)# ip vrf forwarding VPN_A	Associates a Virtual Private Network (VPN) routing and forwarding (VRF) instance with an interface or subinterface <ul style="list-style-type: none"> • <i>vrf-name</i>—Associates the interface with the specified VRF.
Step 7	ip addressip-address ip-address-mask Example:	Configures an IP address on the sub-interface.

	Command or Action	Purpose
	<pre>Router(config-subif)# ip-address 192.168.0.1 255.255.255.0</pre>	
Step 8	<p>no atm enable-ilmi-trap</p> <p>Example:</p> <pre>Router(config-subif)# no atm enable-ilmi-trap</pre>	Disables the ILMI traps.
Step 9	<p>pvc [name]vpi vci</p> <p>Example:</p> <pre>Router(config-subif)# pvc 10/100</pre>	<p>Configures the PVC.</p> <ul style="list-style-type: none"> • name—(Optional) The name of the PVC or map. The name can be up to 15 characters long. • vpi—ATM network virtual path identifier (VPI) for this PVC. The absence of the "/" and a vpi value defaults the vpi value to 0. A value that is out of range is interpreted as a string and is treated as the connection ID. • vci—ATM network virtual channel identifier (VCI) for this PVC. This value ranges from 0 to 1 less than the maximum value set for this interface by the atm vc-per-vp command. Typically, lower values 0 to 31 are reserved for specific traffic (for example, F4 OAM, SVC signalling, ILMI, and so on) and should not be used. The VCI is a 16-bit field in the header of the ATM cell. The VCI value is unique only on a single link, not throughout the ATM network, because it has local significance only. A value that is out of range causes an unrecognized command error message. <p>The arguments vpi and vci cannot both be set to 0; if one is 0, the other cannot be 0.</p>
Step 10	<p>encapsulation aal5snap</p> <p>Example:</p> <pre>Router(config-if-atm-vc)# encapsulation aal5snap</pre>	Specifies AAL5 SNAP for ATM encapsulation on the PVC.
Step 11	<p>end</p> <p>Example:</p>	Returns to privileged EXEC mode.

	Command or Action	Purpose
	Router(config-if-atm-vc)# end	

Configuration Examples for AAL5 L3 Termination

Example: Configuring SONET mode on OC-3 IM

```
Router(config)# controller sonet 3/1/0
Router(config-controller)# framing sonet
Router(config-controller)# sts-1 1
Router(config-ctrlr-sts)# vtg 1 t1 1 atm
Router(config)# interface ATM3/1/0.1/1/1.1 point-to-point
Router(config-subif)# ip address 192.0.1.5 255.255.255.0
Router(config-subif)# pvc 10/100
Router(cfg-if-atm-vc)# encapsulation aal5snap
Router(cfg-if-atm-vc)#
```

Example: Configuring SDH mode on OC-3 IM

```
Router(config)# controller sdh 0/1/0
Router(config-controller)# framing sdh
Router(config-controller)# aug mapping au-4
Router(config-controller)# au-4 1 tug-3 1
Router(config-ctrlr-tug3)# tug-2 1 e1 1 atm
Router(config)# interface ATM0/0/0.1/1/1.2 point-to-point
Router(config-subif)# ip address 192.0.2.3 255.255.255.0
Router(config-subif)# pvc 10/100
Router(cfg-if-atm-vc)# encapsulation aal5snap
Router(cfg-if-atm-vc)#
```

Example: Configuring Layer2 QoS

```
interface ATM0/3/2.1/1/1.101 point-to-point
no atm enable-ilmi-trap
pvc 20/101
ubr 100
encapsulation aal5snap
!
End
interface ATM1/1/0.1/1/1.102 point-to-point
ip address 192.0.2.1 255.255.255.0
no atm enable-ilmi-trap
pvc 20/102
cbr 1000
encapsulation aal5snap
interface ATM1/1/0.1/1/1.102 point-to-point
ip address 192.0.2.1 255.255.255.0
no atm enable-ilmi-trap
pvc 20/102
vbr-rt 1000 600 20
encapsulation aal5snap
```

Example: Configuring Protocol IP Broadcast in the Layer3 ATM Interface

```

interface ATM1/1/0.1/1/1.102 point-to-point
ip address 192.0.2.1 255.255.255.0
no atm enable-ilmi-trap
pvc 20/102
  vbr-nrt 1500 1000 10
  encapsulation aal5snap
interface ATM1/1/0.1/1/1.102 point-to-point
ip address 192.0.2.1 255.255.255.0
no atm enable-ilmi-trap
pvc 20/102
  ubr+ 1000 100
  encapsulation aal5snap

```

Example: Configuring Protocol IP Broadcast in the Layer3 ATM Interface

```

interface ATM0/3/2.1/1/1.200 point-to-point
ip address 192.168.1.2 255.255.255.0
no atm enable-ilmi-trap
pvc 200/10
  protocol ip 192.168.1.2 broadcast -----(remote end IP)
!
End

```

Example: Configuring VRF Enabled ATM L3 Interface

```

ip vrf VPN_A
rd 100:1
route-target export 100:1
route-target import 100:1
interface ATM0/3/2.1/1/1.200 point-to-point
ip vrf forwarding VPN_A
ip address 10.0.0.1 255.255.255.0
no atm enable-ilmi-trap
pvc 200/10
!
End
Router# ping vrf VPN_A 11.12.13.14 -----(Remote end IP)
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.0.0.1, timeout is 2 seconds:
!!!!

```

Verifying AAL5 L3 Termination

- Use the **show atm pvc** command to display all ATM PVCs and traffic information:

OC-3 Interface

```

Router# show atm pvc
Keys: C = ATM0/4/0.1/1/1, B = ATM0/4/2.1/1/1,
      VCD /

```

Interface	Name	VPI	VCI	Type	Encaps	SC	Peak Kbps	Av/Min Kbps	Burst Cells	St
C.1	1	180	181	PVC	SNAP	UBR	1536			UP
B.1	1	180	181	PVC	AAL5	UBR	1536			UP

- Use the **show interfaces ATM** command to display information about the ATM interface:

OC-3 Interface

```
Router# show interfaces ATM0/4/0.1/1/1.1
ATM0/4/0.1/1/1.1 is up, line protocol is up
  Hardware is A900-IMA40S, address is 0022.bddd.d4c0 (bia 0022.bddd.d4c0)
  Internet address is 192.168.0.1/24
  MTU 4470 bytes, BW 1536 Kbit/sec, DLY 100 usec,
    reliability 255/255, txload 129/255, rxload 129/255
  Encapsulation ATM
  Keepalive not supported
    13551261 packets input, 731768094 bytes
    13551227 packets output, 731766258 bytes
    0 OAM cells input, 0 OAM cells output
  AAL5 CRC errors : 0
  AAL5 SAR Timeouts : 0
  AAL5 Oversized SDUs : 0
  AAL5 length violation : 0
  Last clearing of "show interface" counters never
```

- Use the **show atm pvc interface atm interface-number** command to display all PVCs on the specified interface or sub-interface:

```
Router# show atm pvc interface atm 0/4/0.1/1/1.1
Key: C = ATM0/4/0.1/1/1
      VCD /
Interface Name          VPI  VCI Type  Encaps  SC      Peak Av/Min Burst
C.1                1      180  181 PVC   SNAP    UBR     Kbps  Kbps Cells St
                                     1536                                     UP
```

- Use the **show atm map** command to display the protocol IP broadcast on the ATM interface:

```
Router# show atm map
Map list ATM0/3/2.1/1/1.200pvcC8000A : PERMANENT
ip 191.168.1.14 maps to VC 5, VPI 200, VCI 10, ATM0/3/2.1/1/1.200
, broadcast
```

Additional References

Related Documents

Related Topic	Document Title
Cisco IOS commands	Cisco IOS Master Commands List, All Releases
ATM commands	Cisco IOS Asynchronous Transfer Mode Command Reference

MIBs

MIB	MIBs Link
<ul style="list-style-type: none"> • Cisco PVC trap MIB - CISCO-IETF-ATM2-PVCTRAP-MIB 	To locate and download MIBs for selected platforms, Cisco software releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs



CHAPTER 3

ATM Hierarchical Shaping ATM VC into VP Shaping

- [ATM Hierarchical Shaping ATM VC into VP Shaping, on page 41](#)

ATM Hierarchical Shaping ATM VC into VP Shaping

Traffic shaping is a quality of service (QoS) mechanism that is used to manage the network traffic by shaping the traffic to a specified rate. Traffic shaping enables the network administrator to:

- Control access to the available bandwidth.
- Ensure that the traffic conforms to the policies.
- Regulate the flow of traffic to avoid congestion that can occur when the transmitted traffic exceeds the access speed of its remote target interface.

Traffic shaping uses queues to constrain data bursts, limit peak data rate, and smooth jitters so that traffic will fit within the promised envelope. Traffic shaping limits the throughput by buffering excess traffic instead of dropping packets.

ATM VP/VC hierarchical shaping provides two levels of traffic shaping--per-VC and per-VP--to control or modify the flow of traffic on an interface. The shaping function also ensures that the traffic from one VC does not adversely impact another VC, thus preventing the loss of data. The traffic is shaped first at the VC level and then at the VP level.

Restrictions for ATM Hierarchical Shaping

All virtual channels (VCs) within a given virtual path (VP) must belong to the same ATM service category.

Information About ATM Hierarchical Shaping

ATM Hierarchical Shaping

If a service (or an application) wants to use an ATM network to transport a particular kind of traffic, it must first inform the network about what kind of traffic is to be transported, and the performance requirements of that traffic. The ATM service categories provide a method to relate traffic characteristics and QoS requirements

to network behavior. Hierarchical shaping requires that all VCs belonging to a given VP have the same ATM service category. This hierarchy ensures that packets are shaped first at the VC level and then at the VP level. At the interface level, the priority is based on the ATM service category. The service category is determined by the first PVC that is configured under a VP. The priority is in the following order:

1. Constant Bit Rate (CBR)
2. Unspecified Bit Rate (UBR)
3. Unspecified Bit Rate + (UBR+)
4. Variable Bit Rate Non Real-Time (VBR-nRT)
5. Real-time Variable Bit Rate (VBR-RT)

If no service category is specified at the VC level, the default is unshaped UBR. The ATM Hierarchical Shaping feature is supported for all the above ATM traffic service categories.

For VBR-nRT traffic the output sustainable cell rate (SCR) value that is configured will be taken into account for VC shaping. For UBR traffic, the output peak cell rate (PCR) value that is configured will be taken into account for VC shaping.

The ATM Hierarchical Shaping feature supports over-subscription. Over-subscription occurs when the sum of the configured rate of UBR and VBR PVCs exceeds the line rate.

How to Configure ATM Hierarchical Shaping

Configuring ATM Hierarchical Shaping

Perform this task to configure ATM hierarchical shaping.

Procedure

	Command or Action	Purpose
Step 1	enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Router# configure terminal	Enters global configuration mode.
Step 3	interface atm <i>interface-number</i> [<i>.subinterface-number</i> { multipoint point-to-point }] Example: Router(config)# interface atm 0/3/2.1 point-to-point	Configure an ATM interface and enters subinterface configuration mode.

	Command or Action	Purpose
Step 4	pvc <i>vpi / vci</i> Example: Router(config-subif)# pvc 2/200	Creates or assigns a name to an ATM PVC and enters ATM virtual circuit configuration mode.
Step 5	exit Example: Router(config-if-atm-vc)# exit	Exits ATM virtual circuit configuration mode and returns to subinterface configuration mode.
Step 6	ubr <i>output-pcr</i> Example: Router(config-if-atm-vc)# ubr 40001500	Configures UBR QoS and specifies the output PCR for an ATM PVC, PVC range, switched virtual circuit (SVC), VC class, or VC bundle member.
Step 7	exit Example: Router(config-if-atm-vc)# exit	Exits ATM virtual circuit configuration mode and returns to subinterface configuration mode.

Configuration Examples for ATM Hierarchical Shaping

Example Configuring ATM Hierarchical Shaping

The following example shows how to configure ATM hierarchical shaping:

```
enable
configure terminal
interface atm 0/3/2.1 multipoint
 atm pvp 2
  pvc 2/200
  exit
  range range1 pvc 2/100 2/102
  ubr 4000
  exit
 atm pvp 3
  pvc 3/100
  vbr-nrt 1000 1000

end
```

Additional References

Related Documents

Related Topic	Document Title
ATM commands	<i>Cisco IOS Asynchronous Transfer Mode Command Reference</i>

Standards

Standard	Title
No new or modified standards are supported by this feature, and support for existing standards has not been modified by this feature.	--

MIBs

MIB	MIBs Link
No new or modified MIBs are supported by this feature, and support for existing MIBs has not been modified by this feature.	To locate and download MIBs for selected platforms, Cisco software releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

RFCs

RFC	Title
No new or modified RFCs are supported by this feature, and support for existing RFCs has not been modified by this feature.	--

Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	http://www.cisco.com/cisco/web/support/index.html



CHAPTER 4

N:1 PVC Mapping to PWE with Nonunique VPIs

- [N:1 PVC Mapping to PWE with Nonunique VPIs, on page 45](#)

N:1 PVC Mapping to PWE with Nonunique VPIs

The N:1 PVC Mapping to PseudoWire Emulation (PWE) with Nonunique virtual path identifiers (VPIs) feature maps one or more ATM permanent virtual circuits (PVCs) to a single pseudowire (PW). There are two modes of AAL0 encapsulation, N:1 and 1:1 mapping. In N:1 mapping, multiple unrelated virtual path identifier/virtual channel identifier (VPI/VCI) are carried over a single Multiprotocol Label Switching (MPLS) PW. This is an efficient mapping method because less resources are used from the MPLS network. In 1:1 mapping, a single VPI/VCI is carried over a single MPLS PW. Benefits of this feature include the following:

- Aggregate quality of service (QoS) can be applied to related PVCs.
- Bandwidth is conserved with the reduction in the number of pseudowires that are used.

Restrictions for N:1 PVC Mapping to PWE with Nonunique VPIs

- N:1 permanent virtual circuits (PVC) mapping configuration is supported only on multipoint subinterfaces; it is not supported on main interfaces or point-to-point subinterfaces.
- N:1 PVC mapping mode is not supported on Access Circuit Redundancy subinterfaces.
- Preconfigured PVCs cannot exist on the multipoint subinterface on which you want to configure N:1 PVC mapping.
- An attachment circuit that has been bound to a pseudowire cannot be removed unless all Layer 2 virtual circuits (VCs) have been removed.
- Layer 3 PVCs cannot be configured on N:1 subinterfaces.
- Cell packing values configured under a VC class attached to the PVC, main interface, or subinterface will not be inherited by N:1 PVCs.
- Operation, Administration, and Maintenance (OAM) functionality is not supported on N:1 Layer 2 PVCs. OAM cells coming from the customer edge (CE) network will be treated as normal data traffic and will traverse through the pseudowire.
- Only ATM adaptation layer type 0 (AAL0) encapsulation is supported for N:1 PVCs.

- The service policy configuration can be configured only at the subinterface level for N:1 PVCs.
- ATM N:1 and PVP modes cannot be configured on different subinterfaces that belong to a physical interface.
- You cannot change the ATM interface mode from point-to-point to multipoint or from multipoint to point-to-point.
- If you change a layer 2 ATM interface to a layer 3 ATM interface, traffic will not flow.

Information About N:1 PVC Mapping to PWE with Nonunique VPIs

N:1 PVC Mapping to PWE with Nonunique VPIs Feature Description

To transport ATM cells over Multiprotocol Label Switching (MPLS), a VC is established between the provider edge (PE) routers on both ends of the MPLS backbone. With the N:1 permanent virtual circuit (PVC) Mapping to PseudoWire Emulation (PWE) with Nonunique VPIs feature, multiple PVCs irrespective of their Virtual Path Identifiers (VPIs), are transported over a single pseudowire configured on a subinterface. (“N:1” refers to the number of PVCs transported over one pseudowire). ATM cells are packed together in a single frame and sent over the single pseudowire. The ATM cell header information is packed together with the cell payload on a per-cell basis in the packets so that packets received at the egress end are unpacked and the ATM cells are mapped to the respective PVCs.

In N:1 PVC mapping mode, the device can pack cells only from a single PVC in an MPLS packet to transmit over a pseudowire; cells from multiple PVCs cannot be packed in a single MPLS packet and mapped to a single pseudowire for transmission. However, if a device receives an MPLS packet that is packed with cells from multiple PVCs, then those cells will be unpacked and sent to the respective PVCs.

How to Configure N:1 PVC Mapping to PWE with Nonunique VPIs

Configuring N:1 PVC Mapping to PWE with Nonunique VPIs

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	interface atm slot/subslot/port Example: Device(config)# interface atm 9/1/1	Enables the ATM interface and enters interface configuration mode.

	Command or Action	Purpose
Step 4	atm mcpt-timers <i>timer1 timer2 timer3</i> Example: <pre>Device(config-if)# atm mcpt-timers 100 200 300</pre>	Sets the Maximum Cell Packing Timeout (MCPT) values in microseconds. <ul style="list-style-type: none"> The MCPT timer sets the time for which the device waits for the raw cells (AAL0 encapsulation) to be packed into a single packet for punting to the pseudowire.
Step 5	exit Example: <pre>Device(config-if)# exit</pre>	Exits interface configuration mode.
Step 6	configure terminal Example: <pre>Device# configure terminal</pre>	Enters global configuration mode.
Step 7	interface atm <i>slot/subslot/port.subslot</i> multipoint Example: <pre>Device(config)# interface atm 9/1/1.1 multipoint</pre>	Enters subinterface configuration mode and creates a multipoint subinterface on the given port on the specified ATM Shared Port Adapter (SPA).
Step 8	no ip address Example: <pre>Device(config-subif)# no ip address</pre>	Removes the interface IP address.
Step 9	atm enable-ilmi-trap Example: <pre>Device(config-subif)# atm enable-ilmi-trap</pre>	Generates an Integrated Local Management Interface (ILMI) atmVccChange trap when an ATM interface or subinterface is enabled or shut down.
Step 10	cell-packing <i>maxcells mcpt-timer</i> <i>timer-number</i> Example: <pre>Device(config-subif)# cell-packing 20 mcpt-timer 2</pre>	Enables ATM over MPLS to pack multiple ATM cells into each MPLS packet within the MCPT timing.
Step 11	xconnect <i>peer-ipaddress vc-id</i> encapsulation mpls Example: <pre>Device(config-subif)# xconnect 10.1.1.1 100 encapsulation mpls</pre>	(Optional) Enables the attachment circuit and specifies the IP address of the peer, a VC ID, and the data encapsulation method.
Step 12	pvc <i>vpi/vci l2transport</i> Example: <pre>Device(config-subif)# pvc 10/100 l2transport</pre>	Assigns a VPI and virtual channel identifier (VCI).

	Command or Action	Purpose
Step 13	Repeat Step 12 for the number of PVCs that you want to configure.	—
Step 14	end Example: Device(config-subif)# end	Exits subinterface configuration mode and returns to privileged EXEC mode.

Configuring N:1 PVC Mapping to PWE with Nonunique VPIs using the commands associated with the L2VPN Protocol-Based CLIs feature

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	interface atm slot/subslot/port Example: Device(config)# interface atm 9/1/1	Enables the ATM interface and enters interface configuration mode.
Step 4	atm mcpt-timers timer1 timer2 timer3 Example: Device(config-if)# atm mcpt-timers 100 200 300	Sets the Maximum Cell Packing Timeout (MCPT) values in microseconds. <ul style="list-style-type: none"> • The MCPT timer sets the time for which the device waits for the raw cells (AAL0 encapsulation) to be packed into a single packet for punting to the pseudowire.
Step 5	exit Example: Device(config-if)# exit	Exits interface configuration mode.
Step 6	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 7	interface atm slot/subslot/port.subslot multipoint Example:	Enters subinterface configuration mode and creates a multipoint subinterface on the given port on the specified ATM Shared Port Adapter (SPA).

	Command or Action	Purpose
	Device(config)# interface atm 9/1/1.1 multipoint	
Step 8	no ip address Example: Device(config-subif)# no ip address	Removes the interface IP address.
Step 9	atm enable-ilmi-trap Example: Device(config-subif)# atm enable-ilmi-trap	Generates an Integrated Local Management Interface (ILMI) atmVccChange trap when an ATM interface or subinterface is enabled or shut down.
Step 10	cell-packing maxcells mcpt-timer timer-number Example: Device(config-subif)# cell-packing 20 mcpt-timer 2	Enables ATM over MPLS to pack multiple ATM cells into each MPLS packet within the MCPT timing.
Step 11	end Example: Router(config-subif)# end	Exits to privileged EXEC mode.
Step 12	interface pseudowire number Example: Router(config)# interface pseudowire 100	Specifies the pseudowire interface and enters interface configuration mode.
Step 13	encapsulation mpls Example: Router(config-if)# encapsulation mpls	Specifies that Multiprotocol Label Switching (MPLS) is used as the data encapsulation method.
Step 14	neighbor peer-address vcid-value Example: Router(config-if)# neighbor 10.1.1.1 100	Specifies the peer IP address and virtual circuit (VC) ID value of the Layer 2 VPN (L2VPN) pseudowire.
Step 15	exit Example: Router(config-if)# exit	Exits interface configuration mode.

	Command or Action	Purpose
Step 16	l2vpn xconnect context <i>context-name</i> Example: Router(config)# l2vpn xconnect context con1	Creates a Layer 2 VPN (L2VPN) cross connect context and enters xconnect configuration mode.
Step 17	member pseudowire <i>interface-number</i> Example: Router(config-xconnect)# member pseudowire 100	Specifies a member pseudowire to form a Layer 2 VPN (L2VPN) cross connect.
Step 18	member gigabitethernet <i>interface-number</i> Example: Router(config-xconnect)# member GigabitEthernet0/0/0.1	Specifies the location of the Gigabit Ethernet member interface.
Step 19	end Example: Router(config-xconnect)# end	Exits to privileged EXEC mode.
Step 20	pvc <i>vp/vci</i> l2transport Example: Device(config-subif)# pvc 10/100 l2transport	Assigns a VPI and virtual channel identifier (VCI).
Step 21	Repeat Step 12 for the number of PVCs that you want to configure.	—
Step 22	end Example: Device(config-subif)# end	Exits subinterface configuration mode and returns to privileged EXEC mode.

Configuration Examples for N:1 PVC Mapping to PWE with Nonunique VPIs

Example: Configuring N:1 PVC Mapping to PWE with Nonunique VPIs

The following example shows how to configure the N:1 ATM permanent virtual circuit (PVC) mapping to pseudowires with non unique virtual path identifiers (VPIs):

```
Device> enable
Device# configure terminal
Device(config)# interface atm 0/1/0
Device(config-if)# atm mcpt-timers 500 5000 50000
Device(config-if)# exit
Device# configure terminal
```



```

Device(config)# interface atm 0/1/0.1 multipoint
Device(config-subif)# no ip address
Device(config-subif)# atm enable-ilmi-trap
Device(config-subif)# cell packing 20 mcpt-timer 2
Device(config-subif)# xconnect 10.1.1.1 100 encapsulation mpls
Device(config-subif)# pvc 10/100 l2transport
Device(config-subif)# pvc 11/122 l2transport
Device(config-subif)# pvc 19/231 l2transport
Device(config-subif)# end

```

Example: Configuring N:1 PVC Mapping to PWE with Nonunique VPIs using the commands associated with the L2VPN Protocol-Based CLIs feature

The following example shows how to configure the N:1 ATM permanent virtual circuit (PVC) mapping to pseudowires with non unique virtual path identifiers (VPIs):

```

Router> enable
Router# configure terminal
Router(config)# interface atm 0/1/1
Router(config-if)# atm mcpt-timers 500 5000 50000
Router(config-if)# exit
Router(config)# configure terminal
Router(config)# interface atm 0/1/1.1 multipoint
Router(config-subif)# no ip address
Router(config-subif)# atm enable-ilmi-trap
Router(config-subif)# cell packing 20 mcpt-timer 2
Router(config-subif)# exit
Router(config)# interface pseudowire 100
Router(config-if)# encapsulation mpls
Router(config-if)# neighbor 10.1.1.1 100
Router(config-if)# pvc 10/100 l2transport
Router(config-if)# pvc 11/122 l2transport
Router(config-if)# pvc 19/231 l2transport
Router(config-if)# exit
Router(config)# l2vpn xconnect context A
Router(config-xconnect)# member pseudowire 100
Router(config-xconnect)# member atm 9/1/1
Router(config-xconnect)# end

```

Verifying the N:1 PVC Mapping to PWE with Nonunique VPIs Configuration

To verify the N:1 PVC Mapping to PWE with Nonunique VPIs Configuration, use the **show mpls l2transport vc** command in user EXEC or privileged EXEC mode.

```
Router# show mpls l2transport vc
```

Local intf	Local circuit	Dest address	VC ID	Status
AT0/1/1.1	ATM CELL ATM0/1/1.1	2.2.2.2	100	UP

```
interface ATM0/0/0.1/1/1/1
atm mcpt-timers 20 30 40
```

```
interface ATM0/0/0.1/1/1/1.1 multipoint
no ip address
no atm enable-ilmi-trap
cell-packing 2 mcpt-timer 1
```

```
xconnect 2.2.2.2 100 encapsulation mpls
pvc 10/100 l2transport
pvc 20/200 l2transport
pvc 30/300 l2transport
```

Additional References

Related Documents

Related Topic	Document Title
ATM commands	Asynchronous Transfer Mode Command Reference

Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	http://www.cisco.com/cisco/web/support/index.html



CHAPTER 5

Configuring Pseudowire

- [Configuring Pseudowire, on page 53](#)
- [Configuring ATM IMA, on page 54](#)
- [Configuring an ATM over MPLS Pseudowire, on page 56](#)
- [Configuring the Controller, on page 57](#)
- [Configuring an IMA Interface, on page 57](#)
- [Configuring the ATM over MPLS Pseudowire Interface, on page 58](#)
- [Configuring 1-to-1 VCC Cell Transport Pseudowire, on page 59](#)
- [Mapping a Single PVC to a Pseudowire, on page 59](#)
- [Configuring N-to-1 VCC Cell Transport Pseudowire, on page 60](#)
- [Configuring 1-to-1 VPC Cell Transport, on page 60](#)
- [Configuring ATM AAL5 SDU VCC Transport, on page 61](#)
- [Configuring Cell Packing \(Optional\), on page 62](#)
- [Example: ATM IMA Configuration, on page 62](#)
- [Example: ATM over MPLS, on page 63](#)
- [Configuring ATM AAL5 over MPLS Pseudowire on a Sonet Controller, on page 70](#)
- [Configuring ATM AAL5 over MPLS Pseudowire on T1 Controller, on page 71](#)
- [Configuring Service Classes on a PVC, on page 72](#)
- [Example QoS Exp Marking on ATM Layer 2 Interfaces, on page 73](#)

Configuring Pseudowire

This chapter provides information about configuring pseudowire (PW) features.

Pseudowire Overview

The following sections provide an overview of pseudowire.

Asynchronous Transfer Mode over MPLS

An ATM over MPLS (AToM) PW is used to carry Asynchronous Transfer Mode (ATM) cells over an MPLS network. It is an evolutionary technology that allows you to migrate packet networks from legacy networks, while providing transport for legacy applications. AToM is particularly useful for transporting 3G voice traffic over MPLS networks.

You can configure AToM in the following modes:

- N-to-1 Cell—Maps one or more ATM virtual channel connections (VCCs) or virtual permanent connection (VPCs) to a single pseudowire.
- 1-to-1 Cell—Maps a single ATM VCC or VPC to a single pseudowire.

The Cisco ASR 920 Series Router also supports cell packing and PVC mapping for AToM pseudowires.



Note This release does not support AToM N-to-1 Cell Mode or 1-to-1 Cell Mode.

For more information about how to configure AToM, see the "Configuring an ATM over MPLS Pseudowire" section in the "Configuring Pseudowire" chapter of the Cisco ASR 920 Router Chassis Software Configuration Guide.

Configuring ATM IMA

Inverse multiplexing provides the capability to transmit and receive a single high-speed data stream over multiple slower-speed physical links. In Inverse Multiplexing over ATM (IMA), the originating stream of ATM cells is divided so that complete ATM cells are transmitted in round-robin order across the set of ATM links. Follow these steps to configure IMA:



Note IMA is used as an element in configuring ATM over MPLS pseudowires.



Note The maximum ATM over MPLS pseudowires supported per T1/E1 interface module is 500.

To configure the ATM interface on the router, you must install the ATM feature license using the **license install atm** command. To activate or enable the configuration on the IMA interface, use the **license feature atm** command. For more information about installing licenses, see the [Software Activation Configuration Guide, Cisco IOS XE Release 3S](#).



Note You can create a maximum of 16 IMA groups on each T1/E1 interface module.



Note ILMI is *not* supported starting with Cisco IOS XE Release 3.15 on the router.

Procedure

	Command or Action	Purpose
Step 1	enable Example:	Enables privileged EXEC mode. • Enter your password if prompted.

	Command or Action	Purpose
	<code>Router> enable</code>	
Step 2	configure terminal Example: <code>Router# configure terminal</code>	Enters global configuration mode.
Step 3	card type {t1 e1}slot [bay] Example: <code>Router(config)# card type e1 0 0</code>	Specifies the slot and port number of the E1 or T1 interface.
Step 4	controller {t1 e1}slot/subslot/port Example: <code>Router(config)# controller E1 0/0/4</code>	Specifies the controller interface on which you want to enable IMA.
Step 5	clock source internal Example: <code>Router(config-controller)# clock source internal</code>	Sets the clock source to internal.
Step 6	ima group group-number [scrambling-payload] Example: <code>Router(config-controller)# ima-group 0</code>	Assigns the interface to an IMA group, and set the scrambling-payload parameter to randomize the ATM cell payload frames. This command assigns the interface to IMA group 0. Note This command automatically creates an ATM0/IMAx interface. Note To add another member link, repeat Step 3 to Step 6.
Step 7	exit Example: <code>Router(config-controller)# exit</code>	Exits the controller interface.
Step 8	interface ATM slot/subslot/ IMA group-number Example: <code>Router(config-if)# interface atm0/1/ima0</code>	Specify the slot location and port of IMA interface group. <ul style="list-style-type: none"> • <i>slot</i>—The location of the ATM IMA interface module. • <i>group-number</i>—The IMA group.

	Command or Action	Purpose
		<p>Note To explicitly configure the IMA group ID for the IMA interface, use the optional ima group-id command. You cannot configure the same IMA group ID on two different IMA interfaces; therefore, if you configure an IMA group ID with the system-selected default ID already configured on an IMA interface, the system toggles the IMA interface to make the user-configured IMA group ID the effective IMA group ID. The system toggles the original IMA interface to select a different IMA group ID.</p>
Step 9	<p>no ip address</p> <p>Example:</p> <pre>Router(config-if)# no ip address</pre>	Disables the IP address configuration for the physical layer interface.
Step 10	<p>atm bandwidth dynamic</p> <p>Example:</p> <pre>Router(config-if)# atm bandwidth dynamic</pre>	Specifies the ATM bandwidth as dynamic.
Step 11	<p>no atm ilmi-keepalive</p> <p>Example:</p> <pre>Router(config-if)# no atm ilmi-keepalive</pre>	<p>Disables the Interim Local Management Interface (ILMI) keepalive parameters.</p> <p>Note ILMI is <i>not</i> supported starting with Cisco IOS XE Release 3.15 on the router.</p>
Step 12	<p>exit</p> <p>Example:</p> <pre>Router(config)# exit</pre>	Exits configuration mode.

Configuring an ATM over MPLS Pseudowire

ATM over MPLS pseudowires allow you to encapsulate and transport ATM traffic across an MPLS network. This service allows you to deliver ATM services over an existing MPLS network.

The sections below describe how to configure transportation of service using ATM over MPLS:

Configuring the Controller

Procedure

	Command or Action	Purpose
Step 1	Router> enable	Enables privileged EXEC mode.
Step 2	Router# configure terminal	Enters global configuration mode.
Step 3	Router(config)# card type e1 0 0	Configures IMA on an E1 or T1 interface.
Step 4	Router(config)# controller E1 0/4	Specifies the controller interface on which you want to enable IMA.
Step 5	Router(config-controller)# clock source internal	Sets the clock source to internal.
Step 6	Router(config-controller)# ima-group 0 scrambling-payloadima-group 0	If you want to configure an ATM IMA backhaul, use the ima-group command to assign the interface to an IMA group. For a T1 connection, use the no-scrambling-payload to disable ATM-IMA cell payload scrambling; for an E1 connection, use the scrambling-payload parameter to enable ATM-IMA cell payload scrambling.
Step 7	Router(config)# exit	Exits configuration mode. Note For more information about configuring IMA groups, see the Configuring ATM IMA, on page 54 .

Configuring an IMA Interface

If you want to use ATM IMA backhaul, follow these steps to configure the IMA interface.



Note You can create a maximum of 16 IMA groups on each T1/E1 interface module.

Procedure

	Command or Action	Purpose
Step 1	Router> enable	Enables privileged EXEC mode. • Enter your password if prompted.

	Command or Action	Purpose
Step 2	Router# configure terminal	Enters global configuration mode.
Step 3	Router(config-controller)# interface atm0/1/ima0	<p>Specifies the slot location and port of IMA interface group. The syntax is as follows:</p> <ul style="list-style-type: none"> • <i>slot</i>—The slot location of the interface module. • <i>group-number</i>—The group number of the IMA group. <p>The example specifies the slot number as 0 and the group number as 0.</p> <p>Note o explicitly configure the IMA group ID for the IMA interface, you may use the optional ima group-id command. You cannot configure the same IMA group ID on two different IMA interfaces; therefore, if you configure an IMA group ID with the system-selected default ID already configured on an IMA interface, the system toggles the IMA interface to make the user-configured IMA group ID the effective IMA group ID. At the same, the system toggles the original IMA interface to select a different IMA group ID.</p>
Step 4	Router(config-if)# no ip address	Disables the IP address configuration for the physical layer interface.
Step 5	Router(config-if)# atm bandwidth dynamic	Specifies the ATM bandwidth as dynamic.
Step 6	Router(config-if)# no atm ilmi-keepalive	Disables the ILMI keepalive parameters.
Step 7	Router(config)# exit	<p>Exits configuration mode.</p> <p>For more information about configuring IMA groups, see the Configuring ATM IMA.</p>

Configuring the ATM over MPLS Pseudowire Interface

You can configure ATM over MPLS in several modes according to the needs of your network. Use the appropriate section according to the needs of your network. The sections below show configuration of ATM over MPLS pseudowire types:



Note Release 15.1(1)MR does not support N-to-1 VCC Cell Transport for mapping multiple PVCs, 1-to-1 VCC Cell Mode, or PVC mapping.



Note When creating IP routes for a pseudowire configuration, build a route from the xconnect address (LDP router-id or loopback address) to the next hop IP address, such as **ip route 30.30.30.2 255.255.255.255 1.2.3.4**.

Configuring 1-to-1 VCC Cell Transport Pseudowire

A 1-to-1 VCC cell transport pseudowire maps one ATM virtual channel connection (VCC) to a single pseudowire. Complete these steps to configure a 1-to-1 pseudowire.



Note Multiple 1-to-1 VCC pseudowire mapping on an interface is supported.

Mapping a Single PVC to a Pseudowire

To map a single PVC to an ATM over MPLS pseudowire, use the **xconnect** command at the PVC level. This configuration type uses AAL0 and AAL5 encapsulations. Complete these steps to map a single PVC to an ATM over MPLS pseudowire.



Note Release 15.1(1)MR does not support mapping multiple VCCs to a pseudowire.

Procedure

	Command or Action	Purpose
Step 1	Router> enable	Enables privileged EXEC mode.
Step 2	Router# configure terminal	Enters global configuration mode.
Step 3	Router(config)# interface atm0/1/ima0	Configures the ATM IMA interface.
Step 4	Router(config-if-atm)# pvc 10/20 l2transport	Defines a PVC. Use the l2transport keyword to configure the PVC as a layer 2 virtual circuit.
Step 5	Router(config-if-atm-l2trans-pvc)# encapsulation aal0	Defines the encapsulation type for the PVC. The default encapsulation type for the PVC is AAL5.
Step 6	Router(config-if-atm-l2trans-pvc)# xconnect 1.1.1.1 40 encapsulation mpls	Binds an attachment circuit to the ATM IMA interface to create a pseudowire. This example

	Command or Action	Purpose
		creates a pseudowire by binding PVC 40 to the remote peer 1.1.1.1.
Step 7	Router(config-if-atm-l2trans-pvp-xconn)# end	Exits configuration mode.

Configuring N-to-1 VCC Cell Transport Pseudowire

An N-to-1 VCC cell transport pseudowire maps one or more ATM virtual channel connections (VCCs) to a single pseudowire. Complete these steps to configure an N-to-1 pseudowire.

Procedure

	Command or Action	Purpose
Step 1	Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	Router# configure terminal	Enters global configuration mode.
Step 3	Router(config)# interface atm0/1/1.1 multipoint	Configures the ATM multipoint interface.
Step 4	Router(config-subif)# xconnect 1.1.1.1 40 encapsulation mpls	Creates a pseudowire on an ATM interface. This example creates a pseudowire to the remote peer 1.1.1.1.
Step 5	Router(config-subif-xconn)# pvc 10/20 l2transport	Defines the first PVC 0/40 and maps it under the pseudowire created in Step 4. Use the l2transport keyword to configure the PVC as a layer 2 virtual circuit.
Step 6	Router(config-if-atm-l2trans-pvc)# pvc 0/41 l2transport	Defines the second PVC 0/41 and maps it under the pseudowire created in Step 4. Use the l2transport keyword to configure the PVC as a layer 2 virtual circuit.
Step 7	Router (config-if-atm-l2trans-pvc)# end	Exits configuration mode.

Configuring 1-to-1 VPC Cell Transport

A 1-to-1 VPC cell transport pseudowire maps one or more virtual path connections (VPCs) to a single pseudowire. While the configuration is similar to 1-to-1 VPC cell mode, this transport method uses the 1-to-1 VPC pseudowire protocol and format defined in RFCs 4717 and 4446. Complete these steps to configure a 1-to-1 VPC pseudowire.



Note Multiple 1-to-1 VCC pseudowire mapping on an interface is supported.

Procedure

	Command or Action	Purpose
Step 1	Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	Router# configure terminal	Enters global configuration mode.
Step 3	Router(config)# interface atm0/1/ima0	Configures the ATM IMA interface.
Step 4	Router(config-if-atm)# atm pvp 10 l2transport	Maps a PVP to a pseudowire.
Step 5	Router(config-if-atm-l2trans-pvp)# xconnect 30.30.30.2 305 encapsulation mpls	Binds an attachment circuit to the ATM IMA interface to create a pseudowire. This example creates a pseudowire by binding the ATM circuit 305 to the remote peer 30.30.30.2.
Step 6	Router(config-if-atm-l2trans-pvp-xconn)# end	Exits the configuration mode.

Configuring ATM AAL5 SDU VCC Transport

An ATM AAL5 SDU VCC transport pseudowire maps a single ATM PVC to another ATM PVC.

Procedure

	Command or Action	Purpose
Step 1	Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	Device# configure terminal	Enters global configuration mode.
Step 3	Device(config)# interface atm 0/1/ima0	Configures the ATM IMA interface.
Step 4	Device(config-if)# pvc 0/12 l2transport	Configures a PVC and specifies a VCI or VPI.
Step 5	Device(config-if-atm-l2trans-pvc)# encapsulation aal5	Sets the PVC encapsulation type to AAL5. <p>Note You must use the AAL5 encapsulation for this transport type.</p>
Step 6	Device(config-if-atm-l2trans-pvc)# xconnect 25.25.25.25 125 encapsulation mpls	Binds an attachment circuit to the ATM IMA interface to create a pseudowire. This example

	Command or Action	Purpose
		creates a pseudowire by binding the ATM circuit 125 to the remote peer 25.25.25.25.
Step 7	Device(config)# exit	Exits configuration mode.

Configuring Cell Packing (Optional)

You can apply the following optional configurations to a pseudowire link.

Cell packing allows you to improve the efficiency of ATM-to-MPLS conversion by packing multiple ATM cells into a single MPLS packet.

Procedure

	Command or Action	Purpose
Step 1	Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	Device# configure terminal	Enters global configuration mode.
Step 3	Device(config)# int atm1/0/1.1	Configures the ATM interface.
Step 4	Device(config-if)# atm mcpt-timers 1000 2000 3000	Defines the three Maximum Cell Packing Timeout (MCPT) timers under an ATM interface. The three independent MCPT timers specify a wait time before forwarding a packet.
Step 5	Device(config)# pvc 0/11 l2transport	
Step 6	Device(config-if-atm-l2trans-pvc)# encapsulation aal0	
Step 7	Device(config-if-atm-l2trans-pvc)# cell-packing 20 mcpt-timer 3	Specifies the maximum number of cells in PW cell pack and the cell packing timer that the Cisco ASR 920 Series Router uses. This example specifies 20 cells per pack and the third MCPT timer.
Step 8	Device(config-if-atm-l2trans-pvc)# end	Exits the configuration mode.

Example: ATM IMA Configuration

The following example shows how to add a T1/E1 interface to an ATM IMA group as a part of an ATM over MPLS pseudowire configuration. For more information about how to configure pseudowires, see [Configuring Pseudowire](#)



Note This section displays a partial configuration intended to demonstrate a specific feature.

```

controller t1 0/0/0
  ima-group 0
  clock source line

interface atm 0/0/ima0.1 point-to-point
  pvc 1/33 l2transport
  encapsulation aal0
  xconnect 1.1.1.1 33 encapsulation mpls

```

Example: ATM over MPLS

VC Mode for Cell Packing Configuration

CE 1 Configuration

```

interface Gig 1/1/0
  no negotiation auto
  load-interval 30

interface Gig 0/1/0
  ip address 20.1.1.1 255.255.255.0
  interface ATM4/2/4
  no shut
  exit
  !
  interface ATM 1/1/4.10 point
  ip address 50.1.1.1 255.255.255.0
  pvc 20/101
  encapsulation aal5snap
  !
  ip route 30.1.1.2 255.255.255.255 50.1.1.2

```

CE 2 Configuration

```

interface Gig 1/0/1
  no negotiation auto
  load-interval 30

interface Gig 0/1/1
  ip address 30.1.1.1 255.255.255.0
  interface ATM6/2/1
  no shut

  !
  interface ATM 1/0/1.10 point
  ip address 50.1.1.2 255.255.255.0
  pvc 20/101
  encapsulation aal5snap

  !
  ip route 20.1.1.2 255.255.255.255 50.1.1.1

```

PE 1 Configuration

```

interface Loopback0
ip address 192.168.37.3 255.255.255.255

!
interface ATM 0/0/1
no shut

!
interface ATM 0/0/1
atm mcpt-timers 150 1000 4095

interface ATM 0/0/0.10 point
pvc 20/101 l2transport
encapsulation aal0
cell-packing 20 mcpt-timer 1
xconnect 192.168.37.2 100 encapsulation mpls

!
interface Gig 0/1/0
no shut
ip address 40.1.1.1 255.255.0.0
mpls ip

!
mpls ip
mpls label protocol ldp
mpls ldp router-id Loopback0 force
mpls ldp graceful-restart

router ospf 1
network 40.1.0.0 0.0.255.255 area 1
network 192.168.37.0 0.0.0.255 area 1
nsf

```

PE 2 Configuration

```

interface Loopback0
ip address 192.168.37.2 255.255.255.255
!
interface ATM 0/1/1
no shut

!
interface ATM 0/1/1
atm mcpt-timers 150 1000 4095

interface ATM 0/1/1.10 point
pvc 20/101 l2transport
encapsulation aal0
cell-packing 20 mcpt-timer 1
xconnect 192.168.37.3 100 encapsulation mpls

!
interface Gig 1/1
no shut
ip address 40.1.1.2 255.255.0.0
mpls ip

```

```
!  
mpls ip  
mpls label protocol ldp  
mpls ldp router-id Loopback0 force  
mpls ldp graceful-restart  
  
router ospf 1  
network 40.1.0.0 0.0.255.255 area 1  
network 192.168.37.0 0.0.0.255 area 1  
nsf
```

VP Mode for Cell Packing Configuration

CE 1 Configuration

```
interface Gig 0/1/0  
no negotiation auto  
load-interval 30  
  
interface Gig 0/1/0  
ip address 20.1.1.1 255.255.255.0  
interface ATM4/2/4  
  
!  
interface ATM 0/1/4.10 point  
ip address 50.1.1.1 255.255.255.0  
pvc 20/101  
encapsulation aal5snap  
!  
ip route 30.1.1.2 255.255.255.255 50.1.1.2
```

CE 2 Configuration

```
!  
interface Gig 1/1  
no negotiation auto  
load-interval 30  
  
interface Gig 1/1  
ip address 30.1.1.1 255.255.255.0  
interface ATM6/2/1  
no shut  
  
!  
interface ATM 1/0/1.10 point  
ip address 50.1.1.2 255.255.255.0  
pvc 20/101  
encapsulation aal5snap  
  
!  
ip route 20.1.1.2 255.255.255.255 50.1.1.1
```

PE 1 Configuration

```
interface Loopback0  
ip address 192.168.37.3 255.255.255.255
```

```

!
interface ATM 0/0/0
no shut

!
interface ATM 0/0/0
atm mcpt-timers 150 1000 4095

interface ATM 0/0/0.50 multipoint
atm pvp 20 l2transport
cell-packing 10 mcpt-timer 1
xconnect 192.168.37.2 100 encapsulation mpls

!
interface Gig 0/1/0
no shut
ip address 40.1.1.1 255.255.0.0
mpls ip

!
mpls ip
mpls label protocol ldp
mpls ldp router-id Loopback0 force
mpls ldp graceful-restart

router ospf 1
network 40.1.0.0 0.0.255.255 area 1
network 192.168.37.0 0.0.0.255 area 1
nsf

```

PE 2 Configuration

```

!
interface Loopback0
ip address 192.168.37.2 255.255.255.255

!
interface ATM 0/1/1
no shut

!
interface ATM 0/1/1
atm mcpt-timers 150 1000 4095

interface ATM 0/1/1.50 multipoint
atm pvp 20 l2transport
cell-packing 10 mcpt-timer 1
xconnect 192.168.37.3 100 encapsulation mpls

!
interface Gig 1/1
no shut
ip address 40.1.1.2 255.255.0.0
mpls ip

!
mpls ip
mpls label protocol ldp
mpls ldp router-id Loopback0 force

```



```
mpls ldp graceful-restart

router ospf 1
network 40.1.0.0 0.0.255.255 area 1
network 192.168.37.0 0.0.0.255 area 1
nsf
```

VC Mode for Cell Relay Configuration

CE 1 Configuration

```
!
interface gigabitethernet 0/1/0
no negotiation auto
load-interval 30

interface gigabitethernet 0/1/0
ip address 20.1.1.1 255.255.255.0
!
interface ATM 1/0/4
!
interface ATM 1/0/4.10 point
ip address 50.1.1.1 255.255.255.0
pvc 20/101
encapsulation aal5snap
!
ip route 30.1.1.2 255.255.255.255 50.1.1.2
!
```

CE 2 Configuration

```
interface gigabitethernet 1/0
no negotiation auto
load-interval 30

interface gigabitethernet 1/0
ip address 30.1.1.1 255.255.255.0
interface ATM6/2/1
!
interface ATM 1/0/1.10 point
ip address 50.1.1.2 255.255.255.0
pvc 20/101
encapsulation aal5snap
!
ip route 20.1.1.2 255.255.255.255 50.1.1.1
```

PE 1 Configuration

```
!
interface Loopback0
ip address 192.168.37.3 255.255.255.255
!
interface ATM0/0/0
!

interface ATM 0/0/0.10 point
pvc 20/101 l2transport
encapsulation aal0
xconnect 192.168.37.2 100 encapsulation mpls
!
```

```

interface gigabitethernet 0/1/0
ip address 40.1.1.1 255.255.0.0
mpls ip

!
mpls ip
mpls label protocol ldp
mpls ldp router-id Loopback0 force
mpls ldp graceful-restart

router ospf 1
network 40.1.0.0 0.0.255.255 area 1
network 192.168.37.0 0.0.0.255 area 1
nsf

```

PE 2 Configuration

```

!
interface Loopback0
ip address 192.168.37.2 255.255.255.255
!
interface ATM 0/1/1
!
interface ATM 0/1/1.10 point
pvc 20/101 l2transport
encapsulation aal0
xconnect 192.168.37.3 100 encapsulation mpls

!
interface gigabitethernet 1/0
ip address 40.1.1.2 255.255.0.0
mpls ip
!
mpls ip
mpls label protocol ldp
mpls ldp router-id Loopback0 force
mpls ldp graceful-restart

router ospf 1
network 40.1.0.0 0.0.255.255 area 1
network 192.168.37.0 0.0.0.255 area 1
nsf

```

VP Mode for Cell Relay Configuration

CE 1 Configuration

```

!
interface gigabitethernet 1/0/0
no negotiation auto
load-interval 30

interface gigabitethernet 1/1/0
ip address 20.1.1.1 255.255.255.0
!
interface ATM 1/0/4
!
interface ATM 1/0/4.10 point
ip address 50.1.1.1 255.255.255.0
pvc 20/101
encapsulation aal5snap

```

```
!
ip route 30.1.1.2 255.255.255.255 50.1.1.2
```

CE 2 Configuration

```
!
interface gigabitethernet 1/0
no negotiation auto
load-interval 30

interface gigabitethernet 1/0
ip address 30.1.1.1 255.255.255.0
interface ATM 1/0/1
!
interface ATM 1/0/1.10 point
ip address 50.1.1.2 255.255.255.0
pvc 20/101
encapsulation aal5snap
!
ip route 20.1.1.2 255.255.255.255 50.1.1.1
```

PE 1 Configuration

```
interface Loopback0
ip address 192.168.37.3 255.255.255.255
!
!
interface ATM 0/0/0

interface ATM 0/0/0.50 multipoint
atm pvp 20 l2transport
xconnect 192.168.37.2 100 encapsulation mpls
!
interface gigabitethernet 0/1/0
ip address 40.1.1.1 255.255.0.0
mpls ip

!
mpls ip
mpls label protocol ldp
mpls ldp router-id Loopback0 force
mpls ldp graceful-restart

router ospf 1
network 40.1.0.0 0.0.255.255 area 1
network 192.168.37.0 0.0.0.255 area 1
nsf
```

PE 2 Configuration

```
interface Loopback0
ip address 192.168.37.2 255.255.255.255
!
!
interface ATM 1/0/1

interface ATM 1/0/1.50 multipoint
atm pvp 20 l2transport
xconnect 192.168.37.3 100 encapsulation mpls
!
```

```

interface gigabitethernet 1/1
ip address 40.1.1.2 255.255.0.0
mpls ip
!
mpls ip
mpls label protocol ldp
mpls ldp router-id Loopback0 force
mpls ldp graceful-restart

router ospf 1
network 40.1.0.0 0.0.255.255 area 1
network 192.168.37.0 0.0.0.255 area 1
nsf

```

Configuring ATM AAL5 over MPLS Pseudowire on a Sonet Controller

This section describes how to configure the ATM adaptation layer 5 (AAL5) over Multiprotocol Label Switching (MPLS) pseudowire on a Sonet controller.

To configure ATM AAL5 over MPLS on a SONET controller, use the following commands beginning privileged EXEC mode:

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: Device# configure terminal	Enters global configuration mode from the terminal.
Step 2	controller sonet slot/subslot/port Example: Device(config)# controller sonet 0/1/0	Enters controller configuration mode to configure the SONET controller.
Step 3	framing sdh	Specifies the framing type as Synchronous Digital Hierarchy (SDH).
Step 4	Router(config-controller)# aug mapping au-4	Configures the AUG to be derived from AU-4.
Step 5	au-4 au-4-number tug-3 tug-3-number Example: Device(config-controller)# au-4 1 tug-3 1	Specifies the Administrative Unit type 4 (AU-4) and Tributary Unit group type 3 (TUG-3) numbers.
Step 6	tug-2 tug-2-number e1 e1-line-number atm Example: Device(config-ctrlr-tug3)# tug-2 1 e1 1 atm	Creates an ATM group for the AU-4

	Command or Action	Purpose
Step 7	exit	Exits to global configuration mode.
Step 8	interface atm <i>slot/subslot/port . sts-1/vtg/t1 . subpoint .</i> point-to-point Example: Device(config)# interface atm <i>0/0/0.1/1/1/1.2</i> point-to-point	Enters subinterface configuration mode pertaining to the specified subinterface and specifies a point-to-point subinterface.
Step 9	pvc vpi/vci l2transport Example: Device(config-subif)# pvc <i>10/100</i> l2transport	Creates an ATM permanent virtual circuit (PVC) and enters Layer 2 transport ATM virtual circuit configuration submode.
Step 10	encapsulation aal5	Specifies ATM AAL5 encapsulation for the PVC.
Step 11	xconnect remote-pe-loopback ip vcid encapsulation mpls Example: Device(cfg-if-atm-l2trans-pvc)# xconnect <i>203.0.113.5 501</i> encapsulation mpls	Binds the attachment circuit to a pseudowire VC.

Configuring ATM AAL5 over MPLS Pseudowire on T1 Controller

This section describes how to configure the ATM adaptation layer 5 (AAL5) over Multiprotocol Label Switching (MPLS) pseudowire on a T1 controller.

To configure ATM AAL5 over MPLS on a T1 controller, use the following commands beginning privileged EXEC mode:

Procedure

	Command or Action	Purpose
Step 1	Router# configure terminal	Enters global configuration mode from the terminal.
Step 2	Router(config)# controller t1 <i>slot/subslot/port</i> Example: Router(config)# controller t1 <i>0/1/0</i>	Enters the controller configuration mode.
Step 3	Router(config-controller)# atm	Configures the T1 interface for ATM.

	Command or Action	Purpose
Step 4	Router(config)# interface atm <i>slot/subslot/port</i> point-to-point Example: Router(config)# interface atm <i>0/1/0.10</i> point-to-point	Configures a subinterface and point-to-point as the interface type.
Step 5	Router(config-subif)# pvc vpi/vci l2transport Example: Router(config-subif)# pvc 10/100 l2transport	Creates an ATM permanent virtual circuit (PVC) and enters Layer 2 transport ATM virtual circuit configuration submode.
Step 6	Router(cfg-if-atm-l2trans-pvc)# encapsulation aal5	Specifies ATM AAL5 encapsulation for the PVC.
Step 7	Router(cfg-if-atm-l2trans-pvc)# xconnect <i>peer-router-id vcid</i> encapsulation mpls Example: Router(cfg-if-atm-l2trans-pvc)# xconnect 203.0.113.5 501 encapsulation mpls	Binds the attachment circuit to a pseudowire VC.

Configuring Service Classes on a PVC

This section describes how to configure different classes of service on a PVC.

To configure the configure different classes of service on a PVC, use the following commands beginning privileged EXEC mode:

Procedure

	Command or Action	Purpose
Step 1	Router# configure terminal	Enters global configuration mode from the terminal.
Step 2	Router(config)# controller t1 <i>slot/subslot/port</i> Example: Router(config)# controller t1 0/1/0	Enters the controller configuration mode.
Step 3	Router(config-controller)# atm	Configures the T1 interface for ATM.
Step 4	Router(config)# interface atm <i>slot/subslot/port</i> point-to-point Example:	Configures a subinterface and point-to-point as the interface type.

	Command or Action	Purpose
	<code>Router(config)# interface atm 0/1/0.10 point-to-point</code>	
Step 5	<p>Router(config-subif)# pvc vpi/vci l2transport</p> <p>Example:</p> <pre>Router(config-subif)# pvc 10/100 l2transport</pre>	Creates an ATM permanent virtual circuit (PVC) and enters Layer 2 transport ATM virtual circuit configuration submode.
Step 6	<p>Router(cfg-if-atm-l2trans-pvc)# {cbr ubr ubr+ vbr-nrt vbr-rt}</p> <ul style="list-style-type: none"> • Constant Bit Rate (CBR)—The CBR service class is designed for ATM virtual circuits (VCs) that need a static amount of bandwidth that is continuously available for the duration of the active connection. • Unspecified Bit Rate (UBR)—This is a service class where the network management makes no Quality of Service (QoS) commitment. It models the best-effort service that the Internet normally provides and is suitable for applications tolerant to delay and does not require real-time responses. • Unspecified Bit Rate Plus—UBR+ supports a zero committed information rate (CIR) with infinite burst capabilities up to an entire T1. It allows any available network bandwidth to be continuously usable by any data application. • Variable Bit Rate Non-Real Time VBR-nrt service class is used in order to transmit non-real-time applications that are bursty in nature. • Variable Bit Rate Real Time—VBR-rt service class is used in order to transmit real-time data that is sensitive to time delays. <p>Example:</p> <pre>Router(cfg-if-atm-l2trans-pvc)# cbr</pre>	Configures a service class on a PVC. These are the available options:

Example QoS Exp Marking on ATM Layer 2 Interfaces

This section provides examples for configuring QoS Exp Marking on ATM Layer 2 Interfaces.

Example Configuring QoS Exp Marking on PVC Pseudowire

The following example shows how to configure QoS Exp Marking on PVC Pseudowire.

```
Policy-map mark_exp_5
class class-default
set mpls exp imposition 5
interface atm 0/1/1 point-to-point
pvc 10/100 l2transport
xconnect 1.1.1.1 200 encapsulation mpls
service-policy input mark_exp_5
pvc 20/111 l2transport
xconnect 1.1.1.1 200 encapsulation mpls
service-policy input mark_exp_5
```

Example Configuring QoS Exp Marking on PVP Pseudowire

The following example shows how to configure QoS Exp Marking on PVP Pseudowire.

```
Policy-map mark_exp_5
class class-default
set mpls exp imposition 5
interface ATM0/1/2
atm pvp 10 l2 transport
xonnect 1.1.1.1 400 encapsulation mpls
service-policy input mark_exp_5
```

Example Configuring QoS Exp Marking on N:1 Pseudowire

The following example shows how to configure QoS Exp Marking on N:1 Pseudowire.

```
Policy-map mark_exp_5
class class-default
set mpls exp imposition 5
interface atm 0/3/2.1 multipoint
xconnect 11.1.1.1 400 encapsulation mpls
service-policy input mark_exp_5
pvc 10/122
pvc 120/122
```

PE Configuration Example Configuring Cell Packing

The following example shows how to configure Cell Packing.

```
interface ATM0/4/11
no ip address
atm mcpt-timers 51150 51150 51150
no atm enable-ilmi-trap
end
interface ATM0/4/11.1 multipoint
no atm enable-ilmi-trap
cell-packing 28 mcpt-timer 1
xconnect 11.11.11.11 30 encapsulation mpls
pvc 20/10 l2transport
!
pvc 21/11 l2transport
!
pvc 22/12 l2transport
!
pvc 23/13 l2transport
!
pvc 24/14 l2transport
!
pvc 25/15 l2transport
```



```
!  
pvc 26/16 l2transport  
!  
pvc 27/17 l2transport
```

