



## **Cisco Nexus 5500 Series NX-OS Quality of Service Configuration Guide, Release 7.x**

**First Published:** 2014-01-29

**Last Modified:** 2019-07-16

### **Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0883

Text Part Number: OL-30894-03

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

The documentation set for this product strives to use bias-free language. For purposes of this documentation set, bias-free is defined as language that does not imply discrimination based on age, disability, gender, racial identity, ethnic identity, sexual orientation, socioeconomic status, and intersectionality. Exceptions may be present in the documentation due to language that is hardcoded in the user interfaces of the product software, language used based on standards documentation, or language that is used by a referenced third-party product.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2014 Cisco Systems, Inc. All rights reserved.



## CONTENTS

---

### PREFACE

<b>Preface</b>	<b>ix</b>
Audience	<b>ix</b>
Document Conventions	<b>ix</b>
Documentation Feedback	<b>x</b>
Communications, Services, and Additional Information	<b>x</b>

---

### CHAPTER 1

<b>New and Changed Information</b>	<b>1</b>
New and Changed Information	<b>1</b>

---

### CHAPTER 2

<b>Overview</b>	<b>3</b>
Information About Quality of Service	<b>3</b>
Modular QoS CLI	<b>3</b>
QoS for Traffic Directed to the CPU	<b>4</b>

---

### CHAPTER 3

<b>Configuring Classification</b>	<b>5</b>
Information About Classification	<b>5</b>
Ingress Classification Policies	<b>6</b>
Licensing Requirements for Classification	<b>6</b>
Configuring Classification	<b>6</b>
Configuring Class Maps	<b>6</b>
Configuring CoS Classification	<b>7</b>
Configuring Precedence Classification	<b>8</b>
Configuring DSCP Classification	<b>9</b>
Configuring Protocol Classification	<b>11</b>
Configuring IP RTP Classification	<b>12</b>
Configuring ACL Classification	<b>13</b>

QoS ACL Per-Entry Statistics	14
Example: Enabling QoS Policy Statistics	14
Verifying the Classification Configuration	15

---

**CHAPTER 4****Configuring Policy Maps 17**

Information About Policy Types	17
Configuring Policy Maps	19
Creating Policy Maps	19
Configuring Type Network QoS Policies	20
Configuring Type QoS Policies	21
Configuring Type Queuing Policies	22
Enabling and Displaying QoS Statistics for Interfaces	23
Restrictions for Viewing the QoS Statistics	26
Verifying the Policy Map Configuration	27

---

**CHAPTER 5****Configuring Marking 29**

Information About Marking	29
Configuring Marking	29
Configuring DSCP Marking	29
Configuring IP Precedence Marking	31
Configuring CoS Marking	32
Layer 3 QoS Characteristics	33
Required CoS Marking Configuration in a Layer 3 Topology	33
Verifying the Marking Configuration	35

---

**CHAPTER 6****Configuring QoS on the System 37**

Information About System Classes	37
System Classes	37
Default System Classes	37
MTU	37
Configuring System QoS	38
Attaching the System Service Policy	38
Restoring the Default System Service Policies	38
Configuring the Queue Limit for a Specified Fabric Extender	39

Enabling the Jumbo MTU	40
Verifying the Jumbo MTU	41
Verifying the System QoS Configuration	41

---

**CHAPTER 7**
**Configuring QoS on Interfaces 43**

Information About Interface QoS	43
Trust Boundaries	43
Policy for Fibre Channel Interfaces	43
QoS for Multicast Traffic	44
Configuring Interface QoS	44
Configuring Untagged CoS	44
Configuring an Interface Service Policy	45
Configuring a Service Policy for a Layer 3 Interface	45
Verifying the Interface QoS Configuration	46

---

**CHAPTER 8**
**Configuring QoS on VLANs 49**

Information About VLAN QoS	49
Precedence of QoS Policies	49
Example of Interface, System, and VLAN Policy Precedence	49
Example of Interface and System QoS Policy Precedence	50
Example of System and VLAN Policy Precedence	50
Example of VLAN QoS and VACL Policy Precedence	51
Limiting TCAM Entries for VLAN QoS	51
Guidelines and Limitations for VLAN QoS	52
Configuring VLAN QoS	53
Configuring or Changing the Interface QoS TCAM Limit	53
Removing the Interface QoS Limit from the TCAM	53
Configuring a Service Policy on a VLAN	54
Removing a Service Policy from a VLAN	55
Verifying the VLAN QoS Configuration	56
Feature History for VLAN QoS	56

---

**CHAPTER 9**
**Configuring Queuing and Flow Control 57**

Information About Queues	57
--------------------------	----

Ingress Queuing Policies	57
Egress Queuing Policies	57
Buffering and Queue Limits on the Cisco Nexus 5500 Platform	58
Information About Flow Control	59
Link-Level Flow Control	59
Priority Flow Control	59
Configuring Queuing	60
Configuring the Queue Limit for a Specified Fabric Extender	60
Configuring No-Drop Buffer Thresholds	61
Configuring the Buffer Threshold for the Cisco Nexus 2148T Fabric Extender	63
Enabling Virtual Output Queuing Limits for Unicast Traffic on the Cisco Nexus Device	63
Configuring Flow Control	64
Link-Level Flow Control	64
Configuring Priority Flow Control	64
Configuring Link-Level Flow Control	65
Disabling Slow Port Pruning on Multicast Traffic on the Cisco Nexus 5500 Series Device	65
Verifying the Queue and Flow Control Configurations	66

---

**CHAPTER 10**
**Configuring Ingress Policing 67**

Information About Ingress Policing	67
Guidelines and Limitations for Ingress Policing	68
Creating a Policy Map Using a Committed Information Rate	69
Creating a Policy Map Using a Percentage of the Interface Rate	71
Verifying Ingress Policing Configuration	73
Configuration Examples for Ingress Policing	73

---

**CHAPTER 11**
**Configuring ACL Logging 75**

Information About ACL Logging	75
IPv6 ACL Logging Overview	75
Guidelines and Limitations for ACL Logging	75
Configuring ACL Logging	76
Verifying ACL Logging Configuration	78
Configuration Examples for ACL Logging	78

---

**CHAPTER 12****Configuring FEX-Based ACL Classification 81**

Information About FEX-based ACL Classification 81

Overview of FEX-based ACL Classification 81

Guidelines and Limitations for FEX-Based ACL Classification 82

Configuring FEX-Based ACL Classification 83

Configuring FEX ACL-based QoS Policy Enforcement 83

Configuring the FEX ACL-based Interface-Level QoS Policy 84

Configuring FEX ACL-based System-Level QoS Policy 85

Disabling FEX ACL-based QoS Policy Enforcement 87

Verifying the FEX-Based ACL Classification 88

Configuration Examples for FEX-based ACL Classification 88

---

**CHAPTER 13****QoS Configuration Examples 91**

QoS Example 1 91

QoS Example 2 92

QoS Example 3 94







## Preface

---

The preface contains the following sections:

- [Audience, on page ix](#)
- [Document Conventions, on page ix](#)
- [Documentation Feedback, on page x](#)
- [Communications, Services, and Additional Information, on page x](#)

## Audience

This publication is for network administrators who configure and maintain Cisco Nexus devices.

## Document Conventions



---

**Note** As part of our constant endeavor to remodel our documents to meet our customers' requirements, we have modified the manner in which we document configuration tasks. As a result of this, you may find a deviation in the style used to describe these tasks, with the newly included sections of the document following the new format.

---

Command descriptions use the following conventions:

Convention	Description
<b>bold</b>	Bold text indicates the commands and keywords that you enter literally as shown.
<i>Italic</i>	Italic text indicates arguments for which the user supplies the values.
[x]	Square brackets enclose an optional element (keyword or argument).
[x   y]	Square brackets enclosing keywords or arguments separated by a vertical bar indicate an optional choice.
{x   y}	Braces enclosing keywords or arguments separated by a vertical bar indicate a required choice.

Convention	Description
[x {y   z}]	Nested set of square brackets or braces indicate optional or required choices within optional or required elements. Braces and a vertical bar within square brackets indicate a required choice within an optional element.
<i>variable</i>	Indicates a variable for which you supply values, in context where italics cannot be used.
string	A nonquoted set of characters. Do not use quotation marks around the string or the string will include the quotation marks.

Examples use the following conventions:

Convention	Description
<code>screen font</code>	Terminal sessions and information the switch displays are in screen font.
<b>boldface screen font</b>	Information you must enter is in boldface screen font.
<i>italic screen font</i>	Arguments for which you supply values are in italic screen font.
< >	Nonprinting characters, such as passwords, are in angle brackets.
[ ]	Default responses to system prompts are in square brackets.
!, #	An exclamation point (!) or a pound sign (#) at the beginning of a line of code indicates a comment line.

This document uses the following conventions:



**Note** Means *reader take note*. Notes contain helpful suggestions or references to material not covered in the manual.



**Caution** Means *reader be careful*. In this situation, you might do something that could result in equipment damage or loss of data.

## Documentation Feedback

To provide technical feedback on this document, or to report an error or omission, please send your comments to: .

We appreciate your feedback.

## Communications, Services, and Additional Information

- To receive timely, relevant information from Cisco, sign up at [Cisco Profile Manager](#).

- To get the business impact you're looking for with the technologies that matter, visit [Cisco Services](#).
- To submit a service request, visit [Cisco Support](#).
- To discover and browse secure, validated enterprise-class apps, products, solutions and services, visit [Cisco Marketplace](#).
- To obtain general networking, training, and certification titles, visit [Cisco Press](#).
- To find warranty information for a specific product or product family, access [Cisco Warranty Finder](#).

### **Cisco Bug Search Tool**

[Cisco Bug Search Tool](#) (BST) is a web-based tool that acts as a gateway to the Cisco bug tracking system that maintains a comprehensive list of defects and vulnerabilities in Cisco products and software. BST provides you with detailed defect information about your products and software.





# CHAPTER 1

## New and Changed Information

This chapter contains the following sections:

- [New and Changed Information, on page 1](#)

## New and Changed Information

The following table provides an overview of the significant changes made to this configuration guide. The table does not provide an exhaustive list of all changes made to this guide or all new features in a particular release.

Feature	Release	Description	Where Documented
FEX-Based ACL Classification	7.0(3)N1(1)	The FEX-Based ACL Classification feature uses TCAM resources on a FEX to perform ACL-based packet classification of incoming packets on the switch.	<a href="#">Configuring FEX-Based ACL Classification, on page 81</a>
IPv6 ACL logging	7.0(1)N1(1)	The IPv6 ACL logging feature allows you to monitor ACL flows and to log dropped packets on an interface.	Configuring ACL Logging





## CHAPTER 2

# Overview

---

This chapter contains the following sections:

- [Information About Quality of Service, on page 3](#)
- [Modular QoS CLI, on page 3](#)
- [QoS for Traffic Directed to the CPU , on page 4](#)

## Information About Quality of Service

The configurable Cisco NX-OS quality of service (QoS) features allow you to classify the network traffic, prioritize the traffic flow, and provide congestion avoidance.

The default QoS configuration on the device provides best-effort service for Ethernet traffic. QoS can be configured to provide additional classes of service for Ethernet traffic. Cisco NX-OS QoS features are configured using Cisco Modular QoS CLI (MQC).

In the event of congestion or collisions, Ethernet will drop packets. The higher level protocols detect the missing data and retransmit the dropped packets.

## Modular QoS CLI

The Cisco Modular QoS CLI (MQC) provides a standard set of commands for configuring QoS.

You can use MQC to define additional traffic classes and to configure QoS policies for the whole system and for individual interfaces. Configuring a QoS policy with MQC consists of the following steps:

1. Define traffic classes.
2. Associate policies and actions with each traffic class.
3. Attach policies to logical or physical interfaces as well as at the global system level.

MQC provides two command types to define traffic classes and policies:

### **class-map**

Defines a class map that represents a class of traffic based on packet-matching criteria. Class maps are referenced in policy maps.

The class map classifies incoming packets based on matching criteria, such as the IEEE 802.1p class of service (CoS) value. Unicast and multicast packets are classified.

**policy-map**

Defines a policy map that represents a set of policies to be applied on a class-by-class basis to class maps.

The policy map defines a set of actions to take on the associated traffic class, such as limiting the bandwidth or dropping packets.

You define the following class-map and policy-map object types when you create them:

**network-qos**

Defines MQC objects that you can use for system level related actions.

**qos**

Defines MQC objects that you can use for classification.

**queuing**

Defines MQC objects that you can use for queuing and scheduling.



---

**Note** The qos type is the default for the **class-map** and **policy-map** commands, but not for the **service-policy** which requires that you specify an explicit type.

---

You can attach policies to interfaces or EtherChannels as well as at the global system level by using the **service-policy** command.

You can view all or individual values for MQC objects by using the **show class-map** and **show policy-map** commands.

An MQC target is an entity (such as an Ethernet interface) that represents a flow of packets. A service policy associates a policy map with an MQC target and specifies whether to apply the policy on incoming or outgoing packets. This mapping enables the configuration of QoS policies such as marking, bandwidth allocation, buffer allocation, and so on.

## QoS for Traffic Directed to the CPU

The device automatically applies QoS policies to traffic that is directed to the CPU to ensure that the CPU is not flooded with packets. Control traffic, such as bridge protocol data units (BPDU) frames, is given higher priority to ensure delivery.





# CHAPTER 3

## Configuring Classification

This chapter contains the following sections:

- [Information About Classification, on page 5](#)
- [Ingress Classification Policies, on page 6](#)
- [Licensing Requirements for Classification, on page 6](#)
- [Configuring Classification, on page 6](#)
- [QoS ACL Per-Entry Statistics, on page 14](#)
- [Verifying the Classification Configuration, on page 15](#)

## Information About Classification

Classification is the separation of packets into traffic classes. You configure the device to take a specific action on the specified classified traffic, such as policing or marking down, or other actions.

You can create class maps to represent each traffic class by matching packet characteristics with classification criteria.

**Table 1: Classification Criteria**

Classification Criteria	Description
Class map	Criteria specified in a named class-map object.
Precedence	Precedence value within the Type of Service (ToS) byte of the IP Header.
Differentiated Services Code Point (DSCP)	DSCP value within the DiffServ field of the IP Header.
Protocol	Selected set of protocols, including Address Resolution Protocol (ARP) and Connectionless Network Service (CLNS).
IP RTP	Identify applications using Real-time Transport Protocol (RTP) by UDP port number range.
ACL	Traffic is classified by the criteria defined in the access control list (ACL).

Table 2: Supported RFCs

RFC	Title
RFC 2474	Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers

## Ingress Classification Policies

You use classification to partition traffic into classes. You classify the traffic based on the packet property (CoS field) or the packet header fields that include IP precedence, Differentiated Services Code Point (DSCP), and Layer 2 to Layer 4 parameters. The values used to classify traffic are called match criteria.

Traffic that fails to match any class is assigned to a default class of traffic called class-default.

## Licensing Requirements for Classification

This feature does not require a license. Any feature not included in a license package is bundled with the Cisco NX-OS system images and is provided at no extra charge to you. For a complete explanation of the Cisco NX-OS licensing scheme, see the *Cisco NX-OS Licensing Guide*.

## Configuring Classification

### Configuring Class Maps

You can create or modify a class map with the **class-map** command. The class map is a named object that represents a class of traffic. In the class map, you specify a set of match criteria for classifying the packets. You can then reference class maps in policy maps.



**Note** The class map type default is type qos and its match criteria default is match-all.

#### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>class-map</b> [type {network-qos   qos   queuing}] <i>class-map name</i>	Creates or accesses a named object that represents the specified class of traffic.  Class-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.  The three class-map configuration modes are as follows:

	Command or Action	Purpose
		<ul style="list-style-type: none"> <li>• <b>network-qos</b>—Network-wide (global) mode. CLI prompt: <code>switch(config-cmap-nq)#</code></li> <li>• <b>qos</b>—Classification mode; this is the default mode. CLI prompt: <code>switch(config-cmap-qos)#</code></li> <li>• <b>queuing</b>—Queuing mode. CLI prompt: <code>switch(config-cmap-que)#</code></li> </ul>
<b>Step 3</b>	(Optional) <code>switch(config)# class-map [type qos] [match-all   match-any] class-map name</code>	<p>Specifies that packets must match any or all criteria that is defined for a class map.</p> <ul style="list-style-type: none"> <li>• <b>match-all</b>—Classifies traffic if packets match all criteria that is defined for a specified class map (for example, if both the defined CoS and the ACL criteria match).</li> <li>• <b>match-any</b>—Classifies traffic if packets match any criteria that is defined for a specified class map (for example, if either the CoS or the ACL criteria matches).</li> </ul> <p>Class-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.</p>
<b>Step 4</b>	(Optional) <code>switch(config)# no class-map [type {network-qos   qos   queuing}] class-name</code>	<p>Deletes the specified class map.</p> <p>Class-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.</p>

## Configuring CoS Classification

You can classify traffic based on the class of service (CoS) in the IEEE 802.1Q header. This 3-bit field is defined in IEEE 802.1p to support QoS traffic classes. CoS is encoded in the high order 3 bits of the VLAN ID Tag field and is referred to as *user\_priority*.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<code>switch# configure terminal</code>	Enters global configuration mode.
<b>Step 2</b>	<code>switch(config)# class-map type qos class-name</code>	Creates a named object that represents a class of traffic. Class-map names can contain alphabetic, hyphen, or underscore characters,

	Command or Action	Purpose
		are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	switch(config-cmap-qos)# <b>match cos</b> <i>cos-value</i>	Specifies the CoS value to match for classifying packets into this class. You can configure a CoS value in the range of 0 to 7.
<b>Step 4</b>	(Optional) switch(config-cmap-qos)# <b>no match cos</b> <i>cos-value</i>	Removes the match from the traffic class.

### Example

This example shows how to classify traffic by matching packets based on a defined CoS value:

```
switch# configure terminal
switch(config)# class-map type qos match-any class_cos
switch(config-cmap-qos)# match cos 4, 5-6
```

Use the **show class-map** command to display the CoS value class-map configuration:

```
switch# show class-map class_cos
```

## Configuring Precedence Classification

You can classify traffic based on the precedence value in the type of service (ToS) byte field of the IP header (either IPv4 or IPv6). The following table shows the precedence values:

**Table 3: Precedence Values**

Value	List of Precedence Values
<0-7>	IP precedence value
critical	Critical precedence (5)
flash	Flash precedence (3)
flash-override	Flash override precedence (4)
immediate	Immediate precedence (2)
internet	Internetwork control precedence (6)
network	Network control precedence (7)
priority	Priority precedence (1)
routine	Routine precedence (0)

**Procedure**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<code>switch# configure terminal</code>	Enters global configuration mode.
<b>Step 2</b>	<code>switch(config)# class-map type qos match-any class-name</code>	Creates a named object that represents a class of traffic. Class-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	<code>switch(config-cmap-qos)#match precedence precedence-values</code>	Configures the traffic class by matching packets based on precedence values. For a list of precedence values, see the Precedence Values table.
<b>Step 4</b>	(Optional) <code>switch((config-cmap-qos)# no match precedence precedence-values</code>	Removes the match from the traffic class. For a list of precedence values, see the Precedence Values table.

**Example**

This example shows how to classify traffic by matching packets based on the precedence value in the ToS byte field of the IP header:

```
switch# configure terminal
switch(config)# class-map type qos match-any class_precedence
switch(config-cmap-qos)# match precedence 1-2, critical
```

Use the **show class-map** command to display the IP precedence value class-map configuration:

```
switch# show class-map class_precedence
```

## Configuring DSCP Classification

You can classify traffic based on the Differentiated Services Code Point (DSCP) value in the DiffServ field of the IP header (either IPv4 or IPv6).

**Table 4: Standard DSCP Values**

<b>Value</b>	<b>List of DSCP Values</b>
af11	AF11 dscp (001010)—decimal value 10
af12	AF12 dscp (001100)—decimal value 12
af13	AF13 dscp (001110)—decimal value 14
af21	AF21 dscp (010010)—decimal value 18
af22	AF22 dscp (010100)—decimal value 20
af23	AF23 dscp (010110)—decimal value 22

Value	List of DSCP Values
af31	AF31 dscp (011010)—decimal value 26
af32	AF32 dscp (011100)—decimal value 28
af33	AF33 dscp (011110)—decimal value 30
af41	AF41 dscp (100010)—decimal value 34
af42	AF42 dscp (100100)—decimal value 36
af43	AF43 dscp (100110)—decimal value 38
cs1	CS1 (precedence 1) dscp (001000)—decimal value 8
cs2	CS2 (precedence 2) dscp (010000)—decimal value 16
cs3	CS3 (precedence 3) dscp (011000)—decimal value 24
cs4	CS4 (precedence 4) dscp (100000)—decimal value 32
cs5	CS5 (precedence 5) dscp (101000)—decimal value 40
cs6	CS6 (precedence 6) dscp (110000)—decimal value 48
cs7	CS7 (precedence 7) dscp (111000)—decimal value 56
default	Default dscp (000000)—decimal value 0
ef	EF dscp (101110)—decimal value 46

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>class-map type qos class-name</b>	Creates a named object that represents a class of traffic. Class-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	switch(config-cmap-qos)# <b>match dscp dscp-list</b>	Configures the traffic class by matching packets based on the values in the <i>dscp-list</i> variable. For a list of DSCP values, see the Standard DSCP Values table.
<b>Step 4</b>	(Optional) switch(config-cmap-qos)# <b>no match dscp dscp-list</b>	Removes the match from the traffic class. For a list of DSCP values, see the Standard DSCP Values table.

### Example

This example shows how to classify traffic by matching packets based on the DSCP value in the DiffServ field of the IP header:

```
switch# configure terminal
switch(config)# class-map type qos match-any class_dscp
switch(config-cmap-qos)# match dscp af21, af32
```

Use the **show class-map** command to display the DSCP class-map configuration:

```
switch# show class-map class_dscp
```

## Configuring Protocol Classification

You can classify traffic based on the IPv4 Protocol field or the IPv6 Next Header field in the IP header. The following table shows the protocol arguments:

**Table 5: Protocol Arguments**

Argument	Description
arp	Address Resolution Protocol (ARP)
clns_es	CLNS End Systems
clns_is	CLNS Intermediate System
dhcp	Dynamic Host Configuration (DHCP)
ldp	Label Distribution Protocol (LDP)
netbios	NetBIOS Extended User Interface (NetBEUI)

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters configuration mode.
<b>Step 2</b>	switch(config)# <b>class-map type qos class-name</b>	Creates a named object that represents a class of traffic. Class-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	switch(config-cmap-qos)# <b>match protocol {arp   clns_es   clns_is   dhcp   ldp   netbios}</b>	Configures the traffic class by matching packets based on the specified protocol.
<b>Step 4</b>	(Optional) switch(config-cmap-qos)# <b>no match protocol {arp   clns_es   clns_is   dhcp   ldp   netbios}</b>	Removes the match from the traffic class.

### Example

This example shows how to classify traffic by matching packets based on the protocol field:

```
switch# configure terminal
switch(config)# class-map type qos class_protocol
switch(config-cmap-qos)# match protocol arp
```

Use the **show class-map** command to display the protocol class-map configuration:

```
switch# show class-map class_protocol
```

## Configuring IP RTP Classification

The IP Real-time Transport Protocol (RTP) is a transport protocol for real-time applications that transmits data such as audio or video and is defined by RFC 3550. Although RTP does not use a common TCP or UDP port, you typically configure RTP to use ports 16384 to 32767. UDP communications use an even port and the next higher odd port is used for RTP Control Protocol (RTCP) communications.

When defining a match statement in a type qos class-map, to match with upper layer protocols and port ranges (UDP/TCP/RTP, etc.), the system cannot differentiate, for example, between UDP traffic and RTP traffic in the same port range. The system classifies both traffic types the same. For better results, you must engineer the QoS configurations to best match the traffic types present in the environment.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>class-map type qos class-name</b>	Creates a named object that represents a class of traffic. Class-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	switch(config-cmap-qos)# <b>match ip rtp port-number</b>	Configures the traffic class by matching packets based on a range of lower and upper UDP port numbers, which is likely to target applications using RTP. Values can range from 2000 to 65535.
<b>Step 4</b>	(Optional) switch(config-cmap-qos)# <b>no match ip rtp port-number</b>	Removes the match from the traffic class.

### Example

The following example shows how to classify traffic by matching packets based on UDP port ranges that are typically used by RTP applications:



```
switch# configure terminal
switch(config)# class-map type qos match-any class_rtp
switch(config-cmap-qos)# match ip rtp 2000-2100, 4000-4100
```

Use the **show class-map** command to display the RTP class-map configuration:

```
switch# show class-map class_rtp
```

## Configuring ACL Classification

You can classify traffic by matching packets based on an existing access control list (ACL). Traffic is classified by the criteria defined in the ACL. The **permit** and **deny** ACL keywords are ignored in the matching; even if a match criteria in the access-list has a **deny** action, it is still used for matching for this class.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>class-map type qos class-name</b>	Creates a named object that represents a class of traffic. Class-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	switch(config-cmap-qos)# <b>match access-group name acl-name</b>	Configures a traffic class by matching packets based on the <i>acl-name</i> . The <b>permit</b> and <b>deny</b> ACL keywords are ignored in the matching.  <b>Note</b> You can only define a single ACL in a class map.  You cannot add any other match criteria to a class with a <b>match access-group</b> defined.
<b>Step 4</b>	(Optional) switch(config-cmap-qos)# <b>no match access-group name acl-name</b>	Removes the match from the traffic class.

### Example

This example shows how to classify traffic by matching packets based on existing ACLs:

```
switch# configure terminal
switch(config)# class-map type qos class_acl
switch(config-cmap-qos)# match access-group name acl-01
```

Use the **show class-map** command to display the ACL class-map configuration:

```
switch# show class-map class_acl
```

## QoS ACL Per-Entry Statistics

Starting with Cisco NX-OS Release 7.2(0)N1(1), for ACLs associated with QoS Policy, statistics are shown per ACE.

Due to the way statistics and policers are attached to the TCAM entries, there are certain limitations to viewing the statistics:

- Statistics per ACE in an ACL cannot be viewed if there is more than one ACE in the ACL and a policer is attached to the QoS policy.
- The above limitation applies to qos-based matches as well (for example, **match dscp value**, **match precedence value**, and so on).
  - Statistics cannot be viewed with match-all rules.
  - Statistics can be viewed only with match-any.
- Statistics per-ACE of ACL for QoS policies applied of FEX HIF ports will be shown only if policer is not present.

### Example: Enabling QoS Policy Statistics

Statistics will be enabled if the user provides statistics per-entry in the ACL, which is used in QoS Policies.

```
Switch(config-acl)# show ip access-lists test_ACL1

IPV4 ACL test_ACL1
  statistics per-entry
  10 permit ip 10.10.10.1/24 20.2.2.2/24 ----->//Operation when a policer is attached//
      20 deny ip 40.4.4.4/24 any
      30 permit ip 30.3.3.3/24 11.11.11.1/24
Switch(config-acl)#
Switch(config-acl)# class-map type qos test_map
Switch(config-cmap-qos)# match access-group name test_ACL1
Switch(config-cmap-qos)# exit
Switch(config)# policy-map type qos test_pmap
Switch(config-pmap-qos)# class test_map
Switch(config-pmap-c-qos)# set qos-group 4
Switch(config-pmap-c-qos)# conf
Switch(config)# int e1/26
Switch(config-if)# service-policy type qos input test_pmap
Switch(config-if)# conf
Switch(config)# show ip access-lists test_ACL1

IPV4 ACL test_ACL1
  statistics per-entry
  10 permit ip 10.10.10.1/24 20.2.2.2/24 [match=0]--->//Operation with no policer
  attached or ACL having only one entry//
      20 deny ip 40.4.4.4/24 any [match=0]
      30 permit ip 30.3.3.3/24 11.11.11.1/24 [match=0]
```

## Verifying the Classification Configuration

Use one of the following commands to verify the configuration:

Command	Purpose
<b>show class-map</b>	Displays the class maps defined on the switch.
<b>show policy-map</b> <i>[name]</i>	Displays the policy maps defined on the switch. Optionally, you can display the named policy only.
<b>running-config ipqos</b>	Displays information about the running configuration for QoS.
<b>startup-config ipqos</b>	Displays information about the startup configuration for QoS.





## CHAPTER 4

# Configuring Policy Maps

---

This chapter contains the following sections:

- [Information About Policy Types, on page 17](#)
- [Configuring Policy Maps, on page 19](#)
- [Verifying the Policy Map Configuration, on page 27](#)

## Information About Policy Types

The device supports a number of policy types. You create class maps in the policy types.

There are three policy types:

- Network-qos
- Queuing
- QoS

The following QoS parameters can be specified for each type of class:

- Type network-qos—A network-qos policy is used to instantiate system classes and associate parameters with those classes that are of system-wide scope.
  - Classification—The traffic that matches this class are as follows:
    - QoS Group—A class map of type network-qos identifies a system class and is matched by its associated qos-group.
  - Policy—The actions that are performed on the matching traffic are as follows:



---

**Note** A network-qos policy can only be attached to the system QoS target.

---

- Type queuing—A type queuing policy is used to define the scheduling characteristics of the queues associated with system classes.




---

**Note** Some configuration parameters when applied to an EtherChannel are not reflected on the configuration of the member ports.

---

- Classification—The traffic that matches this class are as follows:
  - QoS Group—A class map of type queuing identifies a system class and is matched by its associated QoS group.
- Policy—The actions that are performed on the matching traffic are as follows:




---

**Note** These policies can be attached to the system qos target or to any interface. The output queuing policy is used to configure output queues on the device associated with system classes.

---

- Bandwidth—Sets the guaranteed scheduling deficit weighted round robin (DWRR) percentage for the system class.
- Priority—Sets a system class for strict-priority scheduling. Only one system class can be configured for priority in a given queuing policy.




---

**Note**

---

- Type qos—A type qos policy is used to classify traffic that is based on various Layer 2, Layer 3, and Layer 4 fields in the frame and to map it to system classes.




---

**Note** Some configuration parameters when applied to an EtherChannel are not reflected on the configuration of the member ports.

---

- Classification—The traffic that matches this class are as follows:
  - Access Control Lists—Classifies traffic based on the criteria in existing ACLs.
  - Class of Service—Matches traffic based on the CoS field in the frame header.
  - DSCP—Classifies traffic based on the Differentiated Services Code Point (DSCP) value in the DiffServ field of the IP header.
  - IP Real Time Protocol—Classifies traffic on the port numbers used by real-time applications.
  - Precedence—Classifies traffic based on the precedence value in the type of service (ToS) field of the IP header.
- Policy—The actions that are performed on the matching traffic are as follows:



**Note** This policy can be attached to the system or to any interface. It applies to input traffic only.

- QoS Group—Sets the QoS group that corresponds to the system class this traffic flow is mapped to.

# Configuring Policy Maps

## Creating Policy Maps

The **policy-map** command is used to create a named object that represents a set of policies that are to be applied to a set of traffic classes.

The following predefined policy maps are used as default service policies:

- network-qos: default-nq-policy
- Input qos: default-in-policy
- Output queuing: default-out-policy

You need to create a policy map to specify the policies for any user-defined class. In the policy map, you can configure the QoS parameters for each class. You can use the same policy map to modify the configuration of the default classes.

The device distributes all the policy-map configuration values to the attached network adapters.

### Before you begin

Before creating the policy map, define a class map for each new system class.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>policy-map</b> [type { <b>network-qos</b>   <b>qos</b>   <b>queuing</b> }] <i>policy-name</i>	Creates a named object representing a set of policies that are to be applied to a set of traffic classes. Policy-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.  The three policy-map configuration modes are as follows:

	Command or Action	Purpose
		<ul style="list-style-type: none"> <li>• <b>network-qos</b>—Network-wide (global) mode. CLI prompt: <code>switch(config-pmap-nq)#</code></li> <li>• <b>qos</b>—Classification mode; this is the default mode. CLI prompt: <code>switch(config-pmap-qos)#</code></li> <li>• <b>queuing</b>—Queuing mode. CLI prompt: <code>switch(config-pmap-que)#</code></li> </ul>
<b>Step 3</b>	(Optional) <code>switch(config)# no policy-map [type {network-qos   qos   queuing}] policy-name</code>	Deletes the specified policy map.
<b>Step 4</b>	<code>switch(config-pmap)# class [type {network-qos   qos   queuing}] class-name</code>	<p>Associates a class map with the policy map, and enters configuration mode for the specified system class. The three class-map configuration modes are as follows:</p> <ul style="list-style-type: none"> <li>• <b>network-qos</b>—Network-wide (global) mode. CLI prompt: <code>switch(config-pmap-c-nq)#</code></li> <li>• <b>qos</b>—Classification mode; this is the default mode. CLI prompt: <code>switch(config-pmap-c-qos)#</code></li> <li>• <b>queuing</b>—Queuing mode. CLI prompt: <code>switch(config-pmap-c-que)#</code></li> </ul> <p><b>Note</b> The associated class map must be the same type as the policy-map type.</p>
<b>Step 5</b>	(Optional) <code>switch(config-pmap)# no class [type {network-qos   qos   queuing}] class-name</code>	Deletes the class map association.

## Configuring Type Network QoS Policies

Type network qos policies can only be configured on the system qos attachment point. They are applied to the entire switch for a particular class.



**Note** If FCoE QoS policy is configured and offloaded to FEX without configuring the FCoE Network QoS policy, offloaded QoS policy on the FEX is unable to identify the FCoE class and therefore, QoS policy will not be applied on the FCoE traffic. Hence it is required to have the FCoE network QoS policy configured before offloading the FCoE QoS policy to the FEX.



**Procedure**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>policy-map type network-qos</b> <i>policy-name</i>	Creates a named object that represents a set of policies that are to be applied to a set of traffic classes. Policy-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	switch(config-pmap-nq)# <b>class type network-qos</b> <i>class-name</i>	Associates a class map with the policy map, and enters configuration mode for the specified system class.  <b>Note</b> The associated class map must be the same type as the policy map type.
<b>Step 4</b>	switch(config-pmap-c-nq)# <b>mtu</b> <i>mtu-value</i>	Specifies the MTU value in bytes.  <b>Note</b> The <i>mtu-value</i> that you configure must be less than the value set by the <b>system jumbomtu</b> command.
<b>Step 5</b>	(Optional) switch(config-pmap-c-nq)# <b>no mtu</b>	Resets the MTU value in this class.
<b>Step 6</b>	switch(config-pmap-c-nq)# <b>pause no-drop</b>	Configures a no-drop class.
<b>Step 7</b>	switch(config-pmap-c-nq)# <b>set cos</b> <i>cos-value</i>	Specifies a 802.1Q CoS value which is used to mark packets on this interface. The value range is from 0 to 7.
<b>Step 8</b>	(Optional) switch(config-pmap-c-nq)# <b>no set cos</b> <i>cos-value</i>	Disables the marking operation in this class.

**Example**

This example shows how to define a type network-qos policy map:

```
switch# configure terminal
switch(config)# policy-map type network-qos policy-que1
switch(config-pmap-nq)# class type network-qos class-que1
switch(config-pmap-c-nq)# mtu 5000
switch(config-pmap-c-nq)# set cos 4
```

## Configuring Type QoS Policies

Type qos policies are used for classifying the traffic of a specific system class identified by a unique qos-group value. A type qos policy can be attached to the system or to individual interfaces for ingress traffic only.

You can set a maximum of five QoS groups for ingress traffic.

**Procedure**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>policy-map type qos</b> <i>policy-name</i>	Creates a named object that represents a set of policies that are to be applied to a set of traffic classes. Policy-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	switch(config-pmap-qos)# [ <b>class  </b> <b>class-default</b> ] <b>type qos</b> <i>class-name</i>	Associates a class map with the policy map, and enters configuration mode for the specified system class.  <b>Note</b> The associated class map must be the same type as the policy map type.
<b>Step 4</b>	switch(config-pmap-c-qos)# <b>set qos-group</b> <i>qos-group-value</i>	Configures one or more <b>qos-group</b> values to match on for classification of traffic into this class map. The list below identifies the ranges of the <i>qos-group-value</i> . There is no default value.

**Example**

This example shows how to define a type qos policy map:

```
switch# configure terminal
switch(config)# policy-map type qos policy-s1
switch(config-pmap-qos)# class type qos class-s1
switch(config-pmap-c-qos)# set qos-group 2
```

## Configuring Type Queuing Policies

Type queuing policies are used for scheduling and buffering the traffic of a specific system class. A type queuing policy is identified by its QoS group and can be attached to the system or to individual interfaces (except for Fabric Extender host interfaces) for input or output traffic.

**Procedure**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>policy-map type queuing</b> <i>policy-name</i>	Creates a named object that represents a set of policies that are to be applied to a set of traffic classes. Policy-map names can contain alphabetic, hyphen, or underscore characters,

	Command or Action	Purpose
		are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	switch(config-pmap-que)# <b>class type queuing</b> <i>class-name</i>	Associates a class map with the policy map, and enters configuration mode for the specified system class.
<b>Step 4</b>	switch(config-pmap-c-que)# <b>priority</b>	Specifies that traffic in this class is mapped to a strict priority queue.  <b>Note</b> Only one class in each policy map can have strict priority set on it.
<b>Step 5</b>	(Optional) switch(config-pmap-c-que)# <b>no priority</b>	Removes the strict priority queuing from the traffic in this class.
<b>Step 6</b>	switch(config-pmap-c-que)# <b>bandwidth percent percentage</b>	Specifies the guaranteed percentage of interface bandwidth allocated to this class. By default, no bandwidth is specified for a class.  <b>Note</b> Before you can successfully allocate bandwidth to the class, you must first reduce the default bandwidth configuration on class-default and class-foe.
<b>Step 7</b>	(Optional) switch(config-pmap-c-que)# <b>no bandwidth percent percentage</b>	Removes the bandwidth specification from this class.

### Example

## Enabling and Displaying QoS Statistics for Interfaces

The **qos statistics** command must be enabled when you migrate to Cisco NX-OS release 7.3(0)N1(1) to enable statistics for policy maps. In addition, the existing policies need to be removed and reassigned to ensure the statistics work. Any new policy maps (that are not already configured on any interface) configured after enabling statistics would have the statistics enabled.

From Cisco NX-OS release 7.3(2)N1(1), the following changes are introduced:

- You do not need to use the **qos statistics** command to enable the QoS statistics. By default, the QoS statistics is enabled.
- The class-map and match statistics are not supported. Both these statistics are not displayed when you run the **show policy-map interface** command.
- The policer statistics are still supported and the queuing statistics are added to the **show policy-map interface** command output. Note that the queuing statistics are supported only for the Ethernet interfaces.

The detailed procedure is as follows:

### Before you begin

Enabling statistics can take up additional TCAM space. Hence, you must ensure that there is enough space available to perform this operation, given the existing configuration. Refer to [CSCuq00149](#) for details on whether the statistics can be enabled on your switch.

### Procedure

---

**Step 1** Enter global configuration mode:

```
switch# configure terminal
```

**Step 2** (Optional) Verify the existing status of the statistics on your switch:

```
switch(config)# show policy-map vlan vlan-number
```

**Step 3** (Optional) Enable the statistics, if the existing status of the statistics is disabled on your switch:

```
switch(config)# qos statistics
```

**Note** From Cisco NX-OS release 7.3(2)N1(1), the QoS statistics is enabled by default.

**Step 4** Enter VLAN configuration mode for the specified VLAN:

```
switch(config)# vlan configuration vlan-number
```

**Step 5** Remove the policy from the VLAN:

```
switch(config-vlan-config)# no service-policy type qos input policy-name
```

The *policy-name* is the name assigned to the policy map.

**Step 6** Enter VLAN configuration mode for the specified VLAN:

```
switch(config-vlan-config)# vlan configuration vlan-number
```

**Step 7** Assign or reapply the policy map to the VLAN:

```
switch(config-vlan-config)# service-policy type qos input policy-name
```

**Note** The policy-name is the name assigned to the policy map. Note that the policy must be removed from all attachment points (VLANs and interfaces) before you enable the statistics on even one attachment point.

**Step 8** Verify the status of the statistics on your switch:

```
switch(config-vlan-config)# show policy-map vlan vlan-number
```

**Note** You can also use the **show policy-map interface** command.

**Note** To remove the statistics, use the **no qos statistics** command, then remove and reassign the policies for them to take effect.

---

**Example: Enabling and Displaying QoS Statistics**

This example shows how to enable and display QoS statistics.

```
switch(config)# show policy-map vlan 13
```

```
Global statistics status: disabled
```

```
Vlan 13
```

```
Service-policy (qos) input:  rql
    policy statistics status:  disabled
```

```
Class-map (qos):  rql (match-any)
    Match: cos 4
    set qos-group 2
```

```
Class-map (qos):  class-default (match-any)
    Match: any
    set qos-group 0
```

```
switch(config)# qos statistics
```

Warning: Turning on the statistics would increase the TCAM utilisation. Disable the CLI if this is not intended.

Note that the policies need to be removed and re-applied, for statistics to take effect.

```
switch(config)#vlan configuration 13-59
```

```
switch(config-vlan-config)#no service-policy type qos input rql
```

```
switch(config-vlan-config)#vlan configuration 13
```

```
switch(config-vlan-config)#service-policy type qos input rql
```

```
switch(config-vlan-config)# show policy-map vlan 13
```

```
Global statistics status: enabled
```

```
Vlan 13
```

```
Service-policy (qos) input:  rql
    policy statistics status:  enabled
```

```
Class-map (qos):  rql (match-any)
    3094788 packets
    Match: cos 4
    3094788 Match packets
    set qos-group 2
```

```
Class-map (qos):  class-default (match-any)
    0 packets
    Match: any
    set qos-group 0
```

```
switch(config-vlan-config)#
```

The following example shows the output of the **show policy-map interface** command in the Cisco NX-OS release 7.3(2)N1(1).

```
switch(config)# show policy-map interface ethernet 1/49
```

```
Global statistics status :  enabled
```

NOTE: Type qos policy-map configured on VLAN will take precedence over system-qos policy-map for traffic on the VLAN

Ethernet1/49

```

Service-policy (qos) input:  cos
  policy statistics status:  enabled

Class-map (qos):  cos3 (match-all)
  Match: cos 3
  set qos-group 2
  police cir percent 60 bc 200 ms
    conformed 300579840 bytes, 899939640 bps action: transmit
    violated 43806000 bytes, 131155688 bps action: drop

Class-map (qos):  cos4 (match-all)
  Match: cos 4
  set qos-group 4

Class-map (qos):  class-default (match-any)
  Match: any
  set qos-group 0

Service-policy (queuing) input:  fcoe-default-in-policy
  policy statistics status:  disabled

Class-map (queuing):  class-fcoe (match-any)
  Match: qos-group 1
  bandwidth percent 50

Class-map (queuing):  class-default (match-any)
  Match: qos-group 0
  bandwidth percent 50

Service-policy (queuing) output:  fcoe-default-out-policy
  policy statistics status:  disabled

Class-map (queuing):  class-fcoe (match-any)
  Match: qos-group 1
  queue dropped pkts : 0  queue received pkts : 0
  bandwidth percent 50

Class-map (queuing):  class-default (match-any)
  Match: qos-group 0
  queue dropped pkts : 57346780  queue received pkts : 155740874
  bandwidth percent 50

```

## Restrictions for Viewing the QoS Statistics

Due to the way statistics and policers are attached to the TCAM entries, there are certain limitations to viewing the statistics:

- Statistics are incremented cumulatively for each VLAN or interface where the policy is applied. The statistics are not per-interface/vlan.
- Default policies and system-level policies do not have statistics.
- Statistics per ACE in an ACL cannot be viewed if there is more than one ACE in the ACL and a policer is attached to the QoS policy.
- The above limitation applies to qos-based matches as well (for example, **match dscp value**, **match precedence value**, and so on).

- Statistics cannot be viewed with match-all rules.
  - Statistics can be viewed only with match-any.
- Statistics per-ACE of ACL for QoS policies applied of FEX HIF ports will be shown only if policer is not present.

## Verifying the Policy Map Configuration

Command	Purpose
<b>show policy-map</b> [ <i>name</i> ]	Displays the policy maps defined on the switch. Optionally, you can display the named policy only.
<b>show policy-map interface</b> [ <i>interface number</i> ]	Displays the policy map settings for an interface or all interfaces.
<b>show policy-map system</b>	Displays the policy map settings attached to the system qos.
<b>show policy-map type</b> { <b>network-qos</b>   <b>qos</b>   <b>queuing</b> } [ <i>name</i> ]	Displays the policy map settings for a specific policy type. Optionally, you can display the named policy only.
<b>running-config ipqos</b>	Displays information about the running configuration for QoS.
<b>startup-config ipqos</b>	Displays information about the startup configuration for QoS.







## CHAPTER 5

# Configuring Marking

---

This chapter contains the following sections:

- [Information About Marking, on page 29](#)
- [Configuring Marking, on page 29](#)
- [Verifying the Marking Configuration, on page 35](#)

## Information About Marking

Marking is a method that you use to modify the QoS fields of the incoming and outgoing packets.

You can use marking commands in traffic classes that are referenced in a policy map. The marking features that you can configure are listed below:

- DSCP
- IP precedence
- CoS

## Configuring Marking

### Configuring DSCP Marking

For Cisco Nexus devices, you can set the DSCP value in the six most significant bits of the DiffServ field of the IP header to a specified value. You can enter numeric values from 0 to 63, in addition to the standard DSCP values shown in the table below:



---

**Note** You can set DSCP or IP Precedence but you can not set both values because they modify the same field in the IP packet.

---

**Table 6: Standard DSCP Values**

Value	List of DSCP Values
af11	AF11 dscp (001010)—decimal value 10
af12	AF12 dscp (001100)—decimal value 12
af13	AF13 dscp (001110)—decimal value 14
af21	AF21 dscp (010010)—decimal value 18
af22	AF22 dscp (010100)—decimal value 20
af23	AF23 dscp (010110)—decimal value 22
af31	AF31 dscp (011010)—decimal value 26
af32	AF40 dscp (011100)—decimal value 28
af33	AF33 dscp (011110)—decimal value 30
af41	AF41 dscp (100010)—decimal value 34
af42	AF42 dscp (100100)—decimal value 36
af43	AF43 dscp (100110)—decimal value 38
cs1	CS1 (precedence 1) dscp (001000)—decimal value 8
cs2	CS2 (precedence 2) dscp (010000)—decimal value 16
cs3	CS3 (precedence 3) dscp (011000)—decimal value 24
cs4	CS4 (precedence 4) dscp (100000)—decimal value 32
cs5	CS5 (precedence 5) dscp (101000)—decimal value 40
cs6	CS6 (precedence 6) dscp (110000)—decimal value 48
cs7	CS7 (precedence 7) dscp (111000)—decimal value 56
default	Default dscp (000000)—decimal value 0
ef	EF dscp (101110)—decimal value 46

**Procedure**

	Command or Action	Purpose
<b>Step 1</b>	<code>config t</code>	Enters configuration mode.
<b>Step 2</b>	<code>policy-map type qos qos-policy-map-name</code>	Creates or accesses the policy map named policy-map-name, and then enters policy-map mode. The policy-map name can contain

	Command or Action	Purpose
		alphabetic, hyphen, or underscore characters, is case sensitive, and can be up to 40 characters.
<b>Step 3</b>	<b>class [type qos] {class-map-name   class-default}</b>	Creates a reference to class-map-name, and enters policy-map class configuration mode. Use the <b>class-default</b> keyword to select all traffic that is not currently matched by classes in the policy map.
<b>Step 4</b>	<b>set dscp dscp-value</b>	Sets the DSCP value to dscp-value. See the Standards DSCP Values table.
<b>Step 5</b>	<b>set qos-group y</b>	Specifies the qos-group. The group value can be from 1 to 5.

### Example

This example shows how to set the DSCP value to 10 and specify the qos-group to 2.

```
policy-map type qos test-bulkdata
  class type qos bulkdata
    set dscp 10
    set qos-group 2
```

## Configuring IP Precedence Marking

You can set the value of the IP precedence field in bits 0 to 2 of the IPv4 type of service (ToS) field or the equivalent Traffic Class field for IPv6 of the IP header. The following table shows the precedence values:



**Note** You can set IP Precedence or DSCP but you can not set both values because they modify the same field in the IP packet.

**Table 7: Precedence Values**

Value	List of Precedence Values
<0-7>	IP precedence value
critical	Critical precedence (5)
flash	Flash precedence (3)
flash-override	Flash override precedence (4)
immediate	Immediate precedence (2)
internet	Internetwork control precedence (6)
network	Network control precedence (7)

Value	List of Precedence Values
priority	Priority precedence (1)
routine	Routine precedence (0)

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<code>config t</code>	Enters configuration mode.
<b>Step 2</b>	<code>policy-map [type qos] qos-policy-map-name</code>	Creates or accesses the policy map named <code>policy-map-name</code> , and then enters policy-map mode. The policy-map name can contain alphabetic, hyphen, or underscore characters, is case sensitive, and can be up to 40 characters.
<b>Step 3</b>	<code>class [type qos] {class-map-name   class-default}</code>	Creates a reference to <code>class-map-name</code> , and enters policy-map class configuration mode. Use the <b>class-default</b> keyword to select all traffic that is not currently matched by classes in the policy map.
<b>Step 4</b>	<code>set precedence precedence-value</code>	Sets the IP precedence value to <code>precedence-value</code> . You can enter one of the values shown in the Precedence Values table.

### Example

```
switch(config)# policy-map type qos my_policy
switch(config-pmap-qos)# class type qos my_class
switch(config-pmap-c-qos)# set precedence 5
switch(config-pmap-c-qos)#
```

## Configuring CoS Marking

The value of the CoS field is recorded in the high-order three bits of the VLAN ID Tag field in the IEEE 802.1Q header.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<code>switch# configure terminal</code>	Enters global configuration mode.
<b>Step 2</b>	<code>switch(config) # policy-map [type network-qos] policy-map name</code>	Creates or accesses the policy map named <code>policy-map-name</code> and enters policy-map mode. The policy-map name can contain alphabetic, hyphen, or underscore characters, is case sensitive, and can be up to 40 characters.

	Command or Action	Purpose
<b>Step 3</b>	switch(config-pmap-nq) # <b>class</b> [ <b>type network-qos</b> ] { <i>class-map name</i>   <b>class-default</b> }	Creates a reference to the <i>class-map-name</i> and enters policy-map class configuration mode.  Use the <b>class-default</b> keyword to select all traffic that is not currently matched by classes in the policy map.
<b>Step 4</b>	switch(config-pmap-c-nq) # <b>set cos</b> <i>cos-value</i>	Specifies the CoS value to <i>cos-value</i> .  The <i>cos-value</i> can range from 0 to 7.  <b>Note</b> This command is supported only for egress policies.

## Layer 3 QoS Characteristics

QoS Layer 3 characteristics are as follows:

- Router-on-a-stick hardware architecture.
- Classification carried through the Layer 3 ASIC via the dot1p header only.
- Qos-group classification information at ingress interfaces lost in transit for routable traffic.



**Note** The default Layer 2 CoS Mappings are not copied into the Layer 3 header. A policy is required to statically copy the CoS values into the 802.1p header.

### QoS Recommendations:

Following are the QoS configuration recommendations:

- Configure a 'type qos' policy and in the 'network-qos policy' do 'set cos'.
- Apply type qos to Layer 2 interfaces, or Layer 3 interfaces or system wide (not SVI).
- Apply this egress queuing policy system wide.
- Pre-routed Traffic to Layer 3 engine is prioritized accordingly.
- Post routing, the dot1p information in association with the network-qos policy is used to regenerate qos-group and direct it to a specific queue.
- Layer 3 ASIC maps frames to a CoS queue based on the dot1p information (there are 8 CoS queues, so each CoS gets its queue).
- The post routed traffic is scheduled according to the egress queuing policy.

## Required CoS Marking Configuration in a Layer 3 Topology

In Layer 3 topologies, you must configure each QoS group in the network-qos policy with a unique cos value.

**Procedure**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	switch# <b>show policy-map system</b>	Displays the already configured policy maps and CoS values.  In Layer 3 topologies, each qosgroup must have a unique CoS value. Use the <b>show policy-map system</b> command to view CoS values that have been used and that are unavailable for QoS groups.
<b>Step 2</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 3</b>	switch(config) # <b>policy-map [type network-qos] policy-map name</b>	Creates or accesses the policy map named <i>policy-map-name</i> and enters policy-map mode.  The policy-map name can contain alphabetic, hyphen, or underscore characters, is case sensitive, and can be up to 40 characters.
<b>Step 4</b>	switch(config-pmap-nq) # <b>class [type network-qos] {class-map name  class-default}</b>	Creates a reference to the class-map-name and enters policy-map class configuration mode.  Use the <b>class-default</b> keyword to select all traffic that is not currently matched by classes in the policy map.
<b>Step 5</b>	switch(config-pmap-nq-c) # <b>set cos cos-value</b>	Specifies the CoS value.  The value can range from 0 to 7.  <b>Note</b> You can use this command only in egress policies.  In Layer 3 topologies, each qos-group must have a unique cos configuration.

**Example**

This example shows how to set the CoS value to 4 in a Layer 3 topology:

```
switch# show policy-map system
Type network-qos policy-maps
=====

policy-map type network-qos pn-01
  class type network-qos cn-01      match qos-group 1
    mtu 8500
    pause no-drop
    set cos 2
  class type network-qos cn-02      match qos-group 2
    set cos 4
    mtu 9216
  class type network-qos cn-03      match qos-group 3
```

```

        mtu 8000
        set cos 6
class type network-qos cn-04      match qos-group 4
        mtu 8750
        set cos 7
class type network-qos cn-ip-multicast      match qos-group 5
        set cos 5
        mtu 7500
class type network-qos class-default      match qos-group 0
        mtu 1500
        set cos 1
...
switch# configure terminal
switch(config)# policy-map type network-qos pn-01
switch(config-pmap-nq)# class type network-qos cn-05
switch(config-pmap-c-nq)# set cos 3

```

## Verifying the Marking Configuration

Use one of the following commands to verify the configuration:

Command	Purpose
<b>show class-map</b>	Displays the class maps defined on the switch.
<b>show policy-map</b> [ <i>name</i> ]	Displays the policy maps defined on the switch. Optionally, you can display the named policy only.
<b>running-config ipqos</b>	Displays information about the running configuration for QoS.
<b>startup-config ipqos</b>	Displays information about the startup configuration for QoS.







## CHAPTER 6

# Configuring QoS on the System

This chapter contains the following sections:

- [Information About System Classes, on page 37](#)
- [Configuring System QoS, on page 38](#)
- [Verifying the System QoS Configuration, on page 41](#)

## Information About System Classes

### System Classes

The system qos is a type of MQC target. You use a service policy to associate a policy map with the system qos target. A system qos policy applies to all interfaces on the switch unless a specific interface has an overriding service-policy configuration. The system qos policies are used to define system classes, the classes of traffic across the entire switch, and their attributes. To ensure QoS consistency (and for ease of configuration), the device distributes the system class parameter values to all its attached network adapters using the Data Center Bridging Exchange (DCBX) protocol.

If service policies are configured at the interface level, the interface-level policy always takes precedence over system class configuration or defaults.

### Default System Classes

### MTU

The Cisco Nexus device is a Layer 2 switch, and it does not support packet fragmentation. A maximum transmission unit (MTU) configuration mismatch between ingress and egress interfaces may result in packets being truncated.

When configuring MTU, follow these guidelines:

- MTU is specified per system class. The system class allows a different MTU for each class of traffic but they must be consistent on all ports across the entire switch. You cannot configure MTU on the interfaces.
- Fibre Channel and FCoE payload MTU is 2158 bytes across the switch. As a result, the rxbufsize for Fibre Channel interfaces is fixed at 2158 bytes. If the Cisco Nexus device receives an rxbufsize from a

peer that is different than 2158 bytes, it will fail the exchange of link parameters (ELP) negotiation and not bring the link up.

- Enter the **system jumbomtu** command to define the upper bound of any MTU in the system. The system jumbo MTU has a default value of 9216 bytes. The minimum MTU is 2158 bytes and the maximum MTU is 9216 bytes.
- Configuring the MTU to 9216 bytes on both the Layer 3 ports and the Network QoS at the same time is not supported.
- The system class MTU sets the MTU for all packets in the class. The system class MTU cannot be configured larger than the global jumbo MTU.
- The FCoE system class (for Fibre Channel and FCoE traffic) has a default MTU of 2158 bytes. This value cannot be modified.
- The switch sends the MTU configuration to network adapters that support DCBX.



**Note** MTU is not supported in Converged Enhanced Ethernet (CEE) mode for DCBX.

## Configuring System QoS

### Attaching the System Service Policy

The **service-policy** command specifies the system class policy map as the service policy for the system.

#### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>system qos</b>	Enters system class configuration mode.

#### Example

### Restoring the Default System Service Policies

If you have created and attached new policies to the system QoS configuration, enter the **no** form of the command to reapply the default policies.

#### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.

	Command or Action	Purpose
<b>Step 2</b>	switch(config)# <b>system qos</b>	Enters system class configuration mode.
<b>Step 3</b>	switch(config-sys-qos)# <b>no service-policy type qos input</b> <i>policy-map name</i>	Resets the classification mode policy map. This policy-map configuration is for system QoS input or interface input only:
<b>Step 4</b>	switch(config-sys-qos)# <b>no service-policy type network-qos</b> <i>policy-map name</i>	Resets the network-wide policy map.
<b>Step 5</b>	switch(config-sys-qos)# <b>no service-policy type queuing output</b> <i>policy-map name</i>	Resets the output queuing mode policy map.

### Example

## Configuring the Queue Limit for a Specified Fabric Extender

At the Fabric Extender configuration level, you can control the queue limit for a specified Fabric Extender for egress direction (from the network to the host). You can use a lower queue limit value on the Fabric Extender to prevent one blocked receiver from affecting traffic that is sent to other noncongested receivers ("head-of-line blocking"). A higher queue limit provides better burst absorption and less head-of-line blocking protection. You can use the **no** form of this command to allow the Fabric Extender to use all available hardware space.



**Note** At the system level, you can set the queue limit for Fabric Extenders by using the **fex queue-limit** command. However, configuring the queue limit for a specific Fabric Extender will override the queue limit configuration set at the system level for that Fabric Extender.

You can specify the queue limit for the following Fabric Extenders:

- Cisco Nexus 2148T Fabric Extender (48x1G 4x10G SFP+ Module)
- Cisco Nexus 2224TP Fabric Extender (24x1G 2x10G SFP+ Module)
- Cisco Nexus 2232P Fabric Extender (32x10G SFP+ 8x10G SFP+ Module)
- Cisco Nexus 2248T Fabric Extender (48x1G 4x10G SFP+ Module)
- Cisco Nexus N2248TP-E Fabric Extender (48x1G 4x10G Module)
- Cisco Nexus N2348UPQ Fabric Extender (48x10G SFP+ 6x40G QSFP Module)

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.

	Command or Action	Purpose
<b>Step 2</b>	switch(config)# <b>flex</b> <i>flex-id</i>	Specifies the Fabric Extender and enters the Fabric Extender mode.
<b>Step 3</b>	switch(config-fex)# <b>hardware</b> <i>fex_card_type</i> <b>queue-limit</b> <i>queue-limit</i>	Configures the queue limit for the specified Fabric Extender. The queue limit is specified in bytes. The range is from 81920 to 652800 for a Cisco Nexus 2148T Fabric Extender and from 2560 to 652800 for all other supported Fabric Extenders.

### Example

This example shows how to restore the default queue limit on a Cisco Nexus 2248T Fabric Extender:

```
switch# configure terminal
switch(config-if)# flex 101
switch(config-fex)# hardware N2248T queue-limit 327680
```

This example shows how to remove the queue limit that is set by default on a Cisco Nexus 2248T Fabric Extender:

```
switch# configure terminal
switch(config)# flex 101
switch(config-fex)# no hardware N2248T queue-limit 327680
```

## Enabling the Jumbo MTU

You can enable the jumbo Maximum Transmission Unit (MTU) for the whole switch by setting the MTU to its maximum size (9216 bytes) in the policy map for the default Ethernet system class (class-default).

When you configure jumbo MTU on a port-channel subinterface you must first enable MTU 9216 on the base interface and then configure it again on the subinterface. If you enable the jumbo MTU on the subinterface before you enable it on the base interface then the following error will be displayed on the console:

```
switch(config)# int po 502.4
switch(config-subif)# mtu 9216
ERROR: Incompatible MTU values
```

To use FCoE on switch, add class-fcoe in the custom network-qos policy. If already using FCoE, make sure to add the below lines in the config so that the FCoE does not go down on the switch after enabling the jumbo qos policy.

```
switch# conf t
switch(config)# policy-map type network-qos jumbo
switch(config-pmap-nq)# class type network-qos class-fcoe
switch(config-pmap-nq-c)# end
```

This example shows how to change qos to enable the jumbo MTU:

```
switch# conf t
switch(config)# policy-map type network-qos jumbo
switch(config-pmap-nq)# class type network-qos class-default
switch(config-pmap-c-nq)# mtu 9216
```



**Note** The **system jumbomtu** command defines the maximum MTU size for the switch. However, jumbo MTU is supported only for system classes that have MTU configured.

## Verifying the Jumbo MTU

On the Cisco Nexus device, traffic is classified into one of eight QoS groups. The MTU is configured at the QoS group level. By default, all Ethernet traffic is in QoS group 0. To verify the jumbo MTU for Ethernet traffic, use the **show queuing interface ethernet slot/chassis\_number** command and find "HW MTU" in the command output to check the MTU for QoS group 0. The value should be 9216.

The **show interface** command always displays 1500 as the MTU. Because the Cisco Nexus device supports different MTUs for different QoS groups, it is not possible to represent the MTU as one value on a per interface level.

This example shows how to display jumbo MTU information for Ethernet 1/19:

```
switch# show queuing interface ethernet1/19
Ethernet1/19 queuing information:
  TX Queuing
    qos-group  sched-type  oper-bandwidth
      0         WRR        50
      1         WRR        50

  RX Queuing
    qos-group 0
    q-size: 243200, HW MTU: 9280 (9216 configured)
    drop-type: drop, xon: 0, xoff: 1520
    Statistics:
      Pkts received over the port           : 2119963420
      Ucast pkts sent to the cross-bar      : 2115648336
      Mcast pkts sent to the cross-bar      : 4315084
      Ucast pkts received from the cross-bar : 2592447431
      Pkts sent to the port                 : 2672878113
      Pkts discarded on ingress             : 0
      Per-priority-pause status            : Rx (Inactive), Tx (Inactive)

    qos-group 1
    q-size: 76800, HW MTU: 2240 (2158 configured)
    drop-type: no-drop, xon: 128, xoff: 240
    Statistics:
      Pkts received over the port           : 0
      Ucast pkts sent to the cross-bar      : 0
      Mcast pkts sent to the cross-bar      : 0
      Ucast pkts received from the cross-bar : 0
      Pkts sent to the port                 : 0
      Pkts discarded on ingress             : 0
      Per-priority-pause status            : Rx (Inactive), Tx (Inactive)

  Total Multicast crossbar statistics:
    Mcast pkts received from the cross-bar : 80430744
```

## Verifying the System QoS Configuration

Use one of the following commands to verify the configuration:

<b>Command</b>	<b>Purpose</b>
<b>show policy-map system</b>	Displays the policy map settings attached to the system QoS.
<b>show policy-map</b> <i>[name]</i>	Displays the policy maps defined on the switch. Optionally, you can display the named policy only.
<b>show class-map</b>	Displays the class maps defined on the switch.
<b>running-config ipqos</b>	Displays information about the running configuration for QoS.
<b>startup-config ipqos</b>	Displays information about the startup configuration for QoS.



## CHAPTER 7

# Configuring QoS on Interfaces

This chapter contains the following sections:

- [Information About Interface QoS, on page 43](#)
- [Configuring Interface QoS, on page 44](#)
- [Verifying the Interface QoS Configuration, on page 46](#)

## Information About Interface QoS

### Trust Boundaries

The trust boundary is enforced by the incoming interface as follows:

- By default, all Ethernet interfaces are trusted interfaces. The 802.1p CoS and DSCP are preserved unless the marking is configured. There is no default CoS to queue and DSCP to queue mapping. You can define and apply a policy to create these mappings. By default, without a user defined policy, all traffic is assigned to the default queue.
- Any packet that is not tagged with an 802.1p CoS value is classified into the default drop system class. If the untagged packet is sent over a trunk, it is tagged with the default untagged CoS value, which is zero.
- You can override the default untagged CoS value for an Ethernet interface or port channel.

After the system applies the untagged CoS value, QoS functions the same as for a packet that entered the system tagged with the CoS value.

### Policy for Fibre Channel Interfaces

The egress queues are not configurable for native Fibre Channel interfaces. Two queues are available as follows:

- A strict priority queue to serve high-priority control traffic.
- A queue to serve all data traffic and low-priority control traffic.

## QoS for Multicast Traffic

By default, all multicast Ethernet traffic is classified into the default drop system class. This traffic is serviced by one multicast queue.

Optimized multicasting allows use of the unused multicast queues to achieve better throughput for multicast frames. If optimized multicast is enabled for the default drop system class, the system will use all 128 queues to service the multicast traffic. When optimized multicast is enabled for the default drop system class, all 128 queues are given equal priority.

If you define a new system class, a dedicated multicast queue is assigned to that class. This queue is removed from the set of queues available for the optimized multicast class.

The system provides two predefined class maps for matching broadcast or multicast traffic. These class maps are convenient for creating separate policy maps for unicast and multicast traffic.

The predefined class maps are as follows:

### class-all-flood

The class-all-flood class map matches all broadcast, multicast, and unknown unicast traffic (across all CoS values). If you configure a policy map with the class-all-flood class map, the system automatically uses all available multicast queues for this traffic.

### class-ip-multicast

The class-ip-multicast class map matches all IP multicast traffic. Policy options configured in this class map apply to traffic across all Ethernet CoS values. For example, if you enable optimized multicast for this class, the IP multicast traffic for all CoS values is optimized.



**Note** If you configure either of these predefined class maps as a no-drop class, the priority flow control capability is applied across all Ethernet CoS values. In this configuration, pause will be applied to unicast and multicast traffic.

## Configuring Interface QoS

### Configuring Untagged CoS

Any incoming packet not tagged with an 802.1p CoS value is assigned the default untagged CoS value of zero (which maps to the default Ethernet drop system class). You can override the default untagged CoS value for an Ethernet or EtherChannel interface.

#### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>interface</b> { <b>ethernet</b> [chassis/]slot/port   <b>port-channel</b> channel-number}	Enters the configuration mode for the specified interface or port channel.



	Command or Action	Purpose
<b>Step 3</b>	switch(config-if)# <b>untagged cos</b> <i>cos-value</i>	Configures the untagged CoS value. Values can be from 1 to 7.

### Example

The following example shows how to set the CoS value to 4 for untagged frames received on an interface:

```
switch# configure terminal
switch(config)# interface ethernet 1/2
switch(config-if)# untagged cos 4
```

## Configuring an Interface Service Policy

An input qos policy is a service policy applied to incoming traffic on an Ethernet interface for classification. For type queuing, the output policy is applied to all outgoing traffic that matches the specified class.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>interface</b> { <b>ethernet</b> [ <i>chassis/slot/port</i> ]   <b>port-channel</b> <i>channel-number</i> }	Enters the configuration mode for the specified interface.  <b>Note</b> The service policy on a port channel applies to all member interfaces.
<b>Step 3</b>	switch(config-if)# <b>service-policy input</b> <i>policy-name</i>	Applies the policy map to the interface.  <b>Note</b> There is a restriction that system type qos policy cannot be the same as any the type qos policy applied to an interface or EtherChannel.

### Example

This example shows how to apply a policy to an Ethernet interface:

```
switch# configure terminal
switch(config)# interface ethernet 1/1
switch(config-if)# service-policy type qos input policy1
```

## Configuring a Service Policy for a Layer 3 Interface

You can configure a service policy for a Layer 3 interface.

**Procedure**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>interface ethernet slot/port</b>	Enters the configuration mode for the specified interface.
<b>Step 3</b>	switch(config-if)# <b>no switchport</b>	Selects the Layer 3 interface.

**Example**

The following example shows how to attach a queuing policy map to a Layer 3 interface:

```
switch# configure terminal
switch(config)# interface ethernet 1/5
switch(config-if)# no switchport
switch(config-if)# service-policy type queuing output my_output_q_policy
switch(config-if)#
```

The following example shows how to attach an input qos policy map to a Layer 3 interface:

```
switch# configure terminal
switch(config)# interface ethernet 1/5
switch(config-if)# no switchport
switch(config-if)# service-policy type qos input my_input_qos_policy
switch(config-if)#
```

## Verifying the Interface QoS Configuration

Use one of the following commands to verify the configuration:

<b>Command</b>	<b>Purpose</b>
<b>show class-map</b>	Displays the class maps defined on the switch.
<b>show policy-map</b> [name]	Displays the policy maps defined on the switch. Optionally, you can display the named policy only.
<b>show policy-map interface</b> [interface number]	Displays the policy map settings for an interface or all interfaces.
<b>show queuing interface</b> [interface slot/port]	Displays the queue configuration and statistics.
<b>show interface flowcontrol</b> [module number]	Displays the detailed listing of the flow control settings on all interfaces.
<b>show interface</b> [interface slot/port] <b>priority-flow-control</b> [module number]	Displays the priority flow control details for a specified interface.
<b>show interface untagged-cos</b> [module number]	Displays the untagged CoS values for all interfaces.

Command	Purpose
<b>running-config ipqos</b>	Displays information about the running configuration for QoS.
<b>startup-config ipqos</b>	Displays information about the startup configuration for QoS.





## CHAPTER 8

# Configuring QoS on VLANs

This chapter contains the following sections:

- [Information About VLAN QoS, on page 49](#)
- [Precedence of QoS Policies, on page 49](#)
- [Limiting TCAM Entries for VLAN QoS, on page 51](#)
- [Guidelines and Limitations for VLAN QoS, on page 52](#)
- [Configuring VLAN QoS, on page 53](#)
- [Verifying the VLAN QoS Configuration, on page 56](#)
- [Feature History for VLAN QoS, on page 56](#)

## Information About VLAN QoS

On Cisco Nexus devices, you can configure quality of service (QoS) policies for classification and marking on VLANs. The policies that you apply to a VLAN are applied to the traffic on the VLAN's Layer 2 and switch virtual interface (SVI) ports.

## Precedence of QoS Policies

The marking requirements in a QoS policy determine its precedence. Interface QoS policies take the highest precedence, the VLAN QoS policies are next, and the System QoS policies have the lowest precedence.

However, if a VLAN is assigned both a VLAN QoS policy and a VLAN ACL (VACL), the VACL takes the highest precedence.

## Example of Interface, System, and VLAN Policy Precedence

This example shows a configuration where the traffic on interface 1/1 with CoS 5 goes to qos-group 3. Traffic on the other interfaces with VLAN 10 and CoS 5 go to qos-group 4. Traffic on interfaces other than VLAN 10 and CoS 5 go to qos-group 5.

```
class-map type qos match-all cml
  match cos 5
policy-map type qos pm-ifc
  class cml
    set qos-group 3
```

```

class class-default
policy-map type qos pm-vlan
class cml
  set qos-group 4
class class-default
policy-map type qos pm-sys
class cml
  set qos-group 5
class class-default

system qos
  service-policy type qos input pm-sys
vlan configuration 10
  service-policy type qos input pm-vlan
interface Ethernet1/1
  service-policy type qos input pm-ifc

```

## Example of Interface and System QoS Policy Precedence

This example shows a configuration where the traffic on interface 1/1 with CoS 5 goes to qos-group 3. Traffic on the other interfaces with CoS 5 go to qos-group 5.

```

class-map type qos match-all cml
  match cos 5
policy-map type qos pm-ifc
class cml
  set qos-group 3
class class-default
policy-map type qos pm-sys
class cml
  set qos-group 5
class class-default

system qos
  service-policy type qos input pm-sys

interface Ethernet1/1
  service-policy type qos input pm-ifc

```

## Example of System and VLAN Policy Precedence

This example shows a configuration where the traffic on VLAN 10 with CoS 5 goes to qos-group 4. Traffic on the other VLANs with CoS 5 go to qos-group 5.

```

class-map type qos match-all cml
  match cos 5
policy-map type qos pm-vlan
class cml
  set qos-group 4
class class-default
policy-map type qos pm-sys
class cml
  set qos-group 5
class class-default

system qos
  service-policy type qos input pm-sys
vlan configuration 10
  service-policy type qos input pm-vlan

```

## Example of VLAN QoS and VACL Policy Precedence

In this example, the packets with source IP address 10.10.10.1 are dropped. However, the other packets with VLAN 10 and CoS 5 go to qos-group 4.

```
ip access-list all
 10 permit ip 10.10.10.1/24 any
vlan access-map v-am1
 match ip address all
 action drop
vlan filter v-am1 vlan-list 10


class-map type qos match-all cml
 match cos 5
policy-map type qos pm-vlan
 class cml
  set qos-group 4
 class class-default

vlan configuration 10
 service-policy type qos input pm-vlan
```

## Limiting TCAM Entries for VLAN QoS

The QoS TCAM region is shared by the interface QoS, system QoS, and VLAN QoS policies. You need to limit the number of TCAM entries for the interface QoS policies in order to define VLAN QoS policies. Use the **hardware profile tcam feature interface-qos limit** *tcam-size* to configure this limit.

Figure 1: QoS TCAM Region

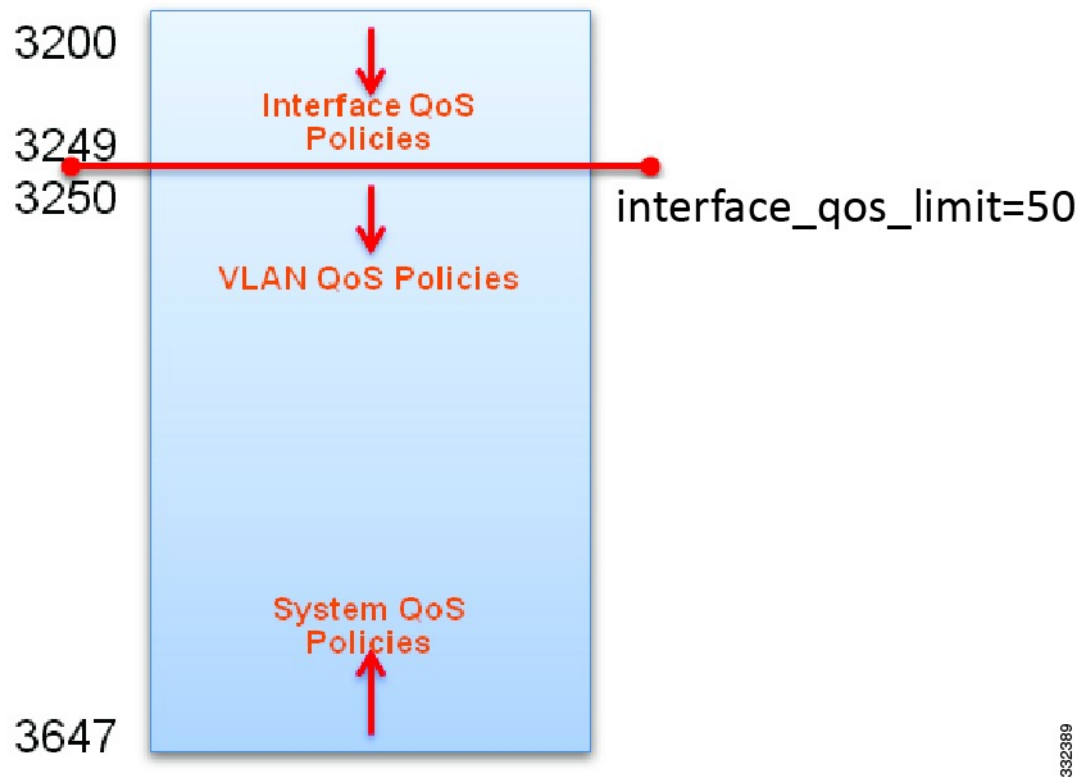

332389

## Guidelines and Limitations for VLAN QoS

- A VLAN must have at least one active member port for a service policy to be configured on. If a VLAN does not have at least one active member, and you configure a service policy on it, the configuration is accepted; however, the TCAM is not programmed.
- If a VLAN is removed with the `no vlan number` command, the service policy that is configured on that VLAN is still present, but it is not active.
- The TCAM must have enough free entries to configure the service policy on the VLAN.
- A rollback might fail if the interface QoS limit is different in the running configuration than in the rollback configuration.
- If a VLAN with a QoS policy is configured on an interface with no QoS policy, the `show policy-map interface number` command does not display the QoS policy configured on the VLAN.
- Remove all interface QoS policies before changing the interface QoS limit.
- Acllogs can only support logging levels of 3 or later.
- We support only logging denials on the ACL, permits will not be logged.
- Only one log message will be displayed until the flow stops and the rest is displayed later.



# Configuring VLAN QoS

## Configuring or Changing the Interface QoS TCAM Limit

To configure the `interface_qos_limit` to a specific number, the QoS region of the TCAMs in all of the ASICs cannot have any interfaces policies configured beyond the offset of that number. For example, to configure the `interface_qos_limit` to 1000, the QoS regions of the TCAMs in all of the ASICs cannot have any interface policies configured beyond offset 1000.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<code>switch# configure terminal</code>	Enters global configuration mode.
<b>Step 2</b>	<code>switch(config)# hardware profile tcam feature interface-qos limit <i>tcam-size</i></code>	Configures the interface QoS TCAM limit. The <i>tcam-size</i> range is from 7 to 446 entries.
<b>Step 3</b>	<code>switch(config)# show hardware profile tcam feature qos</code>	Displays the limits of the QoS TCAMs.
<b>Step 4</b>	(Optional) <code>switch(config)# copy running-config startup-config</code>	Saves the change persistently through reboots and restarts by copying the running configuration to the startup configuration.

### Example

This example shows how to set the interface QoS TCAM limit to 20 entries:

```
switch(config)# configure terminal
switch(config)# hardware profile tcam feature interface-qos limit 20
switch(config)# show hardware profile tcam feature qos
Feature                               Limit (number of tcam entries)
-----
interface-qos                          20
vlan-qos + global-qos                  428

switch(config)# copy running-config startup-config
```

## Removing the Interface QoS Limit from the TCAM

### Before you begin

- Remove all VLAN QoS policies.

**Procedure**

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>show hardware profile tcam feature qos</b>	Displays the limits of the QoS TCAMs.
<b>Step 3</b>	switch(config)# <b>no hardware profile tcam feature interface-qos limit <i>tcam-size</i></b>	Configures the interface QoS TCAM limit. The <i>tcam-size</i> range is from 7 to 446 entries.
<b>Step 4</b>	(Optional) switch(config)# <b>copy running-config startup-config</b>	Saves the change persistently through reboots and restarts by copying the running configuration to the startup configuration.

**Example**

This example shows how to remove the interface QoS TCAM limit:

```
switch(config)# configure terminal
switch(config)# show hardware profile tcam feature qos
Feature                               Limit (number of tcam entries)
-----
interface-qos                          20
vlan-qos + global-qos                   428

switch(config)# no hardware profile tcam feature interface-qos limit 20
switch(config)# copy running-config startup-config
```

## Configuring a Service Policy on a VLAN

**Before you begin**

- You must configure the interface QoS limit.
- You must configure a policy map.
- The TCAM must have enough free entries to configure the service policy on the VLAN.

**Procedure**

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>vlan configuration</b> <i>vlan-number</i>	Creates a VLAN and enters VLAN configuration mode. The <i>vlan-number</i> range is from 1 to 4094.
<b>Step 3</b>	switch(config-vlan)# <b>service-policy type qos</b> <b>input <i>policy-name</i></b>	Assigns a policy map to the VLAN. The <i>policy-name</i> is the name assigned to the policy

	Command or Action	Purpose
		map. The name can be a maximum of 40 alphanumeric characters.
<b>Step 4</b>	(Optional) <code>switch(config-vlan)# copy running-config startup-config</code>	Saves the change persistently through reboots and restarts by copying the running configuration to the startup configuration.

### Example

This example shows how to create a service policy and assign it to VLAN 10:

```
switch# configure terminal
switch(config)# class-map type qos cml
switch(config-cmap-qos)# match cos 5
switch(config-cmap-qos)# policy-map type qos pm-vlan
switch(config-pmap-qos)# class cml
switch(config-pmap-c-qos)# set qos-group 4
switch(config-pmap-c-qos)# exit
switch(config-pmap-qos)# exit
switch(config)# vlan configuration 10
switch(config-vlan-config)# service-policy type qos input pm-vlan
switch(config-vlan-config)#
```

## Removing a Service Policy from a VLAN

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<code>switch# configure terminal</code>	Enters global configuration mode.
<b>Step 2</b>	<code>switch(config)# vlan configuration <i>vlan-number</i></code>	Enters VLAN configuration mode for the specified VLAN. The <i>vlan-number</i> range is from 1 to 4094.
<b>Step 3</b>	<code>switch(config-vlan-config)#no service-policy type qos input <i>policy-name</i></code>	Removes the policy from the VLAN. The <i>policy-name</i> is the name assigned to the policy map. The name can be a maximum of 40 alphanumeric characters.
<b>Step 4</b>	(Optional) <code>switch(config-vlan-config)# copy running-config startup-config</code>	Saves the changes persistently through reboots and restarts by copying the running configuration to the startup configuration.

### Example

This example shows how to remove the pm-vlan policy map from VLAN 10:

```

switch# configure terminal
switch(config)# vlan configuration 10
switch(config-vlan-config)# no service-policy type qos input pm-vlan
switch(config-vlan-config)# copy running-config startup-config

```

## Verifying the VLAN QoS Configuration

Use one of the following commands to verify the configuration:

Command	Purpose
<code>show policy-map vlan <i>vlan-number</i></code>	Displays the QoS policies configured on the specified VLAN.
<code>show policy-map [<i>name</i>]</code>	Displays the policy maps defined on the switch. Optionally, you can display the named policy only.
<code>running-config ipqos</code>	Displays information about the running configuration for QoS.
<code>startup-config ipqos</code>	Displays information about the startup configuration for QoS.

## Feature History for VLAN QoS

Table 8: Feature History for VLAN QoS

Feature Name	Release	Feature Information
VLAN QoS	5.1(3)N2(1)	This feature was introduced.



## CHAPTER 9

# Configuring Queuing and Flow Control

This chapter contains the following sections:

- [Information About Queues, on page 57](#)
- [Information About Flow Control, on page 59](#)
- [Configuring Queuing, on page 60](#)
- [Configuring Flow Control, on page 64](#)
- [Verifying the Queue and Flow Control Configurations, on page 66](#)

## Information About Queues

### Ingress Queuing Policies

You can associate an ingress policy map with an Ethernet interface to guarantee bandwidth for the specified traffic class or to specify a priority queue.

The ingress policy is applied in the adapter to all outgoing traffic that matches the specified CoS value.

When you configure an ingress policy for an interface, the switch sends the configuration data to the adapter. If the adapter does not support the DCBX protocol or the ingress policy type-length-value (TLV), the ingress policy configuration is ignored.

### Egress Queuing Policies

You can associate an egress policy map with an Ethernet interface to guarantee the bandwidth for the specified traffic class or to configure the egress queues.

The bandwidth allocation limit applies to all traffic on the interface.

Each Ethernet interface supports up to eight queues, one for each system class. The queues have the following default configuration:

- In addition to these queues, control traffic that is destined for the CPU uses strict priority queues. These queues are not accessible for user configuration.
- Standard Ethernet traffic in the default drop system class is assigned a queue. This queue uses WRR scheduling with 100 percent of the bandwidth.

If you add a system class, a queue is assigned to the class. You must reconfigure the bandwidth allocation on all affected interfaces. Bandwidth is not dedicated automatically to user-defined system classes.

You can configure one strict priority queue. This queue is serviced before all other queues except the control traffic queue (which carries control rather than data traffic).

## Buffering and Queue Limits on the Cisco Nexus 5500 Platform

On the Cisco Nexus device, the packet buffer per port is 640KB.

On the Nexus 5500 platform, the packet buffer per port is 640KB. The Nexus 5548P, Nexus 5548UP, and the Nexus 5596UP switch share the same buffer architecture. The Nexus 5500 platform implements Virtual Output Queuing (VOQ) and ingress buffer architecture with the majority of the buffer allocated at ingress. The architecture allows the switch to store packets at multiple ingress ports when there are multiple ports sending traffic to one egress port which causes congestion.

The following default buffer allocations per port exist for the Cisco Nexus 5500 Platform:

**Table 9: Cisco Nexus 5500 Platform Default Buffer Allocations Per Port**

Traffic Class	Ingress Buffer (KB)
Class-fcoe	79.360
User-defined no-drop with an MTU less than 2240	79.360
User-defined no-drop class with an MTU greater than 2240	90.204
Tail drop traffic class	22.720
Class-default	All of the remaining buffer (470 with default QoS configuration)

The default buffer allocation varies depending on the type of class. For example, if you create a regular tail drop traffic class the default allocation is 22.7KB, unless you specify a larger size using the **queue-limit** command.

To increase the ingress buffer space available to a user-created qos-group, from a network-qos policy-map, use the **queue-limit** command.

In addition to ingress buffer allocated for each user-created qos-group there is an additional 29.76KB buffer required at egress for each qos-group.

With the default QoS configuration, all of the available buffer (470KB) is allocated to the class-default. When you create a new qos-group, the buffer required for the new qos-group will be taken away from class-default. The amount of buffer that is left for class-default equals 470 minus the ingress buffer used by other qos-groups minus 29.76KB and times the number of qos-groups.



**Note** Each new class requires an additional 29.76KB, so the exact amount of buffer that is left in the class default equals 470 minus the buffer used by other qos-groups minus 29.76KB times the number of qos-groups.

The default QoS policy for the Cisco Nexus device does not create class-fcoe and does not reserve buffer and qos-group for FCoE traffic.

The **show queuing interface** command can display the amount of ingress buffer allocated for each qos-group

## Information About Flow Control

### Link-Level Flow Control

IEEE 802.3x link-level flow control allows a congested receiver to communicate a transmitter at the other end of the link to pause its data transmission for a short period of time. The link-level flow control feature applies to all the traffic on the link.

The transmit and receive directions are separately configurable. By default, link-level flow control is disabled for both directions.

On the Cisco Nexus device, Ethernet interfaces do not automatically detect the link-level flow control capability. You must configure the capability explicitly on the Ethernet interfaces.

On each Ethernet interface, the switch can enable either priority flow control or link-level flow control (but not both).

### Priority Flow Control

Priority flow control (PFC) allows you to apply pause functionality to specific classes of traffic on a link instead of all the traffic on the link. PFC applies pause functionality based on the IEEE 802.1p CoS value. When the switch enables PFC, it communicates to the adapter which CoS values to apply the pause.



---

**Note** You cannot enable PFC on FEX N2K-C2248TP-E-1GE.

---

Ethernet interfaces use PFC to provide lossless service to no-drop system classes. PFC implements pause frames on a per-class basis and uses the IEEE 802.1p CoS value to identify the classes that require lossless service.

In the switch, each system class has an associated IEEE 802.1p CoS value that is assigned by default or configured on the system class. If you enable PFC, the switch sends the no-drop CoS values to the adapter, which then applies PFC to these CoS values.

The default CoS value for the FCoE system class is 3. This value is configurable.

By default, the switch negotiates to enable the PFC capability. If the negotiation succeeds, PFC is enabled and link-level flow control remains disabled regardless of its configuration settings. If the PFC negotiation fails, you can either force PFC to be enabled on the interface or you can enable IEEE 802.x link-level flow control.

If you do not enable PFC on an interface, you can enable IEEE 802.3X link-level pause.



---

**Note** Ensure that pause no-drop is configured on a class map for link-level pause.

---

By default, link-level pause is disabled.

# Configuring Queuing

## Configuring the Queue Limit for a Specified Fabric Extender

At the Fabric Extender configuration level, you can control the queue limit for a specified Fabric Extender for egress direction (from the network to the host). You can use a lower queue limit value on the Fabric Extender to prevent one blocked receiver from affecting traffic that is sent to other noncongested receivers ("head-of-line blocking"). A higher queue limit provides better burst absorption and less head-of-line blocking protection. You can use the **no** form of this command to allow the Fabric Extender to use all available hardware space.



**Note** At the system level, you can set the queue limit for Fabric Extenders by using the **fex queue-limit** command. However, configuring the queue limit for a specific Fabric Extender will override the queue limit configuration set at the system level for that Fabric Extender.

You can specify the queue limit for the following Fabric Extenders:

- Cisco Nexus 2148T Fabric Extender (48x1G 4x10G SFP+ Module)
- Cisco Nexus 2224TP Fabric Extender (24x1G 2x10G SFP+ Module)
- Cisco Nexus 2232P Fabric Extender (32x10G SFP+ 8x10G SFP+ Module)
- Cisco Nexus 2248T Fabric Extender (48x1G 4x10G SFP+ Module)
- Cisco Nexus N2248TP-E Fabric Extender (48x1G 4x10G Module)
- Cisco Nexus N2348UPQ Fabric Extender (48x10G SFP+ 6x40G QSFP Module)

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>fex fex-id</b>	Specifies the Fabric Extender and enters the Fabric Extender mode.
<b>Step 3</b>	switch(config-fex)# <b>hardware fex_card_type queue-limit queue-limit</b>	Configures the queue limit for the specified Fabric Extender. The queue limit is specified in bytes. The range is from 81920 to 652800 for a Cisco Nexus 2148T Fabric Extender and from 2560 to 652800 for all other supported Fabric Extenders.

### Example

This example shows how to restore the default queue limit on a Cisco Nexus 2248T Fabric Extender:



```
switch# configure terminal
switch(config-if)# fex 101
switch(config-fex)# hardware N2248T queue-limit 327680
```

This example shows how to remove the queue limit that is set by default on a Cisco Nexus 2248T Fabric Extender:

```
switch# configure terminal
switch(config)# fex 101
switch(config-fex)# no hardware N2248T queue-limit 327680
```

## Configuring No-Drop Buffer Thresholds

You can configure the no-drop buffer threshold settings for 3000m lossless Ethernet.



**Note** To achieve lossless Ethernet for both directions, the devices connected to the device must have the similar capability. The default buffer and threshold value for the no-drop can ensure lossless Ethernet for up to 300 meters.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>policy-map type network-qos</b> <i>policy-map name</i>	Enters policy-map network-qos class mode and identifies the policy map assigned to the type network-qos policy map.
<b>Step 3</b>	switch(config-pmap-nq)# <b>class type</b> <b>network-qos</b> <i>class-map name</i>	References an existing network QoS class map in a policy map and enters class mode.
<b>Step 4</b>	switch(config-pmap-nq-c)# <b>pause no-drop</b> <b>buffer-size</b> <i>buffer-size</i> <b>pause-threshold</b> <i>xoff-size</i> <b>resume-threshold</b> <i>xon-size</i>	Specifies the buffer threshold settings for pause and resume for 3000m lossless Ethernet: <ul style="list-style-type: none"> <li>• <b>buffer-size</b>—Buffer size for ingress traffic, in bytes. Valid values are from 10240 to 490880.</li> </ul> <p><b>Note</b> On a Cisco Nexus 5020 switch, you can configure a maximum buffer size of 143680 bytes.</p> <p>On a Cisco Nexus 5500 Series device, you can configure a maximum buffer size of 152000 bytes.</p> <ul style="list-style-type: none"> <li>• <b>pause-threshold</b>—Specifies the buffer limit at which the port pauses the peer.</li> </ul>

	Command or Action	Purpose
		<ul style="list-style-type: none"> <li>• <code>xoff-size</code>—Buffer limit for pausing, in bytes. Valid values are 0 to 490880.</li> </ul> <p><b>Note</b> On a Cisco Nexus 5020 switch, you can configure a maximum <code>pause-threshold</code> value of 58860 bytes.</p> <p>On a Cisco Nexus 5500 Series device, you can configure a maximum <code>pause-threshold</code> value of 103360 bytes.</p> <ul style="list-style-type: none"> <li>• <code>resume-threshold</code>—Specifies the buffer limit at which the port resumes the peer.</li> <li>• <code>xon-size</code>—Buffer limit at which to resume, in bytes. Valid values are 0 to 490880.</li> </ul> <p><b>Note</b> On a Cisco Nexus 5020 switch, you can configure a maximum <code>resume-threshold</code> value of 38400 bytes.</p> <p>On a Cisco Nexus 5500 Series device, you can configure a maximum <code>resume-threshold</code> value of 83520 bytes.</p>
<b>Step 5</b>	(Optional) <code>switch(config-pmap-nq-c)# no pause no-drop buffer-size <i>buffer-size</i> pause-threshold <i>xoff-size</i> resume-threshold <i>xon-size</i></code>	Removes the buffer threshold settings for pause and resume for 3000m lossless Ethernet.
<b>Step 6</b>	<code>switch(config-pmap-nq-c)# exit</code>	Exits class mode.
<b>Step 7</b>	<code>switch(config-pmap-nq)# exit</code>	Exits policy-map network-qos mode.

### Example

This example shows how to configure the no-drop buffer threshold for 3000 meters.

```
switch(config-pmap-nq)# policy-map type network-qos nqos_policy
switch(config-pmap-nq)# class type network-qos nqos_class
switch(config-pmap-nq-c)# pause no-drop buffer-size 152000 pause-threshold 103360
resume-threshold 83520
switch(config-pmap-nq-c)# exit
switch(config-pmap-nq)# exit
switch(config)# exit
switch#
```

## Configuring the Buffer Threshold for the Cisco Nexus 2148T Fabric Extender

In the Fabric Extender configuration mode, you can configure the buffer threshold for the Cisco Nexus 2148T Fabric Extender. The buffer threshold sets the consumption level of input buffers before an indication is sent to the egress queue to start observing the tail drop threshold. If the buffer usage is lower than the configured buffer threshold, the tail drop threshold is ignored.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>flex</b> <i>flex-id</i>	Specifies the Fabric Extender and enters the Fabric Extender mode.
<b>Step 3</b>	switch(config-flex)# <b>hardware N2148T buffer-threshold</b> <i>buffer limit</i>	Configures the buffer threshold for the Cisco Nexus 2148T Fabric Extender. The buffer threshold is specified in bytes. The range is from 81920 to 316160 for the Cisco Nexus 2148T Fabric Extender.

### Example

This example shows how to restore the default buffer threshold on the Cisco Nexus 2148T Fabric Extender:

```
switch# configure terminal
switch(config)# flex 101
switch(config-flex)# hardware N2148T buffer-threshold 163840
```

This example shows how to remove the default buffer threshold on the Cisco Nexus 2148T Fabric Extender:

```
switch# configure terminal
switch(config)# flex 101
switch(config-flex)# no hardware N2148T buffer-threshold
```

## Enabling Virtual Output Queuing Limits for Unicast Traffic on the Cisco Nexus Device

You can enable the Virtual Output Queuing (VOQ) limit for unicast traffic. To alleviate congestion and blocking, use VOQ to prevent one blocked receiver from affecting traffic that is sent to other noncongested blocking receivers.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters configuration mode.

	Command or Action	Purpose
<b>Step 2</b>	switch(config)# <b>hardware unicast voq-limit</b>	Enables the VOQ limit for unicast traffic. The default is disabled.
<b>Step 3</b>	switch(config)# <b>no hardware unicast voq-limit</b>	Disables the VOQ limit for unicast traffic.

### Example

This example shows how to enable the VOQ limits for unicast packets on a switch:

```
switch(config)# hardware unicast voq-limit
switch(config)#
```

## Configuring Flow Control

### Link-Level Flow Control

IEEE 802.3x link-level flow control allows a congested receiver to communicate a transmitter at the other end of the link to pause its data transmission for a short period of time. The link-level flow control feature applies to all the traffic on the link.

The transmit and receive directions are separately configurable. By default, link-level flow control is disabled for both directions.

On the Cisco Nexus device, Ethernet interfaces do not automatically detect the link-level flow control capability. You must configure the capability explicitly on the Ethernet interfaces.

On each Ethernet interface, the switch can enable either priority flow control or link-level flow control (but not both).

### Configuring Priority Flow Control

By default, Ethernet interfaces negotiate PFC with the network adapter using the DCBX protocol. When PFC is enabled, PFC is applied to traffic that matches the CoS value configured for the no-drop class.

You can override the negotiation result by forcing the interface to enable PFC.

#### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>interface</b> <i>type slot/port</i>	Specifies the interface to be changed.
<b>Step 3</b>	switch(config-if)# <b>priority-flow-control mode</b> { <b>auto</b>   <b>on</b> }	Sets PFC mode for the selected interface. Specifies auto to negotiate PFC capability. This is the default.

	Command or Action	Purpose
		Specifies on to force-enable PFC.
<b>Step 4</b>	(Optional) switch(config-if)# <b>no priority-flow-control mode on</b>	Disables the PFC setting for the selected interface.

### Example

This example shows how to force-enable PFC on an interface:

```
switch# configure terminal
switch(config)# interface ethernet 1/2
switch(config-if)# priority-flow-control mode on
```

## Configuring Link-Level Flow Control

By default, LLC on Ethernet interfaces is disabled. You can enable LLC for the transmit and receive directions.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>interface</b> <i>type slot/port</i>	Specifies the interface to be changed.
<b>Step 3</b>	switch(config-if)# <b>flowcontrol</b> [ <b>receive</b> { <b>on</b>   <b>off</b> }] [ <b>send</b> { <b>on</b>   <b>off</b> }]	Enables LLC for the selected interface. Set <b>receive</b> and/or <b>send on</b> or <b>off</b> .
<b>Step 4</b>	(Optional) switch(config-if)# <b>no flowcontrol</b> [ <b>receive</b> { <b>on</b>   <b>off</b> }] [ <b>send</b> { <b>on</b>   <b>off</b> }]	Disables LLC for the selected interface.

### Example

This example shows how to enable LLC on an interface:

```
switch# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
switch(config)# interface e1/48
switch(config-if)# flowcontrol receive on
switch(config-if)# flowcontrol send on
```

## Disabling Slow Port Pruning on Multicast Traffic on the Cisco Nexus 5500 Series Device

You can disable slow port pruning on multicast packets.

An interface on the Cisco Nexus 5500 Series device can become congested when it receives excessive multicast traffic or when the mixed unicast and multicast traffic rate exceeds the port bandwidth. When multiple interfaces receive the same multicast flow and one or more ports experience congestion, the slow port pruning feature

allows the switch to drop only the multicast packets for the congested port. This feature is turned on by default. To turn the slow port pruning feature off, enter the **hardware multicast disable-slow-port-pruning** command.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters configuration mode.
<b>Step 2</b>	switch(config)# <b>hardware multicast disable-slow-port-pruning</b>	Disables slow port pruning on multicast packets. The default is enabled.
<b>Step 3</b>	switch(config)# <b>no hardware multicast disable-slow-port-pruning</b>	Enables the slow port pruning feature.

### Example

This example shows how to disable slow port pruning on a Cisco Nexus 5548 switch:

```
switch(config)# hardware multicast disable-slow-port-pruning
switch(config)#
```

## Verifying the Queue and Flow Control Configurations

Use one of the following commands to verify the configuration:

Command	Purpose
<b>show queuing interface</b> [ <i>interface slot/port</i> ]	Displays the queue configuration and statistics.
<b>show interface flowcontrol</b> [ <b>module</b> <i>numbef</i> ]	Displays the detailed listing of the flow control settings on all interfaces.
<b>show interface</b> [ <i>interface slot/port</i> ] <b>priority-flow-control</b> [ <b>module</b> <i>number</i> ]	Displays the priority flow control details for a specified interface.
<b>show wrp-queue cos-map</b> [ <i>var</i> ]	
<b>running-config ipqos</b>	Displays information about the running configuration for QoS.
<b>startup-config ipqos</b>	Displays informationa bout the startup configuration for QoS.



# CHAPTER 10

## Configuring Ingress Policing

This chapter contains the following sections:

- [Information About Ingress Policing, on page 67](#)
- [Guidelines and Limitations for Ingress Policing, on page 68](#)
- [Creating a Policy Map Using a Committed Information Rate, on page 69](#)
- [Creating a Policy Map Using a Percentage of the Interface Rate, on page 71](#)
- [Verifying Ingress Policing Configuration, on page 73](#)
- [Configuration Examples for Ingress Policing, on page 73](#)

### Information About Ingress Policing

Policing allows you to monitor the data rates for a particular class of traffic. When the data rate exceeds user-configured values, the switch drops packets immediately. Because policing does not buffer the traffic; transmission delays are not affected. When traffic exceeds the data rate on a specific class, the switch drops the packets.

You can define single-rate and two-color Ingress Policing.

Single-rate Ingress Policing monitors the committed information rate (CIR) of traffic.



**Note** The committed information rate (CIR) is a value specified as a bit rate from 1 to 80000000000 or a percentage of the link rate.

In addition, Ingress Policing can monitor associated burst sizes of the packets. Two colors, or conditions, are determined by Ingress Policing for each packet depending on the data rate parameters that you supply.

You can configure only one action for each condition. For example, you might police for traffic in a class to conform to the data rate of 256000 bits per second with up to 200 millisecond bursts.

Color-aware Ingress Policing assumes that traffic has been previously marked with a color.

**Table 10: Maximum Supported Hardware Configuration for Policers**

	<b>Nexus 5500 Series</b>	<b>Nexus 2232</b>	<b>Nexus 2248TP-E</b>	<b>Nexus 6000 Series</b>
Burst Size	64 MB	32 MB	32 MB	64 MB

	<b>Nexus 5500 Series</b>	<b>Nexus 2232</b>	<b>Nexus 2248TP-E</b>	<b>Nexus 6000 Series</b>
Max Rate	96 Gbps	12 Gbps	8 Gbps	8 Gbps
Granularity	732 kbps	732 kbps	488 kbps	122 kbps

## Guidelines and Limitations for Ingress Policing

- The configuration for Ingress Policing is a part of the Quality of Service (QoS) policy configuration. You can configure QoS policies with Ingress Policing on the following :
  - Layer 2 switch ports
  - Host interface (HIF) ports
  - Port channels with switch ports
  - Port channels with HIF ports
  - Layer 3 interfaces (but not sub-interfaces or Switched Virtual Interfaces (SVIs))
  - Virtual Port Channel (vPC)
- Statistics are provided with Ingress Policing. Statistics include the drop count and allowed count. You can display the statistics by entering the **show policy-map interface ethernet** command.
- QoS policies that you configure on the attachments are installed in the QoS region of the Ternary Content Addressable Memory (TCAM) and causes the switch to apply Ingress Policing.
- If you configure a QoS policy with Ingress Policing on a HIF port or HIF port channel, Ingress Policing is offloaded to the Fabric Extender (FEX). Policy rewrites occur only in the switch. So QoS policy offload to FEX is required if there is any QoS policy rewrites which affects policer.
- All the match/set criteria that are supported in a QoS policy are supported even with Ingress Policing present in the policy. A Fabric Extender (FEX) supports Layer 3 operations (fragments) and Layer 4 operations (source and destination port ranges) but not the Transmission Control Protocol (TCP) flags and Layer 2 operations.
- You can define match criteria for a QoS policy so that it matches the control protocol traffic. If the type of policy is configured with Ingress Policing on an HIF port, the control traffic also gets policed. Therefore, the match criteria must be specific to the required flow of traffic.
- The switch cannot apply a QoS policy with Ingress Policing to an HIF port that has virtual Ethernet interfaces attached.
- If the switch applies Ingress Policing on the HIF port, the policer is applied to traffic with no Virtual Network Tag (VNTAG).
- A policy with Ingress Policing is allowed only on switch ports, HIF ports, and port channels with switch/HIF ports.
- Ingress Policing with Layer 2 operations and TCP flags in the match criteria is not allowed on FEX interfaces.
- Ingress Policing is not supported on Enhanced VPC (2LayerVPC) ports.



- It is recommended that you apply identical Ingress Policing on Dual-homed (AA) HIF interfaces.
- The **police** command is not supported on system QoS policies.
- The **show policy-map interface** command is recommended to check that the ingress rate limiter is conformed and to display violated statistics. The CLI displays conformed/violated packets and packet per second statistics on HIF interfaces (regular as well as port-channel), whereas on the switchport (regular as well as port-channel) the command displays conformed/violated bytes and bits per second (bps).

## Creating a Policy Map Using a Committed Information Rate

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>policy-map</b> [type qos] [ <i>qos-policy-map-name</i> ]	Creates a named object that represents a set of policies that are applied to a set of traffic classes. Policy-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	switch(config-pmap-qos)# <b>class</b> [type qos] { <i>class-map-name</i>   <b>class-default</b> }	Associates a class map with the policy map and enters configuration mode for the specified system class. Use the <b>class-default</b> keyword to select all traffic that is currently not matched by classes in the policy map.  The <i>class-map-name</i> argument can be a maximum of 40 characters. The name is case sensitive and can only contain alphanumeric characters, hyphens, and underscores.
<b>Step 4</b>	switch(config-pmap-c-qos)# <b>police</b> [cir] { <i>committed-rate</i> [ <i>data-rate</i> ]   <b>percent</b> <i>cir-link-percent</i> } [ [bc] { <i>committed-burst-rate</i> }][ <b>conform</b> { <b>transmit</b> } <b>violate</b> { <b>drop</b> }]]]	Polices <b>cir</b> in bits, kbps, mbps, or gbps. The <b>conform</b> action is applied if the data rate is less than or equal to <b>cir</b> , otherwise, the <b>violate</b> action is applied.  The <b>cir</b> keyword specifies to use the committed information rate, or desired bandwidth, as a bit rate or a percentage of the link rate.  The <i>committed-rate</i> value can range from 1 to 80 Gbps.  The <i>data-rate</i> value can be one of the following: <ul style="list-style-type: none"> <li>• bps—bits per second</li> <li>• kbps—1000 bits per second</li> <li>• mbps—1,000,000 bits per second</li> </ul>

	Command or Action	Purpose
		<ul style="list-style-type: none"> <li>• Gbps—1,000,000,000 bits per second</li> </ul> <p>Values for <i>committed-burst-rate</i> are the following:</p> <ul style="list-style-type: none"> <li>• bytes—bytes</li> <li>• kbytes—1000 bytes</li> <li>• mbytes—1,000,000 bytes</li> <li>• ms—milliseconds</li> <li>• us—microseconds</li> </ul> <p>The following are the Ingress Policing actions:</p> <ul style="list-style-type: none"> <li>• <b>conform</b>—The action to take if the traffic data rate is within bounds. The default action is <b>transmit</b>.</li> <li>• <b>transmit</b>—Transmits the packet. This is available only when the packet conforms to the parameters.</li> <li>• <b>violate</b>—The action to take if the traffic data rate violates the configured rate values. The basic and default action is <b>drop</b>.</li> <li>• <b>drop</b>—Drops the packet. This action is available only when the packet exceeds or violates the parameters.</li> </ul>
<b>Step 5</b>	switch(config-pmap-c-qos)# exit	Exits policy-map class configuration mode and enters policy-map mode.
<b>Step 6</b>	switch(config-pmap-qos)# exit	Exits policy-map mode and enters configuration mode.
<b>Step 7</b>	(Optional) switch(config)# show policy-map [type qos] [policy-map-name]	Displays information about all configured policy maps or a selected policy map of <b>type qos</b> .

### Example

This example shows how to create a policy map with Ingress Policing using the committed information rate:

```
switch# configure terminal
switch(config)# policy-map type qos pml
switch(config-pmap-qos)# class type qos cml
switch(config-pmap-c-qos)# police cir 10 mbps bc 20 kbytes
switch(config-pmap-c-qos)# set qos-group 4
```

```

switch(config-pmap-c-qos)# end
switch# show policy-map type qos pml

Type qos policy-maps
=====

policy-map type qos pml
class type qos cml
set qos-group 4
police cir 20 mbytes conform transmit violate drop
set qos-group 4
class type qos class-default
set qos-group 1
switch#

```

## Creating a Policy Map Using a Percentage of the Interface Rate

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	switch(config)# <b>policy-map</b> [ <b>type qos</b> ] [ <i>qos-policy-map-name</i> ]	Creates a named object that represents a set of policies that are applied to a set of traffic classes. Policy-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	switch(config-pmap-qos)# <b>class</b> [ <b>type qos</b> ] { <i>class-map-name</i>   <b>class-default</b> }	Associates a class map with the policy map and enters configuration mode for the specified system class. Use the <b>class-default</b> keyword to select all traffic that is currently not matched by classes in the policy map.  The <i>class-map-name</i> argument can be a maximum of 40 characters. The name is case sensitive and can only contain alphanumeric characters, hyphens, and underscores.
<b>Step 4</b>	switch(config-pmap-c-qos)# <b>police</b> [ <b>cir</b> ] { <i>committed-rate</i> [ <i>data-rate</i> ]   <b>percent</b> <i>cir-link-percent</i> } [ [ <b>bc</b> ] { <i>committed-burst-rate</i> } ][ <b>conform</b> { <b>transmit</b> } { <b>violate</b> { <b>drop</b> } ]]	Polices <b>cir</b> in bits, kbps, mbps, or gbps. The <b>conform</b> action is applied if the data rate is less than or equal to <b>cir</b> , otherwise, the <b>violate</b> action is applied.  The <b>cir</b> keyword specifies to use the committed information rate, or desired bandwidth, as a bit rate or a percentage of the link rate.  The <i>cir-link-percent</i> value can range from 1 to 100 percent.

	Command or Action	Purpose
		<p>Values for <i>committed-burst-rate</i> are the following:</p> <ul style="list-style-type: none"> <li>• bytes—bytes</li> <li>• kbytes—1000 bytes</li> <li>• mbytes—1,000,000 bytes</li> </ul> <p>The following are the Ingress Policing actions:</p> <ul style="list-style-type: none"> <li>• <b>conform</b>—The action to take if the traffic data rate is within bounds. The default action is <b>transmit</b>.</li> <li>• <b>transmit</b>—Transmits the packet. This is available only when the packet conforms to the parameters.</li> <li>• <b>violate</b>—The action to take if the traffic data rate violates the configured rate values. The basic and default action is <b>drop</b>.</li> <li>• <b>drop</b>—Drops the packet. This is available only when the packet exceeds or violates the parameters.</li> </ul>
<b>Step 5</b>	switch(config-pmap-c-qos)# <b>exit</b>	Exits policy-map class configuration mode and enters policy-map mode.
<b>Step 6</b>	switch(config-pmap-qos)# <b>exit</b>	Exits policy-map mode and enters configuration mode.
<b>Step 7</b>	(Optional) switch(config)# <b>show policy-map [type qos] [policy-map-name   qos-dynamic]</b>	Displays information about all configured policy maps or a selected policy map of <b>type qos</b> .

### Example

This example shows how to create a policy map with Ingress Policing using the percentage of the interface rate:

```
switch# configure terminal
switch(config)# policy-map type qos pm-test1
switch(config-pmap-qos)# class type qos cm-cos4
switch(config-pmap-c-qos)# police cir percent 10 bc 40 kbytes conform transmit violate drop
switch(config-pmap-c-qos)# end
switch# show policy-map type qos pm-test1

Type qos policy-maps
=====

policy-map type qos pm-test1
```

```

class type qos cm-cos4
set qos-group 4
police cir percent 10 bc 40 kbytes conform transmit violate drop
class type qos class-default
set qos-group 1
switch#

```

## Verifying Ingress Policing Configuration

To verify Ingress Policing configuration information, perform one of the following tasks:

Command	Purpose
switch# <b>show policy-map interface</b> [ <i>interface number</i> ]	Displays the policy map settings for an interface or all interfaces.
switch# <b>show policy-map</b> [ <i>type qos</i> ] [ <i>policy-map-name</i> ]	Displays information about all configured policy maps or a selected policy map of <b>type qos</b> .

## Configuration Examples for Ingress Policing

The following example shows the Committed Information Rate (CIR) being specified as a percentage where the Ingress Policing rate is calculated based on the port/port-channel speed:

```

switch(config)# policy-map type qos pm-cos
switch(config-pmap-qos)# class cm-cos
switch(config-pmap-c-qos)# police cir percent 10 bc 20 mbytes conform transmit violate drop

switch(config-pmap-c-qos)#

```

The following example shows the output of the **show policy-map** command with Ingress Policing configured:

```

switch(config-pmap-c-qos)# show policy-map pm-cos

Type qos policy-maps
=====

policy-map type qos pm-cos
  class type qos cm-cos
    set qos-group 4
    police cir percent 10 bc 20 mbytes conform transmit violate drop
  class type qos class-default
    set qos-group 1
switch(config-pmap-c-qos)#

```

The following example shows a policy being applied to an interface with the **service-policy** command:

```

switch(config)# interface ethernet 1/1
switch(config-if)# service-policy type qos input pm-cos

```

The following example shows policy statistics being displayed by using the **show policy-map** command:

```
switch(config-if)# show policy-map interface ethernet 1/1
Global statistics status : disabled

Ethernet1/1

Service-policy (qos) input: qos-police
  policy statistics status: disabled

Class-map (qos): qos-police (match-all)
  0 packets
  Match: dscp 10
  police cir percent 100 bc 200 ms
    conformed 0 bytes, 0 bps action: transmit
    violated 0 bytes, 0 bps action: drop
```



# CHAPTER 11

## Configuring ACL Logging

---

This chapter contains the following sections:

- [Information About ACL Logging, on page 75](#)
- [Guidelines and Limitations for ACL Logging, on page 75](#)
- [Configuring ACL Logging, on page 76](#)
- [Verifying ACL Logging Configuration, on page 78](#)
- [Configuration Examples for ACL Logging, on page 78](#)

### Information About ACL Logging

The ACL logging feature allows you to monitor ACL flows and to log dropped packets on an interface.

### IPv6 ACL Logging Overview

When the ACL logging feature is configured, the system monitors ACL flows and logs dropped packets and statistics for each flow that matches the deny conditions of the ACL entry.

Statistics and dropped-packet logs are generated for each flow. A flow is defined by the source interface, protocol, source IP address, source port, destination IP address, and destination port values. The statistics maintained for a matching flow is the number of denials of the flow by the ACL entry during the specified time interval.

When a new flow is denied (that is a flow that is not already active in the system), the system generates an initial Syslog message with a hit count value of 1. Then each time the flow is denied, the system creates a flow entry and increments the hit count value.

When an existing flow is denied, the system generates a Syslog message at the end of each interval to report the hit count value for the flow in the current interval. After the Syslog message is generated, the hit count value for the flow is reset to zero for the next interval. If no hit is recorded during the interval, the flow is deleted and no Syslog message is generated.

### Guidelines and Limitations for ACL Logging

ACL Logging has the following configuration guidelines and limitations:

- The system logs packets that match deny ACE conditions only. Logging for permit ACE conditions is not supported.
- The logging option may be applied to any ACL deny entry. To apply the logging option to implicitly denied traffic, you must configure the logging option for a specific deny-all ACL entry.
- ACL logging applies to port ACLs (PACL) configured by the **ipv6 port traffic-filter** command and to routed ACLs (RACL) configured by the **ipv6 traffic-filter** commands only.
- The total number of flows and deny-flows are limited to a user-defined maximum value to prevent DOS attacks. If this limit is reached, no new logs are created until an existing flow finishes.
- The system uses a hash table to locate a flow so that a large number of flows can be supported without impacting CPU utilization. The system uses a timer queue to efficiently manage the aging of large number of flows.
- The number of Syslog entries generated by the ACL logging process is limited by the configured logging level of the ACL logging process. If the amount of Syslog entries exceed this limit, the logging facility may drop some logging messages. Therefore, ACL logging should not be used as a billing tool or as an accurate source of the number of matches to an access list.
- The hardware rate-limiter rate-limits traffic on a packet basis, but control plane policing (COPP) rate-limits traffic on a byte basis. If the packet size and the hardware rate-limiter both have high values, the COPP default value can be exceeded and the system drops the packet. To overcome this limitation you must increase the default CIR value (64000 bytes) to a higher value such as 2560000 bytes. When the default CIR is increased packet logging happens normally.
- IPv6 logging is not supported on management or VTY (Terminal) ports
- IPv6 logging is not supported on egress VACLs (due to ASIC limitations).

## Configuring ACL Logging

To configure the ACL logging process, you first create the access list, then enable filtering of IPv6 traffic on an interface using the specified ACL, and finally configure the ACL logging process parameters.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	<b>ipv6 access-list name</b>  <b>Example:</b> switch(config)# ipv6 access-list logging-test	Defines an IPv6 access list and enters IPv6 access list configuration mode.
<b>Step 3</b>	<b>deny ipv6 any destination-address log</b>  <b>Example:</b> switch(config-ipv6-acl)# deny ipv6 any 2001:DB8:1::1/64 log	Sets deny conditions for an IPv6 access list. To enable the system to log matches against this entry, you must use the <b>log</b> keyword when configuring the deny conditions.



	Command or Action	Purpose
Step 4	<b>exit</b> <b>Example:</b> switch(config-ipv6-acl)# exit	Updates the configuration and exits IPv6 access list configuration mode.
Step 5	<b>interface ethernet slot/port</b> <b>Example:</b> switch(config)# interface ethernet 1/1	Enters interface configuration mode.
Step 6	<b>ipv6 traffic-filter logging-test {in   out}</b> <b>Example:</b> switch(config-if)# ipv6 traffic-filter logging-test in	Enables the filtering of IPv6 traffic on an interface using the specified ACL. You can apply an ACL to outbound or inbound traffic.
Step 7	<b>exit</b> <b>Example:</b> switch(config-if)# exit	Updates the configuration and exits interface configuration mode.
Step 8	<b>logging ip access-list cache interval interval</b> <b>Example:</b> switch(config)# logging ip access-list cache interval 5	Configures the log-update interval (in seconds) for the ACL logging process. The default value is 300 seconds. The range is from 5 to 86400 seconds.
Step 9	<b>logging ip access-list cache entries number-of-flows</b> <b>Example:</b> switch(config)# logging ip access-list cache entries 1000	Specifies the maximum number of flows to be monitored by the ACL logging process. The default value is 8000. The range of values supported is from 0 to 1048576.
Step 10	<b>logging ip access-list cache threshold threshold</b> <b>Example:</b> switch(config)# logging ip access-list cache threshold 1	If the specified number of packets are logged before before the expiry of the alert interval the system generates a Syslog message.
Step 11	<b>hardware rate-limiter access-list-log packets</b> <b>Example:</b> switch(config)# hardware rate-limiter access-list-log 200	Configures rate limits in packets per second for packets copied to the supervisor module for access list logging. The range is from 0 to 30000.
Step 12	<b>aclog match-log-level severity-level</b> <b>Example:</b> switch(config)# aclog match-log-level 3	Specifies the minimum severity level to log ACL matches. The default is 6 (informational). The range is from 0 (emergency) to 7 (debugging).  <b>Note</b> Aclogs can only support logging levels of 3 or later.

## Verifying ACL Logging Configuration

To display ACL logging configuration information, perform one of the following tasks:

Command	Purpose
<b>show logging ip access-list status</b>	Displays the deny maximum flow count, the current effective log interval and the current effective threshold value.
<b>show logging ip access-list cache</b>	Displays information on the active logged flows, such as source IP and destination IP addresses, S-Port and D-Port information and so on.

## Configuration Examples for ACL Logging

This example shows how to configure the ACL logging process.

```
switch# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
switch(config)# ipv6 access-list logging-test
switch(config-ipv6-acl)# deny ipv6 any 2001:DB8:1::1/64 log
switch(config-ipv6-acl)# exit
switch(config)# interface ethernet 1/1
switch(config-if)# ipv6 traffic-filter logging-test in
switch(config-if)# exit
switch(config)# logging ip access-list cache entries 1000
switch(config)# logging ip access-list cache interval 5
switch(config)# logging ip access-list cache threshold 1
switch(config)# hardware rate-limiter access-list-log 200
switch(config)# acllog match-log-level 3
switch(config)# exit
switch#
```

This example shows a typical PACL logging configuration.

```
switch(config)# interface ethernet 8/11
switch(config-if)# ipv6 port traffic-filter v6log-pacl in
switch(config-if)# switchport access vlan 4064
switch(config-if)# speed 1000

switch(config)# interface Vlan 4064
switch(config-if)# no shutdown
switch(config-if)# no ip redirects
switch(config-if)# ipv6 address 4064::1/64
```

```
Switch# show vlan filter
vlan map v6-vaclmap:
Configured on VLANs: 4064
```

```
Switch# show vlan access-map v6-vaclmap
Vlan access-map v6-vaclmap
match ipv6: v6-vacl
```

```
action: drop
statistics per-entry
```





## CHAPTER 12

# Configuring FEX-Based ACL Classification

This chapter contains the following sections:

- [Information About FEX-based ACL Classification, on page 81](#)
- [Guidelines and Limitations for FEX-Based ACL Classification, on page 82](#)
- [Configuring FEX-Based ACL Classification, on page 83](#)
- [Verifying the FEX-Based ACL Classification, on page 88](#)
- [Configuration Examples for FEX-based ACL Classification, on page 88](#)

## Information About FEX-based ACL Classification

The Fabric Extender (FEX) based Access Control List (ACL) Classification feature uses ternary content addressable memory (TCAM) resources on a FEX to perform ACL-based packet classification of incoming packets on the switch.

## Overview of FEX-based ACL Classification

The FEX-based ACL Classification feature uses TCAM resources on a FEX to perform ACL-based packet classification of incoming packets on the switch. When QoS policies are processed on a FEX, the policies are enforced on the switch and on the associated FEX or FEXes.

By default this feature is disabled. When the feature is enabled, and if the existing system-level QoS policy is accepted by the FEX, the QoS policy is enforced by the FEX. If the existing system-level QoS policy is not accepted by the FEX, an error message is displayed and the fabric ports associated with the FEX are error-disabled, which prevents the FEX from being online.

If the feature is disabled, the existing system-level QoS policy is removed from the FEX and the enforcement of the existing QoS policy is changed from ACL-based to CoS-based. The TCAM entries are removed and packet classification on the FEX is done using the cos2q map in the FEX hardware.

When this feature is enabled, QoS policies are enforced as follows:

- System level QoS policies are enforced on a FEX in the ACL-based approach. That is, TCAM entries are created and programmed on FEX ASICs. If the QoS policy is not accepted on a FEX, the command is rejected and an error message is generated. A system level QoS policy is always programmed and enforced completely on the switches and all associated FEXes.

- Interface level QoS policies are enforced on the FEX. That is, TCAM entries in the corresponding FEX ASIC are taken and programmed. If the QoS policy is not accepted on the target interface, the command is rejected and an error message is generated.

## Guidelines and Limitations for FEX-Based ACL Classification

When you are configuring Fabric Extender (FEX)-based Access Control List (ACL) classification, you should be aware of the following guidelines and limitations:

- FEX-based ACL classification can be configured for the following interfaces:
  - Global
  - Host interface (HIF) ports
  - HIF port channels
  - VPC
  - 2-Layer VPC
- Only QoS policies are applied at system-level, HIF ports and HIF port channels will be offloaded to FEX platforms.
- In each switching subsystem (SS) on the FEX ASIC, interface-level policies are programmed in TCAM entries in a top-down fashion and system-level policies are programmed in a bottom-up fashion.
- All the match and set criteria supported in a QoS policy are supported even when a policer is present in the policy. FEX supports Layer 3 operations (fragments) and Layer 4 operations (source and destination port ranges). However, policies with TCP flags or Layer 2 operations are not allowed on FEX interfaces.
- QoS policies are not supported on HIF ports that have Virtual Ethernet Interfaces (VETHs) attached.
- If a QoS policy is applied to a HIF port, the classification is applied only to incoming traffic with no VNTAG.
- You could define match criteria for a QoS policy so that the criteria also matches the control protocol traffic. If you configure the policy on a HIF port, the control traffic could also get policed. Therefore, the match criteria should be very specific to the required flow of traffic.
- If a QoS policy is configured on a HIF port or a port channel, the policy is enforced by the FEX and not the switch. However, policy rewrites occur on the switch only.
- Because TCAM entries are not available at network interface (NIF) ports, network-to-host (N2H) traffic is not classified in an ACL-based manner. Instead, N2H traffic is classified in a CoS-based manner.
- ACL-based QoS policy offload is supported on the following platforms:
  - N2224TP Fabric Extender 24x1G 2x10G SFP+ Module
  - N2232P Fabric Extender 32x10G SFP+ 8x10G SFP+ Module
  - N2232TM Fabric Extender 32x10GBase-T 8x10G SFP+ Module
  - N2248T Fabric Extender 48x1G 4x10G SFP+ Module
  - N2248TP E Fabric Extender 48x1G 4x10G SFP+ Module

- N2248PQ Fabric Extender 48x10G SFP+ 16x10G SFP+ Module
  - N2232TM-E Fabric Extender 32x10GBase-T 8x10G SFP+ Module
  - NB22IBM Fabric Extender 14x10G SFP+ 8x10G SFP+ Module
  - N2348UPQ Fabric Extender 6x40G QSFP 48x10G SFP+ FEX
- When a policy is offloaded, the number of access control entries (ACEs) in the policy, which are applied on the FEX, should not exceed 30.



**Note** In Cisco NX-OS Release 7.3(x), the FEX offload capability using interface QoS policies is upto 100 ACEs, and upto only 30 ACEs using system QoS policies.

- ACL-based QoS policy offload is not supported on the following platforms:
  - N2148T Fabric Extender 48x1G 4x10G SFP+ Module

## Configuring FEX-Based ACL Classification

### Configuring FEX ACL-based QoS Policy Enforcement

To configure the FEX ACL-based QoS policy enforcement, you must enable policy offloading on each Fabric Extender individually. When you enable the feature on a FEX and if the existing system-level QoS policy is accepted by the FEX, the QoS policy is enforced by the FEX. However, if the existing system-level QoS policy is not accepted by the FEX, the fabric ports associated with the FEX are error-disabled, which then prevents the FEX from being online.

#### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<code>switch# configure terminal</code>	Enters global configuration mode.
<b>Step 2</b>	<b>FEX <i>chassis_ID</i></b> <b>Example:</b> <code>switch(config)# fex 101</code>	Enters fabric extender configuration mode.
<b>Step 3</b>	<b>hardware <i>card-type</i> qos-policy-offload</b> <b>Example:</b> <code>switch(config-fex)# hardware N2232P qos-policy-offload</code>	Enables QoS policy offloading on a Cisco Nexus N2232P Fabric Extender.  <b>Note</b> When a policy is offloaded, the number of access control entries (ACEs) in the policy, which are applied on the FEX, should not exceed 30.

	Command or Action	Purpose
<b>Step 4</b>	<b>exit</b> <b>Example:</b> <code>switch(config-fex) # exit</code>	Updates the configuration and exits fabric extender configuration mode.
<b>Step 5</b>	(Optional) <b>switch(config-if)# copy running-config startup-config</b>	Saves the change persistently through reboots and restarts by copying the running configuration to the startup configuration.

## Configuring the FEX ACL-based Interface-Level QoS Policy

When FEX ACL-based QoS policy enforcement is enabled and the interface-level QoS policy is applied successfully, two TCAM entries are created at the top of the TCAM region on the FEX ASIC.

### Before you begin

You must enable FEX ACL-based QoS policy enforcement on the switch and on any fabric extenders that you want to use.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>switch# configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	<b>class-map type qos match-all class-name</b> <b>Example:</b> <code>switch(config)# class-map type qos match-all cmap-qos01</code>	Creates a named object that represents a class of traffic. Class-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	<b>match access-group name acl-name</b> <b>Example:</b> <code>switch(config-cmap-qos) # match access-group name acl-01</code>	Specifies the named ACL whose contents are used as the match criteria against which packets are checked to determine if they belong to this class.
<b>Step 4</b>	<b>exit</b> <b>Example:</b> <code>switch(config-cmap-qos) # exit</code>	Updates the configuration and exits class map configuration mode.
<b>Step 5</b>	<b>policy-map type qos policy-name</b> <b>Example:</b> <code>switch(config)# policy-map type qos pmap-qos01</code>	Creates a named object that represents a set of policies that are to be applied to a set of traffic classes. Policy-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.



	Command or Action	Purpose
<b>Step 6</b>	<b>class</b> <i>class-name</i> <b>Example:</b> <pre>switch(config-pmap-qos)# class cmap-qos01</pre>	Associates a class map with the policy map, and enters configuration mode for the specified system class.  <b>Note</b> The associated class map must be the same type as the policy map type.
<b>Step 7</b>	<b>set qos-group</b> <i>qos-group-value</i> <b>Example:</b> <pre>switch(config-pmap-c-qos)# set qos-group 1</pre>	Configures one or more <b>qos-group</b> values to match on for classification of traffic into this class map. There is no default value.
<b>Step 8</b>	<b>interface ethernet</b> <i>fex-id/slot/port</i> <b>Example:</b> <pre>switch(config)# interface ethernet 127/1/1</pre>	Enters interface configuration mode.
<b>Step 9</b>	<b>service-policy type qos input</b> <i>policy-map-name</i> <b>Example:</b> <pre>switch(config-if)# service-policy type qos input pmap-qos01</pre>	Attaches the policy map to the interface.
<b>Step 10</b>	<b>exit</b> <b>Example:</b> <pre>switch(config-if)# exit</pre>	Updates the configuration and exits interface configuration mode.

When the policy is successfully applied, two TCAM entries are created at the top of the TCAM region on the FEX ASIC. The following is an example of that TCAM entry:

```
K=keyType, L=label, B=bindcheck, DH=L2DA, CT=cdceTrnst
L(IF-ifacl V-vacl Q-qos R-rbacl)

[8]> K:IP (3/0) IN v4 L-[Q-ff/8 ]
[8] SA:ffffff00/c0a80200 DA:00000000/00000000
[8]-> cos_rw:0 cos:4 de_rw:0 de:0 fwd_to_cpu:0 cos2q_ow:1

[9]> K:IP/ETH (2/0) IN L-[Q-ff/8 ]
[9]-> cos_rw:0 cos:2 de_rw:0 de:0 fwd_to_cpu:0 cos2q_ow:1
```

## Configuring FEX ACL-based System-Level QoS Policy

When FEX ACL-based QoS policy enforcement is enabled and the system-level QoS policy is applied successfully, two TCAM entries are created at the bottom of the TCAM region on the FEX ASIC.

**Before you begin**

You must enable FEX ACL-based QoS policy enforcement on the switch and on any fabric extenders that you want to use.

**Procedure**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<code>switch# configure terminal</code>	Enters global configuration mode.
<b>Step 2</b>	<b>class-map type qos match-all</b> <i>class-name</i>  <b>Example:</b> <code>switch(config)# class-map type qos match-all cmap-qos01</code>	Creates a named object that represents a class of traffic. Class-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.
<b>Step 3</b>	<b>match access-group name</b> <i>acl-name</i>  <b>Example:</b> <code>switch(config-cmap-qos)# match access-group name acl-01</code>	Specifies the named ACL whose contents are used as the match criteria against which packets are checked to determine if they belong to this class.
<b>Step 4</b>	<b>exit</b>  <b>Example:</b> <code>switch(config-cmap-qos)# exit</code>	Updates the configuration and exits class map configuration mode.
<b>Step 5</b>	<b>policy-map type qos</b> <i>policy-name</i>  <b>Example:</b> <code>switch(config)# policy-map type qos pmap-qos01</code>	Creates a named object that represents a set of policies that are to be applied to a set of traffic classes. Policy-map names can contain alphabetic, hyphen, or underscore characters, are case sensitive, and can be up to 40 characters.
<b>Step 6</b>	<b>class</b> <i>class-name</i>  <b>Example:</b> <code>switch(config-pmap-qos)# class cmap-qos01</code>	Associates a class map with the policy map, and enters configuration mode for the specified system class.  <b>Note</b> The associated class map must be the same type as the policy map type.
<b>Step 7</b>	<b>set qos-group</b> <i>qos-group-value</i>  <b>Example:</b> <code>switch(config-pmap-c-qos)# set qos-group 1</code>	Configures one or more <b>qos-group</b> values to match on for classification of traffic into this class map. There is no default value.
<b>Step 8</b>	<b>system</b> <i>system-name</i>  <b>Example:</b> <code>switch(config)# system qos</code>	Enters QoS system configuration mode.
<b>Step 9</b>	<b>service-policy type qos input</b> <i>policy-map-name</i>	Attaches the classification policy to the system.

	Command or Action	Purpose
	<b>Example:</b> switch(config-sys-qos)# service-policy type qos input pmap-qos01	
<b>Step 10</b>	<b>exit</b> <b>Example:</b> switch(config-sys-qos)# exit	Updates the configuration and exits QoS system configuration mode.

When the policy is successfully applied, two TCAM entries are created at the bottom of the TCAM region on the FEX ASIC. The following is an example of that TCAM entry:

```
K-keyType, L-label, B-bindcheck, DH-L2DA, CT-cdceTrnst
L(IF-ifacl V-vacl Q-qos R-rbacl)

[253]> K:IP (3/0) IN v4 L-[]
[253] SA:ffffff00/c0a80200 DA:00000000/00000000
[253]-> cos_rw:0 cos:4 de_rw:0 de:0 fwd_to_cpu:0 cos2q_ow:1

[254]> K:ALL (0/0) IN L-[]
[254]-> cos_rw:0 cos:2 de_rw:0 de:0 fwd_to_cpu:0 cos2q_ow:1
```

## Disabling FEX ACL-based QoS Policy Enforcement

You can disable FEX ACL-based QoS policy enforcement for an individual FEX. If you disable the feature the existing system-level QoS policy is removed from the FEX and the enforcement of the existing QoS policy is changed from ACL-based to CoS-based. In addition, the TCAM entries are removed and packet classification on the FEX is done using the cos2q map in the FEX hardware.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	switch# <b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	<b>FEX chassis_ID</b> <b>Example:</b> switch(config)# fex 101	Enters fabric extender configuration mode.
<b>Step 3</b>	<b>no hardware card-type qos-policy-offload</b> <b>Example:</b> switch(config-fex)# no hardware N2232P qos-policy-offload	Disables QoS policy offloading on a Cisco Nexus N2232P Fabric Extender.
<b>Step 4</b>	<b>exit</b> <b>Example:</b> switch(config-fex)# exit	Updates the configuration and exits fabric extender configuration mode.
<b>Step 5</b>	(Optional) switch(config-if)# <b>copy running-config startup-config</b>	Saves the change persistently through reboots and restarts by copying the running configuration to the startup configuration.

## Verifying the FEX-Based ACL Classification

To verify FEX-based ACL classification, perform one of these tasks:

Command	Purpose
<b>show running-config</b>	Displays the contents of the currently running configuration file, including information on FEX-based ACL classification settings.
<b>show queuing interface</b>	Displays the queuing information for FEX Ethernet interfaces, including information about the QoS configuration.

## Configuration Examples for FEX-based ACL Classification

The following example shows how to create an IPv4 access control list (ACL):

```
switch# configure terminal
switch(config)# ip access-list acl-01
switch(config-acl)# permit ip 192.168.2.0/24 any
switch(config-acl)# statistics
```

The following example shows how to enable the FEX-based ACL Classification feature on the switch and on a Cisco Nexus N2232P Fabric Extender associated with the switch:

```
switch# configure terminal
switch(config)# fex 101
switch(config-fex)# hardware N2232P qos-policy-offload
switch(config-fex)# exit
```

The following example shows how to configure an ACL-based QoS policy at interface-level for use with the FEX ACL-based QoS policy enforcement feature:

```
switch# configure terminal
switch(config)# class-map type qos match-all cmap-qos01
switch(config-cmap-qos)# match access-group name acl-01
switch(config-cmap-qos)# exit
switch(config)# policy-map type qos pmap-qos01
switch(config-pmap-qos)# class cmap-qos01
switch(config-pmap-c-qos)# set qos-group 2
switch(config)# interface ethernet 101/1/1
switch(config-if)# service-policy type qos input pmap-qos01
switch(config-if)# exit
```

The following example shows how to configure an ACL-based QoS policy at system-level for use with the FEX ACL-based QoS policy enforcement feature:

```
switch# configure terminal
switch(config)# class-map type qos match-all cmap-qos01
switch(config-cmap-qos)# match access-group name acl-01
switch(config-cmap-qos)# exit
switch(config)# policy-map type qos pmap-qos01
switch(config-pmap-qos)# class cmap-qos01
switch(config-pmap-c-qos)# set qos-group 2
switch(config)# system qos
switch(config-sys-qos)# service-policy type qos input pmap-qos01
switch(config-sys-qos)# exit
```

The following example shows how to disable the FEX-based ACL Classification feature on the switch and on a Cisco Nexus N2232P Fabric Extender associated with the switch:

```
switch# configure terminal
switch(config)# fex 101
switch(config-fex)# no hardware N2232P qos-policy-offload
switch(config-fex)# exit
```

The following example shows how to display the ACL-based QoS policy configuration:

```
switch(config-pmap-nq)# show queuing interface ethernet 108/1/48
if_slot 40, ifidx 0x1f6b0bc0
Ethernet108/1/48 queuing information:
  Input buffer allocation:
  Qos-group: 0 2 (shared)
  frh: 2
  drop-type: drop
  cos: 0 1 2 3 4 5 6
  xon      xoff      buffer-size
  -----+-----+-----
  34560    39680    48640

Queueing:
queue  qos-group  cos          priority  bandwidth  mtu
-----+-----+-----+-----+-----+-----
  2      0          0 1 2 3 4 5 6  WRR        10        1600
  4      2          0          WRR         0         1600

Queue limit: 66560 bytes

Queue Statistics:
queue  rx          tx
-----+-----+-----
  2      0          5103082
  4     5103093      0

Port Statistics:
rx drop      rx mcast drop  rx error      tx drop      mux overflow
-----+-----+-----+-----+-----
  0            0              0              0              InActive

Priority-flow-control enabled: no
Flow-control status:
cos      qos-group  rx pause  tx pause  masked rx pause
-----+-----+-----+-----+-----
  0            0      xon      xon      xon
  1            0      xon      xon      xon
  2            0      xon      xon      xon
  3            0      xon      xon      xon
  4            0      xon      xon      xon
  5            0      xon      xon      xon
  6            0      xon      xon      xon
  7           n/a      xon      xon      xon
```





# CHAPTER 13

## QoS Configuration Examples

This chapter contains the following sections:

- [QoS Example 1](#) , on page 91
- [QoS Example 2](#) , on page 92
- [QoS Example 3](#) , on page 94

### QoS Example 1

This example shows how to configure traffic in the entire system matching an access control list to have the frame CoS fields rewritten to the value 5.

#### Procedure

	Command or Action	Purpose
<b>Step 1</b>	Set up the ingress classification policy (the access control list was defined previously).	<pre>(config)# class-map type qos cmap-qos-acl (config-cmap-qos)# match access-group ACL-CoS (config-cmap-qos)# exit (config)# policy-map type qos pmap-qos-acl (config-pmap-qos)# class cmap-qos-acl (config-pmap-c-qos)# set qos-group 4 (config-pmap-c-qos)# exit (config-pmap-qos)# exit</pre>
<b>Step 2</b>	Attach the classification policy to the system.	<pre>(config)# system qos (config-sys-qos)# service-policy type qos input pmap-qos-acl (config-sys-qos)# exit</pre>
<b>Step 3</b>	Set up the system class allocation and rewrite policy. Allocate the system class for qos-group 4 and define the rewrite action.	<pre>(config)# class-map type network-qos cmap-nq-acl (config-cmap-nq)# match qos-group 4</pre>

	Command or Action	Purpose
		<pre>(config-cmap-nq) # exit (config) # policy-map type network-qos pmap-nq-acl (config-pmap-nq) # class type network-qos cmap-nq-acl (config-pmap-c-nq) # set cos 5 (config-pmap-c-nq) # exit (config-pmap-nq) # exit</pre>
<b>Step 4</b>	Attach the allocation and rewrite policy to the system.	<pre>(config) # system qos (config-sys-qos) # service-policy type network-qos pmap-nq-acl (config-sys-qos) # exit</pre>

## QoS Example 2

This example shows how to use an access control list to apply 50% bandwidth to traffic on Ethernet interface 1/3 that matches traffic on Ethernet interface 1/1.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	Set up the ingress classification policy.	<pre>(config) # class-map type qos cmap-qos-bandwidth (config-cmap-qos) # match access-group ACL-bandwidth (config-cmap-qos) # exit (config) # policy-map type qos pmap-qos-eth1-1 (config-pmap-qos) # class cmap-qos-bandwidth (config-pmap-c-qos) # set qos-group 2 (config-pmap-c-qos) # exit (config-pmap-qos) # exit</pre>
<b>Step 2</b>	Attach the classification policy to the interface Ethernet 1/1.	<pre>(config) # interface ethernet 1/1 (config-if) # service-policy type qos input pmap-qos-eth1-1 (config-if) # exit</pre>



	Command or Action	Purpose
<b>Step 3</b>	Set up the system-wide definition of the qos-group first.	<pre>(config)# class-map type queuing cmap-que-bandwidth  (config-cmap-que)# match qos-group 2  (config-cmap-que)# exit</pre>
<b>Step 4</b>	Set up the egress bandwidth policy.	<p><b>Note</b> Before you can successfully allocate bandwidth to the user-defined class cmap-que-bandwidth, you must first reduce the default bandwidth configuration on class-default and class-fcoe.</p> <pre>(config)# policy-map type queuing pmap-que-eth1-2  (config-pmap-que)# class type queuing class-default  (config-pmap-c-que)# bandwidth percent 10  (config-pmap-c-que)# exit  (config-pmap-que)# class type queuing class-fcoe  (config-pmap-c-que)# bandwidth percent 40  (config-pmap-c-que)# exit  (config-pmap-que)# class type queuing cmap-que-bandwidth  (config-pmap-c-que)# bandwidth percent 50  (config-pmap-c-que)# exit  (config-pmap-que)# exit</pre>
<b>Step 5</b>	Attach the bandwidth policy to the egress interface.	<pre>(config)# interface ethernet 1/3  (config-if)# service-policy type queuing output pmap-que-eth1-2  (config-if)# exit</pre>
<b>Step 6</b>	Allocate the system class for qos-group 2.	<pre>(config)# class-map type network-qos cmap-nq-bandwidth  (config-cmap-nq)# match qos-group 2  (config-cmap-nq)# exit</pre>
<b>Step 7</b>	Set up the network-qos policy.	<pre>(config)# policy-map type network-qos pmap-nq-bandwidth</pre>

	Command or Action	Purpose
		<pre>(config-pmap-nq) # class type network-qos cmap-nq-bandwidth (config-pmap-c-nq) # exit (config-pmap-nq) # exit</pre>
<b>Step 8</b>	Attach the network-qos policy to the system.	<pre>(config) # system qos (config-sys-qos) # service-policy type network-qos pmap-nq-bandwidth (config-sys-qos) # exit</pre>

## QoS Example 3

This example shows how to attach a 802.1p tag with a CoS value of 3 to incoming untagged packets, and force priority-flow-control negotiation on Ethernet interface 1/15.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	Set up the ingress classification policy (the access control list was defined previously).	<pre>(config) # interface Ethernet 1/15 (config-if) # untagged cos 3 (config-if) # priority-flow-control mode on (config-if) # exit</pre>



## INDEX

### A

- ACL **83–85**
  - FEX QoS **83**
  - FEX QoS interface-level **84**
  - FEX QoS system-level **85**
- ACL logging **75–76, 78**
  - configuring **76**
  - definition **75**
  - examples **78**
  - guidelines **75**
  - limitations **75**
  - overview **75**
  - verification **78**
- attaching **38**
  - system service policy **38**

### C

- Cisco Nexus devices **63**
  - virtual output queuing limits **63**
- class maps **6**
  - configuring **6**
- classification **5–6**
  - information about **5**
  - licensing requirements **6**
- classification configuration **15**
  - verifying **15**
- classification policies **6**
  - ingress **6**
- configuration example **88**
  - FEX-Based ACL Classification **88**
- configuration examples **73**
  - Ingress Policing **73**
- configuring **20, 29, 31, 45, 61, 64–65, 76, 83–85**
  - ACL logging **76**
  - DSCP marking **29**
  - FEX QoS **83**
  - FEX QoS interface-level **84**
  - FEX QoS system-level **85**
  - interface service policies **45**
  - IP precedence marking **31**
  - link-level flow control **65**
  - no-drop buffer thresholds **61**
  - priority flow control **64**

- configuring (*continued*)
  - type network QoS policies **20**
- Configuring type queuing policies **22**
- configuring untagged CoS **44**
- CoS marking **32–33**
  - configuring **32**
  - layer 3 **33**
- CPU traffic **4**
  - QoS **4**
- creating **69, 71**
  - policy map using a percentage of the interface rate **71**
  - policy map using committed information rate **69**

### D

- default system service policies **38**
  - restoring **38**
- disabling **87**
  - FEX ACL-based policy enforcement **87**
- DSCP classification **9**
  - configuring **9**

### E

- enabling **40**
  - jumbo MTU **40**
- examples **78**
  - ACL logging **78**

### F

- feature history **56**
  - VLAN QoS **56**
- FEX **84–85**
  - QoS interface-level **84**
  - QoS system-level **85**
- FEX-based ACL classification **88**
  - verifying **88**
- FEX-Based ACL Classification **88**
  - configuration example **88**
- Fibre Channel interfaces **43**
  - policy **43**
- flow control **66**
  - verifying **66**

**G**

- guidelines [82](#)
  - FEX-based ACL Classification [82](#)
- guidelines and limitations [52, 68](#)
  - ingress policing [68](#)
  - VLAN QoS [52](#)

**I**

- information about [5, 17, 37, 49, 67](#)
  - classification [5](#)
  - ingress policing [67](#)
  - policy types [17](#)
  - system classes [37](#)
  - VLAN QoS [49](#)
- ingress [6](#)
  - classification policies [6](#)
- interface QoS configuration [46](#)
  - verifying [46](#)
- interface QoS policies [49–50](#)
  - precedence of [49–50](#)
- interface QoS TCAM limit [53](#)
  - changing [53](#)
  - configuring [53](#)
  - removing [53](#)
- IP precedence marking [31](#)
  - configuring [31](#)

**J**

- jumbo MTU [41](#)
  - verifying [41](#)

**L**

- layer 3 [33](#)
  - CoS marking [33](#)
- licensing requirements [6](#)
  - classification [6](#)
- limitations [82](#)
  - FEX-based ACL Classification [82](#)

**M**

- marking [29](#)
  - information about [29](#)
- marking configuration [35](#)
  - verifying [35](#)
- modular QoS CLI [3](#)
- MQC [3](#)
- MTU [37](#)
- multicast traffic [44](#)
  - QoS [44](#)

**O**

- overview [3, 81](#)
  - FEX-based ACL Classification [81](#)
  - quality of service [3](#)

**P**

- policy [43](#)
  - Fibre Channel interfaces [43](#)
- policy map configuration [27](#)
  - verifying [27](#)
- policy maps [19](#)
  - creating [19](#)
- policy types [17](#)
  - information about [17](#)
- precedence [49–51](#)
  - interface QoS policies [49–50](#)
  - system QoS policies [49–50](#)
  - VACL and VLAN QoS policies [51](#)
  - VLAN QoS and VACL policies [51](#)
  - VLAN QoS policies [49–50](#)
- precedence classification [8](#)
  - configuring [8](#)

**Q**

- QoS [4, 44](#)
  - CPU traffic [4](#)
  - multicast traffic [44](#)
- QoS [8–9, 83–85](#)
  - DSCP classification [9](#)
    - configuring [9](#)
  - FEX ACL-based policy enforcement [83](#)
  - FEX interface-level ACL policy [84](#)
  - FEX system-level ACL policy [85](#)
  - precedence classification [8](#)
    - configuring [8](#)
- quality of service [3](#)
  - overview [3](#)
- Quality of Service, *See* QoS
- queue configuration [66](#)
  - verifying [66](#)

**R**

- restoring [38](#)
  - default system service policies [38](#)

**S**

- service policies [55](#)
  - removing from a VLAN [55](#)
- system classes [37](#)
  - information about [37](#)

- system QoS configuration [41](#)
  - verifying [41](#)
- system QoS policies [49–50](#)
  - precedence of [49–50](#)
- system service policy [38](#)
  - attaching [38](#)

## T

- TCAM carving [51](#)
  - VLAN QoS [51](#)
- type QoS polices, configuring [21](#)

## U

- unicast traffic [63](#)
  - virtual output queuing limits [63](#)

## V

- VACLs [51](#)
  - precedence of [51](#)
- verifying [15, 27, 35, 41, 46, 56, 66, 73, 78, 88](#)
  - ACL logging [78](#)

- verifying (*continued*)
  - classification configuration [15](#)
    - FEX-based ACL classification [88](#)
  - flow control [66](#)
  - Ingress Policing configuration [73](#)
  - interface QoS configuration [46](#)
  - marking configuration [35](#)
  - policy map configuration [27](#)
  - queue configuration [66](#)
  - system QoS configuration [41](#)
  - VLAN QoS configuration [56](#)
- virtual output queuing limits [63](#)
  - unicast traffic [63](#)
- VLAN QoS [51–52, 56](#)
  - feature history [56](#)
  - guidelines and limitations [52](#)
  - TCAM carving [51](#)
- VLAN QoS configuration [56](#)
  - verifying [56](#)
- VLAN QoS policies [49–51](#)
  - precedence of [49–51](#)
- VLANs [49, 55](#)
  - QoS [49](#)
  - removing a service policy from [55](#)

