



Cisco Intersight Workload Optimizer User Guide

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS REFERENCED IN THIS DOCUMENTATION ARE SUBJECT TO CHANGE WITHOUT NOTICE. EXCEPT AS MAY OTHERWISE BE AGREED BY CISCO IN WRITING, ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS DOCUMENTATION ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED.

The Cisco End User License Agreement and any product specific license terms govern your use of any Cisco software, including this product documentation, and are located at: <http://www.cisco.com/go/eula>. Cisco product warranty information is available at <http://www.cisco.com/go/warranty>. US Federal Communications Commission Notices are found here <http://www.cisco.com/c/en/us/products/us-fcc-notice.html>.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any products and features described in this document as in development or available at a future date remain in varying stages of development and will be offered on a when-and-if-available basis. Any such product or feature roadmaps are subject to change at the sole discretion of Cisco, and Cisco will have no liability for delay in the delivery or failure to deliver any products or feature roadmap items that may be set forth in this document.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

The documentation set for this product strives to use bias-free language. For the purposes of this documentation set, bias-free is defined as language that does not imply discrimination based on age, disability, gender, racial identity, ethnic identity, sexual orientation, socioeconomic status, and intersectionality. Exceptions may be present in the documentation due to language that is hardcoded in the user interfaces of the product software, language used based on RFP documentation, or language that is used by a referenced third-party product.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com go trademarks](http://www.cisco.com/go/trademarks). Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2023 Cisco Systems, Inc. All rights reserved.

Contents

What's New.....	7
Product Overview.....	9
How Intersight Workload Optimizer Works.....	9
The Desired State.....	10
The Market and Virtual Currency.....	10
Risk Index.....	12
The Intersight Workload Optimizer Supply Chain.....	12
Intersight Workload Optimizer Targets.....	13
Resource Descriptions.....	15
Getting Started.....	19
The Overview.....	19
APPLICATION View.....	19
ON-PREM View.....	20
CLOUD View.....	21
Supply Chain of Entities.....	26
Working With a Scoped View.....	27
Scoping the Intersight Workload Optimizer Session.....	27
Overview Charts.....	30
Details View.....	31
Scope Policies.....	33
List of Entities.....	35
Navigating With the Supply Chain.....	36
Viewing Cluster Headroom.....	37
Intersight Workload Optimizer Actions.....	37
Actions by Entity Type.....	39
Action Types.....	45
Action Categories.....	48
Action Modes.....	49
Working With the Generated Actions.....	50
Pending Actions.....	52
Actions Tips and Best Practices.....	61
Working With Policies.....	61
Placement Policies.....	62
Automation Policies.....	66
Entity Types - Applications.....	79
Business Application.....	79

Business Application Policies.....	81
Business Transaction.....	81
Business Transaction Policies.....	83
Service.....	84
Service Policies.....	87
Application Component.....	89
Application Component Policies.....	91
Application Topology.....	93
Entity Types - Container Platform.....	96
Container.....	98
Container Policies.....	102
Container Spec.....	103
Container Spec Policies.....	105
Workload Controller.....	107
Workload Controller Policies.....	109
Container Pod.....	109
Container Pod Policies.....	114
Namespace.....	115
Container Cluster.....	118
Virtual Machine (Kubernetes Node).....	121
Kubernetes CPU Metrics.....	125
Entity Types - Cloud Infrastructure.....	128
Virtual Machine (Cloud).....	128
Cloud VM Uptime.....	134
Estimated On-demand Costs for Cloud VMs.....	137
Cloud VM Policies.....	144
App Component Spec.....	149
Virtual Machine Spec.....	150
Estimated On-demand Monthly Costs for Azure App Service Plans.....	154
Estimated On-demand Monthly Savings for Empty Azure App Service Plans.....	155
Virtual Machine Spec Policies.....	157
Database Server (Cloud).....	158
Estimated On-demand Costs for Cloud Database Servers.....	164
Cloud Database Server Policies.....	166
Volume (Cloud).....	169
Cloud Volume Policies.....	174
Database (Cloud).....	175
Estimated On-demand Costs for Cloud Databases.....	179
Cloud Database Policies.....	181

Zone.....	184
Region.....	186
Entity Types - On-prem Infrastructure.....	188
Virtual Machine (On-prem).....	189
On-prem VM Policies.....	193
vCPU Scaling Controls.....	198
Database Server (On-prem).....	209
On-prem Database Server Policies.....	210
Volume (On-prem).....	211
On-prem Volume Policies.....	212
Virtual Datacenter (Private Cloud).....	213
Provider Virtual Datacenters.....	213
Consumer Virtual Datacenters.....	215
Host.....	216
Host Policies.....	219
Chassis.....	222
Datacenter.....	223
Storage.....	224
vSAN Storage.....	226
Storage Policies.....	228
Logical Pool.....	232
Logical Pool Policies.....	234
Disk Array.....	234
Disk Array Policies.....	236
Storage Controller.....	238
Storage Controller Policies.....	239
IO Module.....	240
Switch.....	241
Switch Policies.....	241
Plans: Looking to the Future.....	243
Plan Management.....	244
Setting Up Plan Scenarios.....	245
Plan Scenarios and Types.....	250
Optimize Container Cluster Plan.....	253
Optimize Cloud Plan.....	265
Migrate to Cloud Plan.....	271
Buy VM Reservations Plan.....	280
Alleviate Pressure Plan.....	286
Custom Plan.....	289

Configuring Nightly Plans.....	299
Placement: Reserve Workload Resources.....	301
Creating a Reservation.....	303
Managing Reservations.....	305
Dashboards: Focused Views.....	306
Built-in Dashboards.....	307
On-Prem Executive Dashboard.....	307
Cloud Executive Dashboard.....	308
Container Platform Dashboard.....	310
Creating and Editing Custom Dashboards.....	310
Creating and Editing Chart Widgets.....	313
Chart Types.....	316
Actions and Impact Chart Types.....	316
Status and Details Chart Types.....	322
Cloud Chart Types.....	339
On-Prem Chart Types.....	355
Creating Groups.....	358
Working With Schedules.....	361
Creating Schedules.....	362
Templates: Resource Allocations for New Entities.....	365
Creating Templates.....	366
VM Template Settings.....	367
Host Template Settings.....	367
HCI Host Template Settings.....	369
Storage Template Settings.....	371
Billing and Costs.....	372
Reserved Instance Settings.....	373
Price Adjustments.....	373
Creating a Price Adjustment.....	374
AWS Price Override.....	376
AWS Billing Families.....	378
Azure Enterprise Agreements.....	379
Currency Settings.....	381



What's New

Published on February 27, 2023

This releases of Intersight Workload Optimizer includes improvements to existing features, and new features that improve your experience with the platform. We invite you to try them and see how they improve the capabilities of the platform.

■ Container Platform Management

– Node Reconfigure Actions

For Kubernetes environments, Intersight Workload Optimizer can now generate reconfigure actions to notify you of nodes that are currently in the `NotReady` state. After a node's condition is addressed, and the state changes to `Ready`, Intersight Workload Optimizer can begin to monitor the health of the node and the associated container pods.

For details, see [Node Reconfigure Actions \(on page 124\)](#).

– Unknown Container Pods Visibility

When a node is in the `NotReady` state, the associated container pods are in the `Unknown` state. These pods now display with a gray color in the user interface to help you differentiate them from other pods. In addition, you can now use the `Unknown` state as a container pod filter when you use Search or create groups.

– Static Pod Handling

Intersight Workload Optimizer now treats [static pods](#) as `DaemonSets` for the purpose of provisioning or suspending nodes. A static pod provides a node with a specific capability, and is therefore controlled by the node instead of the control plane.

- If a node to be provisioned requires a static pod, Intersight Workload Optimizer generates actions to provision the node and the corresponding static pod.
- If the only workload type left on a node is a static pod, Intersight Workload Optimizer generates actions to suspend the node and the corresponding static pod.

– Kubernetes Collector Updates

When you deploy the collector, be sure to set the following values:

- `iwoserverVersion`: For this installation, give the value, `8.7`.
- `collectorImage.tag`: For this installation, give the value, `8.7.5.1`.

For detailed instructions on deploying the collector, see "Installing the Kubernetes Collector" in the *Target Configuration Guide*.

■ On-prem Resource Management

– vCenter Guest Metrics Discovery

With the discovery of vCenter guest metrics now enabled by default, Intersight Workload Optimizer collects VM memory usage data at the OS level (via VMware tools), which is more accurate than the active memory data reported by the hypervisor. Customers may notice more frequent resize up vMem actions since the vMem usage values reported by the OS are almost always higher than those reported by the hypervisor.

■ Cloud Resource Management

– Azure App Service Optimization

Intersight Workload Optimizer can now recommend actions to scale your provisioned [Azure App Service](#) plans to optimize application performance, or delete empty plans to reduce your cloud expenditure. For scale actions, Intersight Workload Optimizer uses percentile calculations to measure application demand more accurately, and then picks the instance type that can meet demand at the lowest possible cost.

For details, see "Support for Azure App Service" in the *Target Configuration Guide*.

– Newly Supported Azure Instance Tiers

Intersight Workload Optimizer now supports Azure Ebdsv5 and Ebsv5 instance tiers. VMs with these instance tiers are now recognized and managed correctly.



Product Overview

Thank you for choosing Cisco Intersight Workload Optimizer, the premier solution for Application Resource Management (ARM) of cloud and virtual environments.

Application Resource Management is a top-down, application-driven approach that continuously analyzes applications' resource needs and generates fully automatable actions to ensure applications always get what they need to perform. It runs 24/7/365 and scales with the largest, most complex environments.

To perform Application Resource Management, Intersight Workload Optimizer represents your environment holistically as a *supply chain* of resource *buyers* and *sellers*, all working together to meet application demand. By empowering buyers (VMs, instances, containers, and services) with a budget to seek the resources that applications need to perform, and sellers to price their available resources (CPU, memory, storage, network) based on utilization in real-time, Intersight Workload Optimizer keeps your environment within the *desired state* – operating conditions that achieve the following conflicting goals at the same time:

- Assured application performance
 - Prevent bottlenecks, upsize containers/VMs, prioritize workload, and reduce storage latency.
- Efficient use of resources
 - Consolidate workloads to reduce infrastructure usage to the minimum, downsize containers, prevent sprawl, and use the most economical cloud offerings.

Intersight Workload Optimizer is a containerized, microservices architected application running in a Kubernetes environment (or within a VM) on your network or a public cloud VPC. You then assign services running on your network to be Intersight Workload Optimizer *targets*. Intersight Workload Optimizer discovers the entities (physical devices, virtual components and software components) that each target manages, and then performs analysis, anticipates risks to performance or efficiency, and recommends actions you can take to avoid problems before they occur.

How Intersight Workload Optimizer Works

To keep your infrastructure in the desired state, Intersight Workload Optimizer performs Application Resource Management. This is an ongoing process that solves the problem of assuring application performance while simultaneously achieving the most efficient use of resources and respecting environment constraints to comply to business rules.

This is not a simple problem to solve. Application Resource Management has to consider many different resources and how they are used in relation to each other, and numerous control points for each resource. As you grow your infrastructure, the factors for each decision increase exponentially. On top of that, the environment is constantly changing – to stay in the desired state, you are constantly trying to hit a moving target.

To perform Application Resource Management, Intersight Workload Optimizer models the environment as a *market* made up of *buyers* and *sellers*. These buyers and sellers make up a *supply chain* that represents tiers of entities in your inventory. This supply chain represents the flow of resources from the datacenter, through the physical tiers of your environment, into the virtual tier and out to the cloud. By managing relationships between these buyers and sellers, Intersight Workload Optimizer provides closed-loop management of resources, from the datacenter, through to the application.


See [Supply Chain of Entities \(on page 26\)](#) for a visual layout of the buyer and seller relationships.

Intersight Workload Optimizer uses *Virtual Currency* to give a budget to buyers and assign cost to resources. This virtual currency assigns value across all tiers of your environment, making it possible to compare the cost of application transactions with the cost of space on a disk or physical space in a data center.

The price that a seller charges for a resource changes according to the seller's supply. As demand increases, prices increase. As prices change, buyers and sellers react. Buyers are free to look for other sellers that offer a better price, and sellers can duplicate themselves (open new storefronts) to meet increasing demand. Intersight Workload Optimizer uses its *Economic Scheduling Engine* to analyze the market and make these decisions. The effect is an invisible hand that dynamically guides your IT infrastructure to the optimal use of resources.

To get the most out of Intersight Workload Optimizer, you should understand how it models your environment, the kind of analysis it performs, and the desired state it works to achieve.

The Desired State

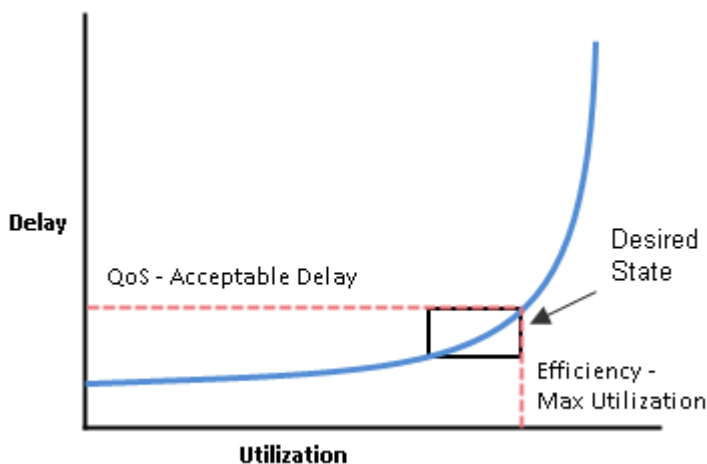

The goal of Application Resource Management is to assure performance while maintaining efficient use of resources. When performance and efficiency are both maintained, the environment is in the desired state. You can measure performance as a function of delay, where zero delay gives the ideal QoS for a given service. Efficient use of resources is a function of utilization where 100% utilization of a resource is the ideal for the most efficient utilization.

If you plot delay and utilization, the result is a curve that shows a correlation between utilization and delay. Up to a point, as you increase utilization, the increase in delay is slight. There comes a point on the curve where a slight increase in utilization results in an unacceptable increase in delay. On the other hand, there is a point in the curve where a reduction in utilization doesn't yield a meaningful increase in QoS. The desired state lies within these points on the curve.

You could set a threshold to post an alert whenever the upper limit is crossed. In that case, you would never react to a problem until delay has already become unacceptable. To avoid that late reaction you could set the threshold to post an alert before the upper limit is crossed. In that case, you guarantee QoS at the cost of over-provisioning – you increase operating costs and never achieve efficient utilization.

Instead of responding *after* a threshold is crossed, Intersight Workload Optimizer analyzes the operating conditions and constantly recommends actions to keep the entire environment within the desired state. If you execute these actions (or let Intersight Workload Optimizer execute them for you), the environment will maintain operating conditions that assure performance for your customers, while ensuring the lowest possible cost thanks to efficient utilization of your resources.

The Market and Virtual Currency

To perform Application Resource Management, Intersight Workload Optimizer models the environment as a market, and uses market analysis to manage resource supply and demand. For example, bottlenecks form when local workload demand exceeds the local capacity – in other words, when demand exceeds supply. By modeling the environment as a market, Intersight Workload Optimizer can use economic solutions to efficiently redistribute the demand or increase the supply.

Intersight Workload Optimizer uses two sets of abstraction to model the environment:


- Modeling the physical and virtual IT stack as a service supply chain

The supply chain models your environment as a set of managed entities. These include applications, VMs, hosts, storage, containers, availability zones (cloud), and data centers. Every entity is a buyer, a seller, or both. A host machine buys physical space, power, and cooling from a data center. The host sells resources such as CPU cycles and memory to VMs. In turn, VMs buy host services, and then sell their resources (VMem and VCPU) to containers, which then sell resources to applications.

See [Supply Chain of Entities \(on page 26\)](#) for a visual layout of the buyer and seller relationships.

- Using virtual currency to represent delay or QoS degradation, and to manage the supply and demand of services along the modeled supply chain

The system uses virtual currency to value these buy/sell transactions. Each managed entity has a running budget – the entity adds to its budget by providing resources to consumers, and the entity draws from its budget to pay for the resources it consumes. The price of a resource is driven by its utilization – the more demand for a resource, the higher its price.

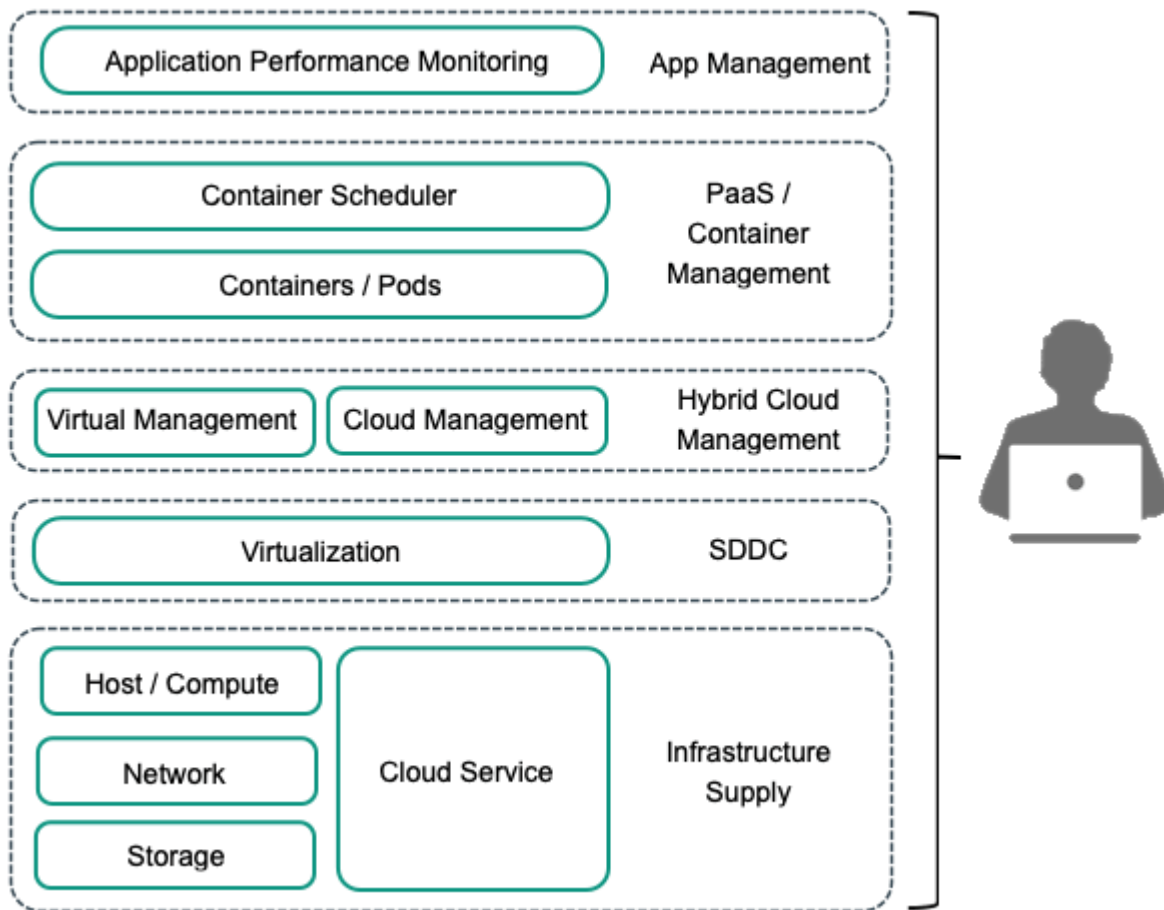

These abstractions open the whole spectrum of the environment to a single mode of analysis – market analysis. Resources and services can be priced to reflect changes in supply and demand, and pricing can drive resource allocation decisions. For example, a bottleneck (excess demand over supply) results in rising prices for the given resource. Applications competing for the same resource can lower their costs by shifting their workloads to other resource suppliers. As a result, utilization for that resource evens out across the environment and the bottleneck is resolved.

Risk Index

Intersight Workload Optimizer tracks prices for resources in terms of the *Risk Index*. The higher this index for a resource, the more heavily the resource is utilized, the greater the delay for consumers of that resource, and the greater the risk to your QoS. Intersight Workload Optimizer constantly works to keep the Risk Index within acceptable bounds.

You can think of Risk Index as the cost for a resource – Intersight Workload Optimizer works to keep the cost at a competitive level. This is not simply a matter of responding to threshold conditions. Intersight Workload Optimizer analyzes the full range of buyer/seller relationships, and each buyer constantly seeks out the most economical transaction that is available.

This last point is crucial to understanding Intersight Workload Optimizer. The virtual environment is dynamic, with constant changes to workload that correspond with the varying requests your customers make of your applications and services. By examining each buyer/seller relationship, Intersight Workload Optimizer arrives at the optimal workload distribution for the current state of the environment. In this way, it constantly drives your environment toward the desired state.

NOTE:

The default Intersight Workload Optimizer configuration is ready to use in many environments. However, you can fine-tune the configuration to address special services and resources in your environment. Intersight Workload Optimizer provides a full range of policies that you can set to control how the software manages specific groups of entities. Before you make such policy changes, you should understand default Intersight Workload Optimizer operation. For more information about policies, see [Working With Policies \(on page 61\)](#).

The Intersight Workload Optimizer Supply Chain

Intersight Workload Optimizer models your environment as a market of buyers and sellers. It discovers different types of entities in your environment via the targets you have added, and then maps these entities to the supply chain to manage the workloads they support. For example, for a hypervisor target, Intersight Workload Optimizer discovers VMs, the hosts and datastores that provide resources to the VMs, and the applications that use VM resources. For a Kubernetes target, it discovers services, namespaces, containers, container pods, and nodes. The entities in your environment form a chain of supply and demand where some entities provide resources while others consume the supplied resources. Intersight Workload Optimizer *stitches* these entities together, for example, by connecting the discovered Kubernetes nodes with the discovered VMs in vCenter.

For information about specific members of the supply chain, see [Supply Chain of Entities \(on page 26\)](#).

Supply Chain Terminology

Cisco introduces specific terms to express IT resources and utilization in terms of supply and demand. These terms are largely intuitive, but you should understand how they relate to the issues and activities that are common for IT management.

Term:	Definition:
Commodity	<p>The basic building block of Intersight Workload Optimizer supply and demand. All the resources that Intersight Workload Optimizer monitors are commodities. For example, the CPU capacity or memory that a host can provide are commodities. Intersight Workload Optimizer can also represent clusters and segments as commodities.</p> <p>When the user interface shows <i>commodities</i>, it's showing the resources a service provides. When the interface shows <i>commodities bought</i>, it's showing what that service consumes.</p>
Composed Of	<p>The resources or commodities that make up the given service. For example, in the user interface you might see that a certain VM is <i>composed of</i> commodities such as one or more physical CPUs, an Ethernet interface, and physical memory.</p> <p>Contrast <i>Composed Of</i> with <i>Consumes</i>, where consumption refers to the commodities the VM has bought. Also contrast <i>Composed Of</i> with the commodities a service offers for sale. A host might include four CPUs in its composition, but it offers CPU Cycles as a single commodity.</p>
Consumes	<p>The services and commodities a service has bought. A service <i>consumes</i> other commodities. For example, a VM consumes the commodities offered by a host, and an application consumes commodities from one or more VMs. In the user interface you can explore the services that provide the commodities the current service consumes.</p>
Entity	<p>A buyer or seller in the market. For example, a VM or a datastore is an entity.</p>

Term:	Definition:
Environment	The totality of data center, network, host, storage, VM, and application resources that you are monitoring.
Inventory	The list of all entities in your environment.
Risk Index	<p>A measure of the risk to Quality of Service (QoS) that a consumer will experience. The higher the Risk Index on a provider, the more risk to QoS for any consumer of that provider's services.</p> <p>For example, a host provides resources to one or more VMs. The higher the Risk Index on the provider, the more likely that the VMs will experience QoS degradation.</p> <p>In most cases, for optimal operation the Risk Index on a provider should not go into double digits.</p>

Intersight Workload Optimizer Targets

The following Intersight Workload Optimizer targets are available for claiming in Intersight:

Category	Target Name	Minimum License Tier Required for Intersight Workload Optimizer	Intersight Assist Required
Cloud	Amazon Web Services	IWO Essentials	No
	Amazon Web Services Billing	IWO Essentials	No
	Google Cloud Platform	IWO Essentials	No
	Google Cloud Platform Billing	IWO Essentials	No
	Microsoft Azure Service Principal	IWO Essentials	No
	Microsoft Azure Billing	IWO Essentials	No
	Microsoft Azure Enterprise Agreement	IWO Essentials	No
Cloud Native	Kubernetes (IKS, CCP, OpenShift, EKS, AKS, GKE) Deployed on-premises	IWO Advantage	Yes
	Kubernetes (OpenShift, EKS, AKS, GKE) SaaS or deployed on public cloud	IWO Advantage	No
Applications and Databases	Apache Tomcat 7.x, 8.x, and 8.5.x Deployed on-premises	IWO Advantage	Yes
	IBM WebSphere Application Server 8.5+ Deployed on-premises	IWO Advantage	Yes
	JVM 6.0+ Deployed on-premises	IWO Advantage	Yes

Category	Target Name	Minimum License Tier Required for Intersight Workload Optimizer	Intersight Assist Required
	Microsoft SQL Server 2012, 2014, 2016, 2017, and 2019 Deployed on-premises	IWO Advantage	Yes
	MySQL Server 5.6.x and 5.7.x Deployed on-premises	IWO Advantage	Yes
	Oracle 11g R2, 12c, 18c, and 19c Deployed on-premises	IWO Advantage	Yes
Compute / Fabric	Cisco UCS Server (Standalone)	IWO Essentials	No
	Cisco UCS Domain (UCSM Managed)	IWO Essentials	No
	Cisco UCS Domain (Intersight Managed)	IWO Essentials	No
	HPE OneView 3.00.04	IWO Essentials	No
Guest OS Process / APM (Application Performance Management)	New Relic SaaS or deployed on public cloud	IWO Premier	No
	Cisco AppDynamics 4.1+ Deployed on-premises	IWO Advantage	Yes
	Cisco AppDynamics SaaS or deployed on public cloud	IWO Advantage	No
	Dynatrace 1.1+ Deployed on-premises	IWO Premier	Yes
	Dynatrace SaaS or deployed on public cloud	IWO Premier	No
Hyperconverged	Cisco Hyperflex 3.5	IWO Essentials	No
	Nutanix Acropolis	IWO Essentials	Yes
Hypervisor	Microsoft Hyper-V 2008 R2, 2012/2012 R2, 2016, 2019	IWO Essentials	Yes
	VMware vCenter 6.0, 6.5, 6.7, and 7.0+	IWO Essentials	Yes
Change Management	ServiceNow	IWO Advantage	No
Storage	HPE 3PAR	IWO Essentials	Yes
	Dell EMC SC Series	IWO Essentials	Yes

Category	Target Name	Minimum License Tier Required for Intersight Workload Optimizer	Intersight Assist Required
	EMC VMAX using SMI-S 8.1+	IWO Essentials	Yes
	EMC ScaleIO 2.x and 3.x	IWO Essentials	Yes
	EMC VPLEX	IWO Essentials	Yes
	NetApp ONTAP 8.0+	IWO Essentials	Yes
	Pure Storage FlashArray	IWO Essentials	Yes
	EMC XtremIO XMS 4.0+	IWO Essentials	Yes

Resource Descriptions

To perform intelligent workload balancing, Intersight Workload Optimizer collects raw data from its target servers – hypervisors, cloud management stacks, public cloud accounts, etc. Intersight Workload Optimizer polls its targets at 10-minute intervals to collect the latest data samples. It then uses these 10-minute data points for analysis and to display data in the GUI.

The way Intersight Workload Optimizer collects host memory data from vCenter Server illustrates how this works. vCenter Server collects peak metrics from its managed VMs at 20-second intervals. Every ten minutes Intersight Workload Optimizer polls vCenter Server to collect its last round of data samples (30 samples in 10 minutes). To track a VM's utilization of host memory, Intersight Workload Optimizer requests *memory.active* data samples from vCenter. From that polling, Intersight Workload Optimizer can track:

- **Peak Memory Utilization** – Intersight Workload Optimizer uses the greatest value in each polling sample. This gives the highest percentage of active memory utilization for the selected VM (or group of VMs), calculated over the selected time period. For a maximum value, Intersight Workload Optimizer uses the highest observed active memory value in the data sample.
- **Average Memory Utilization** – Intersight Workload Optimizer averages all the values in each polling sample.

The following table lists the metrics Intersight Workload Optimizer collects, and includes details about how they are collected or measured. When the Intersight Workload Optimizer user interface plots charts of clusters or groups of devices, these charts show the average of the percentage of allocated resources that are used.

Resource:	Description:
1- 2- 4-CPU Rdy	Wait time in the ready queue on the host, measured in ms. Intersight Workload Optimizer monitors 1-CPU, 2-CPU, 4-CPU, up to 32-CPU ready queues on hosts. Charts show 1 - 4 CPU values. The charts show the percentage allocated ready queue capacity that is in use on the host. For host charts, this is a measure of the total ready queue wait time for all the VMs running on that host.
Balloon	Ballooning capacity on the PM, measured in KBytes. This capacity is the greater of: <ul style="list-style-type: none"> ■ 65% of the VMem configured for all powered-on VMs that the PM hosts ■ The physical memory capacity of the PM Charts show the percentage of the PM's ballooning capacity that is in use.
Buffer	For network environments that support buffered switch ports (Arista networks), this resource measures utilization of a port buffer. For example, if a host connects to the network through port 1 on a switch, and that port has enough traffic to cause packet buffering, this resource will show utilization.
Connection	The connections in use, as a percentage of the maximum connections allowed on the database. Database configuration determines the capacity for this resource.

Resource:	Description:
Cooling	Allocated cooling indicates the highest acceptable running temperature for a physical device, such as a chassis in a compute fabric.
CPU	<p>Host CPU capacity, measured in MHz. This shows what percentage of CPU cycles are devoted to processing instructions.</p> <ul style="list-style-type: none"> ■ Host charts show the percentage of the host's CPU capacity that is in use. ■ VM charts show the percentage of the host's CPU capacity that is consumed by the given VM.
DB Memory	<p>DB Memory (or DBMem) is the measure of memory used by a database, expressed as a percentage of the allocated capacity.</p> <p>Intersight Workload Optimizer collects DB Memory data from Databases and APM Targets. For each target you add, Intersight Workload Optimizer discovers a specific set of entities, which can include self-hosted Database Servers. When you set the scope to a Database Server, the data that Intersight Workload Optimizer collected displays in the DB Memory chart.</p> <p>For details, see DB Memory Chart (on page 327).</p>
Flow0 – InProvider Flow	For measuring network flow, the flow that is within a single provider – For example, the network flow between VMs that are hosted by the same physical machine. This measures network flow between consumers that are on the same set of closely connected providers. Charts show the percentage of capacity that is utilized. Note that Intersight Workload Optimizer assumes an unlimited supply of InProvider Flow because this flow does not go across the physical network.
Flow1 – InDPOD Flow	For measuring network flow, the flow that is local to the given DPOD. This measures network flow between consumers that are on the same set of closely connected providers. Charts show the percentage of capacity that is utilized.
Flow2 – CrossDPOD Flow	For measuring network flow, the flow that is between different DPODs. This measures network flow between consumers that are on different sets of closely connected providers. Charts show the percentage of capacity that is utilized.
Heap	<p>Heap is the portion of memory allocated to individual applications.</p> <p>Intersight Workload Optimizer collects Heap data from Applications and APM targets. For each target you add, Intersight Workload Optimizer discovers a specific set of entities, which can include Application Components. When you set the scope to an Application Component, the data that Intersight Workload Optimizer collected displays in the Heap chart.</p> <p>For details, see Heap Chart (on page 328).</p>
HotStorage	For Nutanix platforms, the storage capacity on the server-attached flash.
IO	<p>Data rate through the host's IO adapter, measured in KBytes/sec.</p> <ul style="list-style-type: none"> ■ Datacenter charts show the average percentage of the host IO capacity that is in use, for all the hosts in the datacenter. ■ Host charts show the percentage of the host's total IO capacity that is in use.
IOPS	Storage access operations per second. Charts show the percentage of allocated IOPS capacity that is used on a datastore.
Latency	Allocated capacity for latency on a datastore. This measures the latency experienced by all VMs and hosts that access the datastore. Charts show the percentage of allocated latency that is in use on the datastore.
Mem	<p>Host memory, measured in Kbytes.</p> <ul style="list-style-type: none"> ■ Host charts show the percentage of the host's memory that is in use. ■ VM charts show the percentage of the host's memory that is consumed by the given VM.

Resource:	Description:
NET	<p>Data rate through the host's Network adapter, measured in Kbytes/sec.</p> <ul style="list-style-type: none"> ■ Datacenter charts show the average percentage of the host NET capacity that is used for all the hosts in the datacenter. ■ Host charts show the percentage of the host's total NET capacity that is in use.
Normalization factor (AWS only)	<p>Normalization factor is a measure of RI capacity that you can use to compare or combine the capacity for different instance families.</p> <p>Intersight Workload Optimizer measures RI coverage in terms of normalization factors. It compares the number of RIs calculated as normalization factors that cover workload capacity with the total number of normalization factors for a given Intersight Workload Optimizer scope. Each workload is assigned normalized units depending on its instance type.</p> <p>AWS normalization factor and Azure reservation ratio are equivalent concepts.</p>
Power	<p>A measure of the power that is consumed by a physical device.</p>
Reservation ratio (Azure only)	<p>Ratio refers to the number of Azure reservation units that cover workload capacity compared to the total number of reservation units for a given Intersight Workload Optimizer scope. Each workload is assigned reservation units based on its instance type.</p> <p>Reservation ratio information appears in the tooltips of cloud discount charts. Information about the Azure instance types and their reservation workloads is provided in the Discount Inventory chart.</p> <p>Azure reservation ratio and AWS normalization factor are equivalent concepts.</p>
Response Time	<p>Response Time is the elapsed time between a request and the response to that request. Response Time is typically measured in seconds (s) or milliseconds (ms).</p> <p>Intersight Workload Optimizer collects Response Time data from Applications and Databases Targets. For each target you add, Intersight Workload Optimizer discovers a specific set of entities, which can include Business Applications, Business Transactions, Services, Application Components, and self-hosted Database Servers. When you set the scope to any of these entities, the data that Intersight Workload Optimizer collected displays in the Response Time chart.</p> <p>For details, see Response Time Chart (on page 329).</p>
Swap	<p>The rate of memory swapping to disk, in bytes per second. The default capacity is 5,000,000 Byte/sec.</p>
Threads	<p>Allocated thread capacity. Charts show the percentage of thread capacity that is consumed by an Application Component.</p>
TransactionLog	<p>The disk space devoted to transaction logging for a database.</p>
Transactions	<p>Transaction is a value that represents the per-second utilization of the transactions allocated to a given entity.</p> <p>Intersight Workload Optimizer collects Transaction data from Applications and Databases Targets. For each target you add, Intersight Workload Optimizer discovers a specific set of entities, which can include Business Applications, Business Transactions, Services, Application Components, and self-hosted Database Servers. When you set the scope to any of these entities, the data that Intersight Workload Optimizer collected displays in the Transaction chart.</p> <p>For details, see Transaction Chart (on page 332).</p>
Risk Index	<p>A measure of the impact on Quality of Service (QoS) that a consumer will experience. The higher the Risk Index on a provider, the more risk to QoS for any consumer of that provider's services.</p> <p>For all the resources that impact performance or risk, charts show the Risk Index for the most utilized resource of a given entity. For example, if a host has a Risk Index of 6 for MEM and 12 for CPU, the chart will show the higher value.</p>

Resource:	Description:
VCPU	The allocated CPU capacity, measured in MHz. Charts show the percentage of VCPU cycles that are devoted to processing instructions.
VMem	<p>The allocated memory capacity, measured in Kbytes. Charts show the percentage of VMem that is in use.</p> <p>Note that percentages of allocated VMem are measured against whichever is the less of: The VMem limit (if set) or the allocated VMem capacity. This is also true in reports and recommended actions. For example, assume a VM with allocated VMem of 8 GB, but a limit of 4 GB. In this case, the percentage in a chart shows the percentage utilized of 4GB.</p>
VStorage	The allocated virtual storage capacity, measured in Kbytes. Charts show the percentage of storage that is in use.



Getting Started

To get started with the platform, open a web browser to your Intersight Workload Optimizer installation. The Intersight Workload Optimizer platform serves the user interface to your browser, where you can log in and get started managing your environment. In this way, you can access the unique capabilities of Intersight Workload Optimizer from any internet connection.


The Overview

In Intersight Workload Optimizer, navigate to **Workload Optimization > Overview**. From there you can:

- Choose a View to see overviews of your environment:
 - APPLICATION – See your environment in the context of your [Business Applications \(on page 79\)](#).
 - ON-PREM – See details for the on-prem environment. Notice that the Supply Chain excludes cloud entities and only shows the entities that are on-prem.
 - CLOUD – See details for the cloud environment, including pending actions, a listing of your cloud accounts by cost, the locations of cloud datacenters that you are using, estimated costs, and other cost-related information.
- Use the Supply Chain Navigator to inspect lists of entities
Click an entity tier in the Supply Chain to see a list of those entities. For example, click Virtual Machine to see a list of all the VMs in your environment.
- Navigate to other Intersight Workload Optimizer pages, including:
 - Search – Set the session scope to drill down to details about your environment
 - Plan – Run what-if scenarios
 - Place – Use Intersight Workload Optimizer to calculate the best placement for workloads, and execute the placement at the time you specify
 - Dashboards – Set up custom views with charts that focus on specifics in your environment
 - Settings – Configure Intersight Workload Optimizer to set up business rules and policies, define groups, and perform other administrative tasks

APPLICATION View

The **APPLICATION** view presents your environment in the context of your [Business Applications \(on page 79\)](#). See the overall health of your applications, examine any performance and compliance risks, and execute the actions that Intersight Workload Optimizer recommends to address these risks.

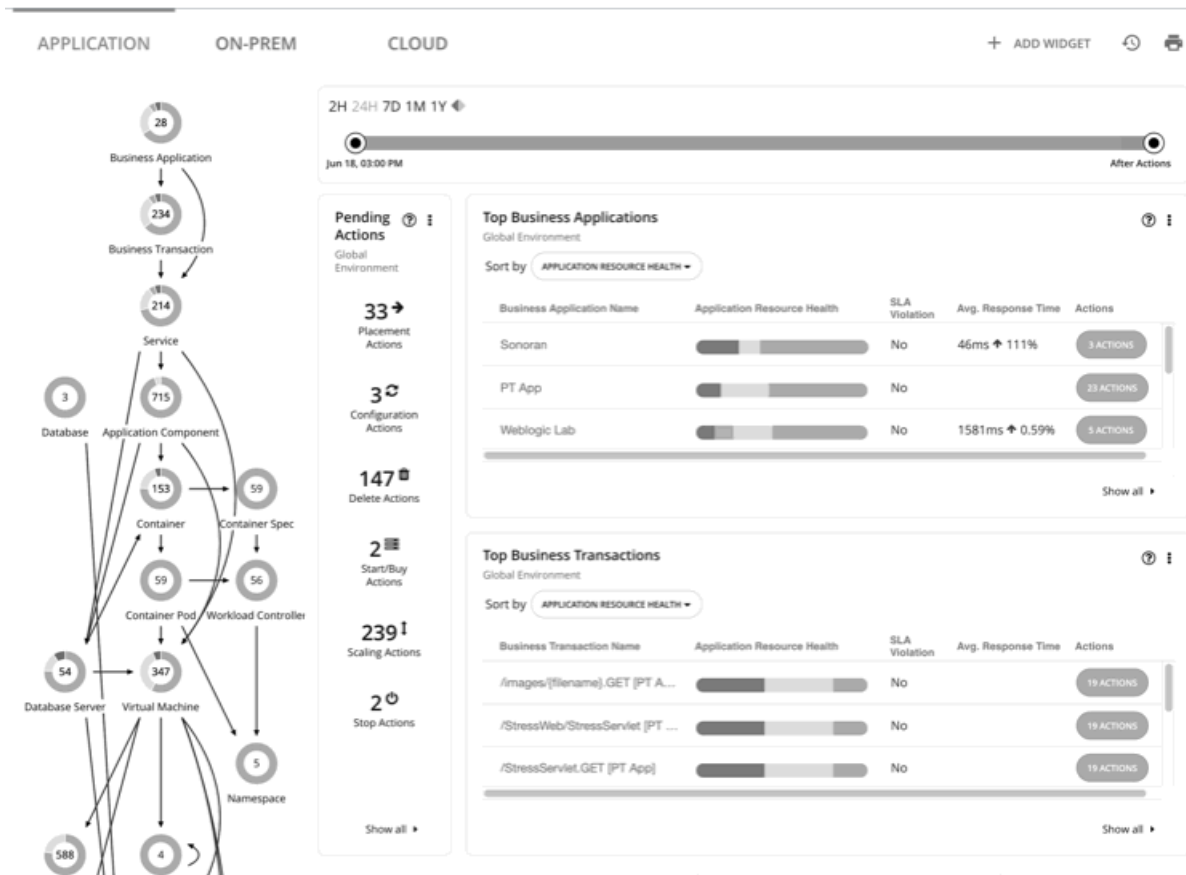


This view also shows the [Business Transactions \(on page 81\)](#) and [Services \(on page 84\)](#) that make up your Business Applications. You can see finer details and set SLOs at these levels of the application model.

NOTE:

If certain application entities do not stitch into the supply chain infrastructure for some reason, Intersight Workload Optimizer displays them in both the ON-PREM and the CLOUD views. Once Intersight Workload Optimizer can stitch them into the infrastructure, it classifies them according to the class of the infrastructure and displays them in the correct views.

ON-PREM View

When you set your session to the Global Scope, you can then select the **ON-PREM** view. This shows an overview of your on-prem environment. If you don't have any workload on the public cloud, then you should use this as your starting point for a Intersight Workload Optimizer session. If you have a hybrid environment (on-prem and on the public cloud), then you can refer to this view to see a detailed on-prem overview.

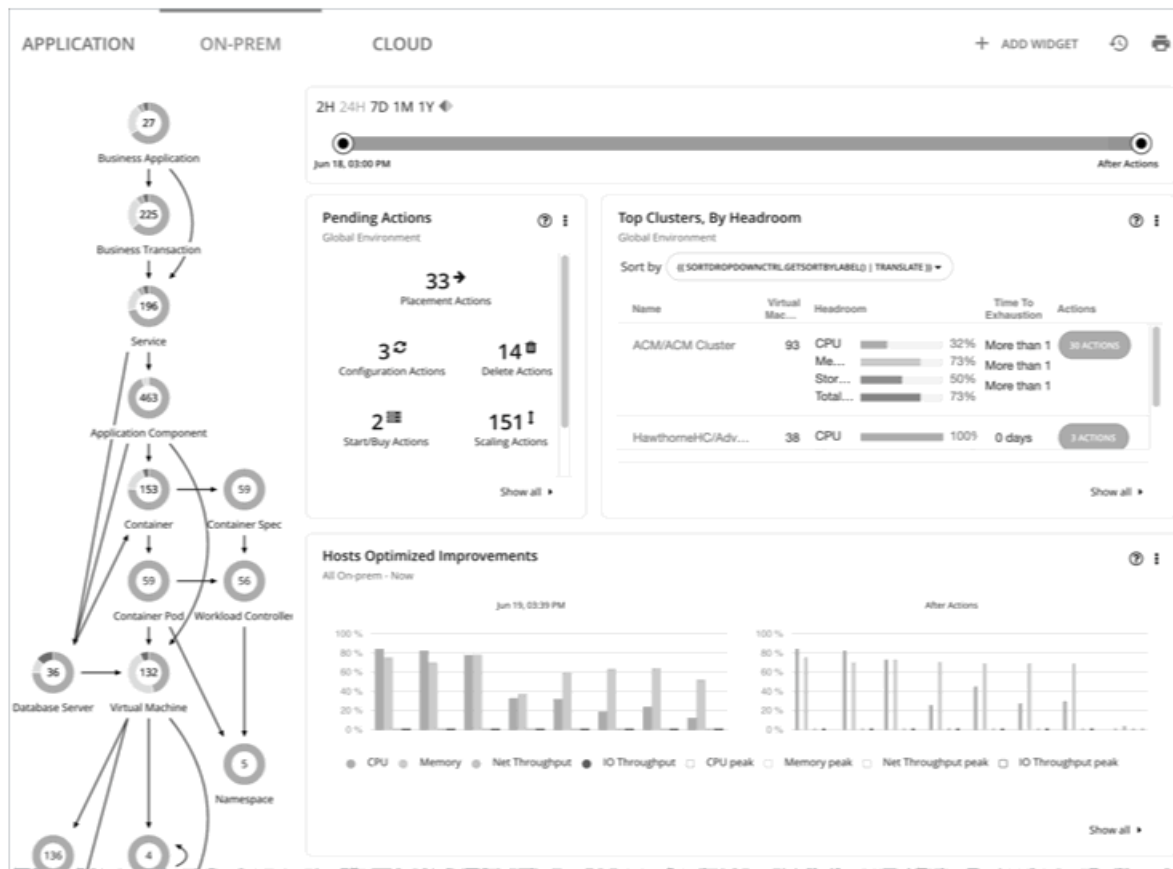


The Supply Chain shows all the on-prem entities in your environment. The charts show details about your environment, including:

- **Overviews of pending actions**
When appropriate, the overview includes estimated one-time savings or costs associated with the actions.
- **Top Cluster utilization**
See a list of the most utilized clusters. The chart shows these clusters, along with a count of actions for each. To drill down into the cluster details, click the cluster name. To see and execute the specific actions, click the **ACTIONS** button for that cluster. To see all the clusters in your environment, click **SHOW ALL**.
- **Optimized Improvements**
Compare current resource utilization with the utilization you would see if you choose to execute all the pending actions.
- **Action history**
You can see a history of all actions that have been recommended and executed, or of just the actions that have been accepted and executed.

CLOUD View

When you set your session to the Global Scope, you can then select the **CLOUD** view. This shows an overview of your cloud environment. If all your workload is on the public cloud, then you should use this as your starting point for a Intersight Workload Optimizer session. If you have a hybrid environment (on-prem and on the public cloud), then you can refer to this view to see a detailed cloud overview.

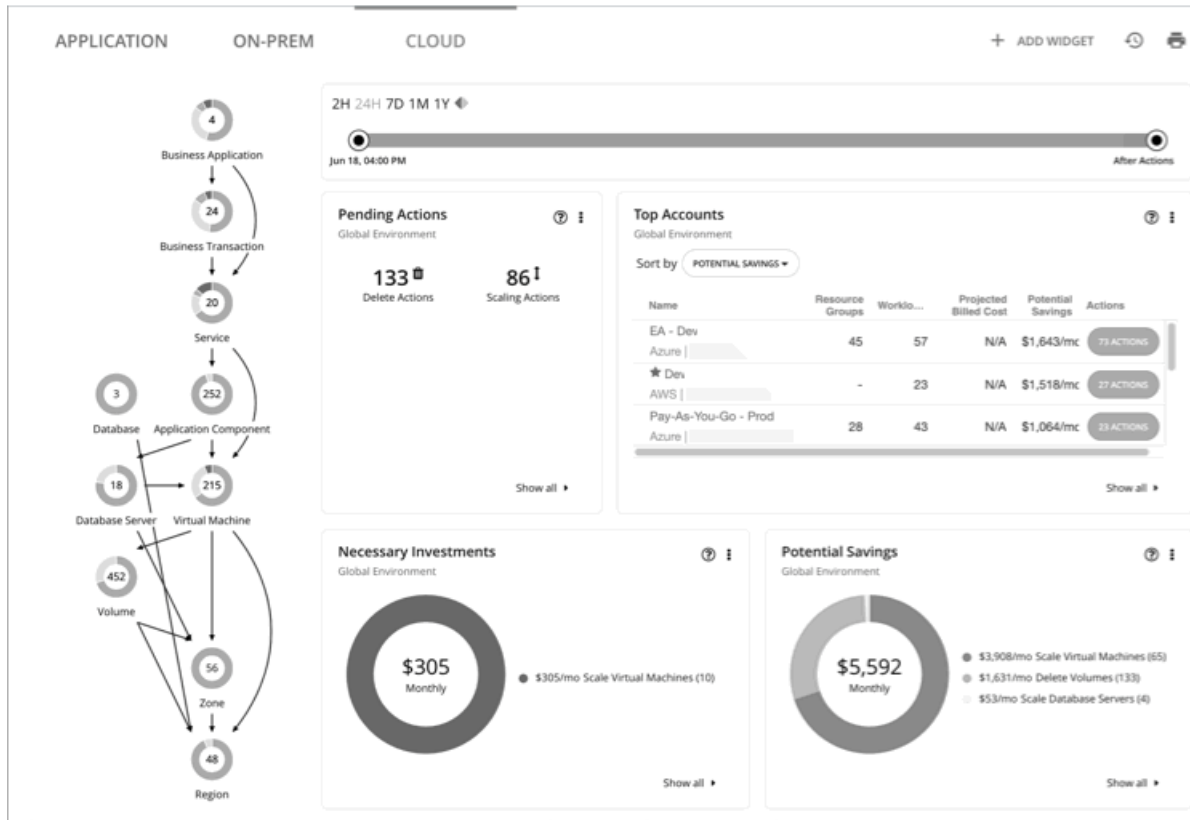

To view cloud cost information, you must have one or more public cloud targets set up in your Intersight Workload Optimizer installation. For information about setting up public cloud targets, see "Cloud Targets" in the *Target Configuration Guide*.

In addition, to view full cost information in AWS, you must have created a Cost and Usage report in your AWS account and you must store it in an S3 bucket.

In this view, the Supply Chain shows all the cloud entities in your environment. The charts show details about your cloud environment, including:

- **Overviews of pending actions**
The overview includes the estimated monthly savings or cost associated with those actions.
- **Top Accounts utilization**
See a list of the most utilized public cloud accounts. The chart shows these accounts, along with an estimate of the monthly cost for each. To see all the cloud accounts in your environment, click **SHOW ALL**.
- **Necessary Investments and Potential Savings**
For the current set of pending actions, these charts show the impact in dollar value. Necessary Investments are from actions to provision more workloads or to resize workloads up. Potential Savings are from actions to resize down, or to purchase discounts and put them into active use.
- **Charts that show your current discounts.** For details, see [Discounts \(on page 25\)](#).
- **Billed Cost by Service**
This chart shows costs over time for each cloud service that you use in your cloud accounts. For example, you can see the cost for AWS CloudWatch, compared to the cost for AWS S3 storage.

Tracking Cloud Cost

Intersight Workload Optimizer tracks your cloud spend based on the cost information it discovers from targets (for example, accounts, billing reports, and on-demand or discount costs), [price adjustments \(on page 373\)](#), and rate cards.

Cost for Services

Intersight Workload Optimizer uses the billing reports from your cloud service providers, as they are associated with your cloud targets. Intersight Workload Optimizer parses these reports to get cost breakdowns by service, service provider, Azure Resource Group, and cloud account. You can see cost data in charts such as:

- Cloud Estimated Cost
- Cost Breakdown by Cloud Accounts, Component, or Service Provider
- Expenses

Workload Expenses

Workloads are the VMs running in your environment, or other hosted processes such as database servers and containers. Intersight Workload Optimizer tracks the following expenses for your workloads:

- Compute

For compute expenses Intersight Workload Optimizer uses hourly expense per template as specified in the associated public cloud account.
- Storage

Intersight Workload Optimizer discovers the storage tier that supports a given workload, and uses the tier pricing to calculate storage cost.
- License

For AWS environments, Intersight Workload Optimizer can calculate OS costs. To calculate the OS cost for a VM, Intersight Workload Optimizer subtracts the template cost from the published workload cost. It assumes the difference is the license cost for that workload. If the OS is open source, then there will be no difference, and license cost is zero.

For Azure environments, Intersight Workload Optimizer can track OS costs for existing VMs. For actions to purchase reservations, Intersight Workload Optimizer does not include the OS cost. For more information about Azure reservations, see [Azure Enterprise Agreements \(on page 379\)](#).
- IP

For some workloads, you might use IP services that incur a cost. For example, your cloud provider might charge to grant a static IP to a VM. On AWS environments Intersight Workload Optimizer can include that cost in its calculation and analysis.

Intersight Workload Optimizer uses this cost information when making VM resize and placement decisions. You can see this information in Expenses charts.

Costs for Dedicated Tenancy on AWS

When you create VMs on AWS, you can specify their tenancy. When you specify Dedicated Tenancy (DT), the VMs you create are Amazon EC2 instances running on hardware that is dedicated to a single customer. To understand DT in the context of Intersight Workload Optimizer, you should consider:

- For AWS, the Intersight Workload Optimizer supply chain shows an Availability Zone as a Host. The supply chain does not indicate whether certain VMs have tenancy dedicated to specific resources in the given availability zone. Also, Intersight Workload Optimizer does not discover or show the costs for dedicated hosting of your workloads.
- Pricing for DT workloads is different than pricing for Shared Tenancy. Intersight Workload Optimizer does not discover that difference, and uses Shared Tenancy cost for the DT workloads. In action descriptions, the listed savings or investments will be based on Shared Tenancy costs.
- Intersight Workload Optimizer discovers the true costs of RIs for DT workloads. However, because the on-demand VM costs are based on Shared Tenancy, Intersight Workload Optimizer can overstate the savings you would get for purchasing and using RI capacity. In most cases, recommendations to purchase RIs will be correct. However, the time to achieve ROI could take longer than action descriptions and charts indicate.
- Some instance types that are valid for Shared Tenancy are not valid for DT. To see which instance types are valid for your DT VMs, consult the AWS documentation or your AWS representative.
- Under some circumstances Intersight Workload Optimizer can recommend changing a workload to a valid instance type for the tenant, even though the current type is already valid. This can happen when the instance type is not included in the Offer File for the tenancy. For example, assume the t3a template family does not support dedicated tenancy. However, assume that the user created a t3a instance with dedicated tenancy in the EC2 console. In that case, Intersight Workload Optimizer will see this as a misconfiguration and recommend changing to a different instance type.

To address these issues, you can create groups that set a scope to your DT workloads. For example, you can use naming conventions, tagging, or other means to identify your DT workloads. Then you can create dynamic groups based on those indicators. With those groups, you can create policies and dashboards that correspond to the differences you see in your DT environment. Use this approach to address issues for:

- **Available Instance Types**

To resize a workload, Intersight Workload Optimizer generates an action to change that workload to a different instance type. Because Intersight Workload Optimizer does not discover the difference between instance types that are valid for DT and for Shared Tenancy, it can recommend scaling a DT workload to an unavailable instance type. To avoid this, create a policy for the DT group, and exclude the unavailable instance types.

- **Displaying Costs**

Intersight Workload Optimizer charts show the costs for your environment. If the scope includes Dedicated Tenancy workloads, then the calculated cost will be incomplete. For example, since AWS does not return pricing data for converted RIs (that is, RIs that have been exchanged at least once) that are on *All Upfront* payment plans, Intersight Workload Optimizer does not include such RIs in its calculations of RI utilization or cost.

Use scope to minimize this effect. You can create separate dashboards for your DT and Shared Tenancy workloads.

Resizing Cloud Workloads

To resize a workload (for example, a VM or an RDS instance) on the cloud, Intersight Workload Optimizer chooses the cloud tier that best matches the workload requirements. This can be to reduce cost by choosing a smaller tier, or it can be to assure performance by choosing a larger tier. To accomplish the resize, Intersight Workload Optimizer actually moves the workload to the new tier. This can include moving to a new availability zone.

Note that resize decisions also take into account the savings you can realize through [discounts \(on page 25\)](#). When considering workload resize actions, Intersight Workload Optimizer can recommend resizing to a an instance type that takes advantage of discounted pricing because the overall cost will be less.

As it considers a resize, Intersight Workload Optimizer also considers the storage and network requirements. Even if the compute resources are underutilized on a workload, if the available tiers cannot support the workload's storage or network requirements then Intersight Workload Optimizer will not recommend the change.

NOTE:

In AWS environments, under certain circumstances VM resizing can fail. If the restart of the VM initially fails, Intersight Workload Optimizer waits 30 seconds and tries to restart again. Intersight Workload Optimizer will try to restart up to four times. If the restart still fails, Intersight Workload Optimizer assumes the VM cannot start up on the new tier, and it restarts the VM on the old tier.

Scaling on the Public Cloud

On the cloud, scaling actions change the VM to a different instance type. These can include:

- Changing a VM to an instance type with different capacity
- Changing a VM to an instance type that is charged a discounted rate

For these actions, the action list shows the current cost for the source workload, and also the projected cost given the change. To show the current cost, Intersight Workload Optimizer uses the actual costs for that workload. However, to show the projected cost it uses an estimate based on average utilization for the VM, for the costs of the given tier.

Note that scaling to an instance type that is charged a discounted rate can result in running the VM on a larger instance when the cost is lower. This might occur even though the VM does not need that capacity and there are other smaller instance types available.

In Azure environments, there are circumstances where a VM resize can be especially disruptive. In a given region, the infrastructure can be made up of different clusters that have different sets of underlying hardware. Further, some tiers that are available in the given region are only available on different clusters. If Intersight Workload Optimizer recommends resizing from a tier on one cluster, to a tier on another cluster, then the resize action can take longer to complete than usual.

In both Azure and AWS environments, Intersight Workload Optimizer conforms to specific instance requirements as it generates resize actions. For more information, see:

- [Azure Instance Requirements \(on page 133\)](#)
- [AWS Instance Requirements \(on page 131\)](#)

Discounts

Intersight Workload Optimizer analysis takes advantage of cloud provider discounts to calculate optimal workload placement and to arrive at the best possible costs for your deployments on the cloud. Intersight Workload Optimizer discovers the following discounts:

- AWS Reserved Instances (RIs) and Savings Plans
- Azure reservations
- GCP committed use discounts

The Cloud View in the Homepage includes the following charts that show discount data:

- [Potential Savings or Necessary Investments Charts \(on page 320\)](#)

If Intersight Workload Optimizer has found actions you can take to improve performance or to reduce cost, then you can see an overview of them in the Potential Savings or Necessary Investments charts. To see a listing of the specific actions, click **Show All** at the bottom of the chart. For more about actions, see [Intersight Workload Optimizer Actions \(on page 37\)](#).

- [Discount Utilization \(on page 352\)](#)

This chart shows how well you have utilized your current discount [inventory \(on page 349\)](#). The desired goal is to maximize the utilization of your inventory and thus take full advantage of the discounted pricing offered by your cloud provider.

- [Discount Coverage \(on page 347\)](#)

This chart shows the percentage of VMs covered by discounts. If you have a high percentage of on-demand VMs, you should be able to reduce your monthly costs by increasing coverage. To increase coverage, you scale VMs to instance types that have existing capacity.

- [Discount Inventory \(on page 349\)](#)

This chart lists the cloud provider discounts discovered in your environment.

- [Recommended RI Purchases \(on page 345\)](#)

Intersight Workload Optimizer can recommend purchasing instance types at a discounted rate to help you increase the percentage of VMs covered by discounted pricing and reduce on-demand costs. This chart shows your pending purchases. Download the list of purchases and then send it your cloud provider or representative to initiate the purchase process.

NOTE:

Purchase actions should be taken along with the related VM scaling actions. To purchase discounts for VMs at their current sizes, run a [Buy VM Reservation Plan \(on page 280\)](#).

Currently, Intersight Workload Optimizer can recommend purchase actions for AWS and Azure. Purchase actions for GCP will be introduced in a future release.

Support for Azure App Service

Azure App Service is an HTTP-based service for hosting apps. With Azure App Service, app developers can easily create enterprise-ready apps and deploy them on a scalable and reliable cloud infrastructure.


Azure App Service offers several types of apps, including web apps, mobile apps, API apps, and logic apps. Each app runs as a set of *app instances* and is associated with a *plan* that defines compute resources (CPU, memory, and storage) available to the app.

When you add an Azure account:

- Intersight Workload Optimizer discovers all the plans in that account, except App Service Environment v3 I4, I5, and I6. Plans appear as 'Virtual Machine Specs' in the supply chain.
- For plans associated with *web apps*, Intersight Workload Optimizer discovers the related app instances. In the supply chain, app instances appear as 'App Component Specs'. Intersight Workload Optimizer generates actions to scale these plans to optimize app performance.
- For plans associated with the other types of apps, Intersight Workload Optimizer does not generate scale actions or discover the related app instances.
- For plans that are not associated with any type of app, Intersight Workload Optimizer generates delete actions as a cost-saving measure.

For details about scale and delete actions, see [Virtual Machine Spec \(on page 150\)](#).
 To discover plans and app instances, you must provide permissions to support all the actions you want to perform. For a list of permissions, see "Azure Required Permissions" in the *Target Configuration Guide*.

Supply Chain of Entities

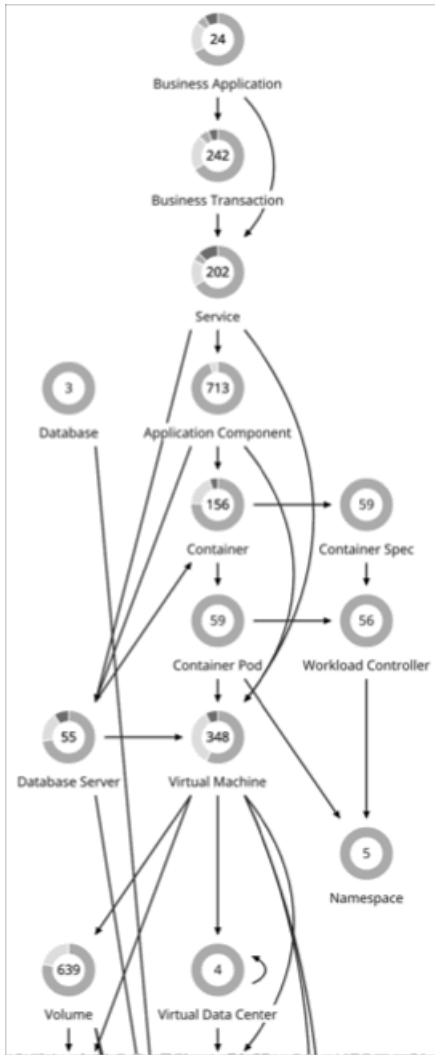

To perform Application Resource Management, Intersight Workload Optimizer models your environment as a market of buyers and sellers linked together in a supply chain. This supply chain represents the flow of resources from the datacenter, through the physical tiers of your environment, into the virtual tier and out to the cloud. By managing relationships between these buyers and sellers, Intersight Workload Optimizer provides closed-loop management of resources, from the datacenter, through to the application.

Reading the Supply Chain

By looking at the Supply Chain, you can see:

- How many entities you have on each tier
 Each entry in the supply chain gives a count of entities for the given type.

- The overall health of entities in each tier

The ring for each entry indicates the percentage of pending actions for that tier in the datacenter. Ring colors indicate how critical the actions are - Green shows the percentage of entities that have no actions pending. To get actual counts of pending actions, hover on a ring to more details.
- The flow of resources between tiers


The arrow from one entry to another indicates the flow of resources. For example, the Virtual Machine entry has arrows to Hosts and to Storage. If the VMs are running in a Virtual Data Center, it will have another arrow to that as well. This means that your VMs consume resources from hosts, storage, and possibly from VDCs.

Listing Entities From the Overview

The Supply Chain shows the relationships of entities in your environment. When you're on the **Overview** with a global scope, the supply chain filters its display according to the view you have chosen:

- APPLICATIONS - All your [Business Applications \(on page 79\)](#)
- ON-PREM - All your on-prem entities
- CLOUD - All your entities on the public cloud

To see a list of entities, click an entity tier in the Supply Chain.

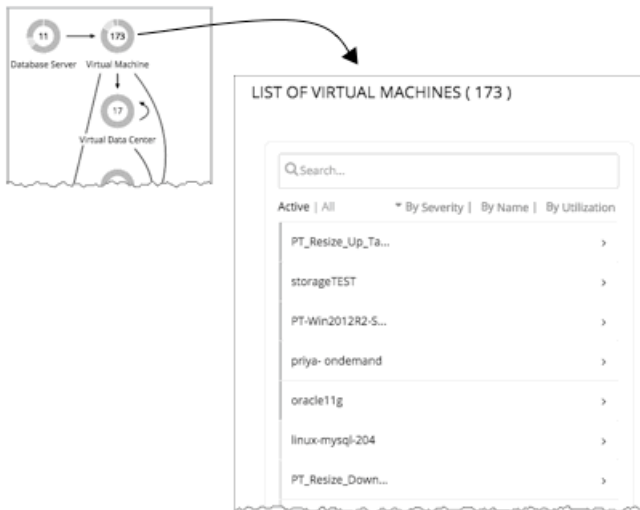

Working With a Scoped View

By default, the **Overview** shows a Global view of your environment. To drill down into specifics of your environment, you can set a scope to your Intersight Workload Optimizer session. A scoped view shows details about the specific entities in that scope.

Once you have set a scope, you can use the Supply Chain to zoom in on a related tier to see details about the entities on that tier.

If you find the current scope to be useful, you can save it as a named group. Using named groups is an easy way to return to different scopes that you have saved.

Scoping the Intersight Workload Optimizer Session

The default scope for the **Overview** shows an overview of the global environment. What if you want to focus on less than the global environment? Assume you are responsible for a subset of workloads in your environment. This could be:

- Workloads managed on a single host cluster
- The workloads in a single datacenter


- A custom group of workloads you have created in Intersight Workload Optimizer

It's easy to set the session scope so that Intersight Workload Optimizer zooms in on the part of the environment that you want to inspect. Once you set the scope, you can get a quick picture of system health for that scope. If you find a certain scope to be useful, you can save it as a named group that you can return to later.

1. Navigate to the Search Page.

Click **More**, then display the Search Page. This is where you can choose the scope you want.

2. Choose the type of entities to search.

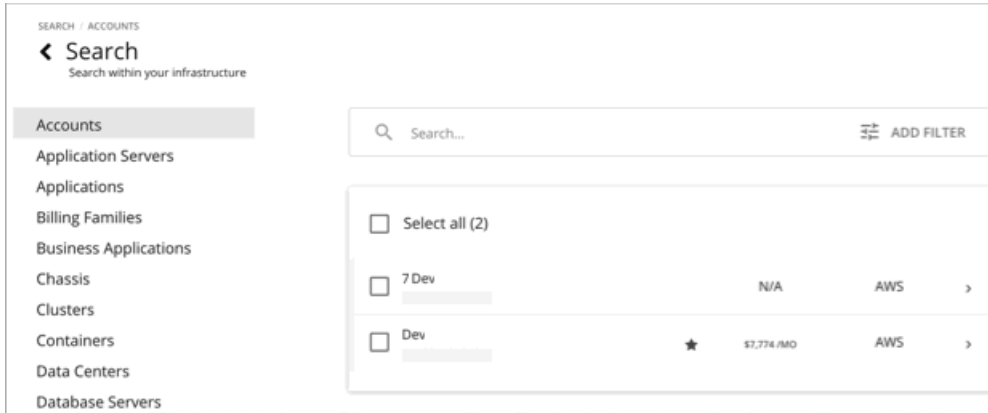

In the Search Page, choose a type of entities that you want to search through. Find the list of entity types on the left. Select **All** to search the complete environment. Or you can focus on entities by type, by groups, or by clusters. When you select an entity type, the page updates to show all entities of that type.

3. Use **Search** to filter the listing.

For example, if you're showing **All** and you search for "Development", then you will see all clusters, groups, and entities with "Development" in their names.

Search for "Development" to filter the list



4. Expand an entry to see details.

For example, expand a group or an entity to see utilization details and pending actions.

NOTE:

For hosts in the public cloud, utilization and capacity for host and datacenter resources don't affect Intersight Workload Optimizer calculations. When you expand an entry for a public cloud host, the details do not include information for these resources.

Click to show/hide details

Search... FILTER

Select all (5)

Weblogic-172.74 AppDynamics ACTIVE

100 % 0.5 % COLLECTION TIME PROVIDED	348 MB 53.2 % HEAP PROVIDED	60,000.0 ms 1.9 % RESPONSE TIME PROVIDED
200 Threads 0 % THREADS PROVIDED	10 TPS 14.2 % TRANSACTION PROVIDED	16.9 GHz 0 % VIRTUAL CPU CONSUMED
12 GB 1.5 % VIRTUAL MEMORY CONSUMED		ACTIVE STATE

Pending Actions

Scale up Heap for Application Server **Weblogic-172.74** from 0.34 GB to 0.44 GB

5. Select one or more entries to set the focus of the **Overview**.

Click to set the scope you have selected

SEARCH - APPLICATION SERVERS

Search within your infrastructure

All Application Servers Applications Budget VM Groups Business Applications Chassis Clusters D-Pods Data Centers Database Servers

Search... FILTER

Select all (5)

- Weblogic-172.74 AppDynamics ACTIVE
- Turbo-EY-6.0.4 AppDynamics ACTIVE
- Turbo-Yuni-EY-6.0.4 AppDynamics ACTIVE

SCOPE TO SELECTION

Choose an entity type, and set the scope to one or more of those entities

SEARCH - GROUPS

Search within your infrastructure

All Application Servers Applications Budget VM Groups Business Applications Chassis Clusters D-Pods Data Centers Database Servers Disk Arrays Favorite Scopes Groups Hosts

Search... FILTER


VMs_Host Network [HP-DL593]	1	Virtual Machines	Dynamic
Storage_RedHatDC-NFS.Red...	1	Storage Devices	Dynamic
VMs_dct17-host-02.eng.vmtur...	17	Virtual Machines	Dynamic
Storage Groups	6	SEs	Dynamic
VMs_VMTTarget_hvGB-entr05...	3	Virtual Machines	Dynamic
iSCSI	37	Storage Devices	Dynamic
LP Groups	1		Dynamic

For different types of groups, click to set a single group as your scope

If you choose a category of entities to limit the list, then you can select one or more of the entities for your session scope. After you select the entities you want to include in your scope, click **SCOPE TO SELECTION** to set the session scope to those entities.

If you choose Groups or Clusters, then you can select a single entry to set the scope for your session. When you select an entry in the list, that sets the focus of the **Overview**. For example, if you select a cluster in the **Search** listing, you set the **Overview** focus to that cluster. Use the **Overview** bread crumbs to set a different scope, or you can return to **Search** and set a different scope from there.

Overview Charts

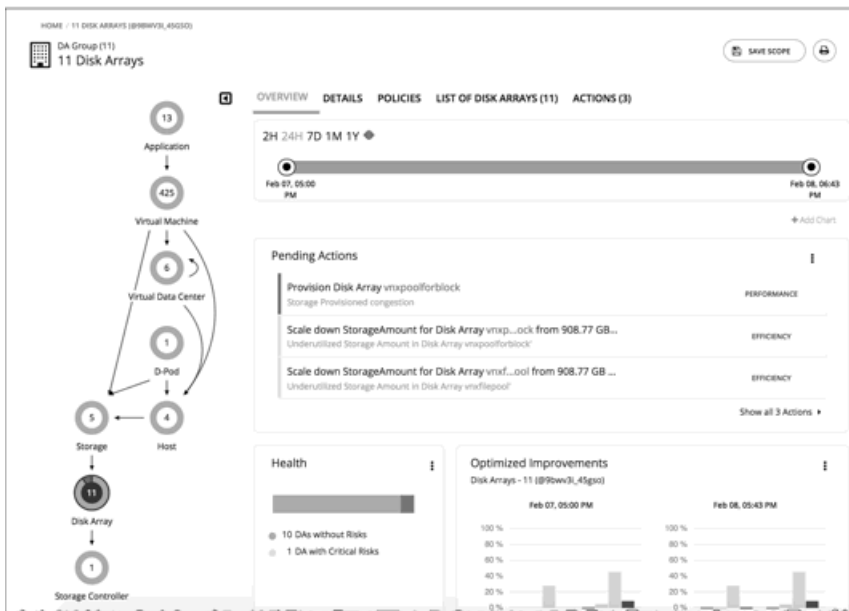

The Overview Charts show your environment's overall operating health for the current session scope. A glance at the Overview gives you insights into service performance health, overall efficiency of your workload distribution, projections into the future, and trends over time.

The charts in this view show data for the current scope that you have set for the Intersight Workload Optimizer session. For the global scope, the charts roll up average, minimum, and peak values for the whole environment. When you reduce the scope (for example, set the scope to a cluster), the charts show values for the entities in that scope.

Some charts included in this view are:

- **Pending Actions**
See all the actions that are pending for the current scope.
- **Health**
Quickly see the health of the entities in this scope- How many entities have risks, and how critical the risks are.
- **Optimized Improvements**
A comparison of utilization in your environment before executing the pending actions, and then after.
- **Capacity and Usage**
This chart lists resources that are used by the current scope of entities, showing utilization as a percentage of the capacity that is currently in use.
- **Multiple Resources**
See the utilization over time of various resources that are used by the current scope of entities.
- **Top Entities**
For example, Top Virtual Machines. These charts list the top consumer entities in the current scope.

- **Risks Avoided**
Each action addresses one or more identified risks or opportunities in your environment. This chart shows how many risks have been addressed by the executed actions.
- **Accepted Actions**
This chart shows how many actions have been executed or ignored, and whether they have been executed manually or automatically.

What You Can Do:


- Set scope: See [Scoping the Intersight Workload Optimizer Session \(on page 27\)](#)
- Create new charts: See [Creating and Editing Chart Widgets \(on page 313\)](#)

Setting Chart Focus

The charts update to reflect the focus that you have set for your viewing session. While viewing the Overview Charts, you can set the focus in different ways:

- **Set Supply Chain Focus**
Choose a tier in the supply chain to set the view focus - see [Navigating With the Supply Chain \(on page 36\)](#)
- **Set Scope**
Use **Search** to set the scope of the viewing session - see [Scoping the Intersight Workload Optimizer Session \(on page 27\)](#)

Chart Time Frame

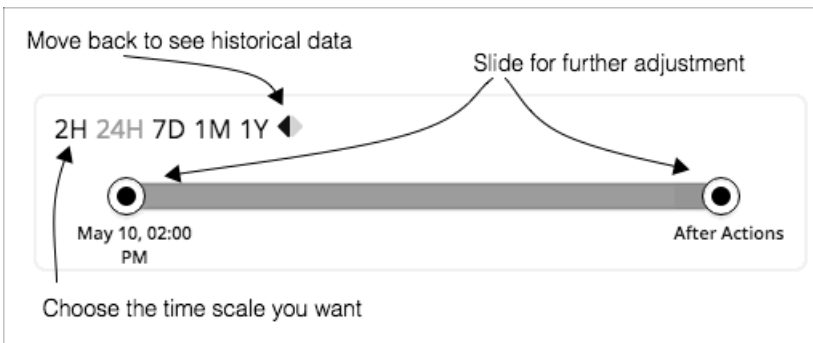


You can set a time frame from recent hours to the past year, and set that to the charts in the view. Use the Time Slider to set specific start and end times within that range. The green section in the slider shows that you can set the time range to include a projection into the future. For this part of the time range, charts show the results you would see after you execute the current set of pending actions.

For most charts, you can also configure the chart to hard-code the time range. In that case, the chart always shows the same time scale, no matter what scale and range you set for the given view.

Note that Intersight Workload Optimizer stores historical data in its database. As you run Intersight Workload Optimizer in your environment for more time, then you can set a time range to show more history.

Details View

The Details View shows more details about the entities in your session scope. These charts focus on the utilization of resources by these entities, so you can get a sense of activity in that scope over time.

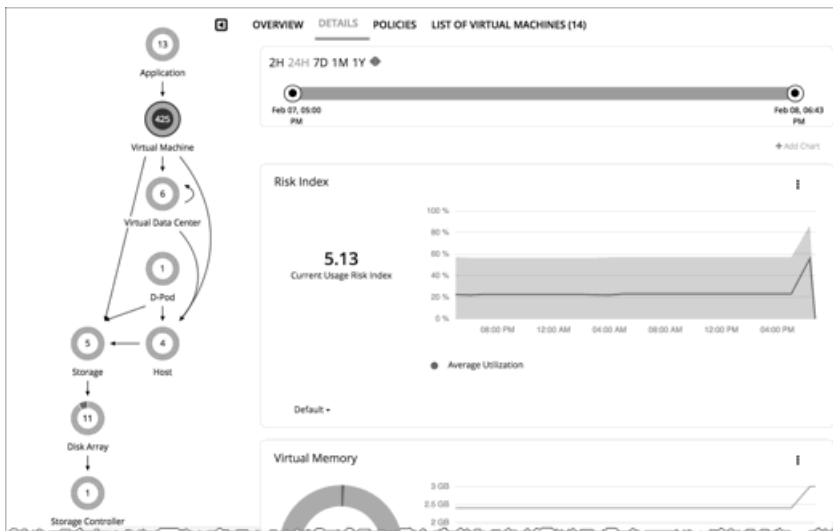

What You Can Do:


- Set scope: See [Scoping the Intersight Workload Optimizer Session \(on page 27\)](#)
- Create new charts: See [Creating and Editing Chart Widgets \(on page 313\)](#)

Setting Chart Focus

The charts update to reflect the focus that you have set for your viewing session. While viewing the Overview Charts, you can set the focus in different ways:

- Set Supply Chain Focus
Choose a tier in the supply chain to set the view focus - see [Navigating With the Supply Chain \(on page 36\)](#)
- Set Scope
Use **Search** to set the scope of the viewing session - see [Scoping the Intersight Workload Optimizer Session \(on page 27\)](#)

Chart Time Frame

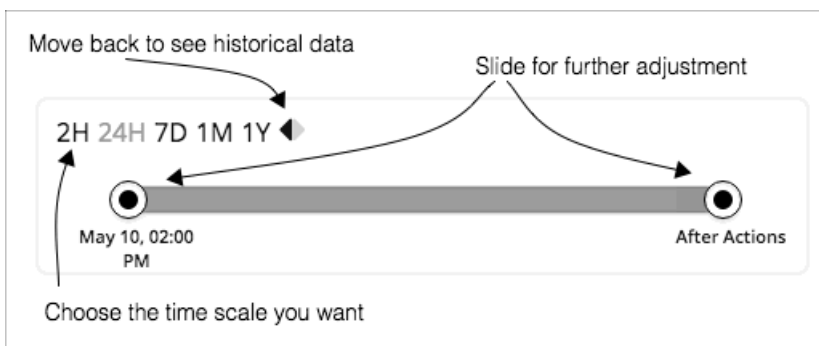


You can set a time frame from recent hours to the past year, and set that to the charts in the view. Use the Time Slider to set specific start and end times within that range. The green section in the slider shows that you can set the time range to include a projection into the future. For this part of the time range, charts show the results you would see after you execute the current set of pending actions.

For most charts, you can also configure the chart to hard-code the time range. In that case, the chart always shows the same time scale, no matter what scale and range you set for the given view.

Note that Intersight Workload Optimizer stores historical data in its database. As you run Intersight Workload Optimizer in your environment for more time, then you can set a time range to show more history.

Scope Policies

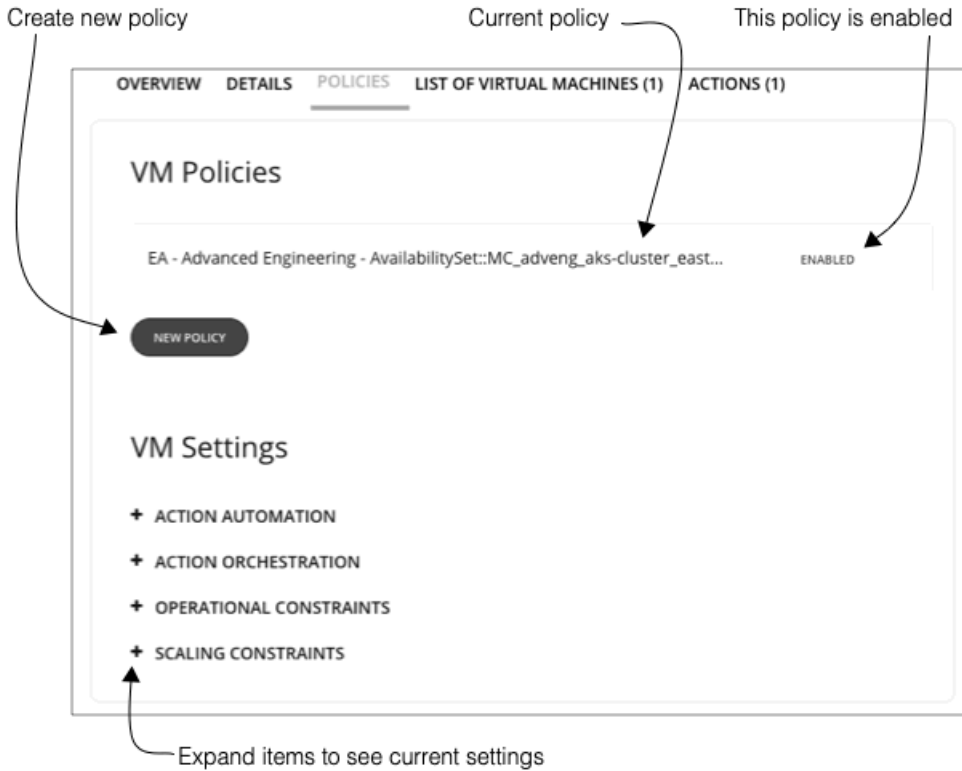

The Policy View gives you a look at the Automation Policies that are set for the entities in the current scope. For each policy, you can see whether it has been enabled or disabled. In addition, you can create new policies and apply them to that scope.

To edit a policy, click the policy name. You can then change the policy settings, or enable/disable the policy.

To see the current policy settings, expand a settings category. For each setting, you can see which policy determines the value—Either the default policy or a custom policy that has been applied to this scope.

When you create a new policy, it automatically includes the current scope. You can add other groups to the policy scope if you like. Note that you can enable more than one policy for the same scope. If two policies apply different values for the same setting, then the most conservative value takes effect.

For more information, see [Automation Policies \(on page 66\)](#).

Entity Placement Constraints

VM Placement Constraints			
- PROVIDERS			
	CURRENT PLACEMENT	OTHER POTENTIAL PLACEMENT	
Host	dc17-host-01.eng.vmturbo.com	4 Hosts	Constraints

Click to see more details

When you drill down to a single entity, you can see details about the entity's relationships in the supply chain. This shows you which entities provide resources to this entity. When considering providers for this entity, you can see the name of each

current provider, and how many alternative providers Intersight Workload Optimizer can choose from if the current one becomes overutilized.

Reviewing the constraints on an entity helps you understand the actions that Intersight Workload Optimizer recommends. If an action seems questionable to you, then you should look at the constraints on the affected entities. It's possible that some policy or constraint is in effect, and it keeps Intersight Workload Optimizer from recommending a more obvious action.

Experimenting With Placement Constraints

For each provider or consumer in the list, you can open a **Constraints** fly-out that gives more details about limits on the current element's supply chain relationships.

For example, assume the **PROVIDERS** list shows your VM's **CURRENT PLACEMENT** is on Host A, and for **OTHER POTENTIAL PLACEMENT** you see that Intersight Workload Optimizer can choose from 4 hosts. When you click **Constraints**, the flyout displays a list of host constraints that currently result in the four potential hosts for this VM.

Host Constraints For "Oracle11g-Win-172.32" ✕

When you add constraints, you limit the placement decisions Turbonomic can make for your VM. Remove unnecessary constraints so Turbonomic can discover more placement options.

<input type="checkbox"/>	CONSTRAINT TYPE	SCOPE NAME	SOURCE	POTENTIAL HOSTS
<input type="checkbox"/>	Cluster boundaries ⓘ	ACMVACM Cluster	vCenter	4 Hosts
<input type="checkbox"/>	Datacenter boundaries ⓘ	ACM	vCenter	4 Hosts
<input type="checkbox"/>	Datastore Commodity ⓘ	Q54:ACM	vCenter	4 Hosts
<input type="checkbox"/>	Network boundaries ⓘ	NetworkCommodity/Oracle11g-Win-172.32	Turbonomic	12 Hosts
<input type="checkbox"/>	Segmentation Commodity ⓘ	My Placement Policy	Turbonomic	16 Hosts
<input type="checkbox"/>	LicenseAccessCommodity ⓘ	Linux	Turbonomic	70 Hosts

POTENTIAL HOSTS: 4
FIND MORE PLACEMENT OPTIONS

↑

Current count of potential providers

↑

Click to enable constraint simulations

The list information includes:

- **CONSTRAINT TYPE**

Most constraints are boundaries that are inherent in your environment such as a cluster boundaries or a networks, or the can be constraint rules such as discovered HA or DRS rules authored Intersight Workload Optimizer placement policies (sometimes called *segments*)

- **SCOPE NAME**

For a given rule or constraint, the scope to which it was applied.

- **SOURCE**

If this is a discovered constraint, the source shows the type of target that imposes this constraint. For example, for a DRS rule the source will be vCenter.

- **POTENTIAL PROVIDERS**

For the given constraint, how many providers that constraint allows. To see a list of the potential providers, click the POTENTIAL PROVIDERS value.

To dig deeper into how these constraints affect your entity, click **FIND MORE PLACEMENT OPTIONS**. This puts you into a *simulation mode* that you can use to experiment with changing the effective constraints. For example, you might see that a cluster boundary is limiting your placement possibilities, and you would like the option to place the current VM on other clusters. Armed with this information, you could navigate to Policies and create a Merge Cluster policy.

Use the toggles to turn off various constraints

CONSTRAINT TYPE	SCOPE NAME	SOURCE	POTENTIAL HOSTS
<input type="checkbox"/> Cluster boundaries	ACM/ACM Cluster	vCenter	4 Hosts
<input type="checkbox"/> Datacenter boundaries	ACM	vCenter	4 Hosts
<input type="checkbox"/> Datastore Commodity	Q54/ACM	vCenter	4 Hosts
<input type="checkbox"/> Network boundaries	NetworkCommodity/Dracle11g Win-172.32	Turbonomic	12 Hosts
<input type="checkbox"/> Segmentation Commodity	My Placement Policy	Turbonomic	16 Hosts
<input type="checkbox"/> LicenseAccessCommodity	Linux	Turbonomic	70 Hosts

Click to see the potential hosts

POTENTIAL HOSTS: 12

By turning off the 4-Host constraints, you have 12 potential hosts for this VM. Click this label to see the resulting list of providers.

Related Entities

Search...

dc17-host-03.eng.vmturbo.com
vCenter | Large | ACTIVE

hp-esx4.eng.vmturbo.com
vCenter | Medium | FALLOVER

hp-esx7.eng.vmturbo.com
vCenter | Large | ACTIVE

hp-esx8.eng.vmturbo.com
vCenter | Large | ACTIVE

dc17-host-01.eng.vmturbo.com
vCenter | Large | ACTIVE

In this mode you can enable and disable different combinations of constraints. As you do, the **POTENTIAL PROVIDERS** label updates to show how many providers are available to your entity. To see the resulting list of providers, click the **POTENTIAL PROVIDERS** label.

List of Entities

Sort the list

44 Virtual Machines

Search...

Expand All | Collapse All Active | All By Virtual CPU | By Severity | By Name | By Utilization


i-2-32-VM	52.06 GHz 5.00 % CPU Provisioned	39.99 GB 12.50 % Memory Provisioned	IDLE State
iometer VM	2.68 TB 0.02 % Storage Amount	2.60 GHz 0.00 % Virtual CPU	5.00 GB 0.00 % Virtual Memory
i-25-39-VM			
shai-test-4			

Expand/collapse details for an entry

The list of entities is a quick way to drill down to details about your environment, so you can see specifics about resource consumption or state. For example, you can see the amount of capacity that has been assigned to a VM that is currently idle.

This list always updates to reflect the focus you have selected in the Supply Chain Navigator. When you select an entity type in the supply chain, the entities list updates to show the entities of that type for your current scope. For example, select Host to see a list of hosts in the current scope. For more information, see [Navigating With the Supply Chain \(on page 36\)](#)

Navigating With the Supply Chain

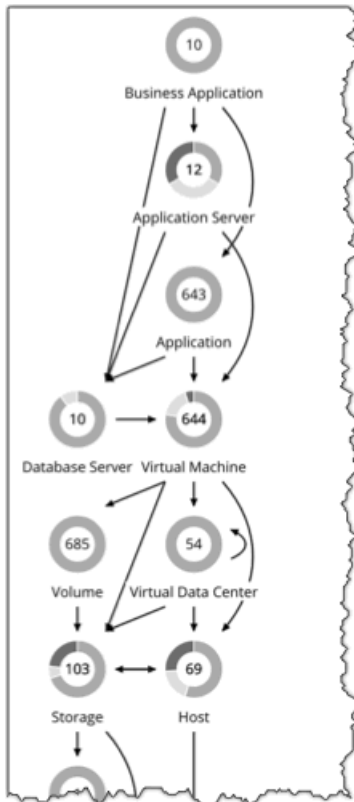

After you have set the scope of your Intersight Workload Optimizer session, you can use the Supply Chain to change the focus of the main view, and see details about different types of entities within the current scope.

Drilling Down in a Scoped Session


When you set a scope to your Intersight Workload Optimizer session, the **Overview** shows information about your environment, including:

- Overview
 - Charts and lists to give you an overview of your environment for the current scope. This overview corresponds to all the entities in scope.
- Details - Charts that give you a more detailed look at your environment for the given scope
- Policies - Any policies that are defined for the entities in the current scope
- Entity Lists - Details about the entities in the current scope
- Pending Actions - Actions that are pending for any entities in the current scope

The Supply Chain shows the currently selected tier of entities. To change the focus of the scoped view, select different tiers in the Supply Chain. The Policies, Entities List, and Pending Actions tabs update to focus on the tier you selected. These tabs show information for all the entities of that type that are in the current scope. For example, if you click the Host tier, these tabs update to show information about the hosts in your current scope.

To zoom in on a specific entity, you can click its name in the Entities List. This sets the scope to that specific entity. To return to the previous scope, use the browser's **Back** button.

Viewing Cluster Headroom

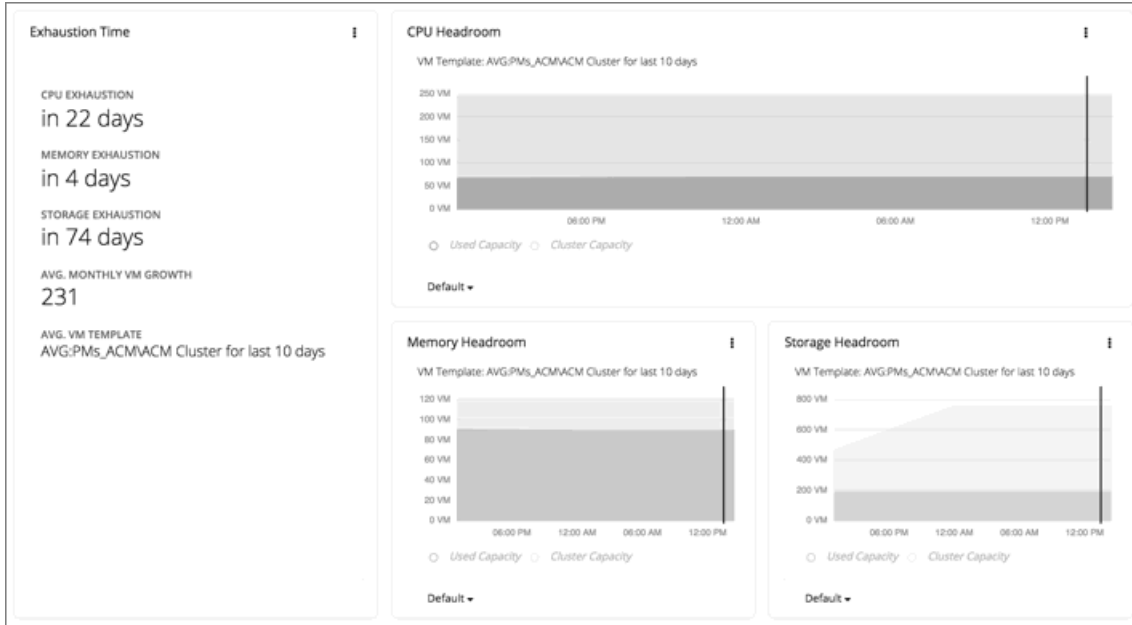

Cluster headroom shows you how much extra capacity your clusters have to host workloads. When you set the scope to a cluster, the **Overview** then includes charts that show headroom for that cluster, as well as time to exhaustion of the cluster resources.

To view cluster headroom:

1. Navigate to the Search page.
2. Choose the Clusters category.
3. Select the cluster you want to view.
4. When the **Overview** displays, scroll down to show the headroom charts.

Make sure you have selected the Host tier in the supply chain navigator.

To calculate cluster capacity and headroom, Intersight Workload Optimizer runs nightly plans that take into account the conditions in your current environment. The plans use the Economic Scheduling Engine to identify the optimal workload distribution for your clusters. This can include moving your current VMs to other hosts within the given cluster, if such moves would result in a more desirable workload distribution. The result of the plan is a calculation of how many more VMs the cluster can support.


To calculate VM headroom, the plan simulates adding VMs to your cluster. The plan assumes a certain capacity for these VMs, based on a specific VM template. For this reason, the count of VMs given for the headroom is an approximation based on that VM template.

To specify the templates these plans use, you can configure the nightly plans for each cluster. For more information, see [Configuring Nightly Plans \(on page 299\)](#)

Intersight Workload Optimizer Actions

After you deploy your targets, Intersight Workload Optimizer starts to perform market analysis as part of its Application Resource Management process. This holistic analysis identifies problems in your environment and the actions you can take to *resolve* and

avoid these problems. Intersight Workload Optimizer then generates a set of actions for that particular analysis and displays it in the Pending Actions charts for you to investigate.

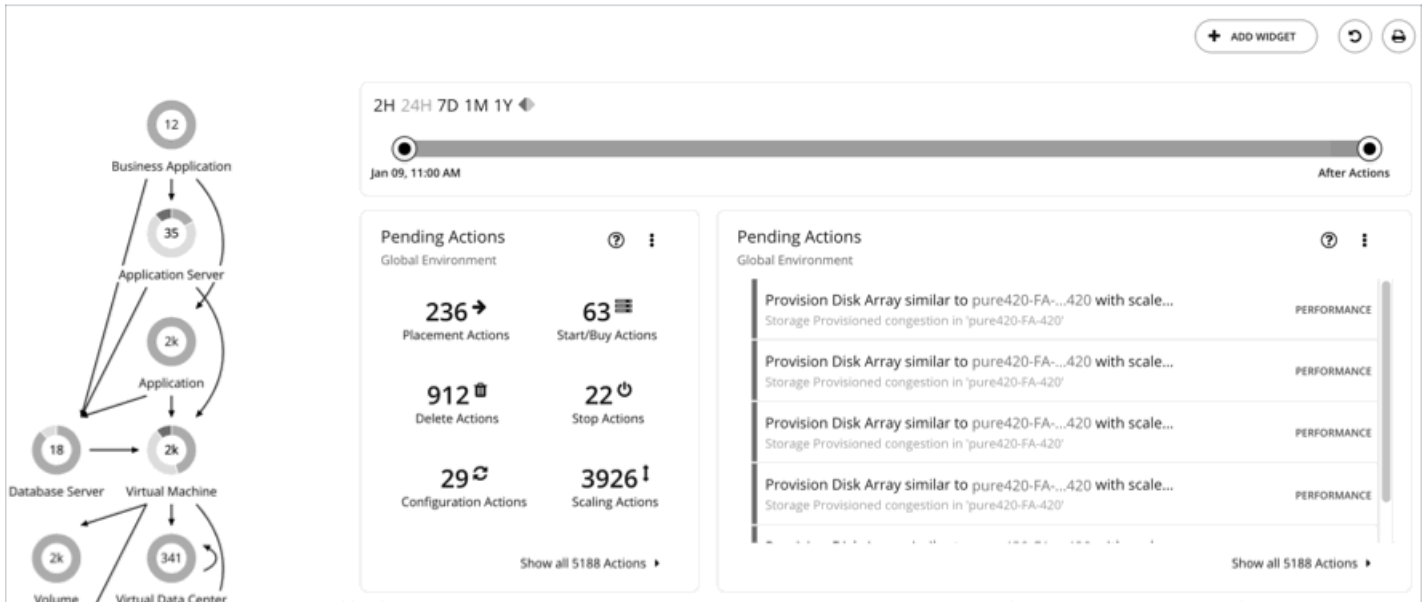

Intersight Workload Optimizer can generate the following actions:

Action	Description
Provision	Introduce new resource providers to update the environment's capacity. For example: <ul style="list-style-type: none"> ■ Provisioning a host adds more compute capacity that is available to VMs. ■ Provisioning a VM adds capacity to run applications.
Start	Start a suspended entity to add capacity to the environment.
Resize	Re-allocate resource capacity on an entity. For example, reduce vCPUs or vMem on a VM, or add volumes to a disk array.
Increase discount coverage	Scale cloud VMs to instance types that are charged discounted rates and have existing capacity, to reduce your costs.
Buy discounts (on page 25)	Purchase additional discount capacity to move your environment toward the discount coverage that you desire.
Reconfigure	Reconfigure an entity that violates a policy. For example, reconfigure an on-prem VM that violates a vCPU scaling policy.
Move	Change a consumer to use a different provider, such as moving a VM to a different host. Moving a VM to a different storage means relocating any file-based component that belongs to a virtual machine.
Suspend	Stop and set resources aside without removing them from the environment. For example, you might consider suspending a virtual machine to save money.
Delete	Remove storage (for example, datastores on disk arrays or unattached volumes).

Actions by Entity Type

Intersight Workload Optimizer generates actions based on how entity types use or provide resources, and what each entity type supports.

The following tables show the actions that each entity type supports:

Application Entity Types

Entity Type	Supported Actions
Business Application	<p>None</p> <p>Intersight Workload Optimizer does not recommend actions for a Business Application, but it does recommend actions for the underlying Application Components and infrastructure. The Pending Actions chart for a Business Application lists these actions, thus providing visibility into the risks that have a direct impact on the Business Application's performance.</p>
Business Transaction	<p>None</p> <p>Intersight Workload Optimizer does not recommend actions for a Business Transaction, but it does recommend actions for the underlying Application Components and infrastructure. The Pending Actions chart for a Business Transaction lists these actions, thus providing visibility into the risks that have a direct impact on the Business Transaction's performance.</p>
Service	<p><i>For non-Kubernetes Services:</i></p> <p>None</p> <p>Intersight Workload Optimizer does not recommend actions for non-Kubernetes Services, but it does recommend actions for the underlying Application Components and nodes. The Pending Actions chart for Services list these actions, thus providing visibility into the risks that have a direct impact on their performance.</p> <p><i>For Kubernetes Services:</i></p> <p>Provision or Suspend</p> <p>For horizontally scalable Kubernetes Services that collect performance metrics (or KPIs) for applications, Intersight Workload Optimizer can dynamically adjust the number of pod replicas that back those Services to help you meet SLOs (Service Level Objectives) for your applications.</p> <p>For details, see Actions for Kubernetes Services (on page 85).</p>
Application Component	<p>Resize</p> <p>Resize the following resources to maintain performance:</p> <ul style="list-style-type: none"> ■ Thread Pool ■ Connections ■ Heap <p>Intersight Workload Optimizer generates Heap resize actions if an Application Component sells Heap and Remaining Garbage Collection (GC) Capacity, and the underlying VM or container sells VMem. These actions are recommend-only and can only be executed outside Intersight Workload Optimizer.</p> <p>NOTE: Remaining GC Capacity is the percentage of uptime that is <i>not</i> spent on garbage collection.</p> <p>The resources that Intersight Workload Optimizer can resize depend on the processes that it discovers from your Application Performance Management (APM) targets. Refer to the topic for a specific target to see a list of resources that can be resized.</p>

Container Platform Entity Types

Entity Type	Supported Actions
Container	<p>Resize</p> <p>Resize containers to assure optimal utilization of resources. By default, containers resize consistently, which allows all replicas of the same container for the same workload type to resize any resource consistently.</p> <p>For details, see Container Actions (on page 100).</p>
Container Spec	<p>None</p> <p>A Container Spec retains the historical utilization data of ephemeral containers. Intersight Workload Optimizer uses this data to make accurate container resize decisions, but does not recommend actions for the Container Spec itself.</p>
Namespace	<p>Resize Quota</p> <p>Intersight Workload Optimizer treats quotas defined in a namespace as constraints when making container resize decisions. If existing container actions would exceed the namespace quotas, Intersight Workload Optimizer recommends actions to resize up the affected namespace quota.</p> <p>Note that Intersight Workload Optimizer does not recommend actions to resize <i>down</i> a namespace quota. Such an action reduces the capacity that is already allocated to an application – The decision to resize down a namespace quota should include the application owner.</p>
Workload Controller	<p>None</p> <p>A Workload Controller executes container actions. When you set the scope to a Workload Controller and view the actions list, the actions apply to containers. Intersight Workload Optimizer does not recommend actions for the Workload Controller itself.</p> <p>NOTE:</p> <p>Intersight Workload Optimizer uses namespace or organization/space quotas as constraints when making resize decisions. The Workload Controller aggregates container actions. If those container resizes exceed current namespace quotas, Intersight Workload Optimizer blocks execution of container resize actions until the namespace quotas are sufficient. For more information about namespace quotas, see Resource Quotas (on page 115).</p>
Container Pod	<ul style="list-style-type: none"> <p>■ Move</p> <p>Move a pod between nodes (VMs) to address performance issues or improve infrastructure efficiency. For example, if a particular node is congested for CPU, you can move pods to a node with sufficient capacity. If a node is underutilized and is a candidate for suspension, you must first move the pods before you can safely suspend the node.</p> <p>■ Provision/Suspend</p> <p>For horizontally scalable Kubernetes Services that collect performance metrics (or KPIs) for applications, provision or suspend pods associated with those Services to maintain SLOs for your applications.</p> <p>When recommending node provision or suspend actions, Intersight Workload Optimizer will also recommend provisioning pods (based on demand from DaemonSets) or suspending the related pods.</p> <p>For details, see Container Pod Actions (on page 111).</p>
Container Cluster	<p>None</p> <p>Intersight Workload Optimizer does not recommend actions for a Container Cluster. Instead, it recommends actions for the containers, pods, nodes (VMs), and volumes in</p>

Entity Type	Supported Actions
	the cluster. Intersight Workload Optimizer shows all of these actions when you scope to a Container Cluster and view the Pending Actions chart.
Kubernetes node (VM)	<p>A Kubernetes node (cloud or on-prem) is represented as a Virtual Machine entity in the supply chain.</p> <ul style="list-style-type: none"> ■ Provision Provision nodes to address workload congestion or meet application demand. ■ Suspend Suspend nodes after you have consolidated pods or defragmented node resources to improve infrastructure efficiency. ■ Reconfigure Reconfigure nodes that are currently in the <code>NotReady</code> state. <p>NOTE: For nodes in the public cloud, Intersight Workload Optimizer reports the cost savings or investments attached to these actions.</p> <p>For details, see Node Actions (on page 123).</p>

Cloud Infrastructure Entity Types

Entity Type	Supported Actions
Virtual Machine (Cloud)	<ul style="list-style-type: none"> ■ Scale Change the VM instance to use a different instance type or tier to optimize performance and costs. ■ Discount-related actions If you have a high percentage of on-demand VMs, you can reduce your monthly costs by increasing discount coverage. To increase coverage, you scale VMs to instance types that have existing capacity. If you need more capacity, then Intersight Workload Optimizer will recommend actions to purchase additional discounts. <p>For details, see Cloud VM Actions (on page 130).</p>
Virtual Machine Spec	<ul style="list-style-type: none"> ■ Scale Scale Azure App Service plans to optimize app performance or reduce costs, while complying with business policies. ■ Delete Delete empty Azure App Service plans as a cost-saving measure. A plan is considered empty if it is not hosting any running apps. <p>For details, see Virtual Machine Spec Actions (on page 151).</p>
App Component Spec	<p>None</p> <p>Intersight Workload Optimizer does not recommend actions for App Component Specs, but it does recommend actions for the underlying Virtual Machine Specs. For details, see Virtual Machine Spec Actions (on page 151).</p>
Database (Cloud)	<p>Scale</p> <ul style="list-style-type: none"> ■ DTU Model Scale DTU and storage resources to optimize performance and costs. ■ vCore Model Scale vCPU, vMem, IOPS, throughput and storage resources to optimize performance and costs.

Entity Type	Supported Actions
	For details, see Cloud Database Actions (on page 177) .
Database Server (Cloud)	<p>Scale</p> <p>Scale compute and storage resources to optimize performance and costs.</p> <p>For details, see Cloud Database Server Actions (on page 159).</p>
Volume (Cloud)	<ul style="list-style-type: none"> ■ Scale Scale attached volumes to optimize performance and costs. ■ Delete Delete unattached volumes as a cost-saving measure. <p>For details, see Cloud Volume Actions (on page 170).</p>
Zone	<p>None</p> <p>Intersight Workload Optimizer does not recommend actions for a cloud zone.</p>
Region	<p>None</p> <p>Intersight Workload Optimizer does not recommend actions for a cloud region.</p>

On-prem Infrastructure Entity Types

Entity Type	Supported Actions
Virtual Machine (On-prem)	<ul style="list-style-type: none"> ■ Resize <ul style="list-style-type: none"> – Resize resource capacity Change the capacity of a resource that is allocated for the VM. For example, a resize action might recommend increasing the VMem available to a VM. Before recommending this action, Intersight Workload Optimizer verifies that the VM's cluster can adequately support the new size. If the cluster is highly utilized, Intersight Workload Optimizer will recommend a move action, taking into consideration the capacity of the new cluster and compliance with existing placement policies. For hypervisor targets, Intersight Workload Optimizer can resize vCPU by changing the VM's socket or cores per socket count. For details, see vCPU Scaling Controls (on page 198). – Resize resource reservation Change the amount of a resource that is reserved for a VM. For example, a VM could have an excess amount of memory reserved. That can cause memory congestion on the host – A resize action might recommend reducing the amount reserved, freeing up that resource and reducing congestion – Resize resource limit Change the limit that is set on the VM for a resource. For example, a VM could have a memory limit set on it. If the VM is experiencing memory shortage, an action that decreases or removes the limit could improve performance on that VM. ■ Move Move a VM due to: <ul style="list-style-type: none"> – High resource utilization on VM or host – Excess IOPS or latency in VStorage – Workload placement violation – Underutilized host (move VM before suspending host) ■ Move VM Storage (Volume)

Entity Type	Supported Actions
	<p>Move a VM's volume due to excess utilization of the current datastore, or for more efficient utilization of datastores in the environment.</p> <ul style="list-style-type: none"> ■ Reconfigure Change a VM's configuration to comply with a policy. For hypervisor targets, Intersight Workload Optimizer can reconfigure VMs that violate vCPU scaling policies. For details, see vCPU Scaling Controls (on page 198). ■ Reconfigure VM Storage Reconfigure overutilized storage resources by adding VStorage capacity. For underutilized storage resources, remove VStorage capacity. For details, see On-prem VM Actions (on page 190).
Database Server (On-prem)	<p>Resize</p> <p>Resize the following resources:</p> <ul style="list-style-type: none"> ■ Connections ■ DBMem <p>Resize actions are driven by metrics on the Database Server, instead of metrics on the hosting VM. Intersight Workload Optimizer uses DB memory and cache hit rate metrics to decide whether resize actions are necessary.</p> <ul style="list-style-type: none"> ■ Transaction Log <p>Resize actions based on the Transaction Log resource depend on support for vStorage in the underlying hypervisor technology. Because current versions of Hyper-V do not provide API support for vStorage, Intersight Workload Optimizer cannot support Transaction Log resize actions for database servers running on the Hyper-V platform.</p>
Volume (On-prem)	<p>Move</p> <p>Move a VM's volume due to excess utilization of the current datastore, or for more efficient utilization of datastores in the environment. To evaluate and execute actions, set the scope to the VM to which a volume is attached.</p>
Virtual Datacenter	<p>None</p> <p>Intersight Workload Optimizer does not recommend actions for a Virtual Datacenter. Instead, it recommends actions for the entities that provide resources to the Virtual Datacenter.</p>
Host	<ul style="list-style-type: none"> ■ Start Start a suspended host when there is increased demand for physical resources. ■ Provision Provision a new host in the environment when there is increased demand for physical resources. Intersight Workload Optimizer can then move workloads to that host. ■ Suspend When physical resources are underutilized on a host, move existing workloads to other hosts and then suspend the host. <p>For details, see Host Actions (on page 218).</p>
Chassis	<p>None</p> <p>Intersight Workload Optimizer does not recommend actions for a chassis.</p>
Datacenter	<p>None</p>

Entity Type	Supported Actions
	Intersight Workload Optimizer does not recommend actions for a datacenter. Instead, it recommends actions for the entities running in the datacenter.
Storage	<ul style="list-style-type: none"> ■ Move For high utilization of physical storage, move datastore to a different disk array (aggregate). ■ Provision For high utilization of storage resources, provision a new datastore. ■ Resize Increase or decrease the datastore capacity. ■ Start For high utilization of storage resources, start a suspended datastore. ■ Suspend For low utilization of storage resources, move served VMs to other datastores and suspend this one. ■ Delete Delete a datastore or volume that has been suspended for a period of time. <p>For details, see Storage Actions (on page 225).</p>
Logical Pool	<ul style="list-style-type: none"> ■ Resize ■ Provision ■ Move ■ Start ■ Suspend
Disk Array	<ul style="list-style-type: none"> ■ Provision For high utilization of the disk array's storage, provision a new disk array (recommendation, only). ■ Start For high utilization of disk array, start a suspended disk array (recommendation, only). ■ Suspend For low utilization of the disk array's storage, move VMs to other datastores and suspend volumes on the disk array (recommendation, only). ■ Move (Only for NetApp Cluster-Mode) For high utilization of Storage Controller resources, Intersight Workload Optimizer can move an aggregate to another storage controller. The storage controllers must be running. For high IOPS or latency, a move is always off of the current disk array. All the volumes on a given disk array show the same IOPS and Latency, so moving to a volume on the same array would not fix these issues. ■ Move VM For high utilization of Storage on a volume, Intersight Workload Optimizer can move a VM to another volume. The new volume can be on the current disk array, on some other disk array, or on any other datastore. For high IOPS or latency, a move is always off of the current disk array. All the volumes on a given disk array show the same IOPS and Latency, so moving to a volume on the same array would not fix these issues. ■ Move Datastore

Entity Type	Supported Actions
	To balance utilization of disk array resources, Intersight Workload Optimizer can move a datastore to another array.
Storage Controller	Provision For high utilization of the storage controller's CPU, provision a new storage controller, and then move disk arrays to it.
IO Module	None Intersight Workload Optimizer does not recommend actions for an IO Module.
Switch	Resize Resize PortChannel for a switch to increase bandwidth.

Action Types

Intersight Workload Optimizer performs the following general types of actions:

- Placement – Place a consumer on a specific provider
- Scaling – Resize allocation of resources, based on profitability
 - Resize up, shown as a required investment
 - Resize down, shown as savings
- Discount Optimization – Increase [discount \(on page 25\)](#) coverage and reduce costs by scaling VMs to instance types that are charged discounted rates
- Configuration – Correct a misconfiguration
- Start/Buy – Start a new instance to add capacity to the environment, shown as a required investment. For cloud environments, purchase [discounts \(on page 25\)](#) to reduce costs.
- Stop – Suspend an instance to increase efficient use of resources, shown as savings
- Delete – Remove storage (for example, datastores on disk arrays or unattached volumes).

Placement

Placement actions determine the best provider for a consumer. These include initial placement for a new entity, and move actions that change a consumer to use a different provider. For example, moving a VM assigns it to a different host. Moving a VM's storage means the VM will use a different datastore.

Placement Constraints

When making placement decisions, Intersight Workload Optimizer checks for placement constraints to limit the set of providers for a given consumer. It respects automatic placement constraints, including cluster boundaries and DRS rules. It also considers user-configured constraints defined in a placement policy to ensure compliance to specific business requirements.

You can run plans to see what happens if you turn off constraints, or disable or enable certain placement policies.

Effective CPU Capacity

CPU processor speed is not necessarily an effective indicator of CPU capacity. For example, processor architecture can make a slower CPU have a greater effective capacity. Newer models of machines can often have fewer cores or less clock speed, but still have a higher effective capacity.

When placing VMs on hosts in the on-prem environment, Intersight Workload Optimizer discovers the effective CPU capacity of your hosts. This increases the accuracy of placement calculations so that newer, more efficient hosts will show a greater effective capacity than less efficient hosts that might have larger or faster processors.

To discover the effective capacity, Intersight Workload Optimizer uses benchmark data from spec.org. This benchmark data maps to effective capacity settings that Intersight Workload Optimizer uses to make placement calculations.

You can see a catalog of these benchmark data and choose from listed processors when you edit Host templates. For more information, see [Selecting CPUs from the Catalog \(on page 368\)](#).

Shared-Nothing Migration Actions

If you have enabled both storage and VM moves, Intersight Workload Optimizer can perform shared-nothing migrations, which move the VM and the stored VM files simultaneously. For details, see [Shared-Nothing Migration \(on page 195\)](#).

Cross-vCenter vMotion

VMware vSphere 6.0 introduces functionality that enables migration of virtual machines between different vCenter Server instances. Intersight Workload Optimizer supports this capability through *Merge* placement policies (see [Creating Placement Policies \(on page 62\)](#)). It considers cross-vCenter locations when calculating placement, and can recommend or execute moves to different vCenter servers.

Moves on the Public Cloud

On the public cloud you do not place workloads on physical hosts. In the Intersight Workload Optimizer Supply Chain, the Host nodes represent availability zones. Intersight Workload Optimizer can recommend moving a workload to a different zone, if such a move can reduce your cloud cost. These moves recognize constraints, such as availability of instances types and [discounts \(on page 25\)](#) in the given zones.

In AWS environments, a VM can use Elastic Block Stores (EBS) or Instance Storage. If the VM's root storage is EBS, then Intersight Workload Optimizer can recommend a VM move. However, because Instance Storage is ephemeral and a move would lose the stored data, Intersight Workload Optimizer does not recommend moving a VM that has Instance Storage as its root storage.

If a VM is running within a billing family, then Intersight Workload Optimizer only recommends moving that VM to other regions within that billing family.

In AWS environments that use RIs, Intersight Workload Optimizer recognizes Availability Zones that you have specified for your RI purchases. For move and resize actions, Intersight Workload Optimizer gives precedence to these RIs in the given zone. All else being equal for a given zone, if you have Zone RIs with reserved capacity and RIs that do not reserve capacity, Intersight Workload Optimizer will use the Zone RI first.

Scaling

Scaling actions update capacity in your environment. For vertical scaling, Intersight Workload Optimizer increases or decreases the capacity of resources on existing entities. For horizontal scaling it provisions new providers. For example, provisioning a host adds more compute capacity that is available to run VMs. Provisioning a VM adds capacity to run applications.

Intersight Workload Optimizer can provision the following:

- Containers
- VMs
- Hosts
- Storage
- Storage Controllers (only for planning scenarios)
- Disk Arrays

Under certain circumstances, Intersight Workload Optimizer can also recommend that you provision a virtual datacenter.

Storage Resize Actions

Any storage resize action impacts both the storage entities and the entities managed by the given hypervisor. However, not all hypervisors recognize changes to the storage capacity. After executing a storage resize, Intersight Workload Optimizer indicates that the resize action has succeeded but a hypervisor might not show the corresponding change in storage capacity. If this occurs, then you must refresh the hypervisor target so Intersight Workload Optimizer can discover the storage changes.

To avoid this situation, you can set the action mode to *Manual* or *Recommend* for storage resize actions. In that way, you can perform the resizes yourself, and then manually refresh your hypervisors.

Scaling on the Public Cloud

On the cloud, scaling actions change the VM to a different instance type. These can include:

- Changing a VM to an instance type with different capacity
- Changing a VM to an instance type that is charged a discounted rate

For these actions, the action list shows the current cost for the source workload, and also the projected cost given the change. To show the current cost, Intersight Workload Optimizer uses the actual costs for that workload. However, to show the projected cost it uses an estimate based on average utilization for the VM, for the costs of the given tier.

Note that scaling to an instance type that is charged a discounted rate can result in running the VM on a larger instance when the cost is lower. This might occur even though the VM does not need that capacity and there are other smaller instance types available.

In Azure environments, there are circumstances where a VM resize can be especially disruptive. In a given region, the infrastructure can be made up of different clusters that have different sets of underlying hardware. Further, some tiers that are available in the given region are only available on different clusters. If Intersight Workload Optimizer recommends resizing from a tier on one cluster, to a tier on another cluster, then the resize action can take longer to complete than usual.

In both Azure and AWS environments, Intersight Workload Optimizer conforms to specific instance requirements as it generates resize actions. For more information, see:

- [Azure Instance Requirements \(on page 133\)](#)
- [AWS Instance Requirements \(on page 131\)](#)

Discount Optimization

To reduce your cloud costs, Intersight Workload Optimizer can recommend scaling VMs to instance types that are charged discounted rates.

- [Discount Utilization \(on page 352\)](#)

This chart shows how well you have utilized your current discount [inventory \(on page 349\)](#). The desired goal is to maximize the utilization of your inventory and thus take full advantage of the discounted pricing offered by your cloud provider.

- [Discount Coverage \(on page 347\)](#)

This chart shows the percentage of VMs covered by discounts. If you have a high percentage of on-demand VMs, you should be able to reduce your monthly costs by increasing coverage. To increase coverage, you scale VMs to instance types that have existing capacity.

- [Discount Inventory \(on page 349\)](#)

This chart lists the cloud provider discounts discovered in your environment.

Discount optimization actions are not executed by Intersight Workload Optimizer users. They reflect capacity reassignments performed by your cloud provider.

Configuration

These are reconfigure and resize actions. Reconfigure actions can add necessary network access, or reconfigure storage. Resize actions allocate more or less resource capacity on an entity, which can include adding or reducing VCPUs or VMem on a VM, adding or reducing capacity on a datastore, and adding or reducing volumes in a disk array.

Intersight Workload Optimizer can reconfigure the following:

- VMs
- Containers
- Storage
- Disk Arrays
- Virtual Datacenters

Start/Buy

Intersight Workload Optimizer can recommend that you start a suspended entity to add capacity to the environment. It can also recommend purchasing cloud provider [discounts \(on page 25\)](#) to reduce costs for your current workload.

Stop

Stop actions suspend entities without removing them from the environment. Suspended capacity is still available to be brought back online, but is currently not available for use. Suspended resources are candidates for termination.

Intersight Workload Optimizer can suspend the following:

- Application Components
- Container Pods
- Disk Arrays
- Hosts
- Storage (on-prem)
- Virtual datacenter

Delete

Delete actions affect storage. For example, Intersight Workload Optimizer might recommend that you delete wasted files to free up storage space, or delete unused storage in your cloud environment to reduce storage costs.

Wasted Storage in Azure Environments

In Azure environments, Intersight Workload Optimizer can identify unmanaged storage as unattached volumes, recommend that you remove this unused storage, and then show *estimated* savings after you remove this storage and no longer pay for it. The savings that Intersight Workload Optimizer shows are estimates based on the overall cost for that storage, since Azure does not provide specific values for the cost per volume or cost for the amount of storage that is in use for a given volume. If the estimated savings appear unusually high, then you should identify which storage the actions will remove, and review your billing to calculate the costs with more precision.

Action Categories

Intersight Workload Optimizer groups entries in the Actions List by different categories. These categories do not strictly define the severity of an issue, but they indicate the nature of the issue.

Performance Assurance

Ultimately, the reason to manage workloads in your environment is to assure performance and meet QoS goals. When Intersight Workload Optimizer detects conditions that directly put QoS at risk, it recommends associated actions in the Performance category. You can consider these critical conditions, and you should execute the recommended actions as soon as possible.

Actions	Risks/Opportunities
<ul style="list-style-type: none"> ■ Provision a new VM, Host, Datastore ■ Increase or decrease the number of VCPUs ■ Provision a new container or container pod ■ Resize heap for an Application Component ■ Scale the resource capacity on an entity 	<ul style="list-style-type: none"> ■ <Resource> Congestion <p>High utilization of application resources. High utilization of resources on workload, host, or datastore.</p>

Efficiency Improvement

Efficient utilization of resources is an important part of running in the desired state. Running efficiently maximizes your investment and reduces cost. When Intersight Workload Optimizer discovers underutilized resources, it recommends actions to

consolidate your operations. For example, it can recommend that you move certain VMs onto a different host. This can free a physical machine to be shut down.

Actions	Risks/Opportunities
<ul style="list-style-type: none"> ■ Move VM ■ Start or suspend VM ■ Buy discounts (on page 25) ■ Scale down resource allocation 	<ul style="list-style-type: none"> ■ Overprovisioning Excess resource capacity in a provider.

Prevention

Intersight Workload Optimizer constantly monitors conditions, and works to keep your environment running in a desired state. As it finds issues that risk moving the environment out of this state, it recommends associated actions in the Prevention category. You should attend to these issues, and perform the associated actions. If you do not, the environment may drift away from the desired state, and the QoS for some services may be put at risk.

Actions	Risks/Opportunities
<ul style="list-style-type: none"> ■ Resize vCPU and vMem ■ Move VM or storage ■ Start VM or host 	<ul style="list-style-type: none"> ■ <Resource> Congestion High resource utilization on the named VM or datastore. For example, CPU congestion or memory congestion can occur on a VM, or an IOPS bottleneck can occur on a datastore. ■ Workload Balancing Excess workload on a given physical machine that can be addressed by moving a VM to another host.

Compliance

A virtual environment can include policies that limit availability of resources. It's possible that the environment configuration violates these defined policies. In such cases, Intersight Workload Optimizer identifies the violation and recommends actions that bring the entity back into compliance.

Actions	Risks/Opportunities
<ul style="list-style-type: none"> ■ Move VM ■ Move container ■ Provision VM, Host, Datastore 	<ul style="list-style-type: none"> ■ Misconfiguration Container configuration is in violation of a policy. ■ Placement Violation The placement of a VM is in violation of a Intersight Workload Optimizer policy or an imported Placement Policy. ■ Misconfiguration The configuration violates discovered requirements. For example, a VM is configured to access a network that is not available from the current cluster.

Action Modes

Action modes specify the degree of automation for the generated actions. For example, in some environments you might not want to automate resize down of VMs because that is a disruptive action. You would use action modes in a policy to set that business rule.

Intersight Workload Optimizer supports the following action modes:

- Recommend – Recommend the action so a user can execute it via the given hypervisor or by other means

- **Manual** – Recommend the action, and provide the option to execute that action through the Intersight Workload Optimizer user interface
- **Automatic** – Execute the action automatically

For automated resize or move actions on the same entity, Intersight Workload Optimizer waits five minutes between each action to avoid failures associated with trying to execute all actions at once. Any action awaiting execution stays in queue. For example, if a VM has both vCPU and vMem resize actions, Intersight Workload Optimizer could resize vCPU first. After this resize completes, it waits five minutes before resizing vMem.

The Pending Actions charts only count actions in *Recommend* or *Manual* mode.

Automated actions appear in the following charts:

- **All Actions** chart on the **Overview** and the On-prem Executive Dashboard
- **Accepted Actions** chart on the **Overview**

Setting Action Modes

To set action modes for specific entities, you can edit the Intersight Workload Optimizer automation policies. This is how you specify the default action modes, or set special action modes for a given group or cluster. For more information, see [Automation Policies \(on page 66\)](#).

Action Mode Overrides


Under some conditions, Intersight Workload Optimizer changes the action mode of an action from *Manual* to *Recommend*.

Intersight Workload Optimizer makes this change as a safeguard against executing actions that the underlying infrastructure cannot support. For example, assume you have VM move actions set to *Manual*. Then assume Intersight Workload Optimizer analysis wants to move a VM onto a host that is already utilized fully. In this case, there would be other actions to move workloads *off* of the given host to make room for this new VM. However, because moves are *Manual*, the host might not be properly cleared off yet. In that case, Intersight Workload Optimizer changes actions to move workloads *to* the host from *Manual* to *Recommend*.


For cloud environments, some instances require workloads to be configured in specific ways before they can move to those instance types. If Intersight Workload Optimizer recommends moving a workload that is not suitably configured onto one of these instances, then it changes the action mode from *Manual* to *Recommend*, and then describes the reason.

Working With the Generated Actions

When you start using Intersight Workload Optimizer, all the actions that the product generates appear as pending. You can view them in the Pending Actions charts and then decide whether to execute and/or automate them. You can also disable them.

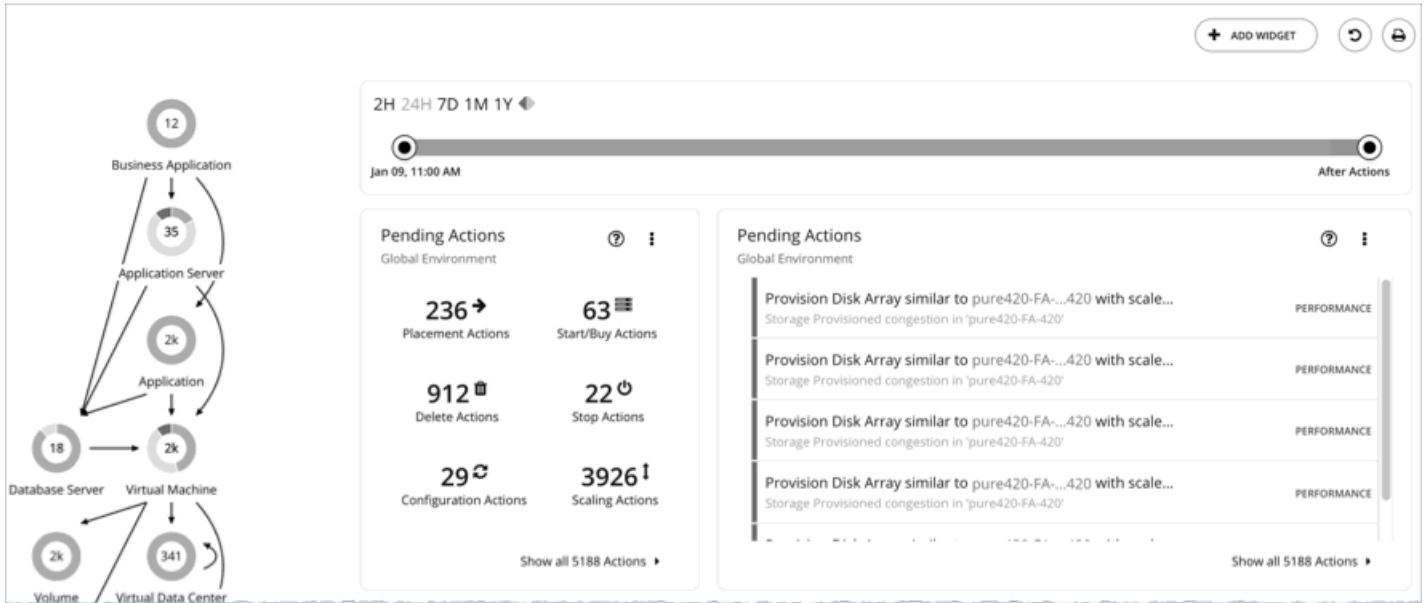

Intersight Workload Optimizer will never execute actions automatically, unless you tell it to. If you examine the default policies that ship with the product, you will notice that these policies do not enable automation on any action. Intersight Workload Optimizer gives you full control over all automation decisions.

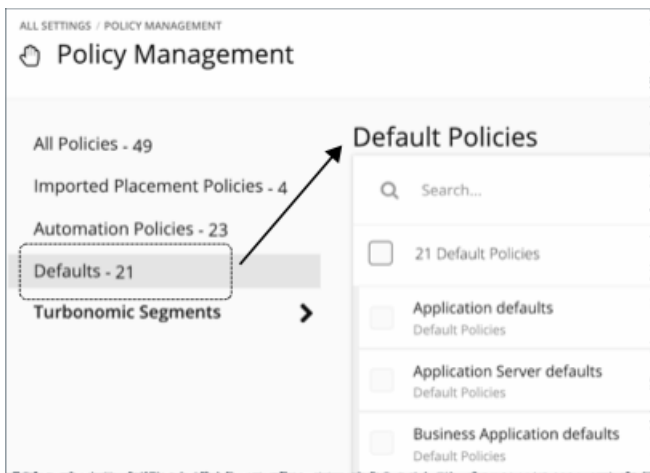

When you first see the pending actions, you execute many of them to see immediate improvements in performance and utilization. Over time, you develop and fine-tune your action-handling process to meet productivity goals and respond to changing business needs. This process could lead to the following key decisions:


- Disabling actions that should never execute, such as those that violate business rules
Intersight Workload Optimizer will not consider recommending disabled actions when it performs its analysis.
 - Allowing certain actions to execute automatically, such as those that assure QoS on mission-critical resources
Automation simplifies your task, while ensuring that workloads continue to have adequate resources to perform optimally. As such, it is important that you set the goal of automating as many actions as possible. This requires evaluating which actions are safe to automate, and on which entities.
 - Continuing to let Intersight Workload Optimizer post certain actions so you can execute them on a case-by-case basis
For example, certain actions might require the approval of specific individuals. In this case, you would want Intersight Workload Optimizer to post those actions for review and only execute the actions that receive an approval.
- These are the actions that you would look for in the Pending Actions charts. They no longer show after you execute them, if you disable or automate them, or if the environment changes in the next market analysis such that the actions are no longer needed.

What You Can Do:

- View and execute pending actions: See [Pending Actions \(on page 52\)](#).
- See the different display views for the pending actions charts: See [Pending Actions Charts \(on page 316\)](#).
- Scope pending actions in the **Overview**: See [Pending Actions Scope \(on page 54\)](#).
- See a running history of generated and executed actions: See [Actions Charts \(on page 318\)](#).
- Review the default policies that drive the actions the product generates.
- Create and run plans to simulate different conditions, and see what actions will keep things healthy under those conditions: See [Plan Management \(on page 244\)](#).

Pending Actions

Intersight Workload Optimizer treats all the non-automated actions that it generates as pending and shows them in the Pending Actions charts.

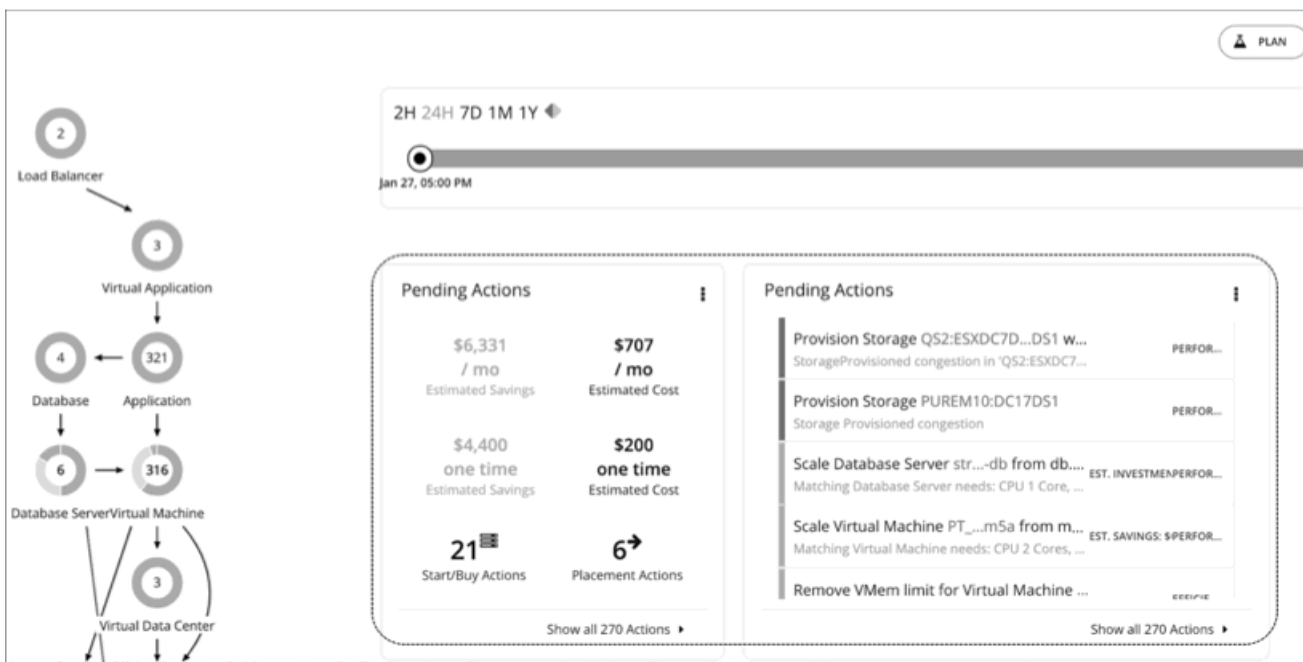

To get the best results from Intersight Workload Optimizer, execute these actions promptly and consider automating as many of them as possible. You can execute these actions from the user interface or outside Intersight Workload Optimizer. To automate these actions, create an [automation policy \(on page 70\)](#) or change the action mode to *Automatic* in the [default policies \(on page 66\)](#).


Intersight Workload Optimizer can execute up to five actions at a time, and queues any new incoming actions for later execution.

Default Pending Actions Charts

Each time you log in to the user interface, Intersight Workload Optimizer immediately shows the Pending Actions charts on the **Overview**'s **HYBRID** view. These charts provide a summary of the actions that require your attention, and entry points to the [Pending Actions List \(on page 55\)](#).

NOTE:

You can also add these charts to any of your [dashboards \(on page 306\)](#).

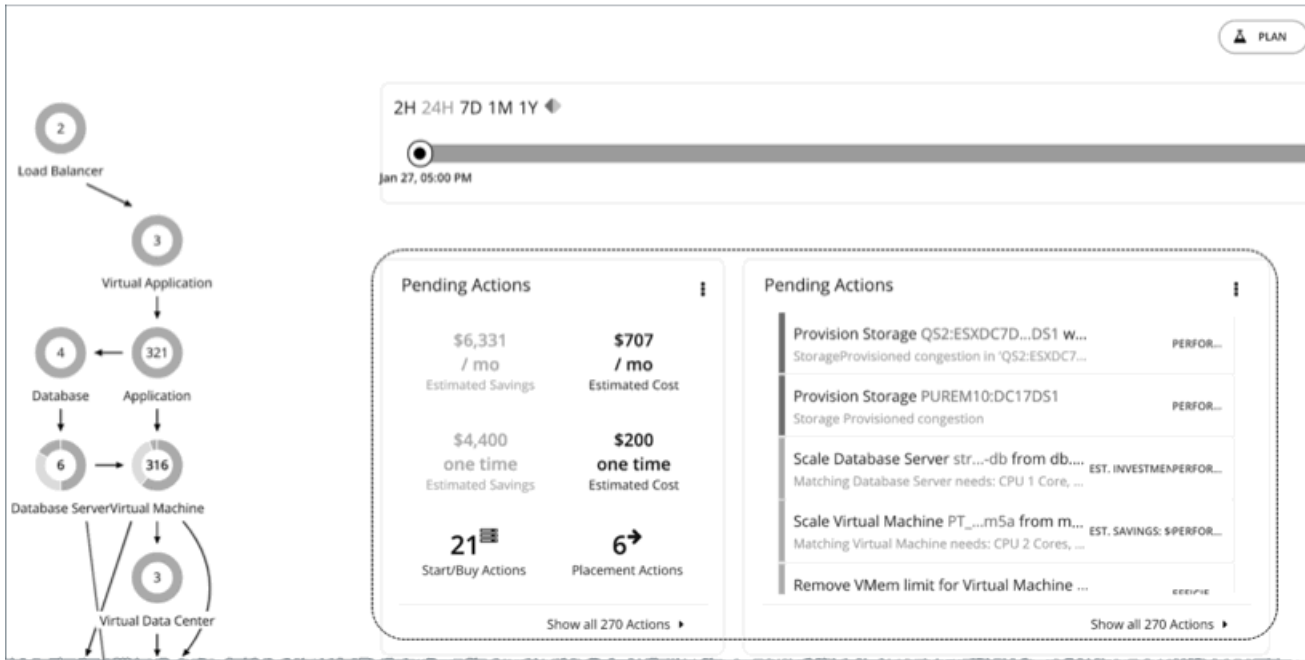


By default, a text chart and a list chart display in the **Overview**, with the scope set to *Global Environment*.

You can change the chart type by clicking the icon on the upper-right corner of the chart. For details about the available chart types, see [Pending Actions Charts \(on page 316\)](#).


Pending Actions - Text Chart

The **text chart** shows the estimated costs or savings associated with the pending actions, and the number of actions for each [action type \(on page 45\)](#).

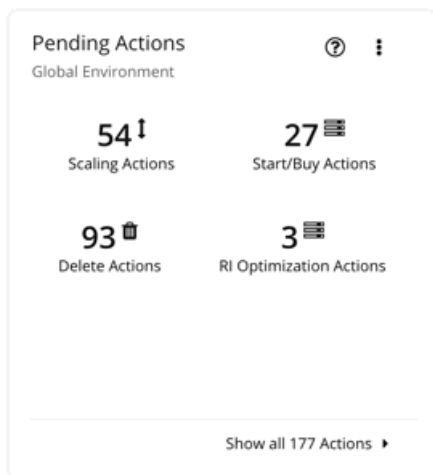

Pending Actions - List Chart

The **list chart** shows a partial list of pending actions, ordered by the severity of the associated problems.

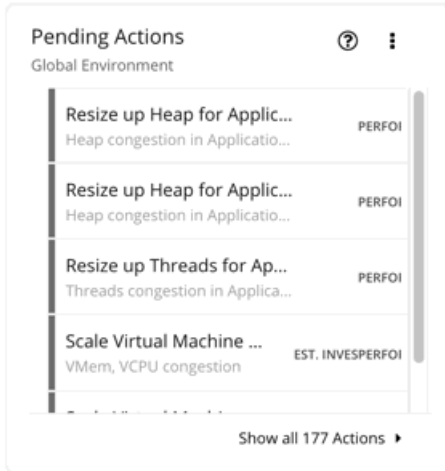


Pending Actions Scope

To perform Application Resource Management, Intersight Workload Optimizer identifies actions you can take to *avoid* problems before they occur. You can perform these actions manually, direct Intersight Workload Optimizer to perform the actions on command, or direct Intersight Workload Optimizer to perform actions automatically as they arise.

There are several ways to scope pending actions in the **Overview**.

Click to filter pending actions by entity type, action type, or entity.

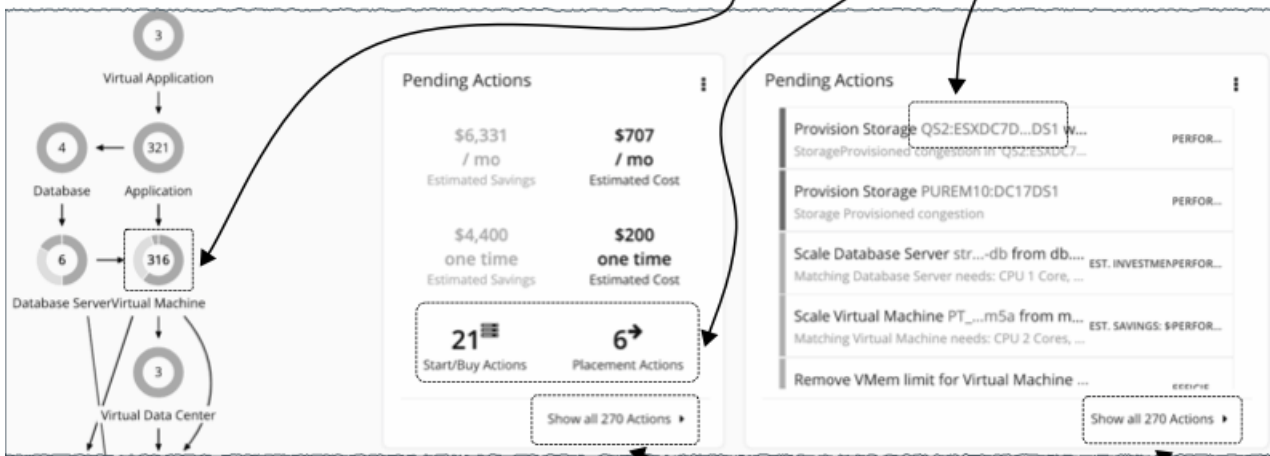

Click to view all pending actions.

To view all pending actions, click **Show all Actions** in the Pending Actions chart.

Click one of the following to narrow the scope of pending actions:


- An entity type in the supply chain.
Intersight Workload Optimizer generates actions based on how entity types use or provide resources, and what each entity type supports. For details on the actions that each entity type supports, see [Actions by Entity Type \(on page 39\)](#).
Only entity types with risks (critical, major, or minor) have pending actions. Hover on the entity type to see a breakdown of risks.
- An action type in the text chart
- An entity name in the list chart

NOTE:

If you are in the **ON-PREM** or **CLOUD** view, the text chart displays by default. Switch to the list chart to see the entity names.

If you clicked **Show all Actions** or an action type, the [Pending Actions List \(on page 55\)](#) displays immediately.

If you clicked an entity type or an entity name, an Overview page displays first. In that page, click the **Actions** tab to view the Pending Actions List.

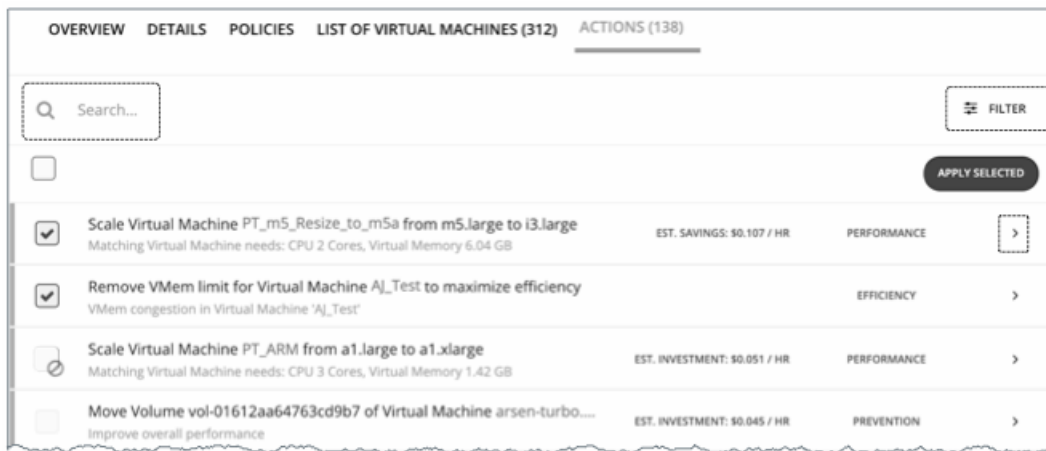


The Pending Actions List includes additional features to narrow the scope further. You can search for specific actions using meaningful keywords or use filters. For details, see [Pending Actions List \(on page 55\)](#).

Pending Actions List

The Pending Actions List includes all the actions that Intersight Workload Optimizer currently recommends for the given scope (for details, see [Pending Actions Scope \(on page 54\)](#)).

You can select actions to execute, and you can expand action items to see more details.

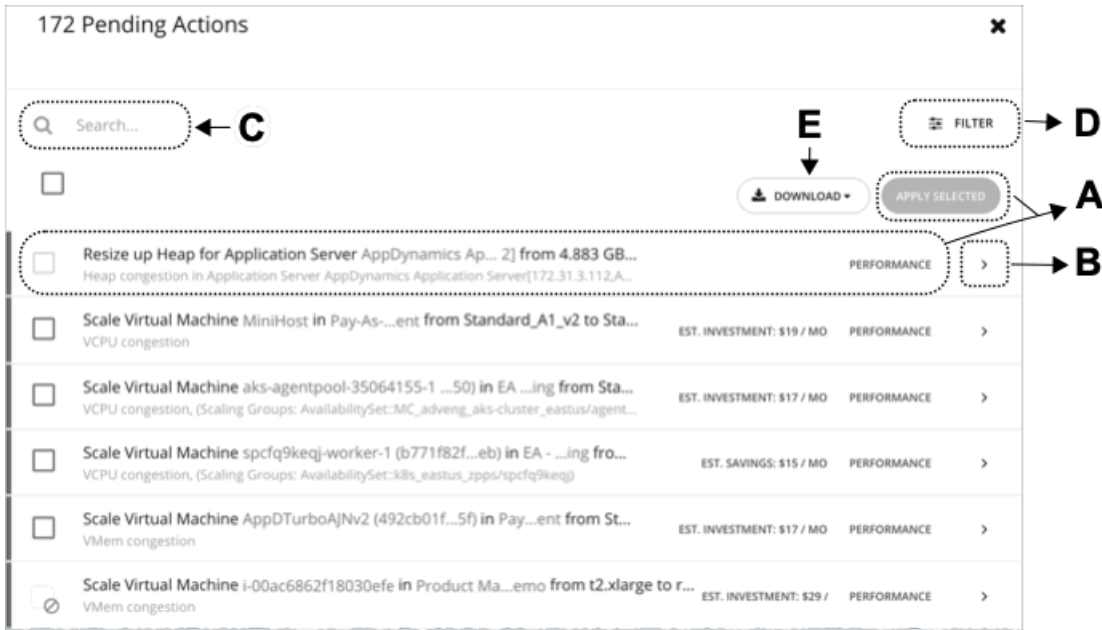

A. Actions List

Each row in the actions list shows:

- The specific action that Intersight Workload Optimizer recommends.
- If applicable, the estimated investment needed to successfully execute the action or the resulting savings after performing the action
- The [action category \(on page 48\)](#).

By default, actions display by the severity of the associated problems, indicated by the thin colored line before the checkbox. Use the Filter functionality to change the order by other categories.

Select one or several actions to execute and click **Apply Selected**.

If you see an action with:

- A grayed-out checkbox ()

The action is recommended-only.

Possible reasons:

- The action mode is *Recommend* or the underlying technology for the entity does not support automation. This means you have to perform the action outside Intersight Workload Optimizer.
- An action that is otherwise executable cannot be executed currently due to prerequisite actions.

The Action Details page indicates that the action is blocked by a policy.

For example, in order to suspend Host A, VM_01 in the host must first move to Host B. However, Host B only has capacity for one VM and is currently hosting VM_02. In this case, Host A suspension is blocked by two prerequisite actions - VM_02 moving to another host and VM_01 moving to Host B.

The Action Details page for the main action (Host A suspension in the example) indicates that there are actions on the target or destination that need to be executed first.

When all the prerequisite actions have been executed, the main action becomes executable.

- A grayed-out checkbox and a prohibition symbol ()

You need to perform some prerequisite steps outside Intersight Workload Optimizer before you can execute the action. Hover on the checkbox to see the prerequisite steps.

Scale VM ComplianceMove2 in Development from t2.micro to t3.nano EST. SAVINGS: \$0.00 EFFICIENCY >

Matching Virtual Machine needs: CPU 1 Core, Virtual Memory not monitored


To execute this action, enable NVMe for ComplianceMove2, and change instance type in the AWS Console

Scale11g-Win-172.32 fro... EST. SAVINGS: \$200 EFFICIENCY >

g-Win-172.32'

B. Action Details

Click the arrow icon to expand the entry and view action details.

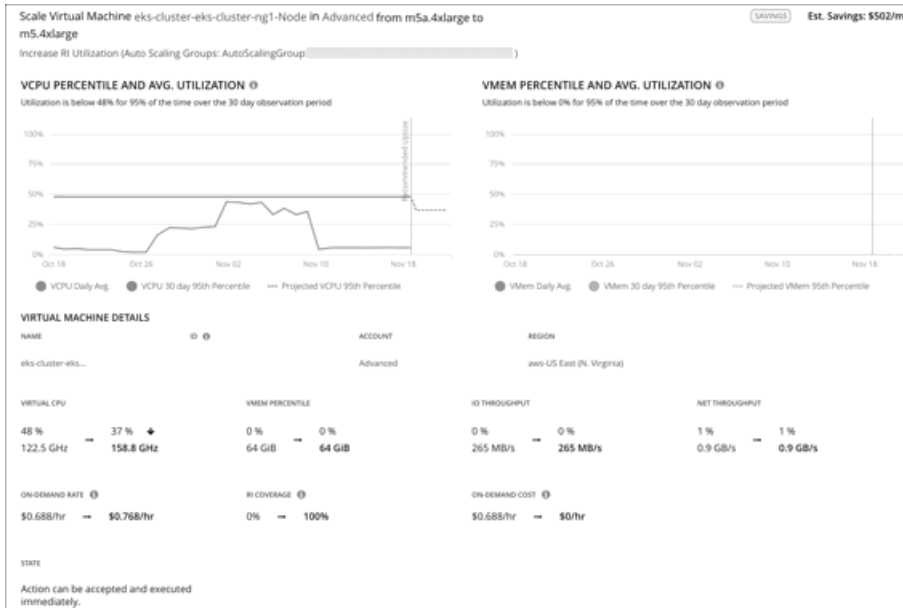

Action details include:

- A description of the recommended action, such as **Scale Virtual Machine...**

NOTE:

The action item gives the names of the affected entities. You can click on these entity names to drill down and set the **Overview** scope to that specific entity. To return after drilling down to an entity in the action details, use the browser's **Back** button.

- Immediately below the description, a summary of requirements, risks, opportunities, or reasons for the recommended action
- The impact of executing the action.

For more information, see [Action Details \(on page 59\)](#).

C. Search


For a long list of pending actions, use search to narrow the results.

Search: turbo FILTER

APPLY SELECTED

- Move Volume vol-0cad8fb9522e40f07 of Virtual Machine michael-turbo...
Improve overall performance EST. SAVINGS: \$0.045 / HR PREVENTION >
- Move Volume vol-01612aa64763cd9b7 of Virtual Machine arsen-turbo-...
Improve overall performance EST. INVESTMENT: \$0.045 / HR PREVENTION >
- Move Volume vol-013d6d9f578e62327 of Virtual Machine arsen-turbo-6...
Improve overall performance EST. SAVINGS: \$0.045 / HR PREVENTION >

D. Filter and Sort

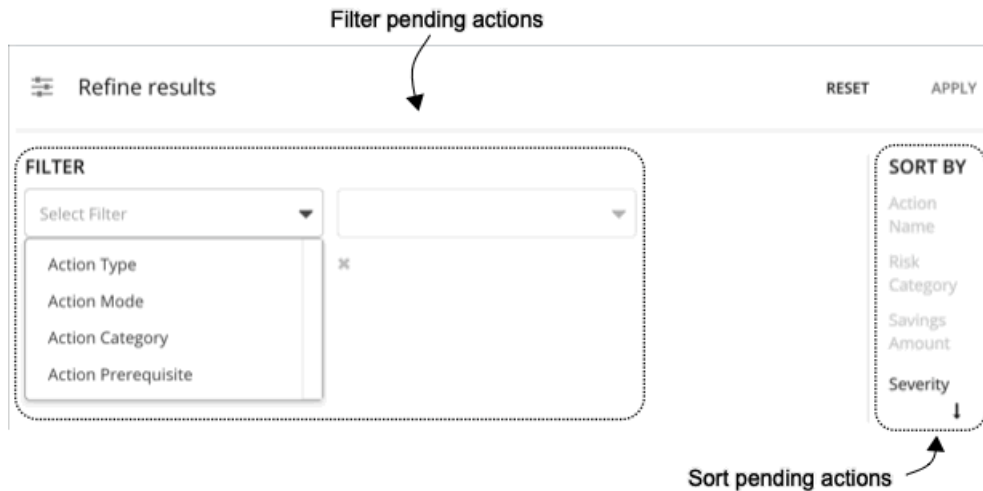

When you click **Filter**, you can:


- Filter the list by [action type \(on page 45\)](#), [action mode \(on page 49\)](#), [action category \(on page 48\)](#), action prerequisite, or any combination of these items.
- Sort the actions in ascending or descending order by severity, name of the action target, risk category, or savings amount.

Intersight Workload Optimizer determines action severity by the amount of improvement the affected entities will gain by executing the action. Action severities are:


- Minor – Issues that affect cost or workload distribution, but not impact the QoS your users will experience
- Major – Issues that can affect QoS and should be addressed
- Critical – Issues that affect the QoS that your environment can deliver, and you are strongly advised to address them

For example:

- To see only the actions that you can execute through the Intersight Workload Optimizer user interface, filter the list by action mode and select **Manually executable**.

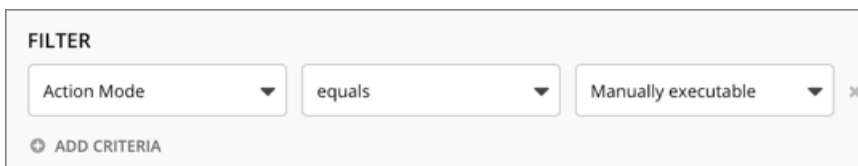

- To see only resize actions that are manually executable and that give efficiency improvements, set the filter as follows:

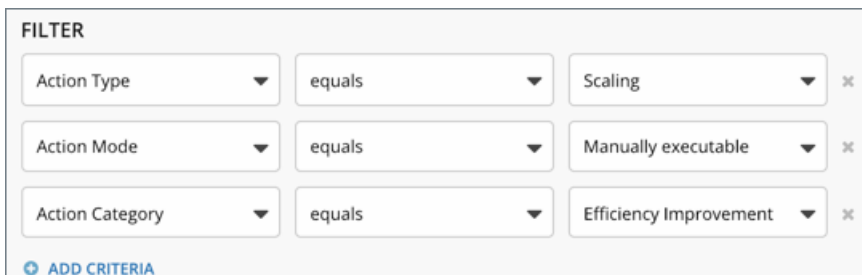

E. Download


Download the pending actions list as a CSV file.

Action Details

Each action in the Pending Actions list comes with a description and additional details to help you understand why Intersight Workload Optimizer recommends it and what you would gain if you execute it.

At first glance, some individual actions might appear trivial and it is instinctively convenient to ignore them. It is important to keep in mind that executing a single action can impact other workloads in a meaningful way, helping move these other workloads closer to their desired state.


Example

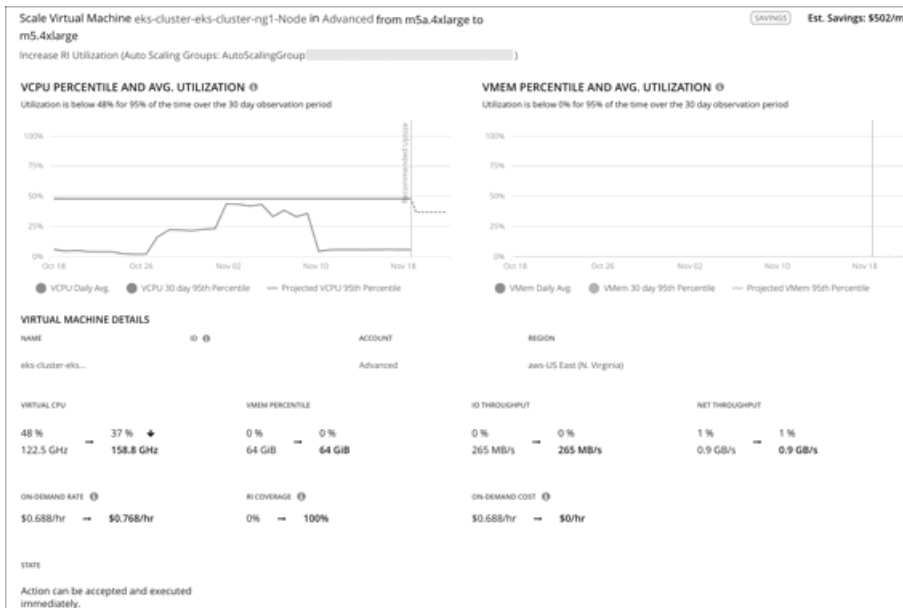

In the image shown above, the action details indicate that scaling the virtual machine to a different instance type impacts discount coverage in a meaningful way. By increasing discount coverage from 0% to 100%, the projected hourly on-demand cost drops to \$0, bringing estimated savings of \$502 per month.

Utilization Charts

Intersight Workload Optimizer uses percentile calculations to measure resource utilization more accurately, and drive actions that improve overall utilization and reduce costs for cloud workloads. When you examine the details for an entity or pending action, you will see charts that highlight resource *utilization percentiles* for a given observation period, and the projected percentiles after you execute the action.

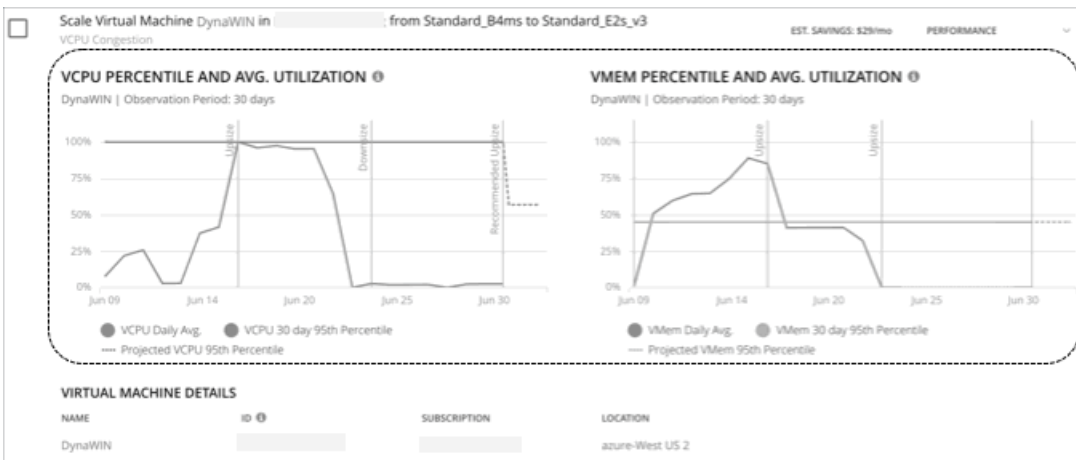

The charts also plot *daily average utilization* for your reference. If you have previously executed scaling actions on the entity, you can see the resulting improvements in daily average utilization. Put together, these charts allow you to easily recognize utilization trends that drive Intersight Workload Optimizer's recommendations.

Notes:

- You can set constraints in policies to refine the percentile calculations.
- After you execute an action, it might take some time for the charts to reflect the resulting improvements.

Entities with Utilization Charts

Utilization charts display for actions on the following entity types:

Entity Type	Monitored Resources		Notes
	Percentile Utilization	Average Utilization	
Virtual Machine	<ul style="list-style-type: none"> ■ vCPU ■ vMem 	<ul style="list-style-type: none"> ■ vCPU ■ vMem 	<p>For on-prem VMs, you will see either a VCPU or VMem chart, depending on the commodity that needs to scale. For cloud VMs and VMs in Migrate to Cloud plans, both charts display.</p> <p>These charts also appear when you scope to a given VM (on-prem or cloud) and view the Details page. They also appear in Migrate to Cloud plan results.</p>
Virtual Machine Spec	<ul style="list-style-type: none"> ■ vCPU ■ vMem 	<ul style="list-style-type: none"> ■ vCPU ■ vMem ■ Storage ■ Number of replicas 	<p>See Virtual Machine Spec Actions (on page 151).</p>
Database (cloud)	<ul style="list-style-type: none"> ■ DTU Pricing Model <ul style="list-style-type: none"> – DTU ■ vCore Pricing Model <ul style="list-style-type: none"> – vCPU – vMem – IOPS – Throughput 	<ul style="list-style-type: none"> ■ DTU Pricing Model <ul style="list-style-type: none"> – DTU – Storage ■ vCore Pricing Model <ul style="list-style-type: none"> – vCPU – vMem – IOPS – Throughput – Storage 	<p>See Cloud Database Actions (on page 177).</p>
Database Server (cloud)	<ul style="list-style-type: none"> ■ vCPU ■ vMem ■ IOPS 	<ul style="list-style-type: none"> ■ vCPU ■ vMem ■ IOPS 	<p>See Cloud Database Server Actions (on page 159).</p>
Volume (cloud)	<ul style="list-style-type: none"> ■ IOPS ■ Throughput 	<ul style="list-style-type: none"> ■ IOPS ■ Throughput 	<p>These charts also appear when you scope to a given volume and view the Details page.</p> <p>See Cloud Volume Actions (on page 170).</p>
Workload Controller	<ul style="list-style-type: none"> ■ vCPU limits and requests 	<ul style="list-style-type: none"> ■ vCPU limits, throttling, and requests 	<p>See Container Actions (on page 100).</p>

Entity Type	Monitored Resources		Notes
	Percentile Utilization	Average Utilization	
	<ul style="list-style-type: none"> vMem limits and requests 	<ul style="list-style-type: none"> vMem limits and requests 	

Actions Tips and Best Practices

To get the best results from Intersight Workload Optimizer's Application Resource Management, you should set as many actions as possible to *Automated*. If you want to approve any changes, set the actions to *Manual*.

At first glance, individual actions might appear trivial and it is instinctively convenient to ignore them. It is important to keep in mind that executing a single action can impact other workloads in a meaningful way, helping move these other workloads closer to their desired state. However, if you find that a recommended action is not acceptable (for example, if it violates existing business rules), you can set up a policy with your preferred action.

In some cases, actions can introduce disruptions that you want to avoid at all costs. For example, during critical hours, Intersight Workload Optimizer might execute a resize action on a mission critical resource, which then requires that resource to restart. It is important to anticipate these disruptions and plan accordingly. For example, you can create a group for all critical resources, scope the group in an automation policy, set the action mode to *Automatic*, and then set the schedule to off-peak hours or weekends. For details on setting schedules, see [Setting Policy Schedules \(on page 76\)](#).

Resize Actions

Allow VMs that have hot-add enabled to automatically resize up.

Use Tuned Scaling to automatically resize VM and storage resources when the resize amount falls within an acceptable range, and for Intersight Workload Optimizer to notify you when the amount falls outside the range so you can take the most appropriate action. For details, see [Tuned Scaling for On-prem VMs \(on page 191\)](#).

After executing a storage resize, Intersight Workload Optimizer indicates that the resize action has succeeded but the hypervisor might not show the corresponding change in storage capacity. If this occurs, perform a manual refresh of the hypervisor so it can discover the storage changes.

Move Actions

Intersight Workload Optimizer recommends automating host and storage migration.

Use placement constraints if you have placement requirements for specific workloads in your environment (for example, all production virtual machines moving only to specific clusters). Intersight Workload Optimizer can automatically import placement policies when you add a target, or you can create new placement policies. For more information, see [Placement Policies \(on page 62\)](#).

Working With Policies

Policies set business rules to control how Intersight Workload Optimizer analyzes resource allocation, how it displays resource status, and how it recommends or executes actions. Intersight Workload Optimizer includes two fundamental types of policies:

- Placement Policies

To modify workload placement decisions, Intersight Workload Optimizer divides its market into segments that constrain the valid placement of workloads. Intersight Workload Optimizer discovers placement rules that are defined by the targets in your environment, and you can create your own segments.

- Automation Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

The Policy Management page shows all the currently defined policies. From this page you can:

- Create new policies.
- Delete a user-created policy.
- Edit a default or user-created policy.
- Enable or disable discovered placement policies. For a Intersight Workload Optimizer segment (a placement policy that was created in Intersight Workload Optimizer), you can edit the policy definition as well as enable/disable it.

To see the policies that are applied to a scope, go to the Search page and set the Intersight Workload Optimizer session to that scope. Then show the Policy view. For more information, see [Scope Policies \(on page 33\)](#).

Placement Policies

To optimize your environment, Intersight Workload Optimizer recommends actions to place workloads such as applications, containers, or VMs on their providers. Intersight Workload Optimizer can recommend these actions, or execute them automatically.

When calculating workload placement, Intersight Workload Optimizer respects cluster boundaries, networks, and provisioned data stores. In addition, the configuration of your environment can specify logical boundaries, and within Intersight Workload Optimizer you can create even more boundaries. These boundaries impose segments on the market that Intersight Workload Optimizer uses to model your application infrastructure.

In finance, a market segment divides the market according to the criteria different groups of people use when they buy or sell goods and services. Likewise in the Intersight Workload Optimizer market, a workload placement segment uses criteria to focus the buying and selling of resources within specific groups of entities. This gives you finer control over how Intersight Workload Optimizer calculates moves. When managing segments you can:

- Review the placement policies that Intersight Workload Optimizer has discovered. These are policies that have been defined in your environment, outside of Intersight Workload Optimizer. See [Importing Workload Placement Policies \(on page 62\)](#).
- Create placement segments that restrict workload placement according to specific rules. See [Creating Placement Policies \(on page 62\)](#).

NOTE:

You can enable or disable any imported policy or created workload placement segment to affect placement calculations in the real-time environment or in plans.

Importing Workload Placement Policies

The hypervisors that you set as targets can include placement policies of their own. Intersight Workload Optimizer imports these placement policies, and considers them to be constraints on placement. You cannot disable these imported policies for real-time analysis, but you can disable them for plans.

Intersight Workload Optimizer imports:

- vCenter Server DRS Rules

See " Other Information Imported from vCenter " in the *Target Configuration Guide*

NOTE:

In vCenter environments, Intersight Workload Optimizer does not import DRS rules if DRS is disabled on the hypervisor. Further, if Intersight Workload Optimizer did import an enabled DRS rule, and somebody subsequently disables that DRS rule, then Intersight Workload Optimizer will discover that the rule was disabled and will remove the imported placement policy.

Creating Placement Policies


Placement Policies set up constraints to affect how Intersight Workload Optimizer calculates the placement of workloads in your environment. In this way, you can direct Intersight Workload Optimizer to recommend actions that satisfy business rules for your enterprise.

Intersight Workload Optimizer discovers Placement policies that have been defined in your environment, and you can also create Placement policies through the Intersight Workload Optimizer user interface. Note that you can enable or disable any Placement policy, both for real-time analysis and for planning scenarios.

Intersight Workload Optimizer supports the following placement policies:

- **Place** – Determine which entities use specific providers
 For example, the VMs in a consumer group can only run on a host that is in the provider group. You can limit the number of consumers that can run on a single provider – for hosts in the provider group, only 2 instances of VMs in the consumer group can run on the same host. Or no more than the specified number of VMs can use the same storage device.
- **Don't Place** – Consumers must never run on specific providers
 For example, the VMs in a consumer group can never run on a host that is in the provider group. You can use such a segment to reserve specialized hardware for certain workloads.
- **Merge** – Merge clusters into a single provider group
 For example, you can merge three host clusters in a single provider group. This enables Intersight Workload Optimizer to move workload from a host in one of the clusters to a host in any of the merged clusters to increase efficiency in your environment.
- **License** – Set up hosts to provide licenses for VMs
 For VMs that require paid licenses, you can create placement policies that set up certain hosts to be the VMs' preferred license providers. Intersight Workload Optimizer can then recommend consolidating VMs or reconfiguring hosts in response to changing demand for licenses.

1. Navigate to the Settings Page.
 Click to navigate to the Settings Page. From there, you can perform a variety of Intersight Workload Optimizer configuration tasks.
2. Choose Policies.
 Click to navigate to the Policy Management Page.
 This page lists all the policies that you currently have configured for Intersight Workload Optimizer.
3. Create a new Placement policy.

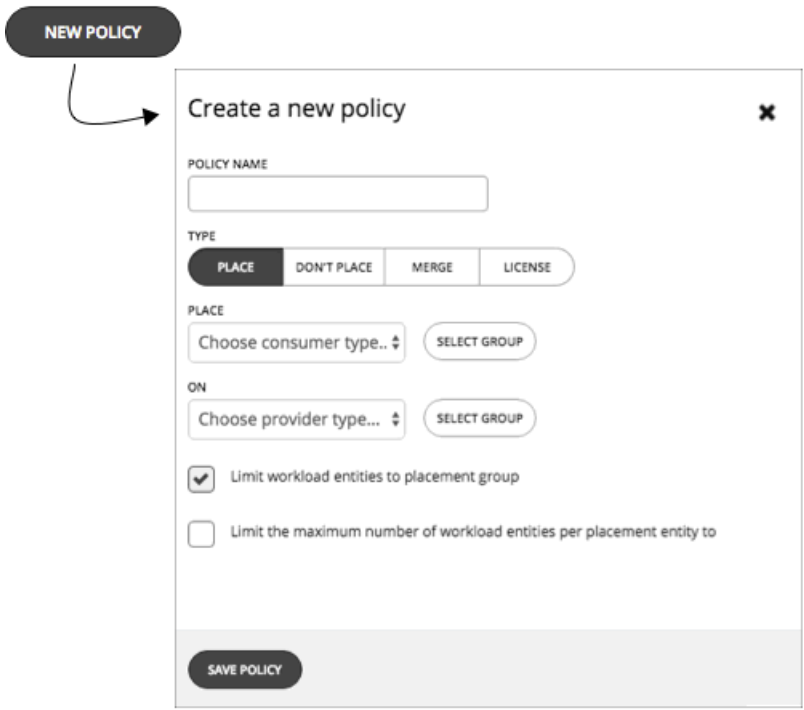

First, select the type of Placement policy to create, then specify the settings:

- Give the policy a name

- Choose the policy type and make the settings
 - Save the policy when you're done
4. Create a **Place** policy.

POLICY NAME

TYPE

PLACE DON'T PLACE MERGE LICENSE

PLACE

Choose consumer type.. ▾ SELECT GROUP

ON

Choose provider type... ▾ SELECT GROUP

Limit workload entities to placement group

Limit the maximum number of workload entities per placement entity to

These policies control where workload can be placed. For example, you can specify that a VM will only be placed on a host that is a member of a specific cluster. Or you could specify that any applications in a specific group can only be placed on a datastore that is a member of a specific group.

- **Specify the consumer group** – The group or cluster of entities that will be placed on the identified providers
 - **Specify the provider group** – The group or cluster of entities that will provide resources to the consumers
 - **Limit workload entities to placement group** – Set the policy to only place consumer entities on members of the provider group
 - **Limit the maximum number of workload entities per placement entity to** – Limit how many instances of the consumer entities can be placed on a single provider
5. Create a **Don't Place** policy.

POLICY NAME

TYPE

PLACE **DON'T PLACE** MERGE LICENSE

DON'T PLACE

Choose consumer type.. ▾ SELECT GROUP

ON

Choose provider type... ▾ SELECT GROUP

These policies identify groups or clusters that will never host the consumer entities. For example, you can specify that a VM will never be placed on a host that is a member of a specific cluster. Or you can specify that a set of non-critical applications will never be placed on specialized hardware, as a way to ensure availability for critical applications.

- **Specify the consumer group** – The group or cluster of entities that will be excluded from the identified providers
 - **Specify the provider group** – The group or cluster of entities that will not provide resources to the consumers
6. Create a **Merge** policy.

POLICY NAME

TYPE

PLACE DON'T PLACE **MERGE** LICENSE

MERGE

Choose consumer type.. ▾ SELECT CLUSTERS

You can create placement policies that merge multiple clusters into a single logical group for the purpose of workload placement.

For example, your environment might divide hosts into clusters according to hardware vendor, or by some other criteria. Workload placement typically does not cross such cluster boundaries. However, there might be no technical reason to apply these boundaries to workload placement. By creating a larger pool of provider resources, Intersight Workload Optimizer has even more opportunities to increase efficiency in your environment.

For merge policies, keep the following considerations in mind:

- For most policies that merge host and storage clusters, the clusters you place in the Merge segment must be members of the same datacenter.
- For vCenter environments, you can create placement policies that merge datacenters to support cross-vCenter moves. In this case, where a datacenter corresponds to a given vCenter target, the merged clusters can be in different datacenters. In this case you must create two merge policies; one to merge the affected datacenters, and another to merge the specific clusters.

Also note that the clusters you merge must use the same network names on their respective datacenters.

- For cloud environments, you can create policies to merge datacenters. Use these merge policies to support VM moves that find better costs on other zones.

To create a Merge policy, choose the type of entity to merge, and then select the groups you will merge.

7. Create a **License** policy.

POLICY NAME

TYPE

PLACE DON'T PLACE MERGE **LICENSE**

LICENSE

Choose consumer type.. ▾ SELECT GROUP

ON

Choose provider type... ▾ SELECT GROUP

Assume you have purchased a number of licenses for a database – you pay for the right to run that database on a certain number of hosts. You can create a license policy to identify the hosts that provide the license, and the VMs that can consume that license.

After you create the policy, Intersight Workload Optimizer can recommend the following actions in response to changing demand for licenses:

- When demand is low, Intersight Workload Optimizer recommends consolidating VMs on as few license-providing hosts as possible to reduce your license costs. To consolidate, you move VMs to another host and then reconfigure the original hosts to remove their licenses. Note that Intersight Workload Optimizer will *not* recommend suspending these hosts. Since they remain active, they can be reconfigured to become providers when demand starts to exceed capacity.

For example, if you have Host_01 providing a license to VM_01 and Host_02 providing a license to VM_02, you will see two recommendations – move VM_02 to Host_01 and then remove the license in Host_01. You will not see a recommendation to suspend Host_01.

- When demand exceeds capacity, and there are hosts in the policy that currently do not provide licenses, Intersight Workload Optimizer recommends reconfiguring those hosts to become providers and then moving VMs to those hosts. If all hosts are currently providing licenses, Intersight Workload Optimizer recommends adding licenses to the hosts to meet demand.

These actions are more efficient than provisioning new hosts.

To create a License policy:

- Specify the license consumers (VMs).
- Specify the license providers (hosts).

In addition to creating a license policy, you must also create host *automation* policies to allow Intersight Workload Optimizer to recommend reconfigure actions on hosts. In the automation policies, add the license-providing hosts and then enable the *Reconfigure* action.

8. When you have made all your settings, be sure to save the Policy.

Automation Policies

As Intersight Workload Optimizer gathers metrics, it compares the metric values against specified constraint and capacity settings to determine whether a metric exhibits a problem, and what actions to recommend or execute to avoid a problem. Intersight Workload Optimizer uses Automation Policies to guide its analysis and resulting actions. These policies can specify:

- Action Automation

Whether to execute automatically or manually, or whether to just recommend the action. For more information, see [Action Automation \(on page 77\)](#).

- Constraints and Other Settings

Settings that affect the Intersight Workload Optimizer analysis of the state of your environment. These include operational, utilization, and scaling constraints.

For more information, see [Constraints and Other Settings \(on page 78\)](#).

Default and Scoped Automation Policies

Intersight Workload Optimizer ships with default Automation Policy setting for the different types of entities it can discover in your environment. The settings for these default policies should be adequate to meet your initial business requirements. These policies apply to the global scope – Unless you override them, they affect all the entities in your environment. For more information, see [Working With Default Automation Policies \(on page 66\)](#).

Intersight Workload Optimizer can include scoped Action Policies, which override the default settings for certain entities. With these policies you specify one or more groups of entities as the policy scope. You can also set a schedule to the policy to specify maintenance windows, or to support orchestration workflows that require approval before executing the given action. For more information, see [Working With Scoped Automation Policies \(on page 69\)](#) and [Setting Policy Schedules \(on page 76\)](#).

Working With Default Automation Policies

Intersight Workload Optimizer ships with default Automation Policy settings for the different types of entities it can discover in your environment. The settings for these default policies should be adequate to meet your initial business requirements. These policies apply to the global scope – Unless you override their settings, they affect all the entities in your environment.

Over time you might learn that you want to make global changes to certain policy settings. For example, **Enforce Non Disruptive Mode** is turned off by default. You might learn that in most cases you want to turn it on, and only turn it off for select scopes. In that case, you would turn it on in the default Automation Policy for VMs, and then set scoped policies for those groups of VMs for which you want to turn it off.

Relationships Between Default and Scoped Policies

Your default Automation Policies and scoped Automation Policies take effect in relation to each other. A default policy has a global effect, while a scoped policy overrides the default policy for the entities within the indicated scope. You should keep the following points in mind:

- Scoped policies override a subset of settings.
 - A scoped policy can override a subset of settings for the entity type, and for the remainder Intersight Workload Optimizer will use the default policy settings on the indicated scope.
- When an entity applies conflicting scoped policies, Intersight Workload Optimizer applies the following tie breakers:
 - A scheduled policy always takes precedence over a non-scheduled policy, even if the non-scheduled policy is more conservative.
 - Among scheduled policies with *identical* schedules, the most conservative setting wins.
 - Among non-scheduled policies, the most conservative setting wins.

For example, a VM currently belongs to four groups with different policy settings.

- Group A policy: Resize VM in *Manual* mode every Saturday.
- Group B policy: Resize VM in *Automatic* mode every Saturday.
- Group C policy: Resize VM in *Manual* mode (no schedule).
- Group D policy: Resize VM in *Recommend* mode (no schedule).


Results:

- On a Saturday, Groups A and B policies take precedence over Groups C and D policies. The VM ultimately applies the Group A setting because it is more conservative.
 - On all the other days, only Groups C and D policies are active. The VM applies the Group D setting because it is more conservative.
- Scoped policies always take precedence over default policies.
 - Even if the default policy has a more conservative setting, the setting in the scoped policy wins for entities in that scope.
 - For a global effect, *always* use default policies.
 - Because of the *conservative setting wins* rule for scoped policies, you should never use a scoped policy to set a global effect. For example, you can create a scoped policy for the **All VMs** group. If you then specify a conservative setting for that policy, no other scoped policy can specify a more aggressive setting – the conservative setting will always win.
 - For this reason, you should always use default Automation Policies whenever you want to achieve a global effect.

Viewing and Editing Default Automation Policies

To view or edit your default policies:

1. Navigate to the Settings Page.
 - Click to navigate to the Settings Page. From there, you can perform a variety of Intersight Workload Optimizer configuration tasks.
2. Choose Policies.
 - Click to navigate to the Policy Management Page.
 - This page lists all the policies that you currently have configured for Intersight Workload Optimizer.
3. On the Policy Management page, click **Defaults**.

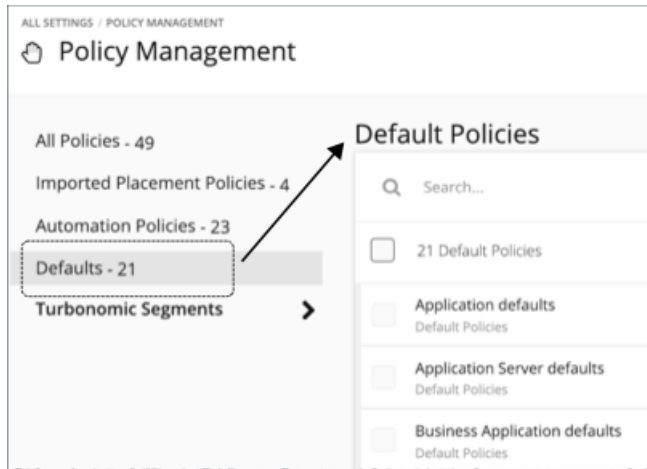

The page displays a list of all the default policies, by entity type.

4. Click the entity type whose default settings you wish to view or change.
A fly-out appears with all the settings for that default policy. You can navigate to view different settings
5. Optionally, edit settings for this default policy.
Navigate to the settings you want to change, and enter a different value for each.
6. When you're done, click **Save and Apply**.

Global Default Policy

Use these settings to modify Intersight Workload Optimizer analysis globally for any scope of your environment. These defaults affect both scoped automation policies and default automation policies.

ACTION AUTOMATION

Disable All Actions

Attribute	Default Setting
Disable All Actions	OFF

When this is ON, Intersight Workload Optimizer does not generate any actions for your environment. For example, assume you have configured a number of policies that automate actions, but you want to stop making changes to the entire environment for a period of time. Turn this ON to stop all execution with a single setting.

OPERATIONAL CONSTRAINTS

VM Growth Observation Period

Attribute	Default Value
VM Growth Observation Period	1 month

Use this setting to specify how much historical data the Intersight Workload Optimizer analysis will use to calculate time to exhaustion of your cluster resources.

Intersight Workload Optimizer runs nightly plans to calculate headroom for the clusters in your on-prem environment. To review your cluster headroom in dashboards, set the view scope to a cluster. With that scope, the view includes charts to show headroom for that cluster, as well as time to exhaustion of the cluster resources.

To calculate cluster growth trends, analysis uses historical data for the given clusters. With **VM Growth Observation Period**, you can specify how much historical data the headroom analysis will use to calculate time to exhaustion of your cluster resources.

For example, if cluster usage is growing slowly, then you can set the observation to a period that is long enough to capture that rate of growth.

If the historical database does not include at least two entries in the monthly data for the cluster, then analysis uses daily historical data.

Allow Unlimited Host Provisioning

Attribute	Default Setting
Allow Unlimited Host Provisioning	OFF

By default, Intersight Workload Optimizer allows overprovisioning hosts up to 10 times their memory capacity, and up to 30 times their CPU capacity. When this setting is ON, Intersight Workload Optimizer removes these overprovisioning limits to allow VM placements on already overprovisioned hosts.

This setting does not stop Intersight Workload Optimizer from recommending actions to provision new hosts in clusters.

Enable Analysis of On-prem Volumes

Attribute	Default Setting
Enable Analysis of On-prem Volumes	OFF

[On-prem volumes \(on page 211\)](#) represent VM Disks discovered by hypervisor targets. A VM will have one volume for each configured disk and another volume (representing the configuration) that always moves with Disk 1.

■ OFF (default)

Intersight Workload Optimizer analyzes volume resources as part of VM analysis. In the real-time market and on-prem plans, any action to move VM storage ensures that volumes stay together on the underlying datastore. A [Migrate to Cloud plan \(on page 271\)](#) will recommend storage per datastore to hold all the VM Disks currently on the datastore.

For example, assume a VM with three disks. Disks 1 and 3 are on Datastore A, while Disk 2 is on Datastore B.

- During a storage migration, VM Disk volumes 1 and 3 will stay on the same datastore.
- A Migrate to Cloud plan will recommend a storage disk for VM Disk volumes 1 and 3, and another storage disk for VM Disk volume 2.

■ ON

Intersight Workload Optimizer analyzes resources on each volume independently. In the real-time market and on-prem plans, any action to move VM storage migrates volumes to the most optimal datastore. A Migrate to Cloud plan will recommend storage for each volume.

For example, assume a VM with three disks. Disks 1 and 3 are on Datastore A, while Disk 2 is on Datastore B.

- During a storage migration, VM Disk volumes 1, 2, and 3 can migrate to different datastores.
- A Migrate to Cloud plan will recommend three separate storage disks for VM Disk volumes 1, 2, and 3.

IMPORTANT:

When you turn on this setting, your Intersight Workload Optimizer instance will start to use more memory and storage to perform its analysis. For example an environment with 10,000 VMs and an average of three disks per VM represents a three-fold increase in entities that require analysis. Currently, instances that monitor more than 50,000 VMs will experience a significant drop in performance. For this reason, this setting is turned off by default.

Before turning on this setting, review your [VM automation policies \(on page 193\)](#) and verify that Storage Move actions are in *Recommend* or *Manual* mode. In addition, review your [storage placement policies \(on page 62\)](#) to ensure that individual VM volumes can be placed on the expected storage.

Working With Scoped Automation Policies

To override the current default Automation Policies, you can create scoped policies. These specify settings you want to change for certain entities in your environment. For these policies, you assign the policy to one or more groups of entities. In addition, you can assign a schedule to a scoped policy to set up maintenance windows or other scheduled actions in your environment.

Reasons to create scoped Automation Policies include:

- Change the Analysis Settings for Certain Entities

Intersight Workload Optimizer uses a number of settings to guide its analysis of the entities in your environment. The default settings might be fine in most cases, but you might want different analysis for some groups of entities. You can configure scoped policies to modify Operational Constraints or Scaling Constraints. For more information, see [Constraints and Other Settings \(on page 78\)](#).

- Phase In Action Automation

Assume you want to automate scaling and placement actions for the VMs in your environment. It is common to take a cautious approach, and start by automating clusters that are not critical or in production. You can scope the policy to those clusters, and set the action mode to Automatic for different actions on those VMs (see [Action Modes \(on page 49\)](#)).

For the steps to create a scoped policy, see [Creating Scoped Automation Policies \(on page 70\)](#).

Discovered Scoped Automation Policies

As Intersight Workload Optimizer discovers your environment, it can find configurations that set up scopes that need specific policies. For example:

- HA Configurations

For vCenter Server environments, Intersight Workload Optimizer discovers HA cluster settings and translates them into CPU and memory utilization constraints. The discovery creates a group of type *folder* for each HA cluster, and creates a policy that sets the appropriate CPU and memory constraints to that policy.

- Availability Sets

In public cloud environments, Intersight Workload Optimizer discovers groups of VMs that should keep all their VMs on the same template. In the Automation Policies list, these appear with the prefix `AvailabilitySet::` on the policy names. You can enable Consistent Resizing for the VMs in each group so Intersight Workload Optimizer can resize them to the same size.


Creating Scoped Automation Policies

Create a new scoped Automation Policy from the Policy Management Page.


1. Entry Point

Click **More** and display the Settings Page. Then choose **Policies**.

This opens the Policy Management Page, which lists all the currently available policies.

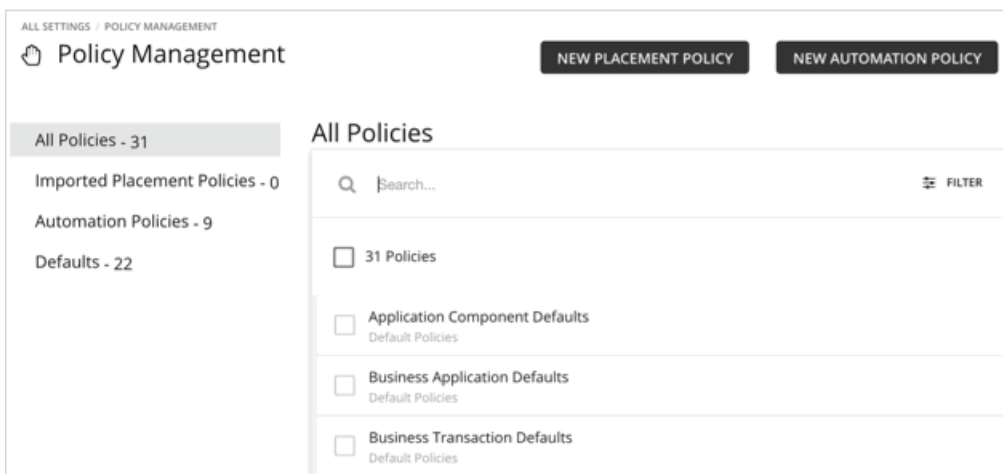


Click **NEW AUTOMATION POLICY** and then select the policy type.

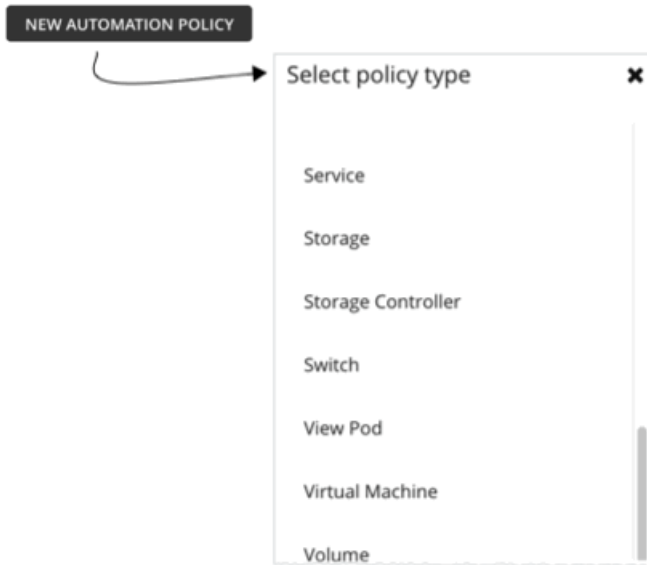


This sets the type of entity that your policy will affect. Note that Intersight Workload Optimizer supports different actions for different types of entities. For example, you cannot add VMem to a storage device. Setting policy type is the first step you take to focus on which actions you want to map to your workflows.

2. Policy Name

Name the policy.

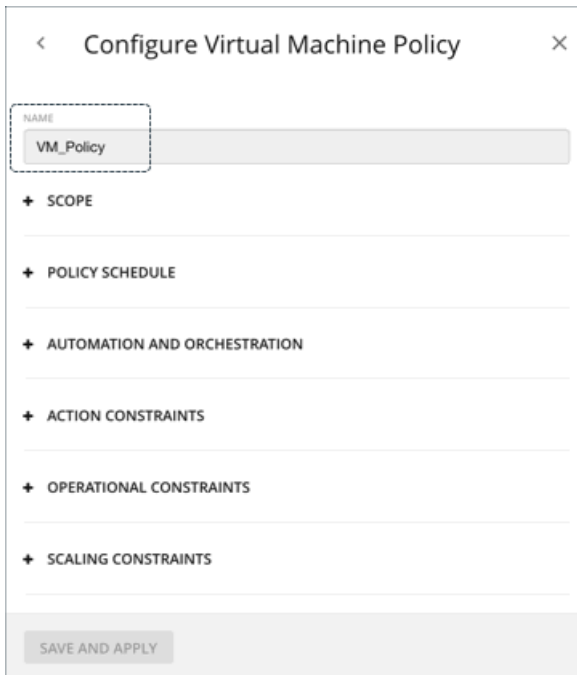

3. Scope

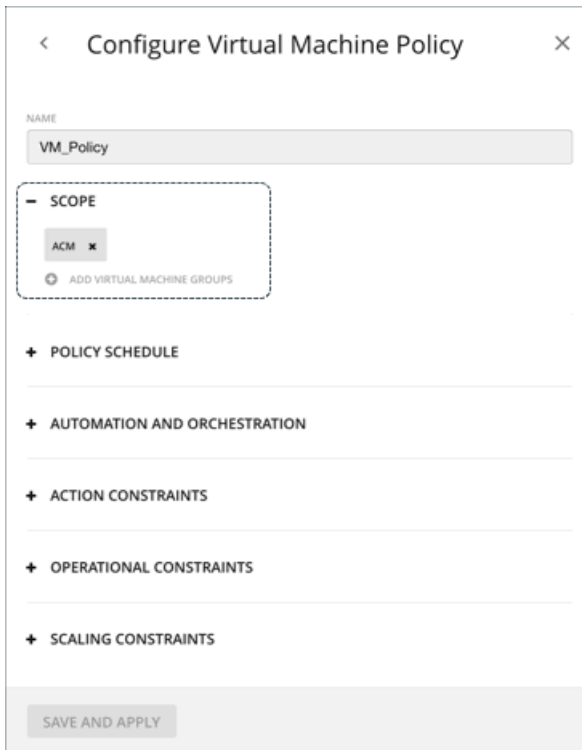

Configure Virtual Machine Policy

NAME
VM_Policy

SCOPE
ACM x
ADD VIRTUAL MACHINE GROUPS

POLICY SCHEDULE

AUTOMATION AND ORCHESTRATION

ACTION CONSTRAINTS

OPERATIONAL CONSTRAINTS

SCALING CONSTRAINTS

SAVE AND APPLY


The scope determines which entities this policy will affect. Choose one or more groups, or create new groups and add them to the policy scope. These groups match the type of entity you have set for the policy.

In Intersight Workload Optimizer you can find nested groups (groups of groups). For example, the "By PM Cluster" group contains host clusters, and each host cluster is a group. Do not set the policy scope to a parent of nested groups. When setting up policies, be sure you set them to individual groups. If necessary, create a custom group for the settings you want to apply.

NOTE:

A single entity can be a member of multiple groups. This can result in a conflict of settings, where the same entity can have different Action Policy settings. For conflicts among scoped policy settings, the most conservative setting will take effect. For more details, see [Policy Scope \(on page 75\)](#).

4. Policy Schedule

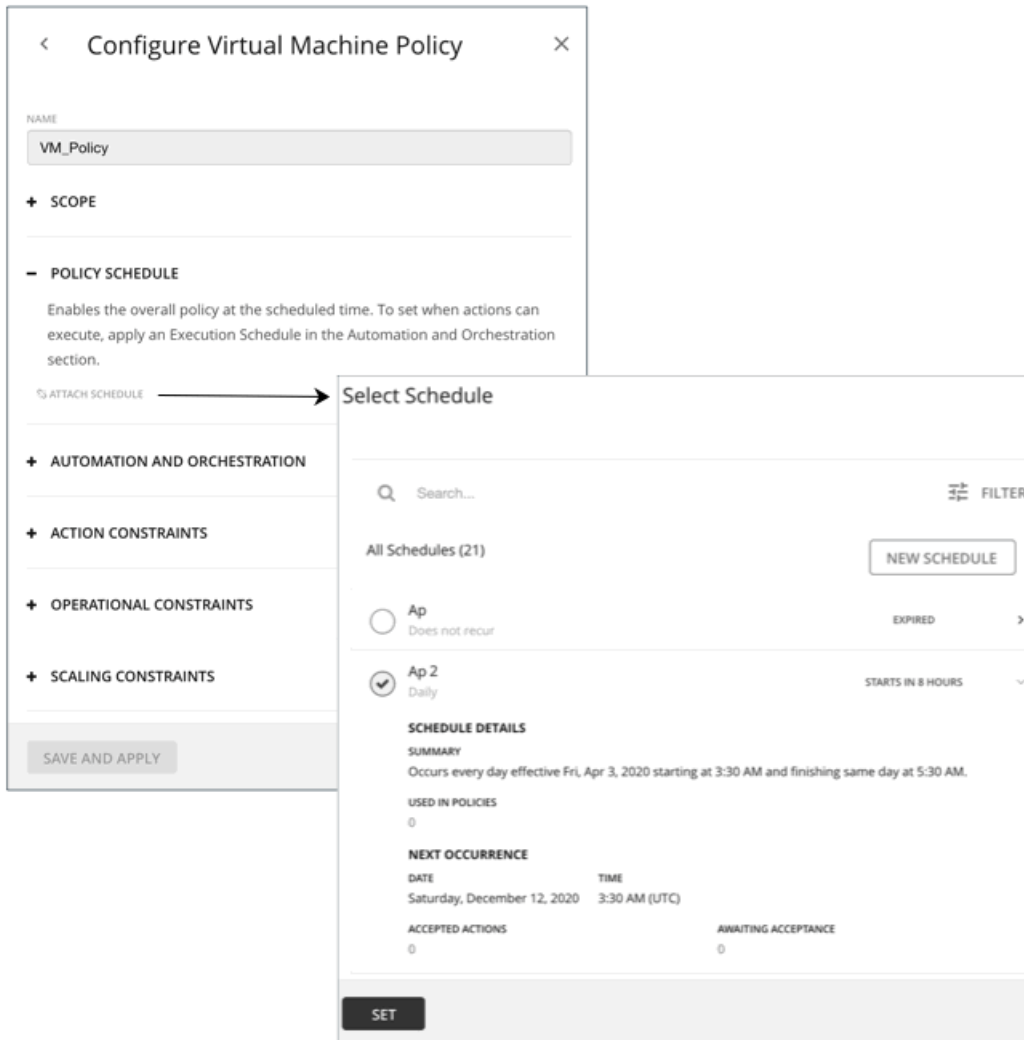

For use cases and information about how schedules affect policies, see [Policy Schedules \(on page 76\)](#).

The **Select Schedule** fly-out lists all the schedules that are currently defined for your instance of Intersight Workload Optimizer. Expand a schedule entry to see its details. The details include a summary of the schedule definition, as well as:

- **Used in Policies**
The number of policies that use this schedule. Click the number to review the policies.
- **Next Occurrence**
When the schedule will next come into effect.
- **Accepted Actions**
How many scheduled actions have been accepted to be executed in the next schedule occurrence. Click the number for a list of these actions.
- **Awaiting Acceptance**
The number of Manual actions affected by this schedule that are in the Pending Actions list, and have not been accepted. Click the number for a list of these actions.

If none of the listed schedules is suitable for your policy (or if none exists), click **New Schedule**. See [Creating Schedules \(on page 362\)](#).

NOTE:

When you configure a schedule window for a VM resize action, to ensure Intersight Workload Optimizer will execute the action during the scheduled time, you must turn off the **Enforce Non Disruptive Mode** setting for that scheduled policy. Even if you turn the setting off for the global policy, you still must turn the setting off for your scheduled policy. Otherwise Intersight Workload Optimizer will not execute the resize action.


5. Automation and Orchestration

NOTE:

If your installation supports both automation *and* orchestration, you can use policy settings to integrate actions with orchestration workflows. If your installation does *not* support orchestration, the following settings will have no effect:

- Before Execution
- Action Execution
- After Execution

You can define automation and orchestration settings for different action types within the same policy. For example, for a group of VMs in a policy, you can automate all *Resize* actions, but require *Suspend* actions to go through an approval process via an Orchestrator (such as ServiceNow).

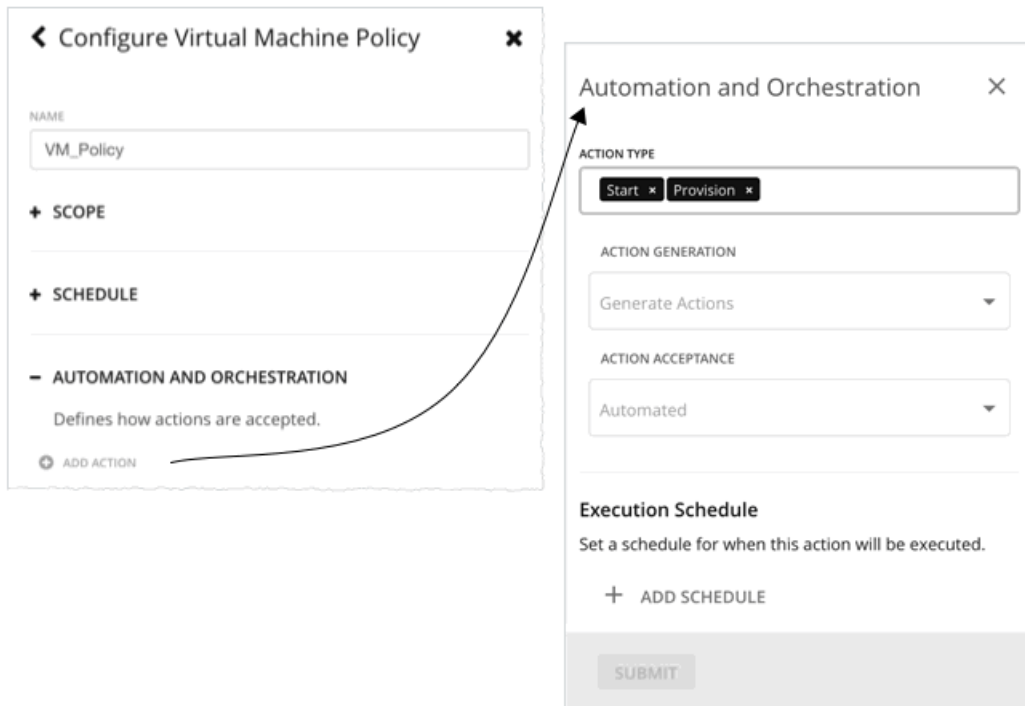

The screenshot shows two overlapping windows. The background window is titled 'Configure Virtual Machine Policy' and has a search bar with 'VM_Policy' entered. It has expandable sections for 'SCOPE', 'SCHEDULE', and 'AUTOMATION AND ORCHESTRATION'. The foreground window is titled 'Automation and Orchestration' and contains the following settings:

- ACTION TYPE:** A multi-select dropdown menu containing 'Start' and 'Provision'.
- ACTION GENERATION:** A dropdown menu set to 'Generate Actions'.
- ACTION ACCEPTANCE:** A dropdown menu set to 'Automated'.
- Execution Schedule:** A section with the text 'Set a schedule for when this action will be executed.' and an 'ADD SCHEDULE' button.
- SUBMIT:** A button at the bottom of the panel.

An arrow points from the 'ADD ACTION' button in the background window to the 'Automation and Orchestration' panel in the foreground window.

5.1. Action Type

See a list of actions that are viable for the policy, and then make your selections.

5.2. Action Generation and Acceptance

- Do not Generate Actions

Intersight Workload Optimizer never considers your selected actions in its calculations. For example, if you do not want to generate *Resize* actions for VMs in the policy, analysis will still drive toward the desired state, but will do so without considering resizes.

- Generate Actions

Intersight Workload Optimizer generates your selected actions to address or prevent problems. Choose from the following *Action Acceptance* modes to indicate how you would like the actions to execute:

- Recommend – Recommend the action so a user can execute it via the given hypervisor or by other means

- Manual – Recommend the action, and provide the option to execute that action through the Intersight Workload Optimizer user interface
- Automatic – Execute the action automatically

For automated resize or move actions on the same entity, Intersight Workload Optimizer waits five minutes between each action to avoid failures associated with trying to execute all actions at once. Any action awaiting execution stays in queue. For example, if a VM has both vCPU and vMem resize actions, Intersight Workload Optimizer could resize vCPU first. After this resize completes, it waits five minutes before resizing vMem.


5.3. Execution Schedule

You can defer the execution of generated actions to a non-critical time window. For example, if a workload experiences memory bottlenecks during the week, you can defer the necessary resize to the weekend. Even if the workload has minimal utilization over the weekend, Intersight Workload Optimizer can recognize the need to resize, and will execute the action.

For more information, see [Action Execution Schedules \(on page 77\)](#).

6. Constraints and Other Settings

The settings you can make are different according to the type of entity this policy will affect. Each setting you add to the policy takes precedence over the default value for that setting. For information about the settings you can make, see [Constraints and Other Settings \(on page 78\)](#).

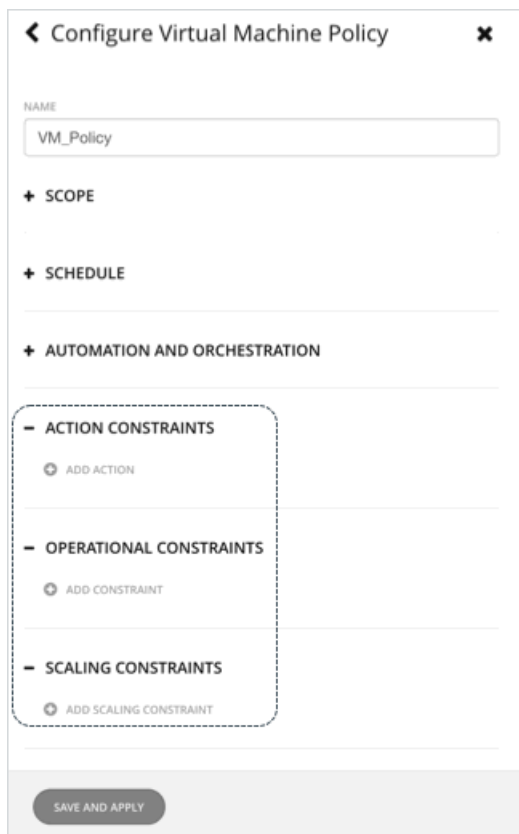

The screenshot shows a configuration window titled "Configure Virtual Machine Policy". At the top, there is a "NAME" field containing "VM_Policy". Below this are three expandable sections: "+ SCOPE", "+ SCHEDULE", and "+ AUTOMATION AND ORCHESTRATION". Under the "AUTOMATION AND ORCHESTRATION" section, there are three sub-sections: "- ACTION CONSTRAINTS" with an "ADD ACTION" button, "- OPERATIONAL CONSTRAINTS" with an "ADD CONSTRAINT" button, and "- SCALING CONSTRAINTS" with an "ADD SCALING CONSTRAINT" button. At the bottom of the window is a "SAVE AND APPLY" button.

Policy Scope

You must declare a scope whenever you make a scoped Automation Policy. The scope determines which entities will be affected by the policy settings. To set scope, you assign one or more groups to the policy. You can use discovered groups, or you can create your own groups. For information about creating groups, see [Creating Groups \(on page 358\)](#).

Relationships Between Default and Scoped Policies

Your default Automation Policies and scoped Automation Policies take effect in relation to each other. A default policy has a global effect, while a scoped policy overrides the default policy for the entities within the indicated scope. You should keep the following points in mind:

- Scoped policies override a subset of settings.

A scoped policy can override a subset of settings for the entity type, and for the remainder Intersight Workload Optimizer will use the default policy settings on the indicated scope.

- When an entity applies conflicting scoped policies, Intersight Workload Optimizer applies the following tie breakers:
 - A scheduled policy always takes precedence over a non-scheduled policy, even if the non-scheduled policy is more conservative.
 - Among scheduled policies with *identical* schedules, the most conservative setting wins.
 - Among non-scheduled policies, the most conservative setting wins.

For example, a VM currently belongs to four groups with different policy settings.

- Group A policy: Resize VM in *Manual* mode every Saturday.
- Group B policy: Resize VM in *Automatic* mode every Saturday.
- Group C policy: Resize VM in *Manual* mode (no schedule).
- Group D policy: Resize VM in *Recommend* mode (no schedule).

Results:

- On a Saturday, Groups A and B policies take precedence over Groups C and D policies. The VM ultimately applies the Group A setting because it is more conservative.
 - On all the other days, only Groups C and D policies are active. The VM applies the Group D setting because it is more conservative.
 - Scoped policies always take precedence over default policies.
- Even if the default policy has a more conservative setting, the setting in the scoped policy wins for entities in that scope.
- For a global effect, *always* use default policies.

Because of the *conservative setting wins* rule for scoped policies, you should never use a scoped policy to set a global effect. For example, you can create a scoped policy for the **All VMs** group. If you then specify a conservative setting for that policy, no other scoped policy can specify a more aggressive setting – the conservative setting will always win.

For this reason, you should always use default Automation Policies whenever you want to achieve a global effect.

Policy Schedules

You can set a schedule for an automation policy, which sets a window of time when the policy takes effect. For example, you can modify the Operational or Scaling Constraints for a given period of time. These settings affect Intersight Workload Optimizer analysis, and the actions it generates. You can set up scheduled times when you want to change those settings.

Remember that for scoped automation policies, it is possible that one entity can be in two different scopes – This means the entity can be under the effect of two different policies. For this reason, scoped policies keep the rule, *the most conservative setting wins*. However, a more aggressive scoped policy takes precedence over the corresponding default automation policy. For more details, see [Policy Scope \(on page 75\)](#).

You must consider these rules when you add schedules to policies. If the more conservative settings are in a default automation policy, then the scheduled change takes effect. However, if the more conservative settings are in another scoped policy, then the conservative settings *win*, and the scheduled changes do not take effect.

Policy Schedule and Action Execution Schedule

A scheduled policy can include *actions*. When the policy is in effect, Intersight Workload Optimizer recommends or automatically executes those actions as they are generated. Some of those actions could be disruptive so you may want to defer their execution to a non-critical time window. In this case, you will need to set an *action execution schedule* within the scheduled policy. For example, you can set a policy that automatically resizes or starts VMs for your customer-facing apps for the entire month of December, in anticipation of an increase in demand. Within this same policy, you can set the resize execution schedule to Monday, from midnight to 7:00 AM, when demand is expected to be minimal.

For more information, see [Action Execution Schedules \(on page 77\)](#).

Action Execution Schedules

You can defer the execution of generated actions to a non-critical time window. For example, if mission-critical VMs experience memory bottlenecks during the week, you can defer the necessary memory resizes to the weekend. Even if the VMs have minimal utilization over the weekend, Intersight Workload Optimizer can recognize the need to resize, and will execute resize actions. For this particular example, you will need to:

1. Create a scoped policy for the VMs.
2. Select *VMem Resize Up* from the list of actions and then set the action mode to either *Automatic* or *Manual*.

NOTE:

Execution schedules have no effect on recommended actions. It is therefore not necessary to set up an execution schedule if all the actions in your policy will be in *Recommend* mode.

3. Set an Execution Schedule that starts on Saturday at 8:00 AM and lasts 48 hours.

Execution of Scheduled Actions

Intersight Workload Optimizer posts an action at the time that the conditions warrant it, which means that you might see the action in the Pending Actions list even before the execution schedule takes effect. The action details show what schedule affects the given action, and shows the next occurrence of that schedule.

■ Automatic

When the schedule takes effect, Intersight Workload Optimizer executes any pending automated actions.

■ Manual

Before the execution schedule, the action details for manually executable actions show the action state as `PENDING ACCEPT`. If you accept the action (select it and click **Apply Selected**), then Intersight Workload Optimizer adds it to the queue of actions to be executed during the maintenance window. The action details show the action state as `AWAITING EXECUTION`. Intersight Workload Optimizer executes the actions when the schedule takes effect.

Keeping Actions Valid Until the Scheduled Time

If you have scheduled action execution for a later time, then conditions could change enough that the action is no longer valid. If this happens, and the action remains invalid for 24 hours, then Intersight Workload Optimizer removes it from the list of pending actions. This action will not be executed.

Intersight Workload Optimizer includes Scaling Constraints that work to stabilize action decisions for VMs. The resulting actions are more likely to remain valid up until their scheduled window for execution. You can make these settings in default or scoped policies.

NOTE:

When you configure an execution schedule for a resize action, to ensure Intersight Workload Optimizer will execute the action during the scheduled time, you must turn off the **Enforce Non Disruptive Mode** setting for the policy. Even if you turn the setting off for the global policy, you still must turn the setting off for your policy. Otherwise Intersight Workload Optimizer will not execute the resize action. For information about non disruptive mode, see [Non-disruptive Mode \(on page 194\)](#).

Action Automation

To avoid problems in your environment, Intersight Workload Optimizer analysis identifies actions that you can execute to keep things in optimal running order. You can specify the **degree of automation** you want for these given actions. For example, in some environments you might not want to automate resize down of VMs because that is a disruptive action. You would use **action modes** in a policy to set that business rule.

Action modes specify the degree of automation for the generated actions. For example, in some environments you might not want to automate resize down of VMs because that is a disruptive action. You would use action modes in a policy to set that business rule.

Intersight Workload Optimizer supports the following action modes:

- **Recommend** – Recommend the action so a user can execute it via the given hypervisor or by other means
- **Manual** – Recommend the action, and provide the option to execute that action through the Intersight Workload Optimizer user interface

- Automatic – Execute the action automatically

For automated resize or move actions on the same entity, Intersight Workload Optimizer waits five minutes between each action to avoid failures associated with trying to execute all actions at once. Any action awaiting execution stays in queue. For example, if a VM has both vCPU and vMem resize actions, Intersight Workload Optimizer could resize vCPU first. After this resize completes, it waits five minutes before resizing vMem.

Action Mode Configuration

There are two ways to configure action modes:

- Change the action mode in a default policy. For details, see [Working With Default Automation Policies \(on page 66\)](#).
- Create an automation policy, scope the policy to specific entities or groups, and then select the action mode for each action.

Intersight Workload Optimizer allows you to create dynamic groups to ensure that entities discovered in the future automatically add to a group and apply the policy of that group. If a conflict arises as a result of an entity belonging to several groups, the entity applies the policy with the most conservative action.

For details, see [Creating Scoped Automation Policies \(on page 70\)](#).

Constraints and Other Settings


Intersight Workload Optimizer collects metrics to drive the analysis that it uses when it calculates actions for your environment. It compares current utilization and demand against allocated capacities for resources, so it can recommend actions that keep your environment in optimal running condition.

Action policies include constraints and other settings that you can make to adjust the analysis that Intersight Workload Optimizer performs. For example, you can set different levels of overprovisioning for host or VM resources, and Intersight Workload Optimizer will consider that as a factor when deciding on actions.

Intersight Workload Optimizer ships with default policies that show all the constraints and settings you can make for each policy. These take effect until you create and apply a policy with different values. For the steps in creating a new policy, see [Creating Scoped Automation Policies \(on page 70\)](#). You can edit the defaults if you want to change analysis globally.


Entity Types – Applications

The supply chain strongly emphasizes our application-driven approach to managing your infrastructure. By showing the entity types that make up your applications at the top of the hierarchy, it is easier for you to see the health of your environment and evaluate actions from the perspective that matters – Application Performance.

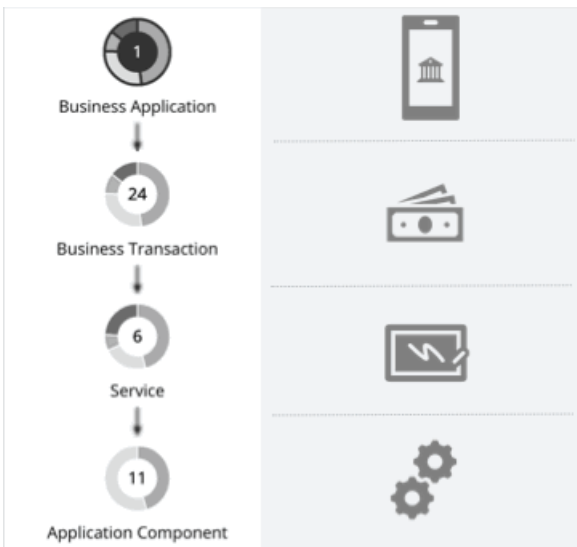

Business Application

A Business Application is a logical grouping of [Business Transactions \(on page 81\)](#), [Services \(on page 84\)](#), [Application Components \(on page 89\)](#), and other elements of the application model that work together to compose a complete application as end users would view it. For example, a mobile banking app is a Business Application with a *Business Transaction* that facilitates payments, a *Service* within the Business Transaction that records payment information, and underlying *Application Components* (such as JVMs) that enable the Service to perform its functions.

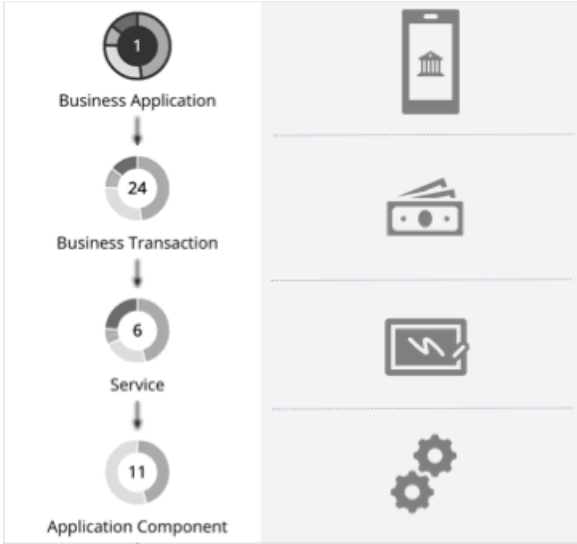

You can monitor overall performance, make resourcing decisions, and set policies in the context of your Business Applications.

Synopsis

Synopsis	
Budget:	Business Applications have unlimited budget.
Provides:	The complete application to end users
Consumes from:	Business Transactions, Services, Application Components, Database Servers, and the underlying nodes
Discovery:	<p>Intersight Workload Optimizer discovers the following:</p> <ul style="list-style-type: none"> ■ AppDynamics Business Applications ■ Dynatrace Applications <p>If you do not have these targets, you can create your own Business Applications using the Application Topology feature. For details, see Application Topology (on page 93).</p>

Monitored Resources

Intersight Workload Optimizer monitors the following:

- Response Time
 - The utilization of the server’s allocated response time
 - Measured in Milliseconds (ms)
- Transactions
 - The utilization of the allocated transactions per second for the given entity
 - Measured in transactions per second

The **Response Time** and **Transaction** charts for a Business Application show average and peak/low values over time. You can gauge performance against the given SLOs. By default, Intersight Workload Optimizer estimates SLOs based on monitored values. You can set your own SLO values in policies.

Actions

None

Intersight Workload Optimizer does not recommend actions for a Business Application, but it does recommend actions for the underlying Application Components and infrastructure. The Pending Actions chart for a Business Application lists these actions, thus providing visibility into the risks that have a direct impact on the Business Application's performance.

Business Application Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

None

Intersight Workload Optimizer does not recommend actions for a Business Application, but it does recommend actions for the underlying Application Components and infrastructure. The Pending Actions chart for a Business Application lists these actions, thus providing visibility into the risks that have a direct impact on the Business Application's performance.

Transaction SLO

Enable this SLO if you are monitoring performance through your Business Applications.

Attribute	Default Setting/Value
Enable Transaction SLO	Off Intersight Workload Optimizer estimates SLO based on monitored values.
Transaction SLO	None If you enable SLO, Intersight Workload Optimizer uses the default value of 10. You can change this to a different value.

Transaction SLO determines the upper limit for acceptable transactions per second. When the number of transactions reaches the given value, Intersight Workload Optimizer sets the risk index to 100%.

Response Time SLO

Enable this SLO if you are monitoring performance through your Business Applications.


Attribute	Default Setting/Value
Enable Response Time SLO	Off Intersight Workload Optimizer estimates SLO based on monitored values.
Response Time SLO [ms]	None If you enable SLO, Intersight Workload Optimizer uses the default value of 2000. You can change this to a different value.

Response time SLO determines the upper limit for acceptable response time (in milliseconds). If response time reaches the given value, Intersight Workload Optimizer sets the risk index to 100%.

Business Transaction

A Business Transaction represents a capability within your Business Application that fulfills a response to a user-initiated request. Its performance directly impacts user experience. You can monitor performance as experienced by your end users in the context of Business Transactions. For more information, see [Business Application \(on page 79\)](#).

Synopsis

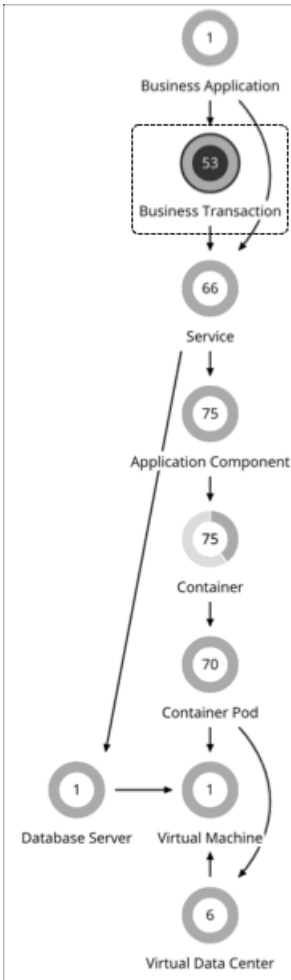

Synopsis	
Budget:	Business Transactions have unlimited budget.
Provides:	Response time and transactions to Business Applications
Consumes from:	Services (on page 84) , Application Components (on page 89) , Database Servers, and the underlying nodes
Discovery:	<p>Intersight Workload Optimizer discovers the following:</p> <ul style="list-style-type: none"> ■ AppDynamics Business Transactions ■ NewRelic Key Transactions <p>If you do not have these targets, you can create your own Business Transactions using the Application Topology feature. For details, see Application Topology (on page 93).</p>

Monitored Resources

Intersight Workload Optimizer monitors the following:

- Response Time
 - The utilization of the server’s allocated response time
 - Measured in Milliseconds (ms)
- Transactions

The utilization of the allocated transactions per second for the given business transaction

Measured in transactions per second

The **Response Time** and **Transaction** charts for a Business Transaction show average and peak/low values over time. You can gauge performance against the given SLOs. By default, Intersight Workload Optimizer estimates SLOs based on monitored values. You can set your own SLO values in policies.

Actions

None

Intersight Workload Optimizer does not recommend actions for a Business Transaction, but it does recommend actions for the underlying Application Components and infrastructure. The Pending Actions chart for a Business Transaction lists these actions, thus providing visibility into the risks that have a direct impact on the Business Transaction's performance.

Business Transaction Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

None

Intersight Workload Optimizer does not recommend actions for a Business Transaction, but it does recommend actions for the underlying Application Components and infrastructure. The Pending Actions chart for a Business Transaction lists these actions, thus providing visibility into the risks that have a direct impact on the Business Transaction's performance.

Transaction SLO

Enable this SLO if you are monitoring performance through your Business Transactions.

Attribute	Default Setting/Value
Enable Transaction SLO	Off Intersight Workload Optimizer estimates SLO based on monitored values.
Transaction SLO	None If you enable SLO, Intersight Workload Optimizer uses the default value of 10. You can change this to a different value.

Transaction SLO determines the upper limit for acceptable transactions per second. When the number of transactions reaches the given value, Intersight Workload Optimizer sets the risk index to 100%.

Response Time SLO

Enable this SLO if you are monitoring performance through your Business Transactions.

Attribute	Default Setting/Value
Enable Response Time SLO	Off Intersight Workload Optimizer estimates SLO based on monitored values.
Response Time SLO [ms]	None If you enable SLO, Intersight Workload Optimizer uses the default value of 2000. You can change this to a different value.


Response time SLO determines the upper limit for acceptable response time (in milliseconds). If response time reaches the given value, Intersight Workload Optimizer sets the risk index to 100%.

Service

A Service in the supply chain represents one or several Application Components that perform a defined, measurable function as part of an internal or user-initiated request. Its performance is key to understanding application performance, but only indirectly impacts user experience. You can measure performance as experienced internal to the Business Application in the context of Services.

For more information, see [Application Component \(on page 89\)](#) and [Business Application \(on page 79\)](#).

Synopsis

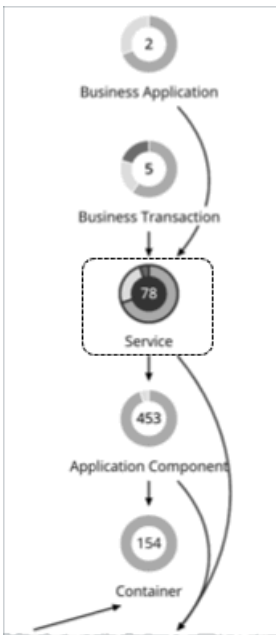

Synopsis	
Budget:	Services have unlimited budget.
Provides:	Response time and transactions to Business Transactions (on page 81) and Business Applications
Consumes from:	Application Components, Database Servers, and the underlying nodes
Discovery:	<p>For APM targets, Intersight Workload Optimizer discovers the following:</p> <ul style="list-style-type: none"> ■ AppDynamics Tiers ■ Dynatrace Services ■ Instana Services ■ NewRelic APM Applications / NewRelic Services (New Relic ONE) <p>NOTE: If you do not have an APM target, you can create your own Services using the Application Topology feature. For details, see Application Topology (on page 93).</p> <p>For Kubernetes, Intersight Workload Optimizer discovers Kubernetes Services through the Kuberturno pod that you have deployed in your environment.</p>

Monitored Resources

Intersight Workload Optimizer monitors the following:

- **Response Time**
Response time (in milliseconds) for the given service
For Kubernetes, this is the desired *weighted average* response time of all Application Component replicas associated with a Service
- **Transactions**
Transactions per second for the given service
For Kubernetes, the maximum number of transactions per second that each Application Component replica can handle.

The **Response Time** and **Transaction** charts for a Service show average and peak/low values over time. You can gauge performance against the given SLOs. By default, Intersight Workload Optimizer estimates SLOs based on monitored values. You can set your own SLO values in policies.

Actions for non-Kubernetes Services

Intersight Workload Optimizer does not recommend actions for non-Kubernetes Services, but it does recommend actions for the underlying Application Components and nodes. The Pending Actions chart for Services list these actions, thus providing visibility into the risks that have a direct impact on their performance.

Actions for Kubernetes Services

For horizontally scalable Kubernetes Services that collect performance metrics (or KPIs) for applications, Intersight Workload Optimizer can dynamically adjust the number of pod replicas that back those Services to help you meet SLOs (Service Level Objectives) for your applications.

For example, when current response time for an application is in direct violation of SLO, Intersight Workload Optimizer will recommend provisioning pods to improve response time. When you examine a pending action to provision pods, you will see *Response Time Congestion* as the reason for the action.

Provision Actions (16)			
Container Pod Name	Container Cluster	Namespace	Risk
<input type="checkbox"/> robot-shop/ratings-857bd6d9c4-5v	Kubernetes-endre-dc11	robot-shop	Response Time Congestion
<input type="checkbox"/> robot-shop/ratings-857bd6d9c4-5v	Kubernetes-endre-dc11	robot-shop	Response Time Congestion
<input type="checkbox"/> robot-shop/user-6ccb589cbd-4hbk	Kubernetes-endre-dc11	robot-shop	Response Time Congestion


If applications can meet response time SLOs using less resources, Intersight Workload Optimizer will recommend suspending pods to improve infrastructure efficiency.

Suspend Actions (2)			
Container Pod Name	Container Cluster	Namespace	Risk
<input type="checkbox"/> demoapp/twitter-cass-api-5bd5898	Kubernetes-ccp-testbed	demoapp	Improve infrastructure efficiency
<input type="checkbox"/> demoapp/twitter-cass-tweet-66588	Kubernetes-ccp-testbed	demoapp	Improve infrastructure efficiency

Intersight Workload Optimizer generates these actions under the following conditions:

- Services are discovered by the Kubeturbo pod that you have deployed in your environment.
- Services collect performance metrics via the Instana target or DIF (Data Ingestion Framework).

- You have created [policies \(on page 88\)](#) for the Services.

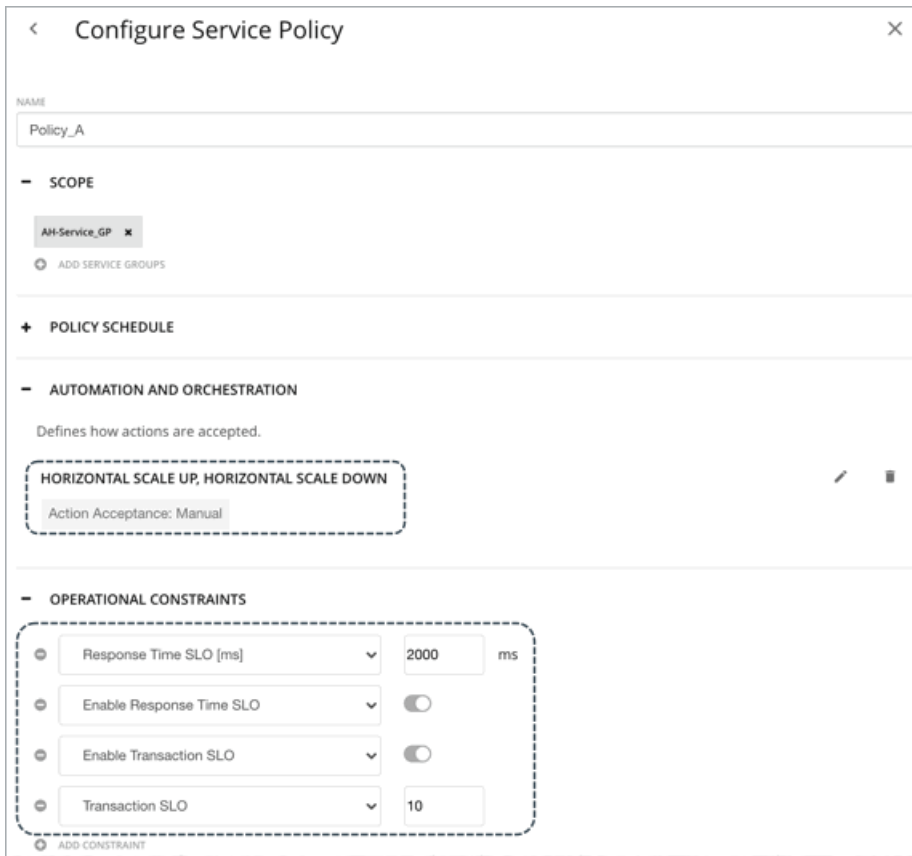

In those Service policies, be sure to:

- Turn on horizontal scaling (up and/or down).
- Enable Response Time and/or Transaction SLO, and then specify your desired SLO values.
 - Response Time SLO
Response Time SLO is the desired *weighted average* response time of all Application Component replicas associated with a Service.
 - Transaction SLO
Transaction SLO is the maximum number of transactions per second that each Application Component replica can handle.


NOTE:

If you specified SLOs but turned off horizontal scaling in the policy, no actions are generated but SLO values will continue to display in the Response Time and Transaction charts for Services, for your reference. This allows you to gauge performance against those SLOs.

Propagation of Service Policy Settings

Settings in a Service policy propagate to the associated pods and Application Components to establish their relationship and provide context.

For example, assume you created a group of Services called `AH-Service_GP` and then applied the Service policy `Ah-Test_HScale` to that group. When you set the scope to this group, `Ah-Test_HScale` displays as a policy in the entity views for Services, Application Components, and Container Pods. You can click the policy name in any view to see or modify the policy settings.

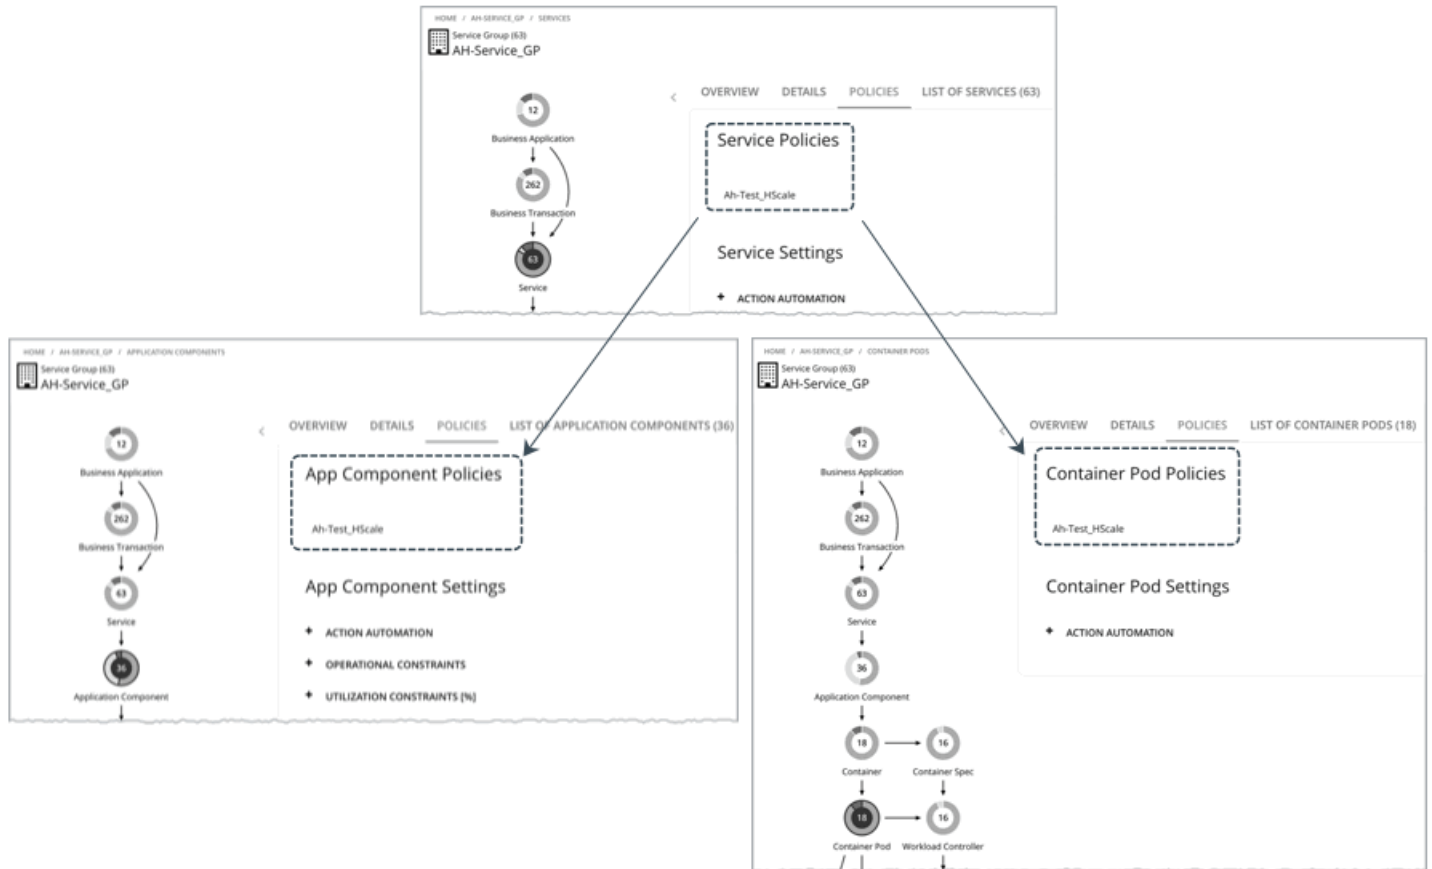

To prevent conflicts, SLO values in Service policies override any SLOs set in Application Components. In addition, the Response Time and Transaction charts for Application Components show SLOs specified in the Service policy.

Action Automation Considerations

We recommend action automation under the following circumstances:

- Your applications run as a set of Kubernetes services backed by a deployment.
- Services deploy via a namespace *without* quotas.
- Newly provisioned pods are placed on nodes with the same CPU speed.
- You do not have an upstream Kubernetes HPA (Horizontal Pod Autoscaling) enabled for the same workload.

We recommend that you disable automation and manually execute actions under the following circumstances:

- Services deploy via a namespace *with* quotas.
- Newly created pods are scheduled on nodes with different CPU speeds.
- Services have non-resource constraints that could result in newly provisioned pods staying in the pending state.

Service Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Policies for Non-Kubernetes Services

- **Action Automation and Orchestration**

Intersight Workload Optimizer does not recommend actions for non-Kubernetes Services, but it does recommend actions for the underlying Application Components and nodes. The Pending Actions chart for Services list these actions, thus providing visibility into the risks that have a direct impact on their performance.

■ Transaction SLO

Enable this SLO if you are monitoring performance through Services.

Attribute	Default Setting/Value
Enable Transaction SLO	Off Intersight Workload Optimizer estimates SLO based on monitored values.
Transaction SLO	None If you enable SLO, Intersight Workload Optimizer uses the default value of 10. You can change this to a different value.

Transaction SLO determines the upper limit for acceptable transactions per second. When the number of transactions reaches the given value, Intersight Workload Optimizer sets the risk index to 100%.

■ Response Time SLO

Enable this SLO if you are monitoring performance through Services.

Attribute	Default Setting/Value
Enable Response Time SLO	Off Intersight Workload Optimizer estimates SLO based on monitored values.
Response Time SLO [ms]	None If you enable SLO, Intersight Workload Optimizer uses the default value of 2000. You can change this to a different value.

Response time SLO determines the upper limit for acceptable response time (in milliseconds). If response time reaches the given value, Intersight Workload Optimizer sets the risk index to 100%.

Policies for Kubernetes Services

■ Action Automation and Orchestration

For horizontally scalable Kubernetes Services that collect performance metrics (or KPIs) for applications, Intersight Workload Optimizer can dynamically adjust the number of pod replicas that back those Services to help you meet SLOs (Service Level Objectives) for your applications.

To generate these actions, you must turn on horizontal scaling (up and/or down) and specify your desired SLOs in a Service policy.

For details about these actions and the environments that are suitable for automating these actions, see [Actions for Kubernetes Services \(on page 85\)](#).

Attribute	Default Setting/Value
Horizontal Scale Down	Off (Disabled)
Horizontal Scale Up	Off (Disabled)

■ Transaction SLO

Transaction SLO is the maximum number of transactions per second that each Application Component replica can handle.

Attribute	Default Setting/Value
Enable Transaction SLO	Off

Attribute	Default Setting/Value
Transaction SLO	None If you enable SLO, Intersight Workload Optimizer uses the default value of 10. You can change this to a different value.

■ Response Time SLO

Response Time SLO is the desired *weighted average* response time of all Application Component replicas associated with a Service.

Attribute	Default Setting/Value
Enable Response Time SLO	Off
Response Time SLO [ms]	None If you enable SLO, Intersight Workload Optimizer uses the default value of 2000. You can change this to a different value.

■ Minimum and Maximum Replicas

You can adjust the default values based on the characteristics of your applications or if you are planning for capacity. The maximum value also acts as a safeguard against overprovisioning of replicas.


Attribute	Default Setting/Value
Minimum Replicas	1
Maximum Replicas	10000

Application Component

An Application Component is a software component, application code, or a unit of processing within a [Service \(on page 84\)](#) that consumes resources to enable it to perform its function for the [Business Application \(on page 79\)](#). For example, Apache Tomcat is a Java Servlet container that hosts a range of Java applications on the web.

Intersight Workload Optimizer can recommend actions to adjust the amount of resources available to Application Components.

Synopsis

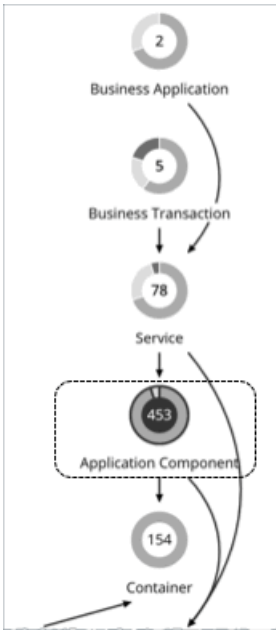

Synopsis	
Budget:	Application Components have unlimited budget.
Provides:	<ul style="list-style-type: none"> ■ Response Time and Transactions to Services, Business Transactions (on page 81), and Business Applications ■ Response Time, Transactions, Heap, Remaining GC Capacity, and Threads to end users
Consumes:	Compute resources from nodes
Discovery:	Intersight Workload Optimizer discovers the following: <ul style="list-style-type: none"> ■ Apache Tomcat ■ AppDynamics Nodes ■ Dynatrace Processes ■ NewRelic APM Application Instances ■ Application Insights Components ■ SNMP ■ WMI ■ Data Ingestion Framework metrics for Kubernetes environments

Monitored Resources

The exact resources monitored will differ based on application type. This list includes all resources you may see.

- Virtual CPU (VCPU)
 - The utilization of the VCPU allocated to the hosting VM
 - Measured in Megahertz (MHz)
- Virtual Memory (VMem)
 - The utilization of the VMem allocated to the hosting VM
 - Measured in Kilobytes (KB)
- Transactions
 - Intersight Workload Optimizer discovers *key* transactions – transactions that the user marked as *key* to the application

The utilization of the allocated transactions per second for the given entity

Measured in transactions per second

- Heap

The utilization of the application server's heap

Measured in Kilobytes (KB)

- Response Time

The utilization of the server's allocated response time

Measured in Milliseconds (ms)

- Connections

The utilization of the connection capacity. Only applicable to database servers

Measured in Connections

- Remaining Garbage Collection Capacity

The percentage of uptime that is *not* spent on garbage collection.

Measured in uptime (%)

- Threads

The utilization of the server's thread capacity

Measured in number of Threads

The charts for an Application Component show average and peak/low values over time. You can gauge performance against the given SLOs. By default, Intersight Workload Optimizer does not enable SLOs in the default policy for Application Components. It estimates SLOs based on monitored values, but does not use these values in its analysis.

NOTE:

In Kubernetes environments, SLOs defined in a Service policy override any SLOs set in the associated Application Components to prevent conflicts. In addition, the Response Time and Transaction charts for Application Components will show SLOs specified in the Service policy. For more information, see [Actions for Kubernetes Services \(on page 85\)](#).

Actions

Resize

Resize the following resources to maintain performance:

- Thread Pool
- Connections
- Heap

Intersight Workload Optimizer generates Heap resize actions if an Application Component sells Heap and Remaining Garbage Collection (GC) Capacity, and the underlying VM or container sells VMem. These actions are recommend-only and can only be executed outside Intersight Workload Optimizer.

NOTE:

Remaining GC Capacity is the percentage of uptime that is *not* spent on garbage collection.

The resources that Intersight Workload Optimizer can resize depend on the processes that it discovers from your Application Performance Management (APM) targets. Refer to the topic for a specific target to see a list of resources that can be resized.

Application Component Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

For details about Application Component actions, see [Application Component Actions. \(on page 91\)](#)

Action	Default Mode
Resize heap (up or down)	Recommend
Resize thread pool (up or down)	Recommend
Resize connections (up or down)	Recommend

Transaction SLO

Enable this SLO to monitor the performance of your Application Components.

NOTE:

In Kubernetes environments, SLOs defined in a Service policy override any SLOs set in the associated Application Components to prevent conflicts. In addition, the Response Time and Transaction charts for Application Components will show SLOs specified in the Service policy. For more information, see [Actions for Kubernetes Services \(on page 85\)](#).

Attribute	Default Setting/Value
Enable Transaction SLO	Off Intersight Workload Optimizer estimates SLO based on monitored values.
Transaction SLO	None If you enable SLO, Intersight Workload Optimizer uses the default value of 10. You can change this to a different value.

Transaction SLO determines the upper limit for acceptable transactions per second. When the number of transactions reaches the given value, Intersight Workload Optimizer sets the risk index to 100%.

Response Time SLO

Enable this SLO to monitor the performance of your Application Components.

NOTE:

In Kubernetes environments, SLOs defined in a Service policy override any SLOs set in the associated Application Components to prevent conflicts. In addition, the Response Time and Transaction charts for Application Components will show SLOs specified in the Service policy. For more information, see [Actions for Kubernetes Services \(on page 85\)](#).

Attribute	Default Setting/Value
Enable Response Time SLO	Off Intersight Workload Optimizer estimates SLO based on monitored values.
Response Time SLO [ms]	None If you enable SLO, Intersight Workload Optimizer uses the default value of 2000. You can change this to a different value.

Response time SLO determines the upper limit for acceptable response time (in milliseconds). If response time reaches the given value, Intersight Workload Optimizer sets the risk index to 100%.

Heap Utilization

The Heap utilization that you set here specifies the percentage of the existing capacity that Intersight Workload Optimizer will consider to be 100% of capacity. For example, a value of 80 means that Intersight Workload Optimizer considers 80% utilization to be 100% of capacity.

Attribute	Default Value
Heap Utilization (%)	80

Intersight Workload Optimizer uses Heap utilization and Remaining GC Capacity (the percentage of CPU time *not* spent on garbage collection) when making scaling decisions. Assume Heap utilization is at 80%, which is 100% of capacity. However, if Remaining GC Capacity is at least 90% (in other words, CPU time spent on garbage collection is only 10% or less), an 80% Heap utilization does not indicate a shortage after all. As a result, Intersight Workload Optimizer will not recommend Heap scaling.

If Heap utilization is low and Remaining GC Capacity is high, Intersight Workload Optimizer will recommend resizing down Heap. If the opposite is true, then Intersight Workload Optimizer will recommend resizing up Heap.

Heap Scaling Increment

This increment specifies how many units to add or subtract when scaling Heap for an application component.


Attribute	Default Value
Heap Scaling Increment (MB)	128

Do not set the increment value to be lower than what is necessary for the Application Component to operate. If the increment is too low, then it's possible there would be insufficient Heap for the Application Component to operate. When reducing allocation, Intersight Workload Optimizer will not leave an Application Component with less than the increment value. For example, if you use the default 128, then Intersight Workload Optimizer cannot reduce the Heap to less than 128 MB.

Application Topology

Intersight Workload Optimizer gives you the ability to create your own [Business Applications \(on page 79\)](#), [Business Transactions \(on page 81\)](#), and [Services \(on page 84\)](#) without the need to ingest additional application data into the platform. This is especially useful in environments where there are gaps in the application stack shown in the Intersight Workload Optimizer supply chain. For example, in the absence of an application monitoring target such as AppDynamics or Dynatrace, you will not see Business Applications in your supply chain. User-created application entities address those gaps.

When you create a new application entity, you identify interrelated application entities and nodes (i.e., the infrastructure that backs the application entities) in your environment for which you want to measure performance. Intersight Workload Optimizer then links them in a supply chain and represents them as a unified group. You can monitor overall performance for the group in the context of the new application entity, and drill down to the individual entities and nodes for finer details.

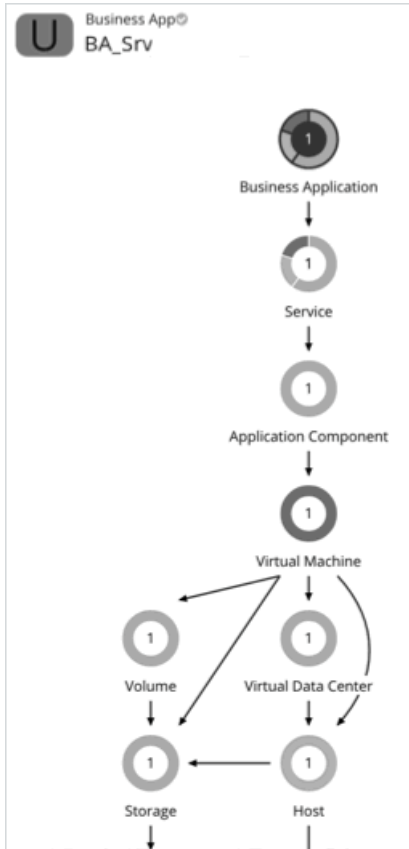

Intersight Workload Optimizer does not perform analysis on any user-created application entity, but it aggregates the underlying risks the same way it does for auto-discovered entities.

After you create an application entity, Intersight Workload Optimizer counts it in the global supply chain and adds it to the relevant charts (for example, if you created a new Service that has performance risks, you might see it listed in the Top Services chart). Drill down to the newly created entity to monitor its performance. You can also use Search to find the application entity and set it as your scope.

NOTE:

It could take up to 10 minutes to see newly created entities in the supply chain.

Creating Application Entities

1. Click **More**, then display the **Settings** Page.
2. Choose **Application Topology**.



3. Click **New Application Topology** and then choose *Automatic* or *Manual*.

- **Automatic**

Create a new application entity composed of tagged entities. For example, create a new Business Application composed of VMs with the "Production" tag.

- a. Select the application entity type that you want to create.
- b. Type an entity name prefix to help you easily identify the application entities that Intersight Workload Optimizer will create for you.
- c. Specify the tags that will identify the underlying entities.

- **Manual**

Create a new application entity composed of a specific set of application entities and nodes.

- a. Select the application entity type that you want to create.
- b. Give the application entity a name.
- c. Select the underlying application entities and nodes.
- d. Enable or disable **Direct Link**.

- Disabled (default)

When **Direct Link** is disabled, Intersight Workload Optimizer creates a context-based definition of the application entity you are creating and automatically updates that definition as the entity evolves. This allows you to create flexible definitions with minimal effort.

The underlying application entities and nodes that you specified act as "seed entities" for creating the definition. Intersight Workload Optimizer uses these seed entities to identify the highest entity in the supply chain and any other related entities ("leaf entities"), and then creates a new context-based definition. The result is an application topology that closely matches your environment.

For example, your initial intent might be to create a new Business Application entity composed of several Services (seed entities), so you can monitor performance at the Service level. However, you might not be aware of other entities that could impact performance, making it more time-consuming to identify and resolve performance issues outside of the selected scope. With **Direct Link** disabled, Intersight Workload Optimizer might discover Application Components and VMs (leaf entities) that back the Services, and then show them in the supply chain. The result is a more complete representation of the Business Application that shows performance risks at each level of the discovered application stack. As the composition of the Business Application changes, Intersight Workload Optimizer automatically updates the definition so your supply chain view remains current.


- Enabled

When **Direct Link** is enabled, Intersight Workload Optimizer creates a definition based solely on your selected entities. This option is ideal if you require full control of your definitions. For example, you might have a requirement to limit the scope of your performance monitoring to certain entities.

4. Click **Create Definition**.

Entity Types – Container Platform

Intersight Workload Optimizer discovers and monitors the entities that make up your container platform, and recommends actions to assure performance for the applications that consume resources from these entities.

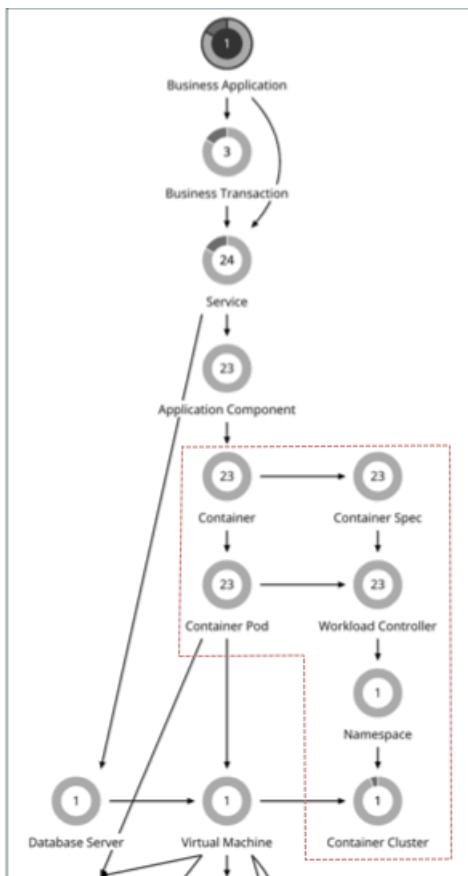

For a Cloud Native environment, Intersight Workload Optimizer discovers:

Entity Type	Kubernetes Object or Reference	Notes
Service (on page 84)	Service	A logical set of pods that represents a given application. In Kubernetes, the Service exposes a single entry point for the application process. While the

Entity Type	Kubernetes Object or Reference	Notes
		Pods that comprise the service are ephemeral, the service is persistent. The Service entity also gives historical tracking of the number of replicas that run to support the Service.
Container (on page 98)	Container	The individual containers that deploy in your environment. Because the container instances that support a service can change at any time, these are considered <i>ephemeral</i> .
Container Pod (on page 109)	Pod	These are the smallest deployable units of computing that you can create and manage in Kubernetes. One Container Pod can contain multiple Container entities. These are also considered <i>ephemeral</i> .
Container Spec (on page 103)	A container's Spec	Persistent entities that collect containers with like properties. In Kubernetes the container's Spec includes the size specifications of limits and requests. In the Intersight Workload Optimizer supply chain, the count of replicas maps to the count of Container entities that a Container Spec encompasses. In Intersight Workload Optimizer, the persistent Container Spec maintains historical data for its ephemeral containers, and all the replicas that have run in the past.
Workload Controller (on page 107)	Controller	<p>A persistent entity that maps to the different controllers in your Kubernetes environment, such as Deployments or Stateful Sets. A single Workload Controller can contain one or more Container Spec entities, and it can be related to one or more running replica pods.</p> <p>In the Supply Chain, the Workload Controller exposes the impact of Namespace quotas on Container Spec resize actions. The Workload Controller aggregates resize actions for the containers that are in its supply chain. In this way, a single action on a Workload Controller can encompass multiple Container actions.</p>
Namespace (on page 115)	Namespace	A logical group of workloads each namespace must be unique within a given Container Cluster. You can specify Resource Quotas for a Namespace, which limit compute resource capacity available to its workloads. Intersight Workload Optimizer will block execution of resize


Entity Type	Kubernetes Object or Reference	Notes
		actions that would exceed Namespace quotas, and identify the quota increase you need to accommodate the workload resize. For OpenShift, a Namespace is equivalent to a Project.
Container Cluster (on page 118)	Cluster	A collection of VMs (referred to as Nodes in Kubernetes). The Container Cluster scope aggregates actions so you can see cluster health in one view. This gives you an idea of cluster health from the perspective of your workloads.
Virtual Machine (Kubernetes Node) (on page 121)	Node	In Kubernetes environments, a node is a virtual or physical machine that contains the services necessary to run pods. Intersight Workload Optimizer represents nodes as Virtual Machine entities in the supply chain. Intersight Workload Optimizer can discover node roles and Master Nodes. It creates policies to keep nodes of the same role on unique host or Availability Zone providers, and policies to disable suspension of Master Nodes. Intersight Workload Optimizer also discovers and displays Node Pools, and OpenShift Machine Sets.
Volume (on page 169)	PV	If a Container Pod is attached to a volume, Intersight Workload Optimizer discovers it as a Persistent Volume (PV), and shows which Pods are connected to the PV.

This section describes the Intersight Workload Optimizer entities that are unique to Cloud Native infrastructures. You can find descriptions of Service, Virtual Machine, and Volume entities in other sections of the User Guide.

Container

An application container is a standalone, executable image of software that includes components to host an application.

Synopsis

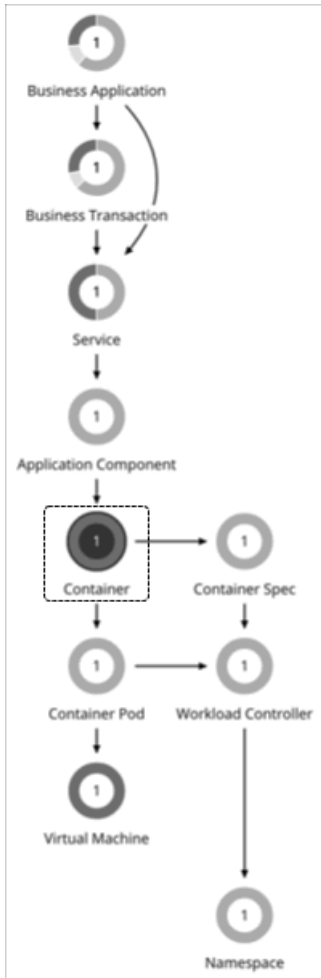

Synopsis	
Budget:	A container obtains its budget by selling resources to the hosted application.
Provides:	Resources for the applications to use: <ul style="list-style-type: none"> ■ Virtual CPU ■ Virtual Memory
Consumes:	Resources from container pods, virtual machines, and virtual datacenters.
Discovered through:	For Kubernetes, Intersight Workload Optimizer discovers containers through the Kubeturbo pod that you have deployed in your environment. For Dynatrace and AppDynamics hosted on containers: <ul style="list-style-type: none"> ■ Dynatrace: Intersight Workload Optimizer discovers containers through the metadata of processes. ■ AppDynamics: Intersight Workload Optimizer discovers containers through container objects.

Monitored Resources

Intersight Workload Optimizer monitors the following resources for a container:

VMem

The virtual memory utilized by the container against the memory limit (if no limit is set, then node capacity is used). Measured in Megabytes (MB)

VMem Request

If applicable, the virtual memory utilized by the container against the memory request. Measured in Megabytes (MB)

VCPU

The virtual CPU utilized by the container against the CPU limit (if no limit is set, then node capacity is used). Measured in millicores (mCores)

VCPU Request

If applicable, the virtual CPU utilized by the container against the CPU request. Measured in millicores (mCores)

VCPU Throttling

The throttling of container vCPU that could impact response time, expressed as the percentage of throttling for all containers associated with a Container Spec. In the Capacity and Usage chart for containers, *used* and *utilization* values reflect the actual throttling percentage, while *capacity* value is always 100%.

Actions

Resize

Resize containers to assure optimal utilization of resources. By default, containers resize consistently, which allows all replicas of the same container for the same workload type to resize any resource consistently.

For vCPU limit resizes, Intersight Workload Optimizer will recommend a resize up action, even if utilization percentile is low, to address slow response times associated with vCPU throttling. Especially for sudden throttling spikes, it will persist the related resize actions so you can evaluate these actions even after the spikes have gone away, and then execute them to prevent spikes from re-occurring. As throttling drops, Intersight Workload Optimizer will not recommend a resize down action right away, as this could result in subsequent back-and-forth upsize and downsize recommendations. Instead, it evaluates past throttling to decide when a resize down action is finally safe to execute. To ensure the timeliness of these actions and arrive at the optimal resize values to recommend, Intersight Workload Optimizer calculates fast and slow moving throttling averages, and then displays smoothed and daily averages in charts.


Action Visibility, Merging, and Execution

Intersight Workload Optimizer shows and executes container resize actions via [Workload Controllers \(on page 107\)](#). You will *not* see actions when you set the scope to containers.

Actions also propagate to application entities and the underlying container infrastructure to show the impact of these actions on the health of your applications and container environment.


Executing several container resize actions can be very disruptive since pods need to restart with each resize. For replicas of the container scale group(s) related to a single Workload Controller, Intersight Workload Optimizer consolidates resize actions into one *merged action* to minimize disruptions. When a merged action has been executed (via the associated Workload Controller), all resizes for all related container specifications will be changed at the same time, and pods will restart once.

After you set the scope to Workload Controllers, go to the Pending Actions chart and then click **Show All** to see the full list of resize actions that you can execute. This list includes individual and merged actions. You can filter the list to focus on specific actions, such as actions to address resource congestion or vCPU throttling.

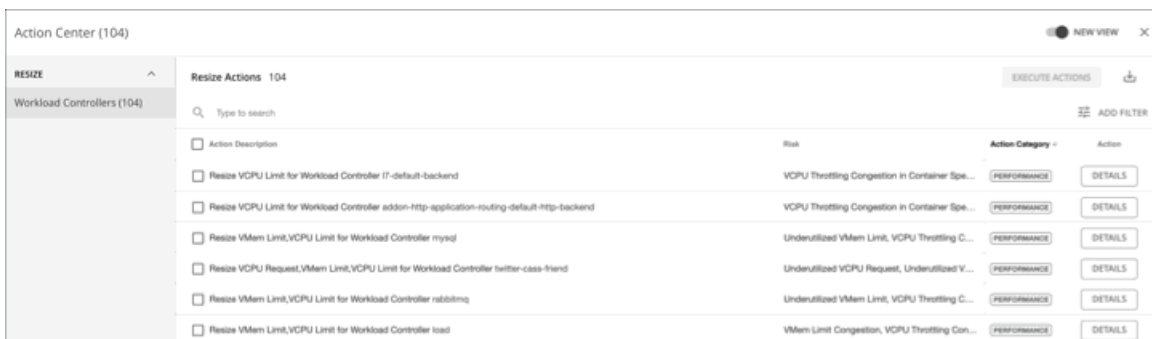

By default, container resize actions are set in *Manual* mode at the Workload Controller level. This means that Intersight Workload Optimizer will not execute any action automatically, and you can manually select the actions that you want to execute. If you prefer to execute actions outside Intersight Workload Optimizer, create Workload Controller policies and set the resize action mode to *Recommend*. To automate actions, create Workload Controller policies and set the resize action mode to *Automatic*.

For each action, click DETAILS and expand the Details section to view time series charts that explain the reason for the action. These charts highlight *utilization percentiles* and *smoothed throttling averages* for a given observation period. Intersight Workload Optimizer uses percentile calculations to make accurate resize decisions.

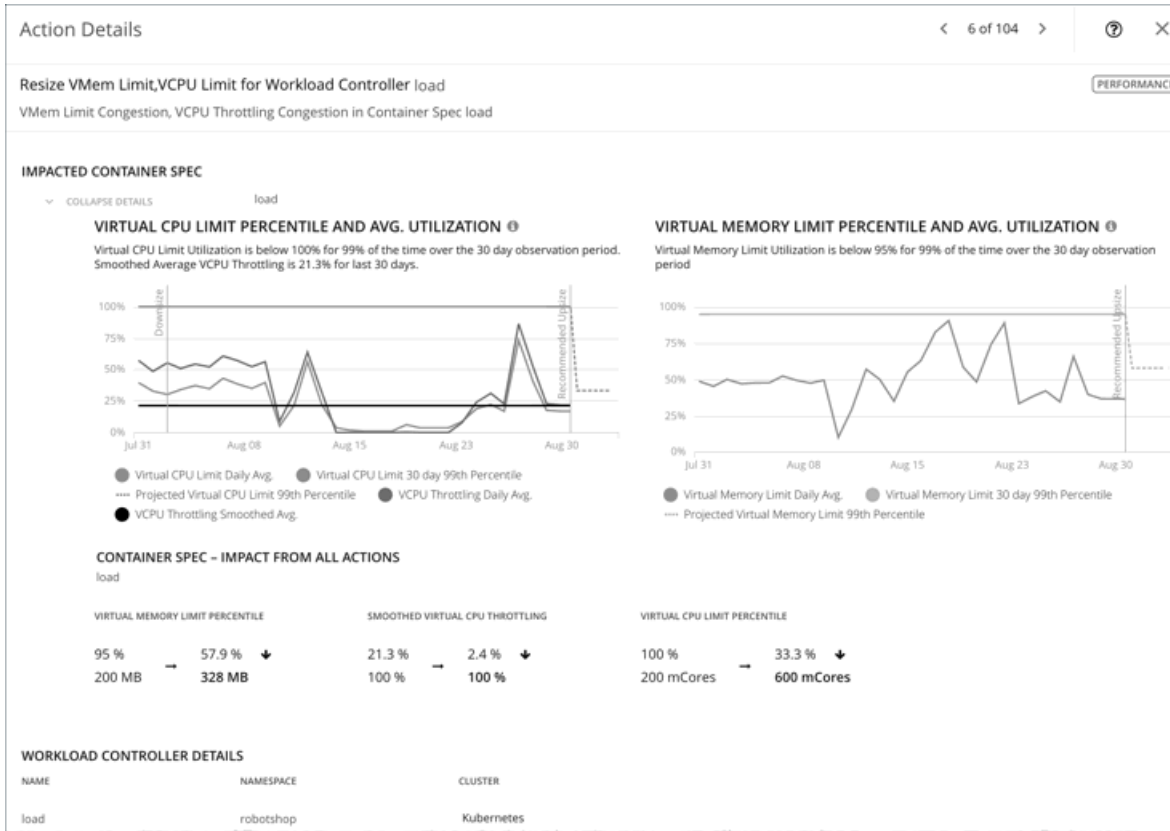

These charts also:

- Plot daily average percentiles and throttling, for your reference.
- Show projected percentiles after you execute the action. If you have previously executed resize actions on the same Workload Controller, the charts show the resulting improvements in daily average utilization.

Put together, these charts allow you to easily recognize trends that drive Intersight Workload Optimizer's resize recommendations.

NOTE:


You can set scaling constraints in Container Spec policies to refine the percentile calculations. For details, see [Aggressiveness and Observation Periods \(on page 106\)](#).

Tuned Scaling for Containers

Intersight Workload Optimizer can automate resizes if the resize values fall within a normal range, and then post more conservative actions when resize values fall outside the range. To do this, you would set specific *action modes* and *tuned scaling* values in policies.

For example, consider resizing vMem limits. As memory demand increases, Intersight Workload Optimizer can automatically execute vMem limit resizes that fall within the normal range. If the Container Spec requests memory beyond the normal range, Intersight Workload Optimizer will either ignore the action or post it for you to review, depending on the tuned scaling settings that you configured.

Assume the following tuned scaling settings in policies:

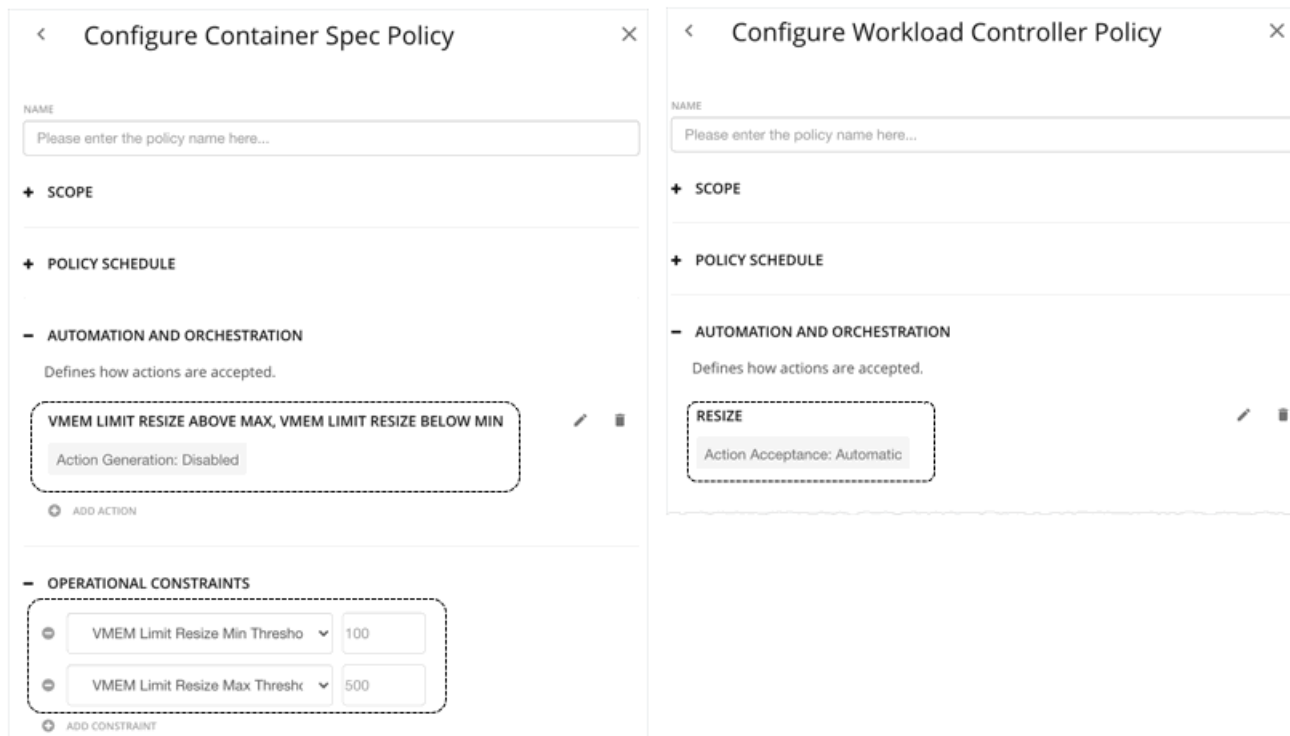

The image shows two side-by-side screenshots of policy configuration interfaces. The left screenshot is titled 'Configure Container Spec Policy' and the right is 'Configure Workload Controller Policy'. Both have a 'NAME' field with a placeholder 'Please enter the policy name here...'. The left interface has sections for '+ SCOPE', '+ POLICY SCHEDULE', '- AUTOMATION AND ORCHESTRATION' (with a description 'Defines how actions are accepted.' and an 'Action Generation: Disabled' button), and '- OPERATIONAL CONSTRAINTS' (with two dropdowns: 'VMEM Limit Resize Min Thresho' set to 100 and 'VMEM Limit Resize Max Threshc' set to 500). The right interface has the same sections but the 'RESIZE' action mode is set to 'Automatic'.

- The **Operational Constraints** settings in the Container Spec policy specify 100 MB to 500 MB as the normal range.
- With the **Resize** action mode in the Workload Controller policy set to *Automatic*, Intersight Workload Optimizer will automate *resize up* actions that are below the *max* threshold and *resize down* actions that are above the *min* threshold.

NOTE:

If the action mode is *Recommend*, Intersight Workload Optimizer will post the actions for you to review. You can only execute these actions outside Intersight Workload Optimizer.

- In the Container Spec policy, since the action mode for **vMem Limit Resize Above Max** and **vMem Limit Resize Below Min** is set to *Disabled*, Intersight Workload Optimizer will not generate resize actions that fall outside the normal range.
- Since vMEM increment constant is *not* defined in the Container Spec policy, Intersight Workload Optimizer uses the default value of 128 MB.

With these two policies in effect:

- If a Container Spec with 200 MB of vMEM limit needs to resize to 328 MB, Intersight Workload Optimizer automatically resizes to 328 MB.
- If a Container Spec with 200 MB of vMEM limit needs to resize to 72 MB, Intersight Workload Optimizer does not generate the action. vMEM limit remains at 200 MB.

NOTE:

Action policies include scope to determine which entities will be affected by the given policy. It's possible for two or more policies to affect the same entities. As is true for other policy settings, Intersight Workload Optimizer uses the most conservative settings for the affected entities.

For tuned scaling, the effective action mode will be the most conservative, and the effective tuned scaling range will be the narrowest range (the lowest *Max* and highest *Min*) out of the multiple policies that affect the given entities. For more information, see [Policy Scope \(on page 75\)](#).

Container Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

Resize

Resize containers to assure optimal utilization of resources. By default, containers resize consistently, which allows all replicas of the same container for the same workload type to resize any resource consistently.

Intersight Workload Optimizer shows and executes container resize actions via [Workload Controllers \(on page 107\)](#). You will *not* see actions when you set the scope to containers.

Action	Default Mode	
	Container	Workload Controller
Resize	N/A	Manual (automatable)

For details, see [Container Actions \(on page 100\)](#).

Consistent Resizing

- *For groups in scoped policies:*

Attribute	Default Setting
Consistent Resizing	Off

When you create a policy for a group of containers and turn on Consistent Resizing, Intersight Workload Optimizer resizes all the group members to the same size, such that they all support the top utilization of each resource commodity in the group. For example, assume container A shows top utilization of CPU, and container B shows top utilization of memory. Container resize actions would result in all the containers with CPU capacity to satisfy container A, and memory capacity to satisfy container B.

For an affected resize, the Actions List shows individual resize actions for each of the containers in the group. If you automate resizes, Intersight Workload Optimizer executes each resize individually in a way that avoids disruption to your workloads.

- *For auto-discovered groups:*


Intersight Workload Optimizer discovers Kubernetes groups such as Deployments, ReplicationControllers, ReplicaSets, DaemonSets, and StatefulSets, and automatically enables Consistent Resizing in a read-only policy for each group. If you do not need to resize all the members consistently, create another policy for the group and turn off Consistent Resizing.

Container Spec

A Container Spec is a shared definition for all ephemeral container replicas. It is a persistent entity that retains the historical utilization data of containers, which Intersight Workload Optimizer leverages to make container sizing decisions. Utilization data includes:

- vCPU used by all container replicas
- vCPU request capacity (if applicable)
- vMem used by all container replicas
- vMem request capacity (if applicable)

Synopsis

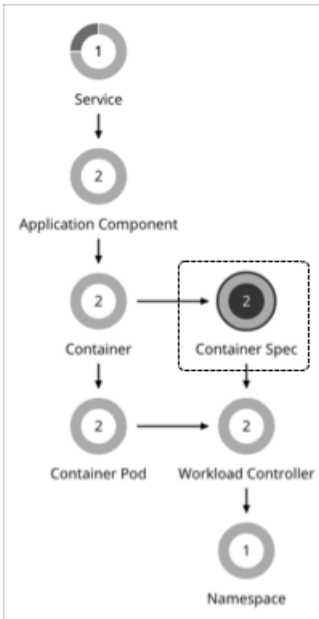

Synopsis	
Budget:	N/A
Provides:	N/A
Consumes:	N/A
Discovered through:	Kubeturbo Mediation Pod

Monitored Resources

When you view the resources for a Container Spec, you will see the historical usage of any instance of a container running for the workload (assuming the workload name stays the same). The chart shows the trend of usage even with restarts or redeployments.

Actions

None

A Container Spec retains the historical utilization data of ephemeral containers. Intersight Workload Optimizer uses this data to make accurate container resize decisions, but does not recommend actions for the Container Spec itself.

NOTE:

To view container resize actions, set the scope to the Workload Controller for related containers. Go to the Pending Actions chart and click **Show All** to see the full list. For more information about container actions, see [Container Actions \(on page 100\)](#).

Constraint for Sidecar Container Specs

A Kubernetes service might include [sidecar](#) Container Specs to provide additional services to a running pod, such as security or logging services. Sidecars injected at pod creation cannot be updated from the parent Workload Controller, causing a resize action to fail.

To prevent the execution of resize actions on injected sidecars, Intersight Workload Optimizer adds them to a group called "Injected Sidecars/All ContainerSpecs". This group applies a read-only policy that sets the action mode for resizes to *Recommend*. This means that you can only execute resizes outside of Intersight Workload Optimizer. The parent Workload Controller will continue to resize non-sidecar Container Specs as usual.

Container Spec Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

The following settings affect tuned scaling:

Setting	Default Mode
vCPU Request Resize Below Min	Recommend
vCPU Limit Resize Above Max	Recommend
vCPU Limit Resize Below Min	Recommend
vMem Request Resize Below Min	Recommend
vMem Limit Resize Above Max	Recommend
vMem Limit Resize Below Min	Recommend

The default mode of *Recommend* means that when resize values in actions fall outside the normal range (as defined in Container Spec policies), Intersight Workload Optimizer will post the actions for you to review. You can only execute these actions outside Intersight Workload Optimizer. If you set the action mode to *Disabled*, Intersight Workload Optimizer will not generate the actions.

For an overview of tuned scaling, see [Tuned Scaling for Containers \(on page 101\)](#).

Resize Thresholds

Intersight Workload Optimizer uses resize thresholds as operational constraints to set up tuned scaling for Container Specs. For an overview of tuned scaling, see [Tuned Scaling for Containers \(on page 101\)](#).

Attribute	Default Value
VCPU Request Resize Min Threshold (mCores)	10
VCPU Limit Resize Min Threshold (mCores)	500
VCPU Limit Resize Max Threshold (mCores)	64000
VMEM Request Resize Min Threshold (MB)	10
VMEM Resize Min Threshold (MB)	10
VMEM Resize Max Threshold (MB)	1048576

Increment Constants

Intersight Workload Optimizer recommends changes in terms of the specified resize increments.

Attribute	Default Value
Increment constant for VCPU Limit and VCPU Request (mCores)	100
Increment constant for VMEM Limit and VMEM Request (MB)	128

For example, assume the vCPU request increment is 100 mCores and you have requested 800 mCores for a container. Intersight Workload Optimizer could recommend to reduce the request by 100, down to 700 mCores.

For vMem, you should not set the increment value to be lower than what is necessary for the container to operate. If the vMem increment is too low, then it's possible that Intersight Workload Optimizer would allocate insufficient vMem. For a container that is underutilized, Intersight Workload Optimizer will reduce vMem allocation by the increment amount, but it will not leave a container with zero vMem. For example, if you set this to 128, then Intersight Workload Optimizer cannot reduce the vMem to less than 128 MB.

Rate of Resize

(For the *default* policy only)

Attribute	Default Value
Rate of Resize	High

When resizing resources for a container, Intersight Workload Optimizer calculates the optimal values for vMem and vCPU. But it does not necessarily make a change to that value in one action. Intersight Workload Optimizer uses the Rate of Resize setting to determine how to make the change in a single action, as follows:

- **Low**

Change the value by one increment, only. For example, if the resize action calls for increasing vMem, and the increment is set at 128, Intersight Workload Optimizer increases vMem by 128 MB.

- **Medium**

Change the value by an increment that is 1/4 of the difference between the current value and the optimal value. For example, if the current vMem is 2 GB and the optimal vMem is 10 GB, then Intersight Workload Optimizer will raise vMem to 4 GB (or as close to that as the increment constant will allow).

- **High**

Change the value to be the optimal value. For example, if the current vMem is 2 GB and the optimal vMem is 8 GB, then Intersight Workload Optimizer will raise vMem to 8 GB (or as close to that as the increment constant will allow).

Aggressiveness and Observation Periods

Intersight Workload Optimizer uses these settings to calculate utilization percentiles for vCPU and vMEM. It then recommends actions to improve utilization based on the observed values for a given time period.

- **Aggressiveness**

Attribute	Default Value
Aggressiveness	99th Percentile

When evaluating vCPU and vMEM performance, Intersight Workload Optimizer considers resource utilization as a percentage of capacity. The utilization drives actions to scale the available capacity either up or down. To measure utilization, the analysis considers a given utilization percentile. For example, assume a 99th percentile. The percentile utilization is the highest value that 99% of the observed samples fall below. Compare that to average utilization, which is the average of *all* the observed samples.

Using a percentile, Intersight Workload Optimizer can recommend more relevant actions. This is important in the cloud, so that analysis can better exploit the elasticity of the cloud. For scheduled policies, the more relevant actions will tend to remain viable when their execution is put off to a later time.

For example, consider decisions to reduce the capacity for CPU on a container. Without using a percentile, Intersight Workload Optimizer never resizes below the recognized peak utilization. For most containers there are moments when peak CPU reaches high levels. Assume utilization for a container peaked at 100% just once. Without the benefit of a percentile, Intersight Workload Optimizer will not reduce allocated CPU for that container.

With **Aggressiveness**, instead of using the single highest utilization value, Intersight Workload Optimizer uses the percentile you set. For the above example, assume a single CPU burst to 100%, but for 99% of the samples CPU never exceeded 50%. If you set **Aggressiveness** to 99th Percentile, then Intersight Workload Optimizer can see this as an opportunity to reduce CPU allocation for the container.

In summary, a percentile evaluates the sustained resource utilization, and ignores bursts that occurred for a small portion of the samples. You can think of this as aggressiveness of resizing, as follows:

- 100th Percentile – The least aggressive, recommended for critical workloads that need maximum guaranteed performance at all times.
- 99th Percentile (Default) – The recommended setting to achieve maximum performance and savings.
- 90th Percentile – Most aggressive, recommended for non-production workloads that can stand higher resource utilization.

■ Max Observation Period

Attribute	Default Value
Max Observation Period	Last 30 Days

To refine the calculation of resource utilization percentiles, you can set the sample time to consider. Intersight Workload Optimizer uses historical data from up to the number of days that you specify as a sample period. (If the database has fewer days' data then it uses all of the stored historical data.)

A shorter period means there are fewer data points to account for when Intersight Workload Optimizer calculates utilization percentiles. This results in more dynamic, elastic resizing, while a longer period results in more stable or less elastic resizing. You can make the following settings:

- Less Elastic – Last 90 Days
- Recommended – Last 30 Days
- More Elastic – Last 7 Days

■ Min Observation Period

Attribute	Default Value
Min Observation Period	1 Day

This setting ensures historical data for a minimum number of days before Intersight Workload Optimizer will generate an action based on the percentile set in **Aggressiveness**. This ensures a minimum set of data points before it generates the action.


Especially for scheduled actions, it is important that resize calculations use enough historical data to generate actions that will remain viable even during a scheduled maintenance window. A maintenance window is usually set for "down" time, when utilization is low. If analysis uses enough historical data for an action, then the action is more likely to remain viable during the maintenance window.

- More Elastic – None
- Recommended – 1 Day
- Less Elastic – 3 or 7 Days

Workload Controller

A Workload Controller is a Kubernetes controller that watches the state of your pods and then requests changes where needed. You can execute container resize actions when you set the scope to a Workload Controller.

Synopsis

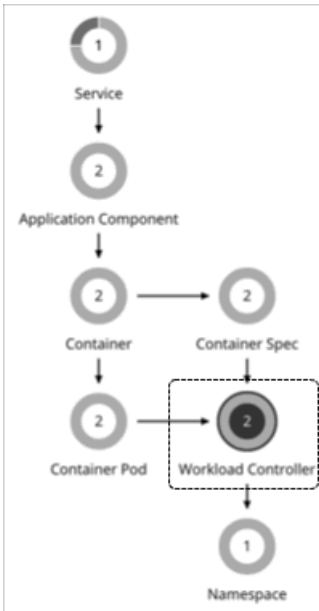

Synopsis	
Budget:	N/A
Provides:	N/A
Consumes:	N/A
Discovered through:	Kubeturbo Mediation Pod

Monitored Resources

Intersight Workload Optimizer does not monitor resources for Workload Controllers.

Actions

None

A Workload Controller executes container actions. When you set the scope to a Workload Controller and view the actions list, the actions apply to containers. Intersight Workload Optimizer does not recommend actions for the Workload Controller itself.

NOTE:

Intersight Workload Optimizer uses namespace or organization/space quotas as constraints when making resize decisions. The Workload Controller aggregates container actions. If those container resizes exceed current namespace quotas, Intersight Workload Optimizer blocks execution of container resize actions until the namespace quotas are sufficient. For more information about namespace quotas, see [Resource Quotas \(on page 115\)](#).

For resize actions on a Workload Controller, the actions details include descriptions of the affected Container Spec entities, and how the resources will change for each. If the resize exceeds current namespace quotas, then Intersight Workload Optimizer blocks the Workload Controller action. The action details list the Namespace actions that block execution of this resize in the **Related Actions** list.

Action Details

Resize VCPU Limit, VMem Limit for Workload Controller `cpu-quota-3`
 VCPU Throttling Congestion, VMem Limit Congestion in Container Spec `cpu-quota-3-spec`

IMPACTED CONTAINER SPEC

COLLAPSE DETAILS `cpu-quota-3-spec`

STATE

Action execution is blocked by related actions.

RELATED ACTIONS

BLOCKED BY

- Resize up VCPU Limit Quota for Namespace `quota-test-with-down` from 3,200 mCores to 3,600 mCores in EA - Advanced Engineering
- Resize up VMem Limit Quota for Namespace `quota-test-with-down` from 3.4 GB to 4 GB in EA - Advanced Engineering

For more information about container actions, see [Container Actions \(on page 100\)](#).

Workload Controller Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

Intersight Workload Optimizer shows and executes container resize actions via [Workload Controllers \(on page 107\)](#). You will *not* see actions when you set the scope to containers.

Action	Default Mode	
	Container	Workload Controller
Resize	N/A	Manual (automatable)

For details, see [Container Actions \(on page 100\)](#).


Executing several container resize actions can be very disruptive since pods need to restart with each resize. For replicas of the container scale group(s) related to a single Workload Controller, Intersight Workload Optimizer consolidates resize actions into one *merged action* to minimize disruptions. When a merged action has been executed (via the associated Workload Controller), all resizes for all related container specifications will be changed at the same time, and pods will restart once.

Action orchestration is currently not supported.

Container Pod

A ContainerPod is a Kubernetes pod, which is a group of one or more containers with shared storage or network resources and a specification for how to run the containers together.

Synopsis

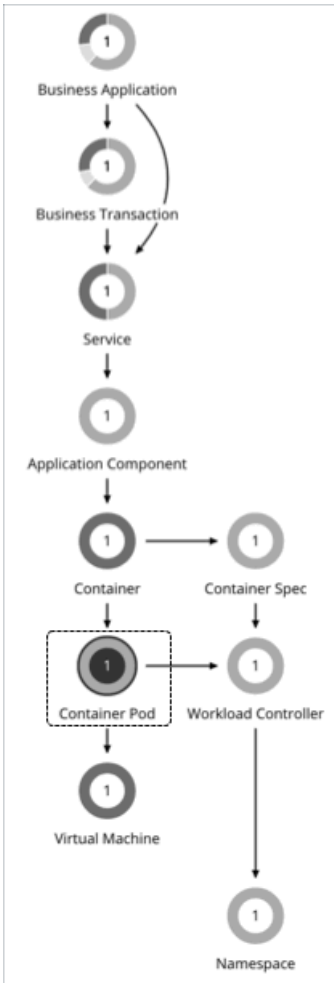

Synopsis	
Budget:	A container pod obtains its budget by selling resources to containers.
Provides:	Resources for containers to use: <ul style="list-style-type: none"> ■ Virtual CPU ■ Virtual Memory
Consumes:	Resources from virtual machines and namespaces.
Discovered through:	Intersight Workload Optimizer discovers Kubernetes pods through the Kubeturbo pod that you have deployed in your environment.

Monitored Resources

Intersight Workload Optimizer monitors the following resources for a container pod:

VMem

The virtual memory utilized by the pod against the node physical capacity. Measured in Megabytes (MB)

VCPU

The virtual CPU utilized by the pod against the node physical capacity. Measured in millicores (mCores)

VMem Request

The virtual memory request allocated by the pod against the node allocatable capacity. Measured in Megabytes (MB)

VCPU Request

The virtual CPU request allocated by the pod against the node allocatable capacity. Measured in millicores (mCores)

VMem Request Quota

If applicable, The amount of virtual memory request the pod has allocated against the namespace quota. Measured in Megabytes (MB)

VCPU Request Quota

If applicable, The amount of virtual CPU request the pod has allocated against the namespace quota. Measured in millicores (mCores)

VMem Limit Quota

If applicable, The amount of virtual memory limit the pod has allocated against the namespace quota. Measured in Megabytes (MB)

VCPU Limit Quota

If applicable, The amount of virtual CPU limit the pod has allocated against the namespace quota. Measured in millicores (mCores)

Pod Move Actions

Move a pod between nodes (VMs) to address performance issues or improve infrastructure efficiency. For example, if a particular node is congested for CPU, you can move pods to a node with sufficient capacity. If a node is underutilized and is a candidate for suspension, you must first move the pods before you can safely suspend the node.

The following items affect the *Move* actions that Intersight Workload Optimizer recommends for pods:

■ Constraints

Intersight Workload Optimizer respects the following constraints when making placement decisions for pods:

- Kubernetes taints for nodes and tolerations for pods are treated as constraints. For example, if a pod has a toleration attribute that restricts it from moving to a certain node, Intersight Workload Optimizer will not move that pod to the restricted node.
- Intersight Workload Optimizer imports Kubernetes node labels and treats them as constraints. For example, if a pod has a defined node label, Intersight Workload Optimizer will move that pod to a node with a matching label.
- Intersight Workload Optimizer recognizes pod affinity and anti-affinity policies.
- You can create placement policies to enforce constraints for pod move actions. For example, you can have a policy that allows pods to only move to certain nodes, or a policy that prevents pods from moving to certain nodes.

For more information, see [Creating Placement Policies \(on page 62\)](#).

■ Eviction Thresholds

Intersight Workload Optimizer considers the memory/storage eviction thresholds of the destination node to ensure that the pod can be scheduled after it moves. Eviction thresholds for `imagefs` and `rootfs` are reflected as node effective capacity in the market analysis.

■ Temporary Quota Increases

If a namespace quota is already fully utilized, Intersight Workload Optimizer temporarily increases the quota to allow a pod to move, while maintaining that one replica continues to run. You can disable temporary increases in quotas, but be aware that this will result in failure to move pods. To disable increases, set the following in the `yaml` resource for Kubeturbo deployment:

```
update-quota-to-allow-moves=false
```

Pod Provision and Suspension Actions In Response to SLOs


For horizontally scalable Kubernetes Services that collect performance metrics (or KPIs) for applications, Intersight Workload Optimizer can dynamically adjust the number of pod replicas that back those Services to help you meet SLOs (Service Level Objectives) for your applications.

For details, see [Actions for Kubernetes Services \(on page 85\)](#).

Pod Provision Action in Response to Node Provision

When recommending node provision actions, Intersight Workload Optimizer also recommends pod provision actions that reflect the projected demand from required DaemonSet pods, and respects the maximum number of pods allowed for a node. This ensures that any application workload can be placed on the new node and stay within the desired range of vMem/vCPU usage, vMem/vCPU request, and number of consumers.

The action details for a pod provision action shows the related node that you need to provision. Click the node name to set it at your scope.

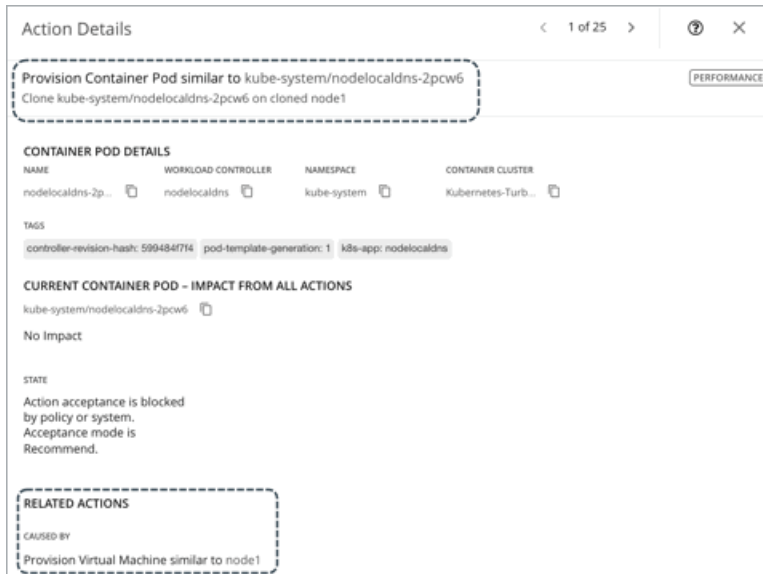

The screenshot shows the 'Action Details' window for a pod provision action. The title is 'Action Details' with a page indicator '1 of 25' and a close button. The main content area is titled 'Provision Container Pod similar to kube-system/nodelocaldns-2pcw6' and includes a sub-description 'Clone kube-system/nodelocaldns-2pcw6 on cloned node1'. A 'PERFORMANCE' tab is visible. Below this, there is a section for 'CONTAINER POD DETAILS' with a table:

NAME	WORKLOAD CONTROLLER	NAMESPACE	CONTAINER CLUSTER
nodelocaldns-2p...	nodelocaldns	kube-system	Kubernetes-Turb...

Below the table, there are 'TAGS' including 'controller-revision-hash: 599484f714', 'pod-template-generation: 1', and 'k8s-app: nodelocaldns'. A section titled 'CURRENT CONTAINER POD - IMPACT FROM ALL ACTIONS' shows 'kube-system/nodelocaldns-2pcw6' with 'No Impact'. A 'STATE' section indicates 'Action acceptance is blocked by policy or system. Acceptance mode is Recommend.' At the bottom, a 'RELATED ACTIONS' section shows 'CAUSED BY' as 'Provision Virtual Machine similar to node1'.

Intersight Workload Optimizer treats [static pods](#) as DaemonSets for the purpose of provisioning nodes. Because a static pod provides a node with a specific capability, it is controlled by the node and is not accessible through the API server. If a node to be provisioned requires a static pod, Intersight Workload Optimizer generates actions to provision the node and the corresponding static pod.

Intersight Workload Optimizer creates an auto-generated group of static pods when it discovers a static pod on each node in a cluster. To view all the auto-generated groups, go to Search, select Groups, and then type `mirror pods` as your search keyword.

←

Search

Search within your infrastructure

ADD FILTER

			NAME ↑
Mirror Pods Kubernetes-ae-cluster-1 <small>On-Prem Kubernetes-ae-cluster-1</small>	5	Container Pods	Static >
Mirror Pods Kubernetes-ae-cluster-2 <small>On-Prem Kubernetes-ae-cluster-2</small>	5	Container Pods	Static >
Mirror Pods Kubernetes-DC11-PT-K8s <small>On-Prem Kubernetes-DC11-PT-K8s</small>	12	Container Pods	Static >
Mirror Pods Kubernetes-Hybrid <small>Hybrid Kubernetes-Hybrid</small>	4	Container Pods	Static >
Mirror Pods Kubernetes-OCF43-AWS <small>Cloud Kubernetes-OCF43-AWS</small>	8	Container Pods	Static >
Mirror Pods Kubernetes-OKD-311 <small>On-Prem Kubernetes-OKD-311</small>	9	Container Pods	Static >
Mirror Pods Kubernetes-Turbonomic <small>Hybrid Kubernetes-Turbonomic</small>	3	Container Pods	Static >

Pod Suspension Action in Response to Node Suspension

When recommending node suspension actions, Intersight Workload Optimizer also recommends suspending the DaemonSet pods that are no longer required to run the suspended nodes.

The action details for a pod suspension action shows the related node that you need to suspend. Click the node name to set it at your scope.

Action Details
< 1 of 1 >
?
×

Suspend Container Pod openshift-sdn/sdn-rc94c

Suspend openshift-sdn/sdn-rc94c on suspended ocp47demo-2v5jc-worker-us-east-2a-ctc7p

CONTAINER POD DETAILS

NAME	WORKLOAD CONTROLLER	NAMESPACE	CONTAINER CLUSTER
sdn-rc94c	sdn	openshift-sdn	Kubernetes-AWS...

TAGS

app: sdn component: network controller-revision-hash: 55d797755b openshift.io/component: network pod-template-generation: 2

type: infra

CONTAINER POD STATS

openshift-sdn/sdn-rc94c

No Stats

STATE

Action acceptance is blocked by policy or system. Acceptance mode is Recommend.


RELATED ACTIONS

CAUSED BY

Suspend Virtual Machine ocp47demo-2v5jc-worker-us-east-2a-ctc7p

Intersight Workload Optimizer treats [static pods](#) as DaemonSets for the purpose of suspending nodes. Because a static pod provides a node with a specific capability, it is controlled by the node and is not accessible through the API server. If the only workload type left on a node is a static pod, Intersight Workload Optimizer generates actions to suspend the node and the corresponding static pod.

Intersight Workload Optimizer creates an auto-generated group of static pods when it discovers a static pod on each node in a cluster. To view all the auto-generated groups, go to Search, select Groups, and then type `mirror pods` as your search keyword.

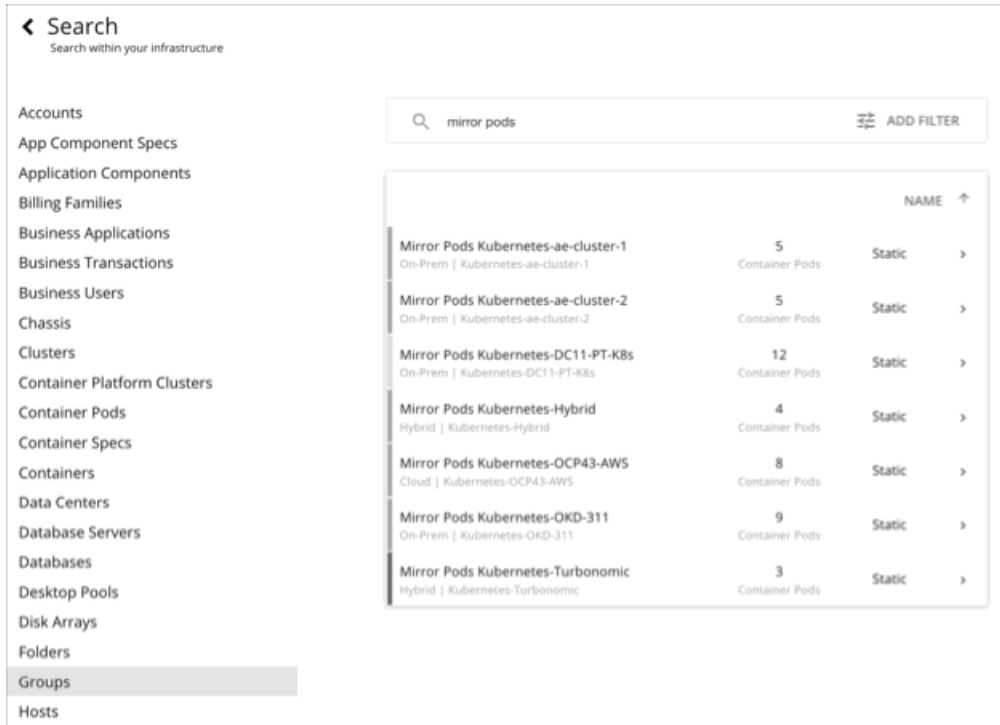

Container Pod Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

For details about container pod actions, see [Container Pod Actions \(on page 111\)](#).

Action	Default Mode
Move	Manual

Action orchestration is currently not supported.

Placement Policies


You can create placement policies to enforce constraints for pod move actions. For example, you can have a policy that allows pods to only move to certain nodes, or a policy that prevents pods from moving to certain nodes.

For more information, see [Creating Placement Policies \(on page 62\)](#).

Namespace

A namespace is a logical pool of resources in a Kubernetes environment that manages workloads based on specific requirements or business needs. For example, administrators can pool resources for different organizations within the enterprise, and assign different policies to each pool.

Synopsis

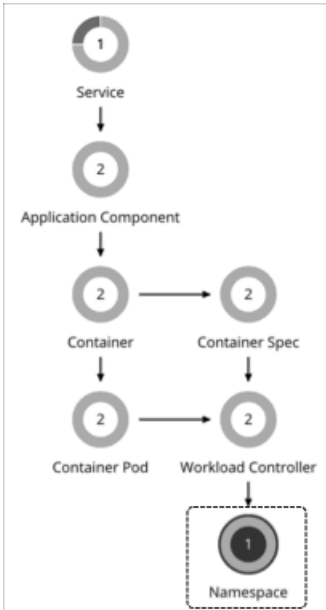

Synopsis	
Budget:	N/A
Provides:	N/A
Consumes:	N/A
Discovered through:	Kubeturbo Mediation Pod

Resource Quotas

A namespace can include the following compute resource quotas:

VMem Request Quota

The total amount of virtual memory request for all pods allocated to the namespace against the namespace quota.
Measured in Megabytes (MB)

VCPU Request Quota

The total amount of virtual CPU request for all pods allocated to the namespace against the namespace quota.
Measured in millicores (mCores)

VMem Limit Quota

The total amount of virtual memory limit for all pods allocated to the namespace against the namespace quota.
Measured in Megabytes (MB)

VCPU Limit Quota

The total amount of virtual CPU limit for all pods allocated to the namespace against the namespace quota.
Measured in millicores (mCores)

When they are configured, these quotas define the capacity for the given namespace. Intersight Workload Optimizer recognizes these quotas as it calculates actions in your environment.

If containers in the namespace require more compute resources, and those requirements exceed the namespace quotas, then Intersight Workload Optimizer recommends increasing the quotas. It will *block* execution of the underlying container actions until the namespace quotas are sufficient. In the details for a quota resize action, you can see the list of blocked container actions.

For more about actions to increase namespace quotas, see [Actions \(on page 117\)](#).

When you run Optimize Container Cluster plans, Intersight Workload Optimizer can calculate increased namespace quotas in the plan results. For more information, see [Optimize Container Cluster Plan \(on page 253\)](#).

Intersight Workload Optimizer treats quotas defined in namespaces as constraints when making sizing decisions for containers. When you scope to a namespace in the supply chain, the Capacity and Usage chart shows *Capacity* as the namespace quotas. *Used* values are the sum of resource limits and/or requests set for all pods in the namespace.

COMMODITY	CAPACITY	USED	UTILIZATION
Memory Request Quota ⓘ	640 MB	640 MB	100%
CPU Limit Quota ⓘ	500 mCores	500 mCores	100%
Memory Limit Quota ⓘ	1.25 GB	1.25 GB	100%
CPU Request Quota ⓘ	250 mCores	100 mCores	40%
Virtual Memory Request	90.99 GB	640 MB	0.69%

SHOW ALL >

For a namespace that does not have defined quotas, *Capacity* for the commodity is infinite (as shown in the image below). *Used* values are the sum of resource limits and/or requests set for all pods in the namespace. If these are not set, *Used* value is 0 (zero).

COMMODITY	CAPACITY	USED	UTILIZATION
Memory Request Quota ⓘ	∞	4.99 GB	0%
CPU Request Quota ⓘ	∞	1.03 Cores	0%
Memory Limit Quota ⓘ	∞	0 KB	0%
CPU Limit Quota ⓘ	∞	0 mCores	0%
Virtual Memory Request	192.04 GB	4.99 GB	2.6%

SHOW ALL >

NOTE:

If you download the data in the chart, the downloaded file shows infinite capacities as unusually large values (for example, 1,000,000,000 cores instead of the ∞ symbol).

Labels and Annotations

Intersight Workload Optimizer discovers namespace labels and annotations as tag properties. You can filter namespaces by labels or annotations when you use Search or create Groups.

Monitored Resources

Intersight Workload Optimizer monitors actual utilization of VMem, VCPU, VMem Requests and VCPU Requests against cluster capacity.

You can see utilization data in the **Capacity and Usage** and **Namespace Multiple Resources** charts. With this data, you can understand how pods running in the namespace are consuming resources.

To see which namespaces use the most cluster resources, set the scope to a container cluster and see the **Top Namespaces** chart. You can use the data in the chart for showback analysis.

Actions

Resize Quota

Intersight Workload Optimizer treats quotas defined in a namespace as constraints when making container resize decisions. If existing container actions would exceed the namespace quotas, Intersight Workload Optimizer recommends actions to resize up the affected namespace quota.

Note that Intersight Workload Optimizer does not recommend actions to resize *down* a namespace quota. Such an action reduces the capacity that is already allocated to an application – The decision to resize down a namespace quota should include the application owner.

Intersight Workload Optimizer only recommends a resize for namespace quotas if underlying actions to resize containers require the increased quota. Note that Intersight Workload Optimizer aggregates container actions in Workload Controller entities. When you have a recommendation to resize namespace quotas, Intersight Workload Optimizer blocks execution of the resize actions for the affected Workload Containers. The action details show these blocked actions in the **Related Actions** list.

Action Details

Resize up VMem Limit Quota for Namespace `quota-test-with-down` from 3.4 GB to 4 GB
VMem Limit Congestion in Related Workload Controller

TAGS
`kubernetes.io/metadata.name: quota-test-with-down`

NAMESPACE - IMPACT FROM ALL ACTIONS
`quota-test-with-down`

<p>MEMORY LIMIT QUOTA</p> <p>100 % → 84.8 % ↓</p> <p>3.4 GB → 4 GB</p>	<p>CPU LIMIT QUOTA</p> <p>100 % → 88.9 % ↓</p> <p>3.2 Cores → 3.6 Cores</p>
--	---

STATE
Action acceptance is blocked by policy or system.
Acceptance mode is Recommend.

RELATED ACTIONS

BLOCKING

- Resize VCPU Limit,VMem Limit for Workload Controller `cpu-quota-3` in EA - Advanced Engineering
- Resize VCPU Limit,VMem Limit for Workload Controller `cpu-quota-1` in EA - Advanced Engineering

For more information about namespace quotas, see [Resource Quotas \(on page 115\)](#).


For more information about container resize actions, see [Workload Controller Actions \(on page 108\)](#).

For more information about container resize actions, see [Container Actions \(on page 100\)](#).

Container Cluster

A Container Cluster is a Kubernetes cluster that Intersight Workload Optimizer discovers through Kubeturbo. With this entity type, Intersight Workload Optimizer can fully link the entire container infrastructure with the underlying nodes, and then present all actions on containers and nodes in a single view. This gives you full visibility into the actions that impact the health of your container environment.

Synopsis

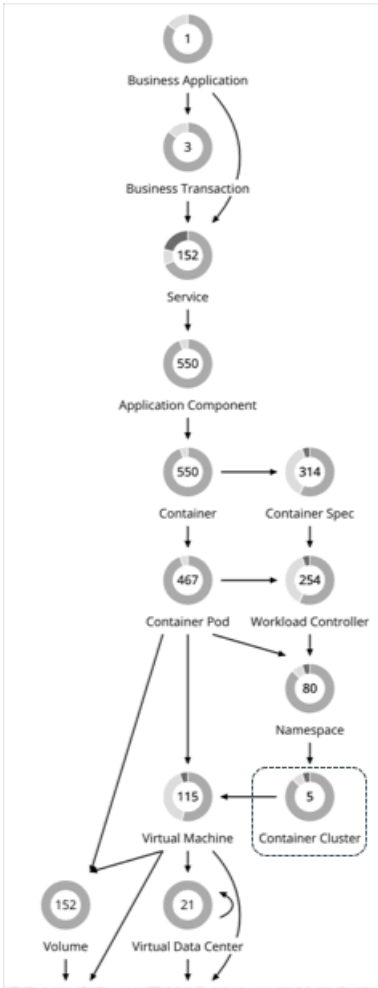

Synopsis	
Budget:	N/A
Provides:	N/A
Consumes:	N/A
Discovered through:	Kubeturbo Mediation Pod


Monitored Resources

Intersight Workload Optimizer does not monitor resources for Kubernetes clusters. Instead, it monitors resources for the containers, pods, nodes (VMs), and volumes in the cluster.

Actions

None

Intersight Workload Optimizer does not recommend actions for a Container Cluster. Instead, it recommends actions for the containers, pods, nodes (VMs), and volumes in the cluster. Intersight Workload Optimizer shows all of these actions when you scope to a Container Cluster and view the Pending Actions chart.

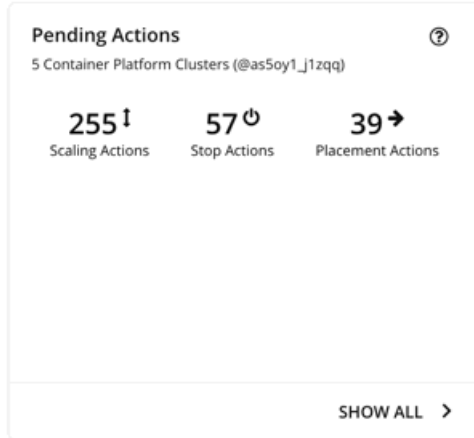

For actions on nodes:

- For actions to suspend or provision nodes in the public cloud, Intersight Workload Optimizer includes cost information (investments or savings) attached to those actions. Note that Intersight Workload Optimizer generates these actions *not* to optimize costs, but to assure performance and efficiency for your container infrastructure. Intersight Workload Optimizer reports costs to help you track your cloud spend.
To view cost information, set the scope to a cluster in the public cloud and view the Necessary Investments or Potential Savings charts. You can also set the scope to the global cloud environment to see total costs, or to individual container clusters or nodes.
- For VMs/nodes that make up an Azure Kubernetes Service (AKS) cluster, you can manually execute recommended VM Provision and VM Suspend actions. This adjusts the count of nodes in a given node pool, where Provision raises the node count, and Suspend lowers it. You can execute these actions if the cluster is also discovered through an Azure target (along with the KubeTurbo target).
- Node pools and machine sets are ways to deploy and scale compute resources for Kubernetes services hosted in the public cloud and the OpenShift 4.x container platform on any infrastructure.

For Kubernetes services in the public cloud, Intersight Workload Optimizer uses default labels with the following patterns to discover the node pool types within each cluster:

- Azure Kubernetes Service (AKS): `agentpool`
- Amazon Elastic Kubernetes Service (EKS):
`//alpha.eksctl.io/nodegroup-name`
`eks.amazonaws.com/nodegroup`
- Google Kubernetes Engine (GKE): `cloud.google.com/gke-nodepool`

For OpenShift 4.x, Intersight Workload Optimizer creates node pools based on machine sets.

For both discovered and auto-created node pools, Intersight Workload Optimizer aggregates and visualizes actions for all the nodes in a pool to help you identify performance issues and optimization opportunities at the node pool level. Use the Top Node Pools chart to see actions and detailed information. By default, this chart displays when you set the scope to your global environment and then click the Container Cluster entity in the supply chain.

Top Node Pools
Global Environment

SORT BY: POTENTIAL SAVINGS ↓

Name	Node Count	Potential Savings ⓘ	Potential Investments ⓘ	Actions
NodePool-machineset-ocp47demo-2v5jc-worker-us	6	\$165.11/mo	\$165.11/mo	26 ACTIONS
NodePool-eks-cluster-ng2-Kubernetes-EKS-withWin	2	\$8.69/mo	N/A	1 ACTION
NodePool-agentpool-Kubernetes-AKS	4	\$0.00/mo	N/A	no actions
NodePool-ami-005fb2dc84caa293d-Kubernetes-EKS	2	\$0.00/mo	N/A	no actions
NodePool-ami-0a99721a12001ebd4-Kubernetes-EKS	2	\$0.00/mo	N/A	no actions
NodePool-bar-Kubernetes-DC11-PT-K8s	1	\$0.00/mo	N/A	no actions
NodePool-eks-cluster-ng1-Kubernetes-EKS-withWin	1	\$0.00/mo	N/A	no actions

SHOW ALL >

The chart shows the number of nodes and aggregated actions for each node pool. For node pools in the public cloud, the chart also shows the costs you would incur if you provision nodes and then scale their volumes, or the savings you would realize if you suspend nodes. To view individual actions, click the button under the Actions column. To see more details, including the full list of nodes for each pool, click the node pool name.

You can automate the execution of these actions through Intersight Workload Optimizer with OpenShift 4.x Machine Operator. You can also manually execute node actions for AKS, EKS, or GKE via the cloud provider.

NOTE:

The following capabilities will be introduced in a future release:

- Actions to provision or suspend nodes via a plan simulation
- Policies for node pools
- Execution of node actions for AKS, EKS and GKE through Intersight Workload Optimizer

Cluster Health

To assess the health of each cluster, see the **Top Container Platform Clusters** chart in the predefined Container Platform Dashboard.

For each cluster, the chart shows the sum of resources used by containers and the underlying nodes. Click the **Actions** button to see a list of pending actions.

Top Container Platform Clusters
Global Environment

SORT BY: HEALTH ↓

Container Cluster	Health	Virtual CPU Used	Virtual CPU Request	Virtual Memory Used	Virtual Memory Request	Actions
Kubernetes-PT-AKS		8.2 Cores (41%) ↓ 0.31%	13.01 Cores (68%)	20.58 GB (28%) ↓ 0%	21.66 GB (40%)	60 ACTIONS
Kubernetes-DC11-PT-K8s		6.78 Cores (28%) ↓ 3%	11.46 Cores (50%)	24.67 GB (26%) ↑ 0.1%	12.27 GB (13%)	139 ACTIONS
Kubernetes-OCP47-AWS		13.36 Cores (26%) ↑ 2%	12.87 Cores (27%) ↑ 3%	90.84 GB (45%) ↓ 13%	72.4 GB (38%) ↑ 0.69%	217 ACTIONS
Kubernetes-OKD-311		4.07 Cores (16%) ↓ 9%	8.86 Cores (35%) ↑ 1%	27.94 GB (30%) ↑ 23%	21.35 GB (23%) ↑ 0.92%	119 ACTIONS
Kubernetes-ocp-wdc02		10.02 Cores (21%) ↓ 17%	10.6 Cores (22%) ↓ 0.92%	208.77 GB (55%) ↓ 24%	103.17 GB (30%) ↑ 2%	319 ACTIONS
Kubernetes-OCP43-AWS		3.32 Cores (21%) ↑ 17%	7.41 Cores (51%) ↓ 0%	23.72 GB (38%) ↑ 2%	15.53 GB (26%) ↓ 0%	16 ACTIONS
Kubernetes-Turbonomic		5.11 Cores (64%) ↑ 27%	0.95 Cores (12%)	61.83 GB (49%) ↑ 5%	18.03 GB (14%)	73 ACTIONS

SHOW ALL >

The **Top Namespaces** chart shows the namespaces that use the most cluster resources. You can use the data in the chart for showback analysis.

Top Namespaces
Global Environment

SORT BY: HEALTH ↓

Namespace	H.	Container Cluster	Virtual CPU Used	CPU Request Quota	CPU Limit Quota	Virtual Memory Used	Memory Request Quota	Memory Limit Quota	Actions
demoapp		OKD-311	152 mCores (1%) ↓ 0.19%	100 mCores (0%)	200 mCores (0%)	1.91 MB (0%)	10 MB (0%)	20 MB (0%)	72 ACTIONS
action-merge-test		OKD-311	16 mCores (0%) ↓ 5%	100 mCores (0%)	200 mCores (0%)	153.23 MB (0%) ↑ 0.08%	260 MB (0%)	400 MB (0%)	75 ACTIONS
action-merge-test2		OKD-311	202 mCores (1%) ↓ 0.07%	90 mCores (0%)	202 mCores (0%)	2.2 MB (0%) ↑ 4%	260 MB (0%)	400 MB (0%)	78 ACTIONS
turbo-operator-arsen		OCP47-AWS	92 mCores (0%) ↑ 279%	200 mCores (0%)	1 Cores (0%)	202.93 MB (0%) ↑ 6%	512 MB (0%)	1 GB (0%)	5 ACTIONS
provelt		DC11-PT-K8s	442 mCores (2%) ↓ 0.09%	606 mCores (15%)	5.78 Cores (72%)	585.42 MB (1%)	2.44 GB (24%)	20.88 GB (42%)	84 ACTIONS
instana-agent		OCP47-AWS	1.27 Cores (2%) ↑ 1%	2.5 Cores (0%)	7.5 Cores (0%)	2.58 GB (1%) ↓ 4%	2.5 GB (0%)	2.5 GB (0%)	17 ACTIONS
aqiqui-cpu-throttling		DC11-PT-K8s	757 mCores (3%) ↑ 0.18%	600 mCores (0%)	1.35 Cores (0%)	23.71 MB (0%)	50 MB (0%)	100 MB (0%)	78 ACTIONS


SHOW ALL >

Virtual Machine (Kubernetes Node)

In Kubernetes environments, a node is a virtual or physical machine that contains the services necessary to run pods. Intersight Workload Optimizer represents nodes as Virtual Machine entities in the supply chain.

Intersight Workload Optimizer can discover node roles and Master Nodes. It creates policies to keep nodes of the same role on unique host or Availability Zone providers, and policies to disable suspension of Master Nodes. Intersight Workload Optimizer also discovers and displays Node Pools, and OpenShift Machine Sets.

Synopsis

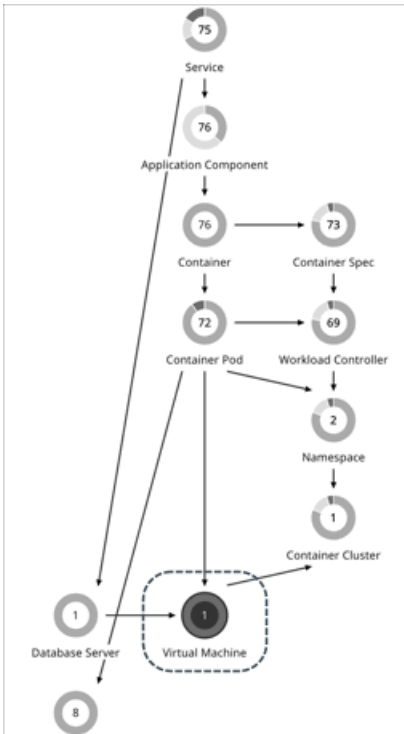

Synopsis	
Provides:	Resources to pods
Consumes:	Resources from container clusters
Discovered through:	Kubeturbo Mediation Pod

Monitored Resources

Intersight Workload Optimizer monitors the following resources for nodes that host Kubernetes pods. These resources are monitored along with the resources from the infrastructure probes, such as vCenter or a public cloud mediation probe.

- **Virtual Memory**
The memory currently used by all containers on the node. The capacity for this resource is the Node Physical capacity.
- **Virtual CPU**
The CPU currently used by all containers on the node. The capacity for this resource is the Node Physical capacity.
- **Memory Request Allocation**
The memory available to the node to support the ResourceQuota request parameter for a given namespace (Kubernetes namespace or OpenShift project).
- **CPU Request Allocation**
The CPU available to the node to support the ResourceQuota request parameter for a given namespace (Kubernetes namespace or OpenShift project).
- **Virtual Memory Request**
The memory currently guaranteed by all containers on the node with a Memory Request. The capacity for this resource is the Node Allocatable capacity, which is the amount of resources available for pods and can be less than the physical capacity.
- **Virtual CPU Request**
The CPU currently guaranteed by all containers on the node with a CPU Request. The capacity for this resource is the Node Allocatable capacity, which is the amount of resources available for pods and can be less than the physical capacity.

- **MemAllocation**
The memory ResourceQuota limit parameter for a given namespace (Kubernetes namespace or OpenShift project).
- **CPUAllocation**
The CPU ResourceQuota limit parameter for a given namespace (Kubernetes namespace or OpenShift project).

Actions

Intersight Workload Optimizer can recommend the following actions:

- **Provision**
Provision nodes to address workload congestion or meet application demand.
- **Suspend**
Suspend nodes after you have consolidated pods or defragmented node resources to improve infrastructure efficiency.
- **Reconfigure**
Reconfigure nodes that are currently in the `NotReady` state.

NOTE:

For nodes in the public cloud, Intersight Workload Optimizer reports the cost savings or investments attached to node and provision actions. For example, you can see the additional costs you would incur if you provision nodes and then scale their volumes, or the savings you would realize if you suspend nodes. Note that performance and efficiency are the drivers of these actions, *not* cost. Cost information is included to help you track your cloud spend. For this reason, you will *not* see cost-optimization actions, including recommendations to re-allocate discounts or delete unattached volumes.

To view cost information, set the scope to a node and see the Necessary Investments and Potential Savings charts. You can also set the scope to a [container cluster \(on page 118\)](#) or the global cloud environment to view aggregated cost information.

Node Provision Actions

When recommending node provision actions, Intersight Workload Optimizer also recommends pod provision actions that reflect the projected demand from required DaemonSet pods, and respects the maximum number of pods allowed for a node. This ensures that any application workload can be placed on the new node and stay within the desired range of vMem/vCPU usage, vMem/vCPU request, and number of consumers.

The action details for a node provision action show the related DaemonSet pods that are required for the node to run. Click a pod name to set it at your scope.

The screenshot displays the 'Action Details' for a 'Provision Virtual Machine' action. The action title is 'Provision Virtual Machine similar to node1' with a 'PERFORMANCE' tag. The 'VIRTUAL MACHINE DETAILS' section includes the following information:

- CONTAINER CLUSTER:** Kubernetes-Turbonomic
- TAGS:**
 - kubernetes.io/hostname: node1
 - kubernetes.io/arch: amd64
 - kubernetes.io/os: linux
 - storageclass: glusterfs
 - beta.kubernetes.io/arch: amd64
 - beta.kubernetes.io/os: linux
- VIRTUAL CPU:** 20.7 GHz
- VIRTUAL MEMORY:** 62.8 GiB

The **ACTION STATE** is 'Action acceptance is blocked by policy or system. Acceptance mode is Recommend.'

The **RELATED ACTIONS** section, under the 'CAUSING' category, lists the following pods:

- Provision Container Pod similar to kube-system/calico-node-5cfzg
- Provision Container Pod similar to default/glusterfs-gkdgx
- Provision Container Pod similar to turbonomic/prometheus-node-exporter-hdfhk
- Provision Container Pod similar to kube-system/nodelocaldns-2pcw6
- Provision Container Pod similar to kube-system/kube-proxy-ikqj4


Intersight Workload Optimizer treats [static pods](#) as DaemonSets for the purpose of provisioning nodes. Because a static pod provides a node with a specific capability, it is controlled by the node and is not accessible through the API server. If a

node to be provisioned requires a static pod, Intersight Workload Optimizer generates actions to provision the node and the corresponding static pod.

Node Suspension Actions

When recommending node suspension actions, Intersight Workload Optimizer also recommends suspending the DaemonSet pods that are no longer required to run the suspended nodes.

The action details for a node suspension action show the related DaemonSet pods that are no longer needed to run the suspended nodes. Click a pod name to set it at your scope.

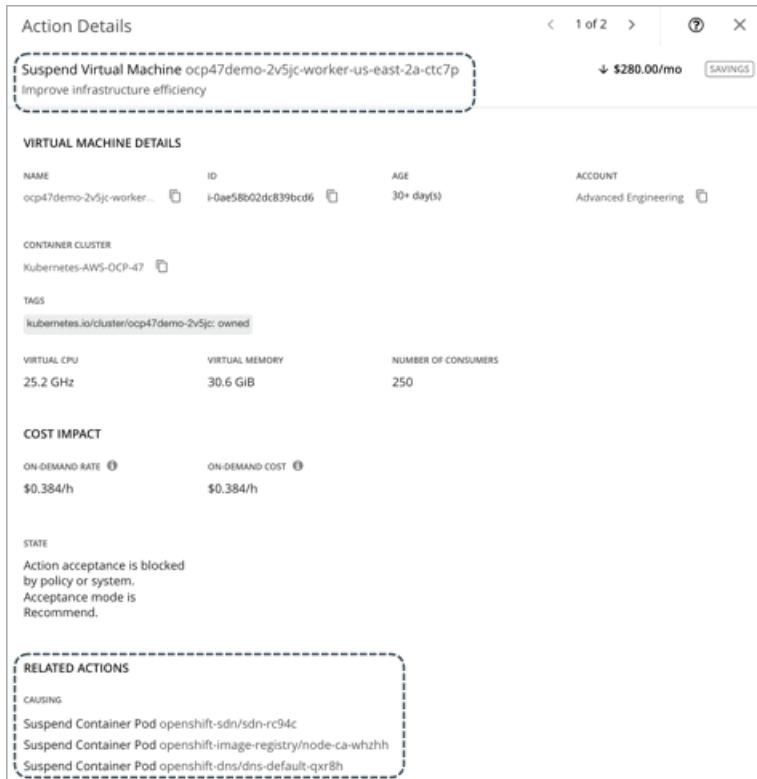

Intersight Workload Optimizer treats [static pods](#) as DaemonSets for the purpose of suspending nodes. Because a static pod provides a node with a specific capability, it is controlled by the node and is not accessible through the API server. If the only workload type left on a node is a static pod, Intersight Workload Optimizer generates actions to suspend the node and the corresponding static pod.

Node Reconfigure Actions

Intersight Workload Optimizer generates node reconfigure actions to notify you of nodes that are currently in the `NotReady` state.

A reconfigure action should change a node's state to `Ready` so that Intersight Workload Optimizer can begin to monitor the health of the node and the associated container pods. This action is read-only and must be executed outside Intersight Workload Optimizer. As part of action execution, you might need to restart the node or the kubelet agent on the node.

NOTE:

Intersight Workload Optimizer treats a node as a VM under certain circumstances. For example, it treats a node in vCenter as a VM that can move to a different host if the current host is congested. This means that for a `NotReady` node in vCenter, it is possible to see a VM move action along with the expected node reconfigure action. Both actions are valid and safe to execute since they achieve two different and non-conflicting results.

For each Kubernetes cluster, Intersight Workload Optimizer creates an auto-generated group of `NotReady` nodes. To view all the auto-generated groups, go to Search, select Groups, and then type `notready` as your search keyword. Click a group to view the individual nodes and the pending reconfigure actions.

← Search
 Search within your infrastructure

Accounts
 App Component Specs
 Application Components
 Billing Families
 Business Applications
 Business Transactions
 Business Users
 Chassis
 Clusters
 Container Platform Clusters
 Container Pods
 Container Specs
 Containers
 Data Centers
 Database Servers
 Databases
 Desktop Pools
 Disk Arrays
 Folders
Groups
 Hosts

ADD FILTER

NAME			↑
NotReady Nodes [Kubernetes-ae-cluster-1] <small>On-Prem Kubernetes-ae-cluster-1</small>	2	Virtual Machines	Static >
NotReady Nodes [Kubernetes-Hybrid] <small>Hybrid Kubernetes-Hybrid</small>	2	Virtual Machines	Static >

When you examine a pending reconfigure action, you can click the link in the 'Entities Impacted by this Node' section to view a list of impacted pods.

Action Details

Reconfigure Virtual Machine ae-cluster1-node-group-afdd79db90
 The node is in a NotReady status

VIRTUAL MACHINE DETAILS

NAME
 ae-cluster1-node-group-afdd79db90

VMEM PERCENTILE	VCPU PERCENTILE
31 %	11 %
8 GB	4.8 GHz

STATE
 Action acceptance is blocked by policy or system. Acceptance mode is Recommend.

ENTITIES IMPACTED BY THIS NODE


Reconfiguring this VM might activate the container pods that are currently in an unknown state.

[View List of Container Pods in Unknown State](#)

These pods are in the Unknown state and are not controllable. In the supply chain and in the list of container pods, these pods display with a gray color to help you differentiate them from other pods.

Kubernetes CPU Metrics

To meet user requirements and align with Kubernetes specifications, Intersight Workload Optimizer uses millicore (mCore) as the base unit for CPU metrics for your Kubernetes platform.

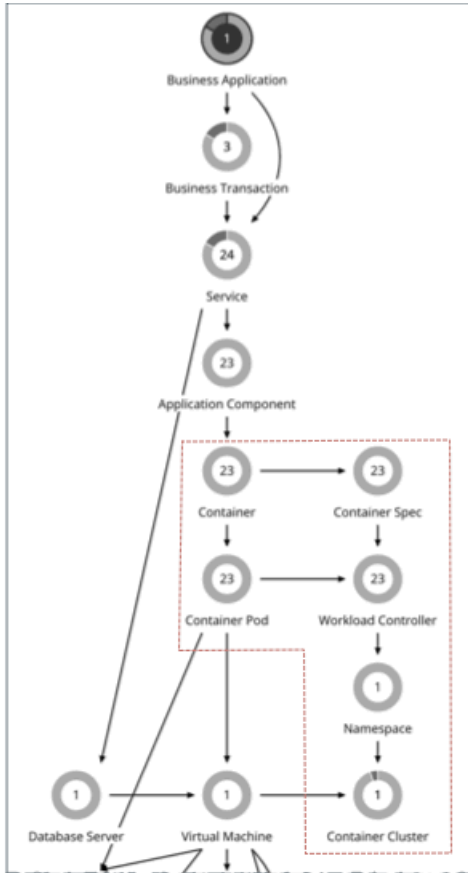

These include metrics for the following CPU-related commodities:

- vCPU
- vCPU Request
- vCPU Limit Quota
- vCPU Request Quota

Intersight Workload Optimizer displays these commodities in charts, actions, policies, and plans. For example:

- In the Capacity and Usage chart for container platform entities, *capacity* and *used* values for CPU-related commodities are shown in mCores.
- In the supply chain, when you scope to a Workload Controller to view pending [resize actions \(on page 100\)](#) for a container, you will see utilization and resize values in mCores.
- When you create [Container Spec policies \(on page 105\)](#), resize thresholds and increment constants for CPU-related commodities are set in mCores.
- For an Optimize Container Cluster plan, the [plan results \(on page 256\)](#) for CPU-related commodities are shown in mCores.

For nodes (VMs) and Application Components:

- For nodes stitched to your Kubernetes platform, the base unit for *vCPU Request* is also mCore, since this commodity is provided only to Kubernetes.
- For both nodes and Application Components (standalone or stitched to your Kubernetes platform), the base unit for *vCPU* is MHz, since this is a generic commodity. For example, when you view a pod move action, vCPU metrics for the current and destination nodes for the pod are expressed in MHz.


The following table summarizes the base units of CPU measurement that Intersight Workload Optimizer uses.

Entity	CPU Commodity			
	vCPU	vCPU Request	vCPU Limit Quota	vCPU Request Quota
Container	mCore	mCore	mCore	mCore

Entity	CPU Commodity			
	vCPU	vCPU Request	vCPU Limit Quota	vCPU Request Quota
Container Spec	mCore	mCore	N/A	N/A
Workload Controller	N/A	N/A	mCore	mCore
Container Pod	mCore	mCore	mCore	mCore
Namespace	mCore	mCore	mCore	mCore
Container Cluster	mCore	mCore	N/A	N/A
Node (VM)	MHz	mCore	N/A	N/A
Application Component	MHz	N/A	N/A	N/A

Entity Types - Cloud Infrastructure

Intersight Workload Optimizer discovers and monitors the entities that make up your cloud infrastructure, and recommends actions to assure application performance at the lowest possible cost.

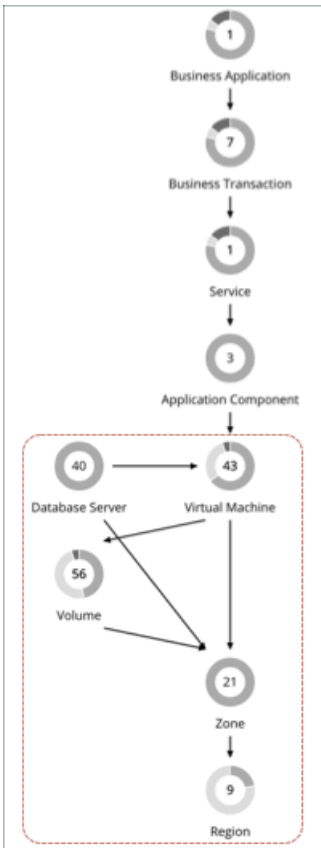


Virtual Machine (Cloud)

A virtual machine (VM) is a software emulation of a physical machine, including OS, virtual memory and CPUs, and network ports. VMs host applications, or they provide resources to container platforms.

NOTE:

Kubernetes nodes are represented as Virtual Machines in the Intersight Workload Optimizer supply chain. For details about nodes, see [Virtual Machine \(Kubernetes Node\) \(on page 121\)](#).

Synopsis

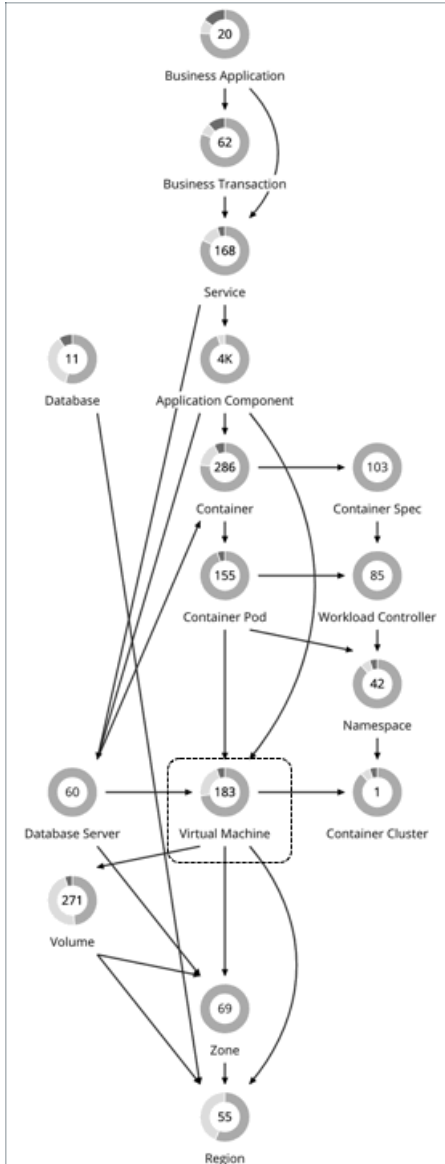

Synopsis

Budget: A VM gains its budget by selling resources to the applications it hosts.

Provides: Resources for hosted applications to use:

- VMEM (Kbytes)
- VCPU (MHz)
- VStorage
- IOPS (storage access operations per second)
- Latency (capacity for disk latency in ms)
- Memory and CPU Requests (for Kubernetes environments)

Synopsis	
Consumes:	Resources from cloud zones
Discovered through:	Cloud targets

Monitored Resources

Intersight Workload Optimizer monitors the following resources for a cloud VM:

- **Virtual Memory (VMem)**
The utilization of the VMem allocated to the hosting VM
Measured in Kilobytes (KB)
- **Virtual CPU (VCPU)**
The utilization of the VCPU allocated to the hosting VM
Measured in Megahertz (MHz)
- **Storage Amount**
The utilization of the datastore's capacity
Measured in Megabytes (MB)
- **Storage Access Operations Per Second (IOPS)**
The utilization of IOPS allocated for the VStorage on the VM
Measured in IOPS
- **Net Throughput**
Rate of message delivery over a port
Measured in KB/s
- **Net Throughput Inbound**
Rate of message received over a port
Measured in KB/s
- **Net Throughput Outbound**
Rate of message sent over a port
Measured in KB/s
- **I/O Throughput**
The throughput to the underlying storage for the entity
Measured in KB/s
- **Latency**
The utilization of latency allocated for the VStorage on the VM
Measured in milliseconds (ms)

Cloud VM Actions

- **Scale**
Change the VM instance to use a different instance type or tier to optimize performance and costs.
- **Discount-related actions**
If you have a high percentage of on-demand VMs, you can reduce your monthly costs by increasing discount coverage. To increase coverage, you scale VMs to instance types that have existing capacity. If you need more capacity, then Intersight Workload Optimizer will recommend actions to purchase additional discounts.

NOTE:

Purchase actions should be taken along with the related VM scaling actions. To purchase discounts for VMs at their current sizes, run a [Buy VM Reservation Plan \(on page 280\)](#).

Currently, Intersight Workload Optimizer can recommend purchase actions for AWS and Azure. Purchase actions for GCP will be introduced in a future release.

For scale actions, you can choose **Cloud Scale All**, **Cloud Scale for Performance**, or **Cloud Scale for Savings**.

- You can direct Intersight Workload Optimizer to only execute cloud VM scaling actions that improve performance (*Cloud Scale for Performance*) or reduce costs (*Cloud Scale for Savings*). The default action mode for these actions is *Manual*. When you examine the pending actions, only actions that satisfy the policy are allowed to execute. All other actions are read-only.
- *Cloud Scale All* enables all scaling actions, including those that result in efficiency improvements and increased costs.

NOTE:

The *Move/Compute Scale* action available in version 7.22.5 or earlier has been separated into two actions starting in version 7.22.6 – *Move* (for on-prem VMs) and *Cloud Compute Scale* (for cloud VMs). In version 8.0.5, *Cloud Compute Scale* has been renamed *Cloud Scale All*.

If you disabled *Move/Compute Scale* and then updated to 7.22.6 or later, only *Move* actions are disabled. To apply the same action to cloud VMs, create policies for the affected VMs and then disable *Cloud Scale All*.

- When policy conflicts arise, **Cloud Scale All** overrides the other two scaling options in most cases. For more information, see [Relationship Between Scoped and Default Policies \(on page 67\)](#).

Cloud VMs with Failed Sizing

For workload on the public cloud, if Intersight Workload Optimizer tries to execute a scale action but the action fails, then Intersight Workload Optimizer places the affected VM in a special group named *Cloud VMs with Failed Sizing*. Under normal circumstances this group will be empty. But in case some actions have failed, you can review the contents of this group to inspect the individual VMs. As soon as Intersight Workload Optimizer successfully executes a scale action on a VM in this group, it then removes the VM from the group.

NOTE:

When Intersight Workload Optimizer places a VM in this group, it restarts the VM to ensure that it is running correctly with its original configuration.

By default Intersight Workload Optimizer does not include any action policies for this group. Whatever action mode is set to the given VMs remains in effect while the VMs are in this group. You can create a policy and scope the policy to this group. For example, assume you see typical failures for actions that Intersight Workload Optimizer tries to execute during working hours. In that case, you can create a scheduling window that enables scale actions during off hours. That can help to automatically execute the actions and remove the VMs from this group.

Note that the VMs in this group could already be in a scope that is affected by another actions policy. Remember that with competing policies, the most conservative policy wins. When working with the *Cloud VMs with Failed Sizing* group, this can have unintended consequences. Assume you have VMs with automated scale actions, and you create a policy the sets the action mode to *Manual* for this group. Assume a failed scale action places a VM into this group. In that case the more conservative action mode takes effect, and the VM will use *Manual* mode. Because of a failed scale action, the VM does not automate subsequent scale actions.

AWS VMs

AWS Instance Requirements

In AWS some instances require workloads to be configured in specific ways before they can move to those instance types. If Intersight Workload Optimizer recommends moving a workload that is not suitably configured onto one of these instances, then it sets the action to *Recommend Only*, and describes the reason. Intersight Workload Optimizer will not automate the move, even if you have set the action mode for that scope to *Automatic*. You can execute the move manually, after you have properly configured the instance.

Note that if you have workloads that you cannot configure to support these requirements, then you can set up a policy to keep Intersight Workload Optimizer from making these recommendations. Create a group that contains these workloads, and then create a placement policy for that scope. In the policy, **Excluded Templates** to exclude the instance types that do require ENA

support. For information about placement policies, see [Automation Policies \(on page 66\)](#). For information about excluding instance types, see [Cloud Instance Types \(on page 147\)](#).

The instance requirements that Intersight Workload Optimizer recognizes are:

- **Enhanced Network Adapters**

Some workloads can run on instances that support Enhanced Networking via the Elastic Network Adapter (ENA), while others can run on instances that do not offer this support. Intersight Workload Optimizer can recommend moving a workload that does not support ENA onto an instance that does. To make that move, you must perform the required configuration of the workload before you can execute the move. If you move a non-ENA VM to an instance that requires ENA, then AWS cannot start up the VM after the move. Before executing the move, you must enable ENA on the VM.

For information about ENA configuration, see "Enabling Enhanced Networking with the Elastic Network Adapter (ENA) on Windows Instances" in the AWS documentation.

- **Linux AMI Virtualization Type**

An Amazon Linux AMI can use ParaVirtual (PV) or Hardware Virtual Machine (HVM) virtualization. Intersight Workload Optimizer can recommend moving a PV workload to an HVM instance that does not include the necessary PV drivers.

To check the virtualization type of an instance, open the Amazon EC2 console to the Details pane, and review the Virtualization field for that instance.

- **64-bit vs 32-bit**

Not all AWS instance can support a 32-bit workload. Intersight Workload Optimizer can recommend moving a 32-bit workload to an instance that only supports a 64-bit platform.

- **NVMe Block**

Some instances expose EBS volumes as NVMe block devices, but not all workloads are configured with NVMe drivers. Intersight Workload Optimizer can recommend moving such a workload to an instance that supports NVMe. Before executing the move, you must install the NVMe drivers on the workload.

In addition, Intersight Workload Optimizer recognizes processor types that you currently use for your workloads. For move or resize actions, Intersight Workload Optimizer keeps your workloads on instance types with compatible processors:

- **GPU-based instances:**

Intersight Workload Optimizer recognizes when your workload is on a GPU-based instance. To ensure the workload always stays on a compatible processor, Intersight Workload Optimizer does not recommend resize actions.

- **ARM-based instances**

If your workload is on an ARM-based instance, then Intersight Workload Optimizer will only recommend resizes to other compatible ARM-based instance types.

Resizing Storage Capacity in AWS Environments

When a VM needs more storage capacity Intersight Workload Optimizer recommends actions to move the it to an instance that provides more storage. Note that AWS supports both Elastic Block Store (EBS) and Instance storage. Intersight Workload Optimizer recognizes these storage types as it recommends storage actions.

If the root storage for your workload is Instance Storage, then Intersight Workload Optimizer will not recommend a storage action. This is because Instance Storage is ephemeral, and such an action would cause the workload to loose all the stored data.

If the root storage is EBS, then Intersight Workload Optimizer recommends storage actions. EBS is persistent, and the data will remain after the action. However, if the workload uses Instance Storage for extra storage, then Intersight Workload Optimizer does not include that storage in its calculations or actions.

Action Details for AWS Workloads

In AWS environments, Intersight Workload Optimizer considers a VM's used and reserved memory to calculate virtual memory utilization, and drives actions based on the calculated value. This may not always match the values seen in CloudWatch or at the OS level of the VM.

According to the [AWS FAQ](#), "In C5, portions of the total memory for an instance are reserved from use by the Operating System including areas used by the virtual BIOS for things like ACPI tables and for devices like the virtual video RAM.". When Intersight Workload Optimizer recommends moving to one of these instances, the action details use the capacity that is reported by the

instance template. However, subsequent reporting of the Mem capacity for the given instance uses the values that Intersight Workload Optimizer discovers in the environment.

Nodes in AWS EMR Clusters

Intersight Workload Optimizer treats nodes in AWS [EMR](#) clusters like regular VMs. As such, it could incorrectly generate scaling actions for such nodes. After a node scaling action executes, AWS detects the action as a defect, terminates the node, and replaces it with a new instance of the initial size. To avoid this issue, we recommend that you disable scaling actions for nodes in EMR clusters.

AWS automatically assigns [system tags](#) to EMR clusters. To disable scaling actions, create a VM group that uses these tags as a filter, and then create a VM policy that disables the 'Cloud Scale All' action type for the VM group.

Azure VMs

Azure Resource Group Discovery

To discover Azure Resource Groups, you can set up the following targets:

- Microsoft Azure service principle targets
- Microsoft Azure Enterprise Agreement (EA) targets

For Azure environments that include Resource Groups, Intersight Workload Optimizer discovers the Azure Resource Groups and the tags that are used to identify these groups.

In the Intersight Workload Optimizer user interface, to search for a specific Azure Resource Group, choose **Resource Groups** in the Search Page.

You can set the scope of your Intersight Workload Optimizer session to an Azure Resource Group by choosing a group in the Search results and clicking **Scope To Selection**.

You can also use Azure tags as filter criteria when you create a custom Intersight Workload Optimizer resource group. You can choose the Azure Resource Groups that match the tag criteria to be members of the new custom group.

To find the available tags for a specific Azure Resource Group, add the Basic Info chart configured with Related Tag Information to your view or custom dashboard. See [Basic Info Charts \(on page 323\)](#).

Azure Instance Requirements

In Azure environments, some instance types require workloads to be configured in specific ways, and some workload configurations require instance types that support specific features. When Intersight Workload Optimizer generates resize actions in Azure, these actions consider the following features:

- Accelerated Networking (AN)

In an Azure environment, not all instance types support AN, and not all workloads on AN instances actually enable AN. Intersight Workload Optimizer maintains a dynamic group of workloads that have AN enabled, and it assigns a policy to that group to exclude any templates that do not support AN. In this way, if a workload is on an instance that supports AN, and that workload has enabled AN, then Intersight Workload Optimizer will not recommend an action that would move the workload to a non-AN instance.
- Azure Premium Storage

Intersight Workload Optimizer recognizes whether a workload uses Premium Storage, and will not recommend a resize to an instance that does not support Azure Premium Storage.

In addition, Intersight Workload Optimizer recognizes processor types that you currently use for your workloads. If your workload is on a GPU-based instance, then Intersight Workload Optimizer will only recommend moves to other compatible GPU-based instance types. For these workloads, Intersight Workload Optimizer does not recommend resize actions.

Performance Metrics for Azure VMs

To analyze the utilization of Azure VM resources, Intersight Workload Optimizer collects performance metrics (such as memory and CPU usage) from Azure periodically. It collects metrics in the following ways:

- Azure storage account
- For VMs with basic diagnostics enabled, Intersight Workload Optimizer collects performance metrics that Azure publishes via this storage account.

■ Azure Monitor Log Analytics

Rather than enabling diagnostics on a per-VM basis, you may have created [Azure Monitor Log Analytics](#) workspaces to centralize the management of your Azure VM configurations. Intersight Workload Optimizer discovers these workspaces when you add Azure targets, and then retrieves performance metrics periodically.

If you have configured your Log Analytics workspace in a separate Azure subscription that is *not* configured as a Intersight Workload Optimizer target, then Intersight Workload Optimizer service accounts for Azure targets must have one of the following built-in roles in addition to other required permissions:

- Reader
- Log Analytics Reader

IOPS-aware Scaling for Azure VMs

Intersight Workload Optimizer considers IOPS utilization when making scaling decisions for Azure VMs. To measure utilization, Intersight Workload Optimizer takes into account a variety of attributes, such as per-disk IOPS utilization, whole VM IOPS utilization, cache settings, and IOPS capacity for the VMs. It also respects IOPS utilization and aggressiveness constraints that you set in VM policies. For details, see [Aggressiveness and Observation Periods \(on page 145\)](#).

Analysis impacts VM scaling decisions in different ways. For example:

- If your instance experiences IOPS bottlenecks, Intersight Workload Optimizer can recommend scaling up to a larger instance type to increase IOPS capacity, even if you do not fully use the current VCPU or VMEM resources.
- If your instance experiences underutilization of VMEM and VCPU, but high IOPS utilization, Intersight Workload Optimizer might not recommend scaling down. It might keep you on the larger instance to provide sufficient IOPS capacity.
- If the instance experiences underutilization of IOPS capacity along with normal utilization of other resources, you might see an action to resize to an instance that is very similar to the current one. If you inspect the action details, you should see that you are changing to a less expensive instance with less IOPS capacity.

Cloud VM Uptime

For cloud VMs, Intersight Workload Optimizer includes *uptime* data in its cost calculations. This is especially important for VMs that do not run 24/7 and are charged on-demand rates. With uptime data, Intersight Workload Optimizer can calculate costs more accurately based on the amount of time a VM has been running.

The Action Details page shows uptime data for these VMs. Intersight Workload Optimizer calculates uptime based on the VM's age.



Key Concepts

- Uptime

A percentage value that indicates how long a VM has been running over a period of time (age)

- Age

The number of days that a VM has existed since first discovery. For VMs older than 30 days, Intersight Workload Optimizer displays a value of **30+ days**, but only calculates uptime over the last 30 days.

For newly discovered VMs, age is 0 (zero) on the day of discovery. If the VM is running at the time of discovery, uptime is 100%. Otherwise, uptime is 0% and remains unchanged until the VM is powered on. Intersight Workload Optimizer recalculates uptime every hour and then refreshes the data shown in the user interface.

Examples

- A VM that was first discovered 5 days (or 120 hours) ago and has been running for a total of 60 hours during that period has a current uptime value of 50%.
- A VM that was first discovered 2 months ago and has been running for a total of 180 hours over the last 30 days (or 720 hours) has a current uptime value of 25%.

Cost Calculations Using Uptime Data

Intersight Workload Optimizer uses uptime data to calculate estimated on-demand costs for your cloud VMs. For details about calculations, see [Estimated On-demand Monthly Costs for Cloud VMs \(on page 137\)](#).


Uptime data impacts cost calculations, but not the actual scaling decisions that Intersight Workload Optimizer makes. These decisions rely on other factors, such as resource utilization percentiles and scaling constraints set in policies.

Uptime Data in Charts

Intersight Workload Optimizer recalculates uptime data every hour and then updates the values shown in charts. The following charts reflect the cost impact of uptime-based calculations:

- Potential Savings and Necessary Investment charts

The projected amounts in these charts include on-demand costs for cloud VMs.

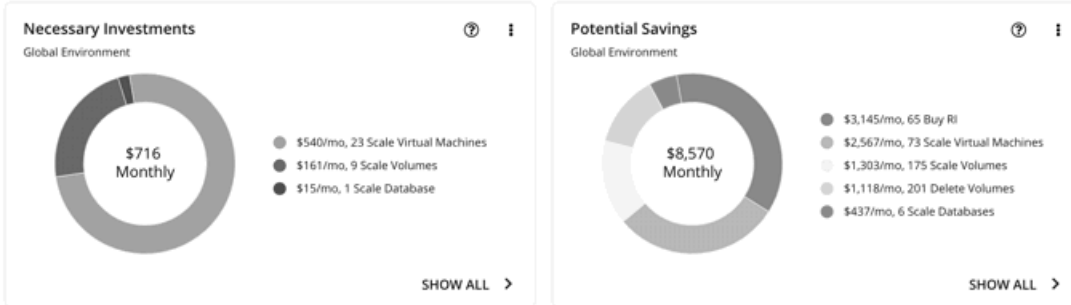


When you click **Show All** in these charts and view details for a pending VM action, the **Action Details** page shows on-demand costs before and after you execute the action, factoring in the VM's uptime value. The page also shows the VM's age.



- Workload Cost Breakdown chart

This chart shows estimated costs over time, including on-demand costs for VMs.

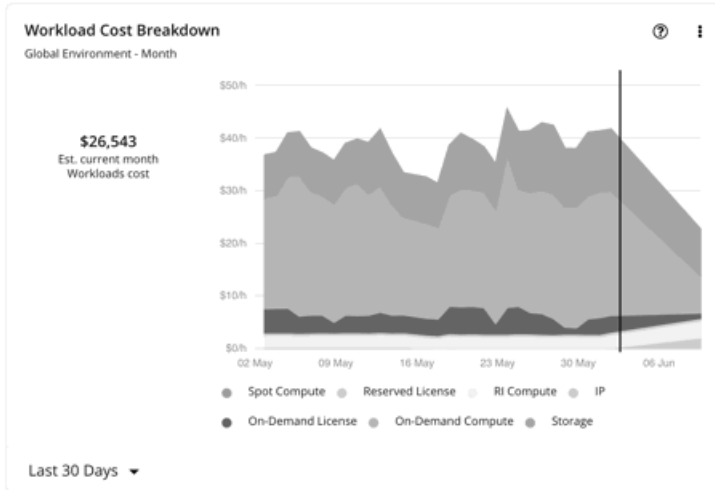

- The **Entity Information** chart shows the latest uptime and age data for a specific cloud VM.

Number of VCPUs	4
Region	azure-Canada East
Account	[Redacted]
Resource Group	[Redacted]
Uptime ⓘ	86.9%
Last Modification Time	N/A
Attachment State	Attached
Vendor ID [EA - PT2]	[Redacted]
Age ⓘ	30+ days

Estimated On-demand Costs for Cloud VMs

Intersight Workload Optimizer considers a variety of factors when calculating *Estimated On-demand Monthly Cost* for a cloud VM.

VIRTUAL MACHINE DETAILS							
NAME	ID	AGE	ACCOUNT	REGION			
PT_Consistent_S...	[Redacted]	30+ days	[Redacted]	aws-EU (Paris)			
VCPU PERCENTILE		VMEM PERCENTILE		NET THROUGHPUT		IO THROUGHPUT	
1 %	0.6 % ↓	94 %	47 % ↓	0 %	0 %	0 %	0 %
800 MHz	1.4 GHz	1 GiB	2 GiB	468.8 MB/s	468.8 MB/s	260.6 MB/s	260.6 MB/s
ON-DEMAND RATE ⓘ	RI COVERAGE ⓘ	UPTIME ⓘ	EST. ON-DEMAND MONTHLY COST ⓘ				
\$0.012/h → \$0.021/h	50% → 0%	95.3%	\$4.1/mo → \$15/mo				

AWS VMs and Azure VMs Without License Costs

Cost Calculation

For these VMs, the calculation for Estimated On-demand Monthly Cost can be expressed as follows:

$$\text{On-demand Rate} * \text{Usage Not Covered by Discounts} * \text{Uptime} * 730 = \text{Estimated On-demand Monthly Cost}$$

Where:

- **On-demand Rate** is the hourly cost for a VM's instance type *without* discount coverage (AWS RIs/Savings Plans or Azure reservations).
 - For AWS, this rate includes all license costs, but not storage or IP. You can obtain on-demand rates via [Amazon EC2 On-demand Pricing](#).
 - For Azure, the rate does *not* include license costs, storage, or IP. You can obtain on-demand rates via [Azure Pricing Calculator](#).

NOTE:

Azure VMs covered by Azure Hybrid Benefit do not have license costs.

- **Usage Not Covered by Discounts** is the percentage of hourly VM usage not covered by any discount. For example:
 - Discount Coverage = 20% (0.2)
 - Usage Not Covered by Discounts = 80% (0.8)
- **Uptime** is a percentage value that indicates how long a VM has been running over a period of time (age). Age refers to the number of days that a VM has existed since first discovery. For VMs older than 30 days, Intersight Workload Optimizer only calculates uptime over the last 30 days.

To estimate monthly on-demand costs, Intersight Workload Optimizer projects the current uptime value into the future. It assumes that future uptime will be similar to the current uptime.

- **730** represents the number of hours per month that Intersight Workload Optimizer uses to estimate monthly costs.

The listed items above impact cost calculations, but not the actual scaling decisions that Intersight Workload Optimizer makes. These decisions rely on other factors, such as resource utilization percentiles and scaling constraints set in policies.

Example

Assume the following data for a pending scale action for an AWS VM:

VIRTUAL MACHINE DETAILS							
NAME	ID	AGE	ACCOUNT	REGION			
PT_Consistent_S...	[REDACTED]	30+ days	[REDACTED]	aws-EU (Paris)			
VCPUs PERCENTILE		VMEM PERCENTILE		NET THROUGHPUT		IO THROUGHPUT	
1 %	0.6 % ↓	94 %	47 % ↓	0 %	0 %	0 %	0 %
800 MHz	1.4 GHz	1 GiB	2 GiB	468.8 MB/s	468.8 MB/s	260.6 MB/s	260.6 MB/s
ON-DEMAND RATE ⓘ		RI COVERAGE ⓘ		UPTIME ⓘ		EST. ON-DEMAND MONTHLY COST ⓘ	
\$0.012/h → \$0.021/h		50% → 0%		95.3%		\$4.1/mo → \$15/mo	

	Current Values	Values After Action Execution
On-demand Rate	\$0.012/hr	\$0.021/hr
Discount Coverage	50% (0.5)	0% (0.0)
Usage Not Covered by Discounts <i>(calculated based on discount coverage)</i>	50% (0.5)	100% (1.0)

	Current Values	Values After Action Execution
Uptime	95.3% (.953)	

Intersight Workload Optimizer calculates the following:

VIRTUAL MACHINE DETAILS

NAME	ID	AGE	ACCOUNT	REGION
PT_Consistent_S...		30+ days		aws-EU (Paris)

VCPU PERCENTILE		VMEM PERCENTILE		NET THROUGHPUT		IO THROUGHPUT	
1 %	0.6 % ↓	94 %	47 % ↓	0 %	0 %	0 %	0 %
800 MHz	1.4 GHz	1 GiB	2 GiB	468.8 MB/s	468.8 MB/s	260.6 MB/s	260.6 MB/s

ON-DEMAND RATE	RI COVERAGE	UPTIME	EST. ON-DEMAND MONTHLY COST
\$0.012/h → \$0.021/h	50% → 0%	95.3%	\$4.1/mo → \$15/mo

■ **Current Estimated On-demand Monthly Cost:**

$$0.012 * 0.5 * 0.953 * 730 = 4.1$$

■ **Estimated On-demand Monthly Cost *after* executing the action:**

$$0.021 * 1.0 * 0.953 * 730 = 15$$

NOTE:

Intersight Workload Optimizer rounds the calculated values that it displays in the user interface.

Since the Estimated On-demand Monthly Cost is projected to increase from \$4.1/month to \$15/month, Intersight Workload Optimizer treats the action as an investment and shows an estimated investment of \$11/month.

Action Details 14 of 22

Scale Virtual Machine PT_Consistent_Scaling_VM_1 in [redacted] from t3.micro to t3a.small

VMem Congestion PERFORMANCE Est. Investment: \$11/mo ← Estimated investment

VCPU PERCENTILE AND AVG. UTILIZATION

Utilization is below 1% for 95% of the time over the 7 day observation period

VMEM PERCENTILE AND AVG. UTILIZATION

Utilization is below 94% for 95% of the time over the 7 day observation period

VIRTUAL MACHINE DETAILS

NAME	ID	AGE	ACCOUNT	REGION
PT_Consistent_S...		30+ days		aws-EU (Paris)

VCPU PERCENTILE		VMEM PERCENTILE		NET THROUGHPUT		IO THROUGHPUT	
1 %	0.6 % ↓	94 %	47 % ↓	0 %	0 %	0 %	0 %
800 MHz	1.4 GHz	1 GiB	2 GiB	468.8 MB/s	468.8 MB/s	260.6 MB/s	260.6 MB/s

ON-DEMAND RATE	RI COVERAGE	UPTIME	EST. ON-DEMAND MONTHLY COST
\$0.012/h → \$0.021/h	50% → 0%	95.3%	\$4.1/mo → \$15/mo

Azure VMs with License Costs

Cost Calculation

For VMs with license costs, Intersight Workload Optimizer first calculates the *On-demand Compute Rate*, which it then uses to calculate *Estimated On-demand Monthly Costs*.

1. On-demand Compute Rate Calculation

The calculation for On-demand Compute Rate can be expressed as follows:


$$\text{On-demand Rate} - (\text{Reserved License Cost} + \text{On-demand License Cost}) = \text{On-demand Compute Rate}$$

Where:

- **On-demand Rate** is the hourly cost for a VM's instance type *without* reservation coverage. This does *not* include license costs, storage, or IP. You can obtain on-demand rates via [Azure Pricing Calculator](#).
- **Reserved License Cost** and **On-demand License Cost** are the hourly costs for the VM's licenses. You can obtain license costs via Azure Pricing Calculator or the Intersight Workload Optimizer user interface.

From the user interface, set the scope to the Azure VM and then see the Workload Cost Breakdown chart. In the chart, set the time frame to Last 2 Hours, and then:

- Hover over the second to the last bar in the chart to obtain the *current* On-demand License Cost and Reserved License Cost.

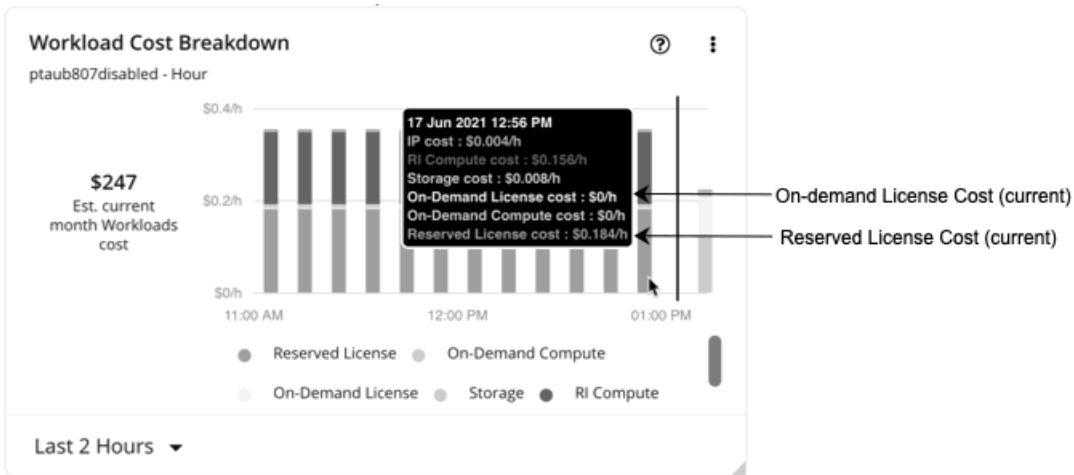

- Hover over the last bar (after the vertical line) in the chart to obtain the On-demand License Cost and Reserved License Cost *after* you execute actions.



The *On-demand Compute Rate* and *License Cost (On-demand and Reserved)* are then used to calculate Estimated On-demand Monthly Costs.

2. Estimated On-demand Monthly Cost Calculation

The calculation can be expressed as follows:

$$(\text{On-demand Compute Rate} * \text{Usage Not Covered by Reservations}) + \text{License Cost} * \text{Uptime} * 730 = \text{Estimated On-demand Monthly Cost}$$

Where:

- **Usage Not Covered by Reservations** is the percentage of hourly VM usage not covered by any reservation. For example:
 - Reservation Coverage = 20% (0.2)
 - Usage Not Covered by Reservations = 80% (0.8)
- **License Cost** is the sum of On-demand License Cost and Reserved License Cost.
- **Uptime** is a percentage value that indicates how long a VM has been running over a period of time (age). Age refers to the number of days that a VM has existed since first discovery. For VMs older than 30 days, Intersight Workload Optimizer only calculates uptime over the last 30 days.

To estimate monthly on-demand costs, Intersight Workload Optimizer projects the current uptime value into the future. It assumes that future uptime will be similar to the current uptime.

- **730** represents the number of hours per month that Intersight Workload Optimizer uses to estimate monthly costs.



The listed items above impact cost calculations, but not the actual scaling decisions that Intersight Workload Optimizer makes. These decisions rely on other factors, such as resource utilization percentiles and scaling constraints set in policies.

Example

Assume the following data for a pending scale action for an Azure VM with license costs:

VIRTUAL MACHINE DETAILS							
NAME	ID	AGE	SUBSCRIPTION		LOCATION		
ptaub807disable...	25b9c0ce-0e08-4...	30+ days	EA - Development		azure-East US 2		
VCPU PERCENTILE		VMEM PERCENTILE		VM IOPS PERCENTILE		VM STORAGE THROUGHPUT PERCENTILE	
2 %	→ 2.9 % ↑	9 %	→ 18 % ↑	0 %	→ 0 %	0 %	→ 0 %
33.2 GHz	→ 22.7 GHz	32 GiB	→ 16 GiB	6,400 IOPS	→ 3,200 IOPS	96 MB/s	→ 48 MB/s
ON-DEMAND RATE ⓘ		RI COVERAGE ⓘ		UPTIME ⓘ		EST. ON-DEMAND MONTHLY COST ⓘ	
\$0.45/h → \$0.218/h		100% → 0%		96.1%		\$129/mo → \$153/mo	

	Current Values	Values After Action Execution
On-demand Rate	\$0.45/hr	\$0.218/hr

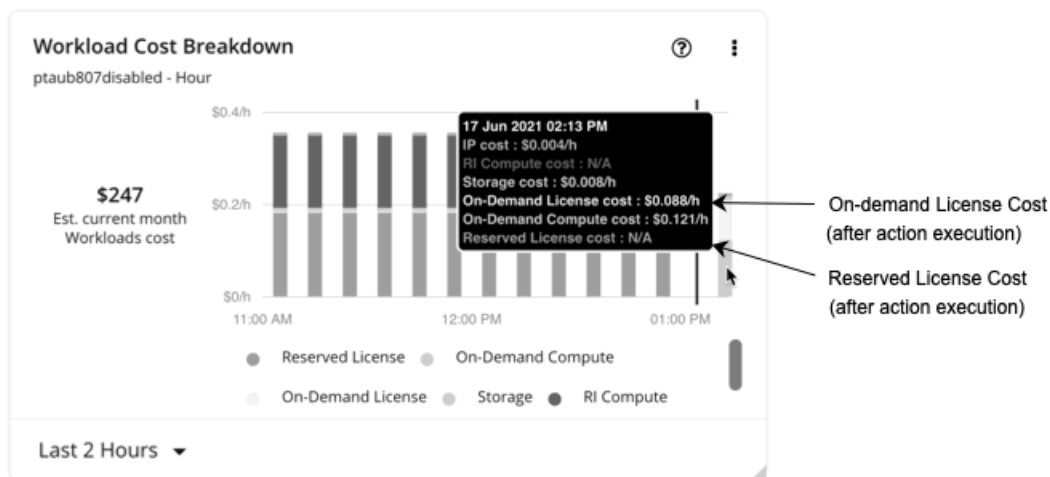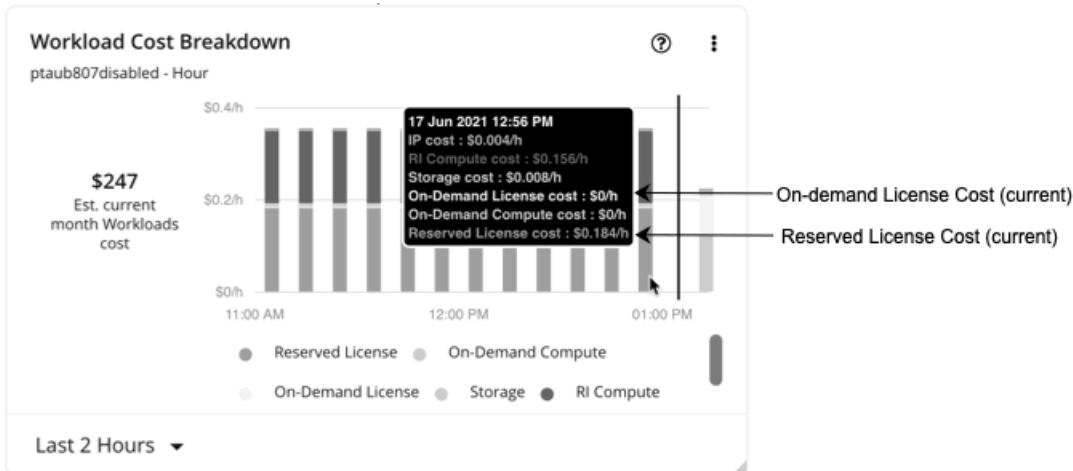

	Current Values	Values After Action Execution
On-demand License Cost	\$0/hr	\$0.088/hr
Reserved License Cost	\$0.184/hr	N/A

1. Intersight Workload Optimizer first calculates the following:

- Current On-demand Compute Rate:

$$0.45 - (0.184 + 0) = 0.266$$

- On-demand Compute Rate *after* executing the action:

$$0.218 - (0 + 0.088) = 0.13$$

2. Intersight Workload Optimizer can now calculate Estimated On-demand Monthly Cost based on:

- On-demand Compute Rate

	Current Values	Values After Action Execution
On-demand Compute Rate	\$0.266/hr	\$0.13/hr

- Usage Not Covered by Reservations and Uptime

VIRTUAL MACHINE DETAILS				
NAME	ID	AGE	SUBSCRIPTION	LOCATION
ptaub807disable...	25b9c0ce-0e08-4...	30+ days	EA - Development	azure-East US 2
VCPU PERCENTILE		VMEM PERCENTILE		VM IOPS PERCENTILE
2 %	2.9 % ↑	9 %	18 % ↑	0 %
33.2 GHz	22.7 GHz	32 GiB	16 GiB	6,400 IOPS
				3,200 IOPS
ON-DEMAND RATE ⓘ		RI COVERAGE ⓘ	UPTIME ⓘ	EST. ON-DEMAND MONTHLY COST ⓘ
\$0.45/h	\$0.218/h	100% → 0%	96.1%	\$129/mo → \$153/mo

	Current Values	Values After Action Execution
Reservation Coverage	100% (1.0)	0% (0.0)
Usage Not Covered by Reservations <i>(calculated based on reservation coverage)</i>	0% (0.0)	100% (1.0)
Uptime	96.1% (.961)	

Intersight Workload Optimizer calculates the following:

VIRTUAL MACHINE DETAILS				
NAME	ID	AGE	SUBSCRIPTION	LOCATION
ptaub807disable...	25b9c0ce-0e08-4...	30+ days	EA - Development	azure-East US 2
VCPU PERCENTILE		VMEM PERCENTILE		VM IOPS PERCENTILE
2 %	2.9 % ↑	9 %	18 % ↑	0 %
33.2 GHz	22.7 GHz	32 GiB	16 GiB	6,400 IOPS
				3,200 IOPS
ON-DEMAND RATE ⓘ		RI COVERAGE ⓘ	UPTIME ⓘ	EST. ON-DEMAND MONTHLY COST ⓘ
\$0.45/h	\$0.218/h	100% → 0%	96.1%	\$129/mo → \$153/mo

■ **Current Estimated On-demand Monthly Cost:**

$$(0.266 * 0.0) + 0.184 * 0.961 * 730 = 129$$


■ **Estimated On-demand Monthly Cost *after* executing the action:**

$$(0.13 * 1.0) + 0.088 * 0.961 * 730 = 153$$

NOTE:

Intersight Workload Optimizer rounds the calculated values that it displays in the user interface.

Since the on-demand cost is projected to increase from \$129/month to \$153/month, Intersight Workload Optimizer treats the action as an investment and shows an estimated investment of \$24/month.

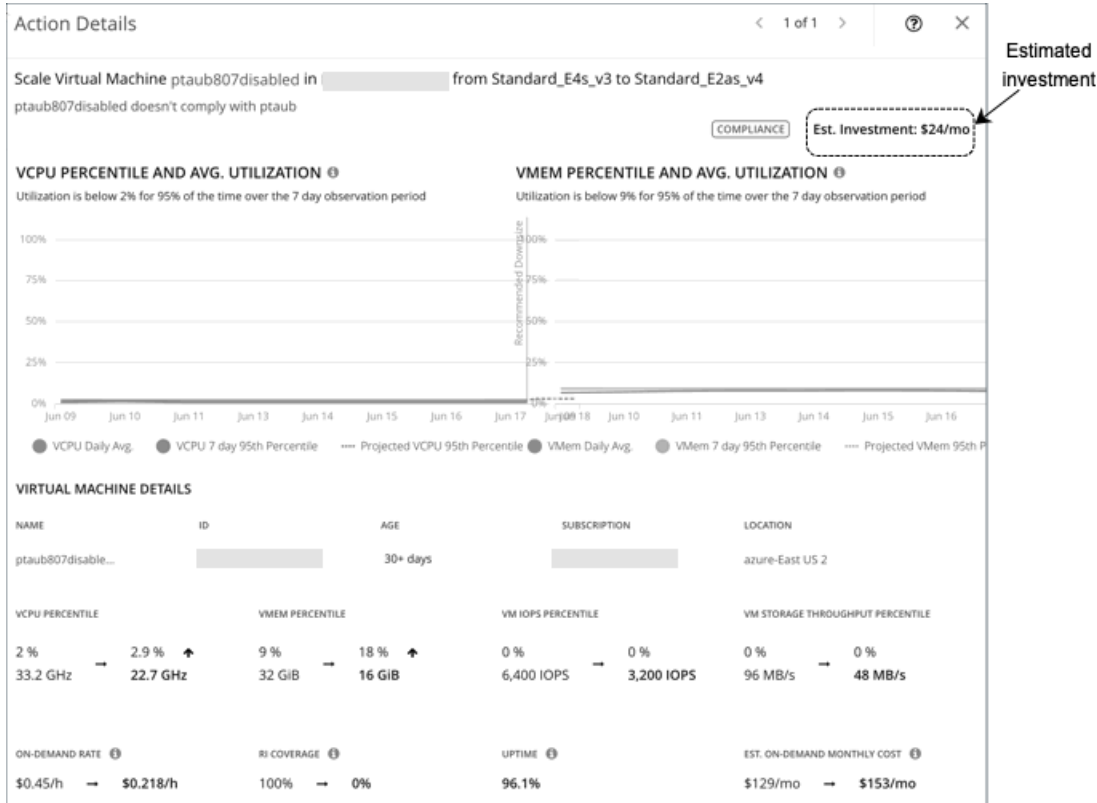

Cloud VM Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

For details about cloud VM actions, see [Cloud VM Actions \(on page 130\)](#).

Cloud Scale

Action	Default Mode	AWS, Azure, and GCP
Cloud Scale All	Manual	<button>Auto</button>
Cloud Scale for Performance	Manual	<button>Auto</button>
Cloud Scale for Savings	Manual	<button>Auto</button>

Other Actions

Action	Default Mode	AWS and Azure	GCP
Buy discounts	Recommend	<button>Recmd</button>	Not yet supported
Provision Kubernetes node (VM)	Manual	<button>Recmd</button>	<button>Recmd</button>

Action	Default Mode	AWS and Azure	GCP
Suspend Kubernetes node (VM)	Manual	Auto	Auto

Scaling Target Utilization

For VCPU, VMEM, and IO/Net Throughput Utilization:

These advanced settings determine how much you would like a scope of workloads to utilize their resources. These are fixed settings that override the way Intersight Workload Optimizer calculates the optimal utilization of resources. You should only change these settings after consulting with Technical Support.

While these settings offer a way to modify how Intersight Workload Optimizer recommends actions, in most cases you should never need to use them. If you want to control how Intersight Workload Optimizer recommends actions to resize workloads, you can set the aggressiveness per the percentile of utilization, and set the length of the sample period for more or less elasticity on the cloud.

Attribute	Default Value
Scaling Target VCPU Utilization	70 The target utilization as a percentage of VCPU capacity.
Scaling Target VMEM Utilization	90 The target utilization as a percentage of memory capacity.
Scaling Target IO Throughput Utilization	70 The target utilization as a percentage of IO throughput (Read and Write) capacity.
Scaling Target Net Throughput Utilization	70 The target utilization as a percentage of network throughput (Inbound and Outbound) capacity.

For IOPS Utilization:

Intersight Workload Optimizer uses this setting in conjunction with aggressiveness constraints to control scaling actions for VMs. You can set the aggressiveness per the percentile of utilization, and set the length of the sample period for more or less elasticity on the cloud.

Attribute	Default Value
Scaling Target IOPS Utilization (Azure VMs only)	70 For Azure environments, the target percentile value Intersight Workload Optimizer will attempt to match.

For details on how IOPS utilization affects scaling decisions, see [IOPS-aware Scaling for Azure VMs \(on page 134\)](#).

Aggressiveness and Observation Periods

Intersight Workload Optimizer uses these settings to calculate utilization percentiles for vCPU, vMEM, and IOPS (Azure VMs only). It then recommends actions to improve utilization based on the observed values for a given time period.

■ Aggressiveness

Attribute	Default Value
Aggressiveness	95th Percentile

When evaluating performance, Intersight Workload Optimizer considers resource utilization as a percentage of capacity. The utilization drives actions to scale the available capacity either up or down. To measure utilization, the analysis considers a given utilization percentile. For example, assume a 95th percentile. The percentile utilization is the highest value that 95% of the observed samples fall below. Compare that to average utilization, which is the average of *all* the observed samples.

Using a percentile, Intersight Workload Optimizer can recommend more relevant actions. This is important in the cloud, so that analysis can better exploit the elasticity of the cloud. For scheduled policies, the more relevant actions will tend to remain viable when their execution is put off to a later time.

For example, consider decisions to reduce the capacity for CPU on a VM. Without using a percentile, Intersight Workload Optimizer never resizes below the recognized peak utilization. For most VMs, there are moments when peak CPU reaches high levels, such as during reboots, patching, and other maintenance tasks. Assume utilization for a VM peaked at 100% just once. Without the benefit of a percentile, Intersight Workload Optimizer will not reduce allocated CPU for that VM.

With **Aggressiveness**, instead of using the single highest utilization value, Intersight Workload Optimizer uses the percentile you set. For the above example, assume a single CPU burst to 100%, but for 95% of the samples CPU never exceeded 50%. If you set **Aggressiveness** to 95th Percentile, then Intersight Workload Optimizer can see this as an opportunity to reduce CPU allocation for the VM.

In summary, a percentile evaluates the sustained resource utilization, and ignores bursts that occurred for a small portion of the samples. You can think of this as aggressiveness of resizing, as follows:

- 100th and 99th Percentile – More performance. Recommended for critical workloads that need maximum guaranteed performance at all times, or workloads that need to tolerate sudden and previously unseen spikes in utilization, even though sustained utilization is low.
- 95th Percentile (Default) – The recommended setting to achieve maximum performance and savings. This assures application performance while avoiding reactive peak sizing due to transient spikes, thus allowing you to take advantage of the elastic ability of the cloud.
- 90th Percentile – More efficiency. Recommended for non-production workloads that can stand higher resource utilization.

By default, Intersight Workload Optimizer uses samples from the last 30 days. Use the **Max Observation Period** setting to adjust the number of days. To ensure that there are enough samples to analyze and drive scaling actions, set the **Min Observation Period**.

■ Max Observation Period

Attribute	Default Value
Max Observation Period	Last 30 Days

To refine the calculation of resource utilization percentiles, you can set the sample time to consider. Intersight Workload Optimizer uses historical data from up to the number of days that you specify as a sample period. If the database has fewer days' data then it uses all of the stored historical data.

You can make the following settings:

- Less Elastic – Last 90 Days
- Recommended – Last 30 Days
- More Elastic – Last 7 Days

Intersight Workload Optimizer recommends an observation period of 30 days following the monthly workload maintenance cycle seen in many organizations. VMs typically peak during the maintenance window as patching and other maintenance tasks are carried out. A 30-day observation period means that Intersight Workload Optimizer can capture these peaks and increase the accuracy of its sizing recommendations.

You can set the value to 7 days if workloads need to resize more often in response to performance changes. For workloads that cannot handle changes very often or have longer usage periods, you can set the value to 90 days.

■ Min Observation Period

Attribute	Default Value
Min Observation Period	None

This setting ensures historical data for a minimum number of days before Intersight Workload Optimizer will generate an action based on the percentile set in **Aggressiveness**. This ensures a minimum set of data points before it generates the action.

Especially for scheduled actions, it is important that resize calculations use enough historical data to generate actions that will remain viable even during a scheduled maintenance window. A maintenance window is usually set for "down" time,

when utilization is low. If analysis uses enough historical data for an action, then the action is more likely to remain viable during the maintenance window.

- More Elastic – None
- Less Elastic – 7 Days

Cloud Instance Types

Attribute	Default Value
Cloud Instance Types	None

By default, Intersight Workload Optimizer considers all instance types currently available for scaling when making scaling decisions for VMs. However, you may have set up your cloud VMs to *only scale to* or *avoid* certain instance types to reduce complexity and cost, improve discount utilization, or meet application demand. Use this setting to identify the instance types that VMs can scale to.

Click **Edit** to set your preferences. In the new page that displays, expand a **cloud tier** (a family of instance types, such as *a1* for AWS or *B-series* for Azure) to see individual instance types and the resources allocated to them. If you have several cloud providers, each provider will have its own tab.

Select your preferred instance types or cloud tiers, or clear the ones that you want to avoid. After you save your changes, the main page refreshes to reflect your selections.

If you selected a cloud tier and the service provider deploys new instance types to that tier later, then those instance types will automatically be included in your policy. Be sure to review your policies periodically to see if new instance types have been added to a tier. If you do not want to scale to those instance types, update the affected policies.

Consistent Resizing

Attribute	Default Setting
Enable Consistent Resizing	Off

For groups in scoped policies:

When you create a policy for a group of VMs and turn on Consistent Resizing, Intersight Workload Optimizer resizes all the group members to the same size, such that they all support the top utilization of each resource commodity in the group. For example, assume VM A shows top utilization of CPU, and VM B shows top utilization of memory. A resize action would result in all the VMs with CPU capacity to satisfy VM A, and memory capacity to satisfy VM B.

For an affected resize, the Actions List shows individual resize actions for each of the VMs in the group. If you automate resizes, Intersight Workload Optimizer executes each resize individually in a way that avoids disruption to your workloads.

Use this setting to enforce the same template across all VMs in a group when resizing VMs on the public cloud. In this way, Intersight Workload Optimizer can enforce a rule to size all the VMs in a group equally.

For auto-discovered groups:

In public cloud environments, Intersight Workload Optimizer discovers groups that should keep all their VMs on the same template, and then creates read-only policies for them to implement Consistent Resizing. The details of this discovery and the associated policy vary depending on the Cloud Provider.

■ Azure

Intersight Workload Optimizer discovers Azure availability sets and scale sets.

- For availability sets, Intersight Workload Optimizer does *not* enable Consistent Resizing, but it can recommend scale actions for individual VMs in the availability set.

When a scale action for a VM in an availability set fails due to insufficient resources in the compute cluster, the action remains pending. When you hover over the pending action, you will see a message indicating that action execution has been temporarily disabled due to a previous execution error in the availability set. Intersight Workload Optimizer assumes that all other VMs in the availability set will fail to scale due to the same resource issue, so it creates a temporary policy that disables action execution for the availability set. Specifically, this policy sets the action mode for scale actions to *Recommend* and stays in effect for 730 hours (one month). This means that for the duration of the policy, Intersight Workload Optimizer will continue to generate read-only, non-executable scale actions for individual

VMs, so you can evaluate their resource requirements and plan accordingly. You can delete this policy if you need to re-enable action execution in the availability set.

- For scale sets, Intersight Workload Optimizer automatically enables Consistent Resizing across all the VMs in the group. You can choose to execute all the actions for such a group, either manually or automatically. In that case, Intersight Workload Optimizer executes the resizes one VM at a time. If you do not need to resize all the members of a given scale set to a consistent template, create another policy for that scope and turn off Consistent Resizing.

■ AWS

Intersight Workload Optimizer discovers Auto Scaling Groups and automatically enables Consistent Resizing across all the VMs in each group. You can choose to execute all the actions for such a group, either manually or automatically. In that case, Intersight Workload Optimizer executes the resizes one VM at a time. If you do not need to resize all the members of a given Auto Scaling Group to a consistent template, create another policy for that scope and turn off Consistent Resizing.

If you select one or all actions for the group either manually or automatically, Intersight Workload Optimizer will change the Launch Configuration for the Auto Scaling Group but it will not terminate the EC2 instances.

Reasons to employ Consistent Resizing for a group include:

■ Load Balancing

If you have deployed load balancing for a group, then all the VMs in the group should experience similar utilization. In that case, if one VM needs to be resized, then it makes sense to resize them all consistently.

■ High Availability (HA)

A common HA configuration on the public cloud is to deploy mirror VMs to different availability zones, where the given application runs on only one of the VMs at a given time. The other VMs are on standby to recover in failover events. Without Consistent Resizing, Intersight Workload Optimizer would tend to size down or suspend the unused VMs, which would make them unready for the failover situation.

When working with Consistent Resizing, consider these points:

- You should not mix VMs in a group that has a Consistent Resizing policy, with other groups that enable Consistent Resizing. One VM can be a member of more than one group. If one VM (or more) in a group with Consistent Resizing is also in another group that has Consistent Resizing, then both groups enforce Consistent Resizing together, for all their group members.
- If one VM (or more) is in a group with Consistent Resizing turned on, and the same VMs are in a group with Consistent Resizing turned off, the affected VMs assume the ON setting. This is true if you created both groups, or if Intersight Workload Optimizer created one of the groups for Azure Scale Sets or AWS Auto Scaling Groups.
- For any group of VMs that enables Consistent Resizing, you should not mix the associated target technologies. For example, one group should not include VMs that are managed on both Azure and AWS platforms.
- Charts that show actions and risks assign the same risk statement to all the affected VMs. This can seem confusing. For example, assume one VM needs to resize to address vCPU risk, and 9 other VMs are set to resize consistently with it. Then charts will state that 10 VMs need to resize to address vCPU risks.

Instance Store Aware Scaling


Attribute	Default Setting
Instance Store Aware Scaling	Off

The template for your workload determines whether the workload can use an *instance store*, and it determines the instance store capacity. As Intersight Workload Optimizer calculates a resize or move action, it can recommend a new template that does not support instance stores, or that does not provide the same instance store capacity.

To ensure that resize actions respect the instance store requirements for your workloads, turn on **Instance Store Aware Scaling** for a given VM or for a group of VMs. When you turn this on for a given scope of VMs, then as it calculates move and resize actions, Intersight Workload Optimizer will only consider templates that support instance stores. In addition, it will not move a workload to a template that provides less instance store capacity.

App Component Spec

In Azure App Service deployments, an App Component Spec represents a set of app instances comprising a single web application. Intersight Workload Optimizer discovers App Component Specs when you add an Azure target with the necessary permissions.

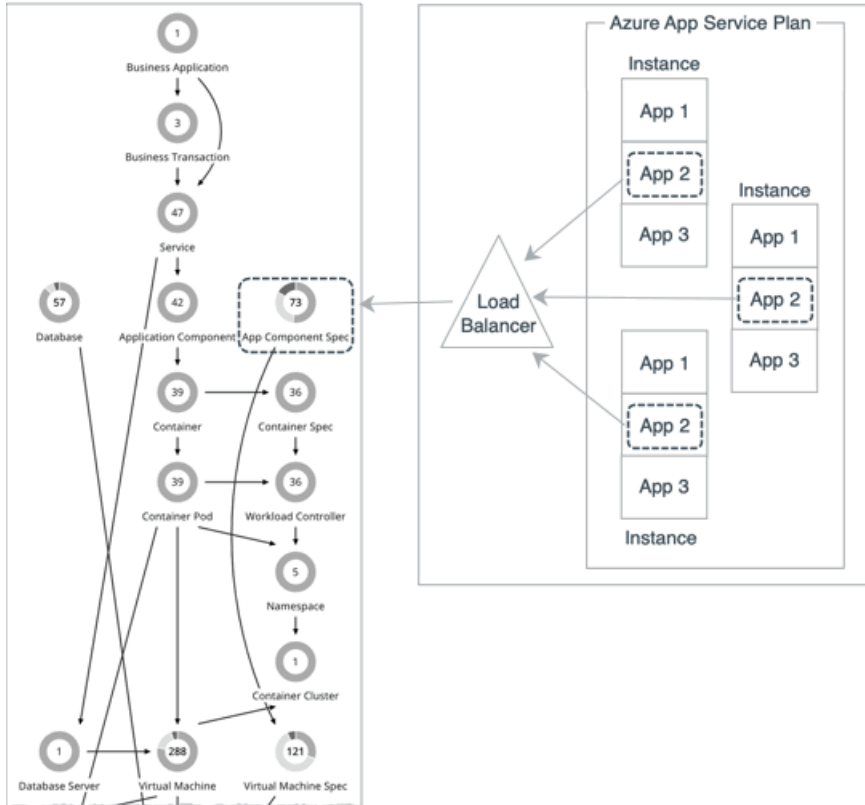

NOTE:

For a list of permissions, see "Azure Required Permissions" in the *Target Configuration Guide*.

Intersight Workload Optimizer also discovers the *plans* that provide resources to app instances. The supply chain shows these plans as [Virtual Machine Specs \(on page 150\)](#) and links them with App Component Specs to establish their relationship.

Synopsis

Synopsis	
Provides:	App services to end users
Consumes:	Resources from App Service plans
Discovered through:	Azure targets

Monitored Resources

- Response Time
 - The elapsed time between a request to an App Component Spec and the response to that request
- Virtual CPU (VCPU)
 - The percentage of total CPU time utilized by a given app


Actions

None

Intersight Workload Optimizer does not recommend actions for App Component Specs, but it does recommend actions for the underlying Virtual Machine Specs. For details, see [Virtual Machine Spec Actions \(on page 151\)](#).

Virtual Machine Spec

In Azure App Service, *plans* define CPU, memory, and storage resources that are available to VM instances to run apps. When you add an Azure target with the necessary permissions, Intersight Workload Optimizer discovers the plans associated with apps, and shows them as Virtual Machine Specs in the supply chain. Currently, Intersight Workload Optimizer discovers all plans, except App Service Environment v3 I4, I5, and I6.

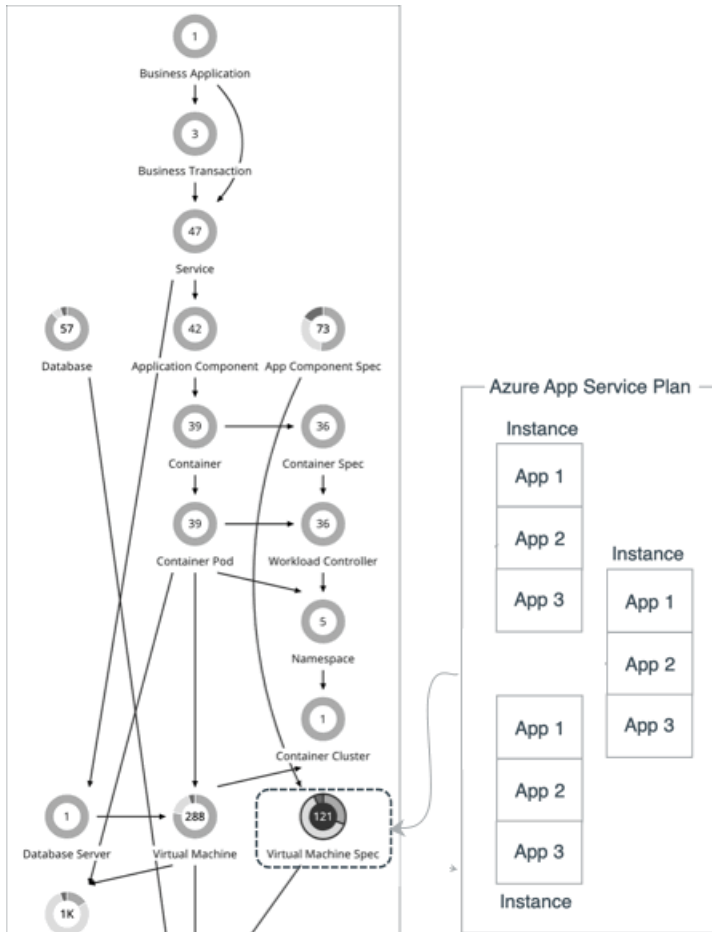

NOTE:

For a list of permissions, see "Azure Required Permissions" in the *Target Configuration Guide*.

Points to consider:

- Azure App Service offers several types of apps, including web apps, mobile apps, API apps, and logic apps. Intersight Workload Optimizer discovers the plans associated with these apps, but only recommends scale actions for plans associated with web apps. If a plan is no longer associated with any type of app, Intersight Workload Optimizer will recommend that you delete it.
- For web apps, Intersight Workload Optimizer also discovers the app instances that consume resources from a plan, and shows them as [App Component Specs \(on page 149\)](#) in the supply chain. The supply chain links App Component Specs with Virtual Machine Specs to establish their relationship.

- VM instances underlying a plan scale as a group. For this reason, Intersight Workload Optimizer represents these VM instances as a single Virtual Machine Spec entity and does *not* monitor them individually. The Entity Information chart for a Virtual Machine Spec shows the current number of VM instances, while resource charts (such as the Virtual CPU and Virtual Memory charts) show aggregated metrics for all VM instances.

Synopsis

Synopsis	
Provides:	Resources to apps (via App Component Specs)
Consumes:	Resources from Azure regions
Discovered through:	Azure targets

Monitored Resources

- Virtual Memory (VMem)
 - The utilization of VMem allocated to an App Service plan
- Virtual CPU (VCPU)
 - The utilization of VCPU allocated to an App Service plan
- Storage Amount
 - The amount of Azure storage utilized by an App Service plan
- Number of Replicas
 - The total number of VM instances underlying an App Service plan

Actions

- **Scale**
 - Scale Azure App Service plans to optimize app performance or reduce costs, while complying with business policies.
- **Delete**
 - Delete empty Azure App Service plans as a cost-saving measure. A plan is considered empty if it is not hosting any running apps.

Scale Actions

Intersight Workload Optimizer supports vertical scaling actions for provisioned App Service plans. These actions change the *size* of all VM instances underlying a plan (for example, from small to large, or large to medium). Horizontal scaling actions, which change the *number* of VM instances underlying a plan, are currently not supported.

Vertical scaling recommendations rely on a variety of factors, including:

- [Resource utilization percentiles \(on page 153\)](#)
- [On-demand monthly costs \(on page 154\)](#)
- VM instance count
 - Intersight Workload Optimizer will only recommend vertical scaling actions on plans with six or less VM instances.
- Scaling eligibility
 - Eligible for scaling – Basic, Standard, Premium v2, Premium v3, Isolated, Isolated v2
 - Not eligible for scaling – Workflow Standard, Elastic Premium, Free, Shared, Dynamic/Serverless
- Azure-enforced constraints, including:
 - Region – Only recommend instance types in regions where they are available
 - Server rack – Only recommend instance types on server racks where they are available
 - Zone redundancy – If zone redundancy is enabled, only recommend instance types that support zone redundancy
 - Deployment slots – Only recommend instance types that support the currently configured number of deployment slots that can be added to apps

- Hybrid connections – Only recommend scaling to instance types that support the currently configured number of hybrid connections for a plan

NOTE:

To see the number of deployment slots and hybrid connections configured for a plan, set the scope to the corresponding Virtual Machine Spec and then view the Entity Information chart.

- Scaling constraints that you set in Intersight Workload Optimizer [policies \(on page 157\)](#) for Virtual Machine Specs

For example, you can set a constraint if you want App Service plans to *only scale to* or *avoid* certain instance types.

Delete Actions

When Intersight Workload Optimizer discovers an empty plan (i.e., a plan that is not hosting any running apps), it will immediately recommend that you delete the plan as a cost-saving measure. Intersight Workload Optimizer can recommend deleting provisioned App Service plans, as well as Elastic Premium and Workflow Standard plans.

If a currently empty plan is not deleted and is subsequently discovered as used, Intersight Workload Optimizer removes the delete action attached to it.


Delete actions include the 'Days Empty' information that indicates how long a plan has been empty.

You can control the delete actions that Intersight Workload Optimizer recommends, based on the 'Days Empty' value that you set. For example, if you want Intersight Workload Optimizer to only generate delete actions for plans that have been empty for at least 5 days, perform these steps:

1. In the default policy for Virtual Machine Specs, *disable* delete actions.
2. Create a dynamic group of Virtual Machine Specs and set the 'Days Empty' filter to `Days Empty > = 5`.
3. Create a custom Virtual Machine Spec policy, set the scope to the group that you just created, and then *enable* delete actions in that policy.

Actions in Charts

Use the Necessary Investments and Potential Savings charts to view pending Virtual Machine Spec actions. These charts show total monthly investments and savings, assuming you execute all the actions.

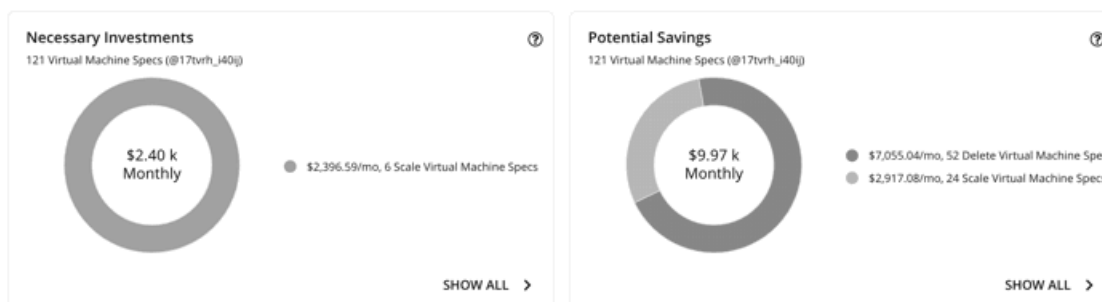


Click **Show All** for each chart to review and execute the actions.

The table shows the following:

- Actions that are pending for each Virtual Machine Spec
- Savings or investments for each Virtual Machine Spec

Utilization Charts for Scale Actions

Intersight Workload Optimizer uses percentile calculations to measure resource utilization, and drive scaling actions that improve overall utilization and reduce costs. When you examine the details for a pending scaling action on an App Service plan, you will see charts that highlight resource *utilization percentiles* for a given observation period, and the projected percentiles after you execute the action.

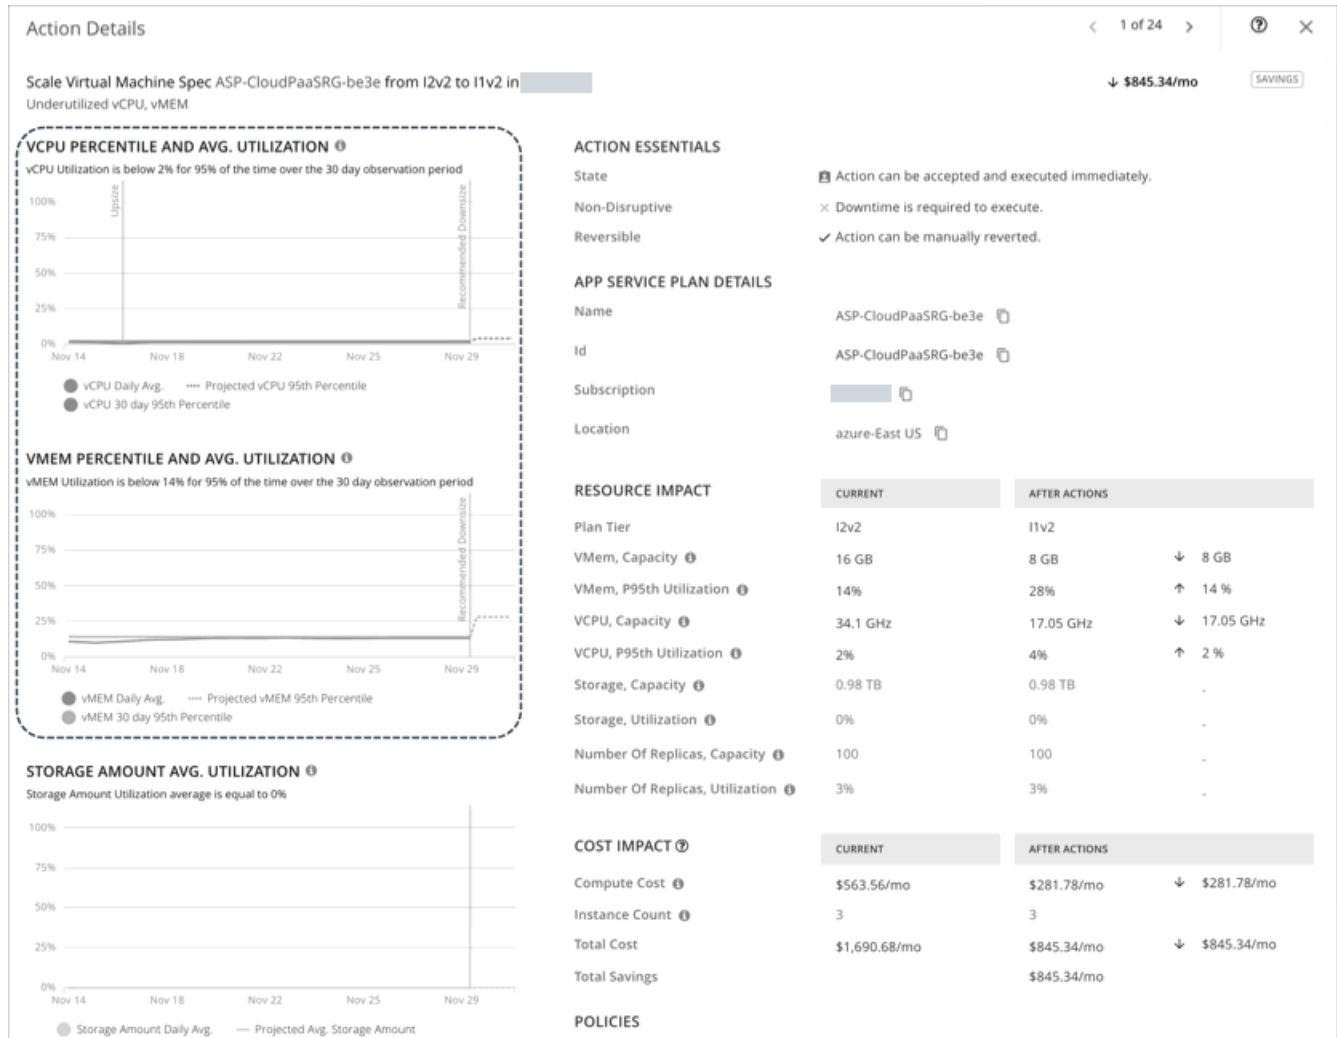

The charts also plot *daily average utilization* for your reference. If you have previously executed scaling actions on the App Service plan, you can see the resulting improvements in daily average utilization. Put together, these charts allow you to easily recognize utilization trends that drive Intersight Workload Optimizer's scaling recommendations.

NOTE:

You can set scaling constraints in Virtual Machine Spec policies to refine the percentile calculations. For details, see [Scaling Sensitivity \(on page 157\)](#).

Disruptiveness and Reversibility of Scale Actions

Intersight Workload Optimizer always recommends scaling to a different instance type, so all scaling actions are disruptive and require downtime. You can reverse an action by scaling an App Service plan back to its original instance type.

Estimated On-demand Monthly Costs for Azure App Service Plans

Intersight Workload Optimizer considers a variety of factors when calculating estimated on-demand monthly costs for Azure App Service plans.

NOTE:

Azure App Service plans appear as Virtual Machine Spec entities in the supply chain.

Action Details
< 1 of 24 >
?
✕

Scale Virtual Machine Spec ASP-CloudPaaS-3e from I2v2 to I1v2 in ↓ \$845.34/mo SAVINGS

Underutilized vCPU, vMEM

VCPU PERCENTILE AND AVG. UTILIZATION

vCPU Utilization is below 2% for 95% of the time over the 30 day observation period

● vCPU Daily Avg. - - - Projected vCPU 95th Percentile
● vCPU 30 day 95th Percentile

ACTION ESSENTIALS

State: ✔ Action can be accepted and executed immediately.

Non-Disruptive: ✕ Downtime is required to execute.

Reversible: ✔ Action can be manually reverted.

VMEM PERCENTILE AND AVG. UTILIZATION

vMEM Utilization is below 14% for 95% of the time over the 30 day observation period

● vMEM Daily Avg. - - - Projected vMEM 95th Percentile
● vMEM 30 day 95th Percentile

APP SERVICE PLAN DETAILS

Name: ASP-CloudPaaS-3e

Id: ASP-CloudPaaS-3e

Subscription:

Location: azure-East US

STORAGE AMOUNT AVG. UTILIZATION

Storage Amount Utilization average is equal to 0%

● Storage Amount Daily Avg. - - - Projected Avg. Storage Amount

RESOURCE IMPACT

	CURRENT	AFTER ACTIONS	
Plan Tier	I2v2	I1v2	
VMem, Capacity	16 GB	8 GB	↓ 8 GB
VMem, P95th Utilization	14%	28%	↑ 14 %
VCPU, Capacity	34.1 GHz	17.05 GHz	↓ 17.05 GHz
VCPU, P95th Utilization	2%	4%	↑ 2 %
Storage, Capacity	0.98 TB	0.98 TB	-
Storage, Utilization	0%	0%	-
Number Of Replicas, Capacity	100	100	-
Number Of Replicas, Utilization	3%	3%	-

COST IMPACT

	CURRENT	AFTER ACTIONS	
Compute Cost	\$563.56/mo	\$281.78/mo	↓ \$281.78/mo
Instance Count	3	3	
Total Cost	\$1,690.68/mo	\$845.34/mo	↓ \$845.34/mo
Total Savings		\$845.34/mo	

POLICIES

Cost Calculation

The calculation for estimated on-demand monthly cost can be expressed as follows:

$$(\text{On-demand Compute Rate} * 730) * \text{Number of Instances} = \text{Estimated On-demand Monthly Cost}$$

Where:

- **On-demand Compute Rate** is the **hourly** cost for an App Service plan's instance type. You can obtain on-demand rates via [App Service Pricing](#).
- **730** represents the number of hours per month that Intersight Workload Optimizer uses to calculate monthly costs.
- **Number of Instances** is the total number of VM instances underlying the App Service plan.

The listed items above impact cost calculations and the scaling decisions that Intersight Workload Optimizer makes. These decisions also rely on other factors, such as resource utilization percentiles and scaling constraints set in policies.

Example

Assume the following data for a pending action to scale an Azure Service plan from the I2V2 to the I1V1 instance type.

	Current Values	Values After Action Execution
On-demand Compute Rate	\$0.772/hr	\$0.386/hr
Number of Instances	3	3

Intersight Workload Optimizer calculates the following:

- *Current* estimated on-demand monthly cost:

$$(\$0.772 * 730) * 3 = \$1690.68/\text{Mo.}$$

- Estimated on-demand monthly cost *after* executing the action:

$$(\$0.386 * 730) * 3 = \$845.34/\text{Mo.}$$

NOTE:

Intersight Workload Optimizer rounds the calculated values that it displays in the user interface.

The estimated on-demand monthly cost is projected to decrease from \$1690.68/month to \$845.34/month, as shown in the Details section of the pending action.

COST IMPACT ⓘ	CURRENT	AFTER ACTIONS	
Compute Cost ⓘ	\$563.56/mo	\$281.78/mo	↓ \$281.78/mo
Instance Count ⓘ	3	3	
Total Cost	\$1,690.68/mo	\$845.34/mo	↓ \$845.34/mo
Total Savings		\$845.34/mo	
POLICIES			

Intersight Workload Optimizer treats the action as a cost-saving measure, and shows total savings of \$845.34/month.

COST IMPACT ⓘ	CURRENT	AFTER ACTIONS	
Compute Cost ⓘ	\$563.56/mo	\$281.78/mo	↓ \$281.78/mo
Instance Count ⓘ	3	3	
Total Cost	\$1,690.68/mo	\$845.34/mo	↓ \$845.34/mo
Total Savings		\$845.34/mo	
POLICIES			

Estimated On-demand Monthly Savings for Empty Azure App Service Plans

Intersight Workload Optimizer considers an empty App Service plan's on-demand compute rate and VM instance count when calculating the estimated on-demand monthly savings that you would realize when you delete the plan. A plan is considered empty if it is not hosting any running apps.

NOTE:

Azure App Service plans appear as Virtual Machine Spec entities in the supply chain.

Action Details
< 10 of 52 >
?
×

Delete Empty P2v2 App Service Plan paas-asp-zone-redundant from ↓ \$147.46/mo SAVINGS

Increase savings

<p>ACTION ESSENTIALS</p> <p>State 📄 Action can be accepted and executed immediately.</p> <p>Non-Disruptive ✓ Downtime is not required to execute.</p> <p>Reversible ✗ Action cannot be manually reverted.</p>	<p>APP SERVICE PLAN DETAILS</p> <p>Name paas-asp-zone-redundant 📄</p> <p>Id paas-asp-zone-redundant 📄</p> <p>Subscription 📄</p> <p>Location azure-East US 📄</p> <p>Days Empty 7</p>																								
<p>RESOURCE IMPACT</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th></th> <th style="background-color: #f2f2f2;">CURRENT</th> <th style="background-color: #f2f2f2;">AFTER ACTIONS</th> </tr> </thead> <tbody> <tr> <td>Virtual Memory</td> <td>7 GB</td> <td>-</td> </tr> <tr> <td>Virtual CPU</td> <td>18.36 GHz</td> <td>-</td> </tr> </tbody> </table>		CURRENT	AFTER ACTIONS	Virtual Memory	7 GB	-	Virtual CPU	18.36 GHz	-	<p>COST IMPACT ?</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th></th> <th style="background-color: #f2f2f2;">CURRENT</th> <th style="background-color: #f2f2f2;">AFTER ACTIONS</th> </tr> </thead> <tbody> <tr> <td>Compute Cost ?</td> <td>\$147.46/mo</td> <td>N/A</td> </tr> <tr> <td>Instance Count ?</td> <td>1</td> <td>N/A</td> </tr> <tr> <td>Total Cost</td> <td>\$147.46/mo</td> <td>\$0.00/mo ↓ \$147.46/mo</td> </tr> <tr> <td>Total Savings</td> <td></td> <td>\$147.46/mo</td> </tr> </tbody> </table>		CURRENT	AFTER ACTIONS	Compute Cost ?	\$147.46/mo	N/A	Instance Count ?	1	N/A	Total Cost	\$147.46/mo	\$0.00/mo ↓ \$147.46/mo	Total Savings		\$147.46/mo
	CURRENT	AFTER ACTIONS																							
Virtual Memory	7 GB	-																							
Virtual CPU	18.36 GHz	-																							
	CURRENT	AFTER ACTIONS																							
Compute Cost ?	\$147.46/mo	N/A																							
Instance Count ?	1	N/A																							
Total Cost	\$147.46/mo	\$0.00/mo ↓ \$147.46/mo																							
Total Savings		\$147.46/mo																							

Savings Calculation

The calculation for estimated on-demand monthly savings can be expressed as follows:

$$(\text{On-demand Compute Rate} * 730) * \text{Number of Instances} = \text{Estimated On-demand Monthly Savings}$$

Where:

- **On-demand Compute Rate** is the **hourly** cost for an App Service plan's instance type.
You can obtain on-demand rates via [App Service Pricing](#).
- **730** represents the number of hours per month that Intersight Workload Optimizer uses to calculate monthly savings.
- **Number of Instances** is the total number of VM instances underlying the App Service plan.

Example

Assume the following data for a pending action to delete an empty Azure Service plan on the P2V2 instance type.

	Current Values
On-demand Compute Rate	\$0.202/hr
Number of Instances	1

Intersight Workload Optimizer calculates savings as follows:

$$(\$0.202 * 730) * 1 = \$147.46/Mo.$$

NOTE:

Intersight Workload Optimizer rounds the calculated values that it displays in the user interface.

Intersight Workload Optimizer shows total savings of \$147.46/month.

COST IMPACT [?]	CURRENT	AFTER ACTIONS
Compute Cost [?]	\$147.46/mo	N/A
Instance Count [?]	1	N/A
Total Cost	\$147.46/mo	\$0.00/mo ↓ \$147.46/mo
Total Savings		\$147.46/mo

Virtual Machine Spec Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

For details about Virtual Machine Spec actions, see [Virtual Machine Spec Actions \(on page 151\)](#).

Action	Default Mode
Cloud Scale All	Manual
Cloud Scale for Performance	Manual
Cloud Scale for Savings	Manual
Delete Virtual Machine Spec	Manual

When you create a policy, you can choose **Cloud Scale All**, **Cloud Scale for Performance**, or **Cloud Scale for Savings**.

- You can direct Intersight Workload Optimizer to only execute scaling actions that improve performance (*Cloud Scale for Performance*) or reduce costs (*Cloud Scale for Savings*). The default action mode for these actions is *Manual*. When you examine the pending actions for Virtual Machine Specs, only actions that satisfy the policies are allowed to execute. All other actions are read-only.
- Cloud Scale All* enables all scaling actions, including those that result in efficiency improvements and increased costs.
- When policy conflicts arise, **Cloud Scale All** overrides the other two scaling options in most cases. For more information, see [Relationship Between Scoped and Default Policies \(on page 67\)](#).

Scaling Sensitivity

Intersight Workload Optimizer uses a percentile of utilization over the specified observation period. This gives sustained utilization and ignores short-lived bursts.

Cloud Instance Types

Attribute	Default Value
Cloud Instance Types	None

By default, Intersight Workload Optimizer considers all instance types currently available for scaling when making scaling decisions for Virtual Machine Specs. However, you may have set up your Virtual Machine Specs to *only scale to* or *avoid* certain instance types to reduce complexity and cost, improve discount utilization, or meet application demand. Use this setting to identify the instance types that Virtual Machine Specs can scale to.

Click **Edit** to set your preferences. In the new page that displays, expand a **cloud tier** (a family of instance types, such as *Basic*) to see individual instance types and the resources allocated to them.

Select your preferred instance types or cloud tiers, or clear the ones that you want to avoid. After you save your changes, the main page refreshes to reflect your selections.

If you selected a cloud tier and the service provider deploys new instance types to that tier later, then those instance types will automatically be included in your policy. Be sure to review your policies periodically to see if new instance types have been added to a tier. If you do not want to scale to those instance types, update the affected policies.

Scaling Target Utilization

The utilization that you set here specifies the percentage of the existing capacity that Intersight Workload Optimizer will consider to be 100% of capacity.

Attribute	Default Value
VCPU	70
VMEM	90
Storage	90

These advanced settings determine how much you would like a scope of workloads to utilize their resources. These are fixed settings that override the way Intersight Workload Optimizer calculates the optimal utilization of resources. You should only change these settings after consulting with Technical Support.

While these settings offer a way to modify how Intersight Workload Optimizer recommends actions, in most cases you should never need to use them. If you want to control how Intersight Workload Optimizer recommends actions to resize workloads, you can set the aggressiveness per the percentile of utilization, and set the length of the sample period for more or less elasticity on the cloud.


Database Server (Cloud)

In AWS public cloud environments, a Database Server is a relational database that you have configured using AWS Relational Database Service (RDS). Intersight Workload Optimizer discovers RDS instances through your AWS targets, and then generates scaling actions as needed.

NOTE:

Azure SQL Databases discovered by Intersight Workload Optimizer appear as *Database* entities in the supply chain. For details, see [Database \(Cloud\) \(on page 175\)](#).

Synopsis

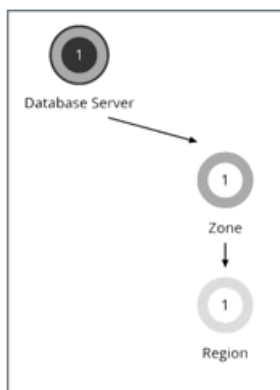

AWS RDS

Synopsis	
Budget:	A cloud Database Server has unlimited budget.
Provides:	Database services to cloud applications and end users

Synopsis	
Consumes:	Compute and storage resources in the availability zone
Discovered through:	AWS targets

Permissions

Intersight Workload Optimizer requires the following permissions for AWS RDS Database Servers:

- Monitoring permissions:
 - cloudwatch:GetMetricData
 - pi:GetResourceMetrics
 - rds:DescribeDBInstances
 - rds:DescribeDBParameters
 - rds:ListTagsForResource
 - rds:DescribeOrderableDBInstanceOptions
- Action execution permissions:
 - rds:ModifyDBInstance

For a full list of permissions, see "Amazon Web Services" in the *Target Configuration Guide*.

Monitored Resources

Intersight Workload Optimizer monitors the following resources for a cloud Database Server:

- Virtual Memory (VMem)
 - The utilization of VMem allocated to the Database Server's instance type
- Virtual CPU (VCPU)
 - The utilization of VCPU allocated to the Database Server's instance type
- Storage Amount
 - The amount of Amazon EBS storage utilized by the Database Server
- Storage Access
 - IOPS utilized by the Database Server
- DB Cache Hit Rate (if available)
 - The percentage of database responses served through cache hits
- Connections
 - The number of connections to the Database Server

Actions

Scale

Scale compute and storage resources to optimize performance and costs.

To recommend accurate scaling actions, Intersight Workload Optimizer analyzes resource utilization percentiles and collects relevant metrics (such as connections utilization) from AWS. It also takes into consideration constraints defined in [policies \(on page 166\)](#).

Consider the following scenarios and actions:

- To address vCPU congestion, Intersight Workload Optimizer can recommend scaling a Database Server to the instance type that can adequately meet demand at the lowest possible cost. If vCPU is underutilized, it can recommend scaling to a smaller instance type.
- To address IOPS congestion, Intersight Workload Optimizer can recommend increasing provisioned IOPS or scaling the Database Server to a different storage type. For gp2 storage, it can recommend increasing disk size to increase provisioned IOPS. After executing these actions, Intersight Workload Optimizer will not recommend new actions for the next six hours, in compliance with AWS's "cooldown" period for EBS storage.

- Intersight Workload Optimizer analyzes DB cache hit rate before making vMem scaling decisions. To perform its analysis, it collects cache hit rate metrics for Database Servers with [Performance Insights](#) enabled.

For Database Servers with cache hit rate metrics, Intersight Workload Optimizer considers at least 90% cache hit rate to be optimal. This percentage value is not configurable.

- A cache hit rate value equal to or greater than 90% indicates efficiency. For this reason, Intersight Workload Optimizer will not recommend an action even if vMem utilization is high. If vMem utilization is low, it will recommend scaling to a smaller instance type.
- When the cache hit rate is below 90%, Intersight Workload Optimizer will also not recommend an action, provided that vMem utilization remains low. If vMem utilization is high, then it will recommend scaling to a larger instance type.


Notes on Performance Insights and cache hit rate metrics:

- Performance Insights is enabled by default on a majority of AWS Database Servers. In the Intersight Workload Optimizer user interface, you can use Search and then apply the Performance Insights filter to see which Database Servers have Performance Insights enabled.
- If Performance Insights is disabled or is not supported for your AWS Database Server engines or regions, Intersight Workload Optimizer will not have cache hit rate metrics to analyze and will therefore not generate actions in direct response to vMem utilization. For a list of supported engines and regions, see this [AWS page](#).
- An action to scale to a different instance type in response to vCPU utilization might also include vMem changes, but vMem utilization alone (without cache hit rate metrics) will not drive actions.

Intersight Workload Optimizer also considers Connections utilization and capacity when making scaling decisions. It collects utilization metrics from CloudWatch and calculates capacity based on the maximum number of simultaneous connections configured for the Database Server. The maximum number varies by Database Server engine type and memory allocation, and is set in the [parameter group](#) associated with a Database Server. Intersight Workload Optimizer currently supports Database Servers associated with parameter groups that use [default values](#). For example, consider a MySQL Database Server that is on a `db.t3.large` instance type with 8 GB (8589934592 bytes) of memory, and is associated with a parameter group that uses the default value `{DBInstanceClassMemory/12582880}`. In this case, Intersight Workload Optimizer calculates capacity as 682 connections (or `{8589934592/12582880}`). When Intersight Workload Optimizer generates an action due to vMem underutilization and sees that Connections utilization is only 15% of capacity (or roughly 100 connections), it picks a smaller instance type that is adequate for both the vMem and Connections requirements of the Database Server. For example, it could pick `db.t2.small`, which provides 2 GB of memory and a maximum of 170 connections.

Actions in Charts

Use the Necessary Investments and Potential Savings charts to view pending Database Server actions. These charts show total monthly investments and savings, assuming you execute all the actions.

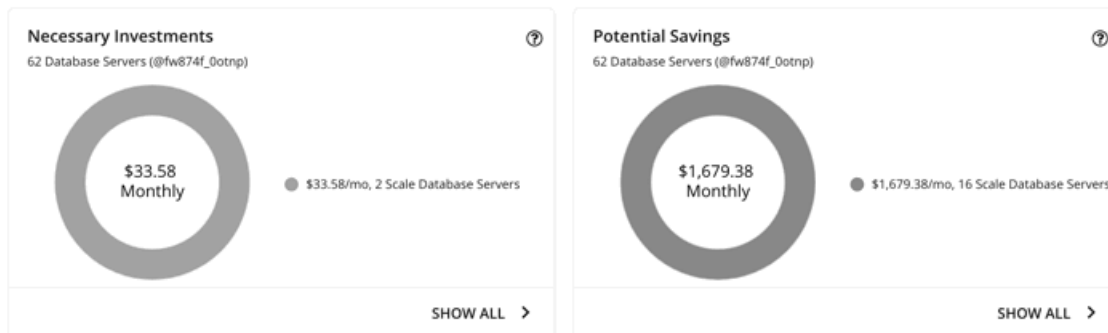

Click **Show All** for each chart to review and execute the actions.

The table lists all the actions that are pending for Database Servers, and the savings or investments for each action.

Scale Actions 16 Savings \$1,679.38/mo										EXECUTE ACTIONS	↓
Type to search										ADD FILTER	
Database Server Name	Account	Non-Disrupt...	Reversible	Instance Type	On-Demand	New Instance Type	New On-Demand	Action Category	Savings +	Action	
<input type="checkbox"/> rds-mariamultiaz		×	✓	db.t3.small-io1	\$0.924/h	db.t3.small-stand...	\$0.095/h	SAVINGS	↓ \$604.80/rr	DETAILS	
<input type="checkbox"/> testioautoscaling		×	✓	db.t3.micro-io1	\$0.446/h	db.t3.micro-gp2	\$0.033/h	SAVINGS	↓ \$301.00/rr	DETAILS	
<input type="checkbox"/> rds-maria-io1		×	✓	db.t3.micro-io1	\$0.418/h	db.t3.micro-stand...	\$0.031/h	SAVINGS	↓ \$282.50/rr	DETAILS	
<input type="checkbox"/> btc-dbs-1		×	✓	db.m5.xlarge-io1	\$0.514/h	db.r6g.large-stan...	\$0.219/h	SAVINGS	↓ \$215.20/rr	DETAILS	

For details on how Intersight Workload Optimizer calculates savings or investments, see [Estimated On-demand Costs for Cloud Database Servers \(on page 164\)](#).


Utilization Charts

Intersight Workload Optimizer uses percentile calculations to measure resource utilization more accurately, and drive scaling actions that improve overall utilization and reduce costs. When you examine the details for a pending scale action on a Database Server, you will see charts that highlight *utilization percentiles* for a given observation period, and the projected percentiles after you execute the action.



The charts also plot *daily average utilization* for your reference. If you have previously executed scaling actions on the Database Server, you can see the resulting improvements in daily average utilization. Put together, these charts allow you to easily recognize utilization trends that drive Intersight Workload Optimizer's scaling recommendations.

You can set scaling constraints in Database Server policies to refine the percentile calculations.

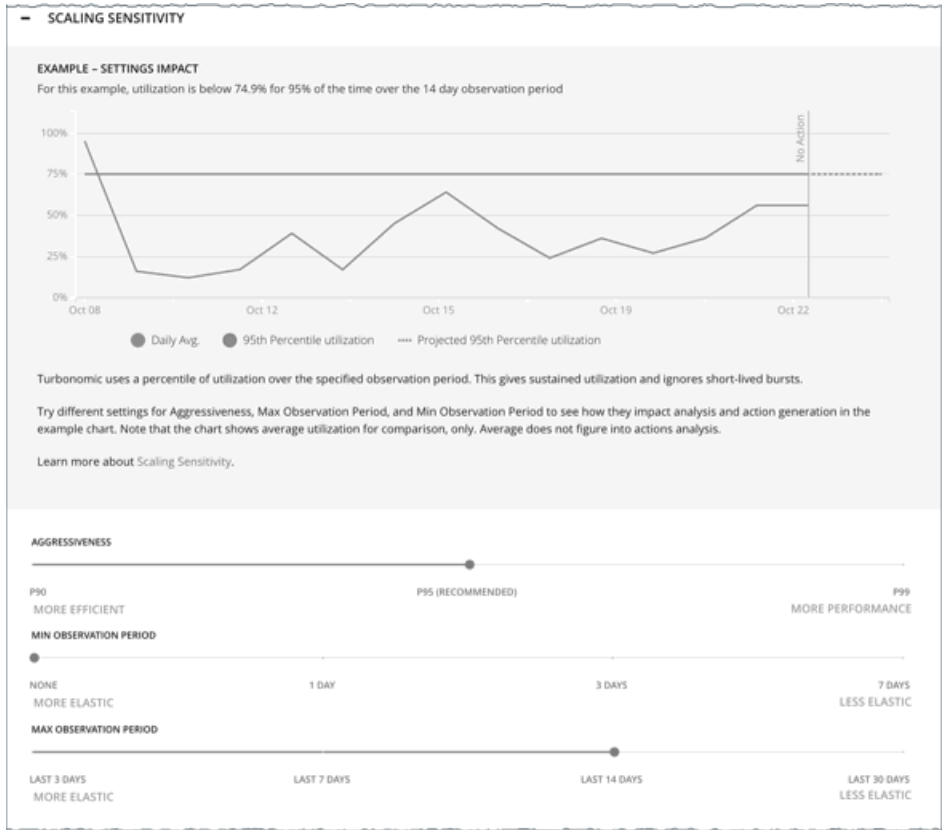

For details, see [Scaling Sensitivity \(on page 167\)](#).

Non-disruptive and Reversible Scaling Actions

Intersight Workload Optimizer indicates whether a pending action is non-disruptive or reversible to help you decide how to handle the action.

Scale Actions 16 Savings \$1,679.38/mo					
Type to search					
<input type="checkbox"/> Database Server Name	Account	Non-Disruptive	Reversible	Instance Type	On-Demand Cost
<input type="checkbox"/> rds-mariamulti-az		✗	✓	db.t3.small-io1	\$0.924/h
<input type="checkbox"/> testioautoscalingenabled		✗	✓	db.t3.micro-io1	\$0.446/h
<input type="checkbox"/> rds-maria-io1		✗	✓	db.t3.micro-io1	\$0.418/h
<input type="checkbox"/> btc-dbs-1		✗	✓	db.m5.xlarge-io1	\$0.514/h

The following table describes the disruptiveness and reversibility of the actions that Intersight Workload Optimizer recommends:

Action	Disruptive	Reversible
Scaling to a different instance type	Yes	Yes
Scaling up storage amount	No	No
Scaling up storage access (provisioned IOPS)	No	Yes

Action	Disruptive	Reversible
Scaling to a different storage type + Scaling up storage amount	Yes	No
Scaling to a different storage type + Scaling up storage access (provisioned IOPS)	Yes	Yes
Scaling to a different storage type + Scaling up storage amount + Scaling up storage access (provisioned IOPS)	Yes	No

You can set action modes in policies to specify the degree of automation for these actions.

Configure Database Server Policy

- + SCOPE ⓘ
- + POLICY SCHEDULE ⓘ
- AUTOMATION AND ORCHESTRATION
 - Database Server Scaling Actions
Generate cloud database server scaling actions
 - DISRUPTIVE IRREVERSIBLE SCALING**
AWS RDS storage amount scale and instance type or storage tier change
Action Acceptance: Recommend
 - DISRUPTIVE REVERSIBLE SCALING**
AWS RDS instance type scaling, storage tier changes
Action Acceptance: Recommend
 - NON-DISRUPTIVE IRREVERSIBLE SCALING**
AWS RDS storage amount scaling
Action Acceptance: Recommend
 - NON-DISRUPTIVE REVERSIBLE SCALING**
AWS RDS provisioned IOPS scaling
Action Acceptance: Recommend

Unavailable Instance Types

A scale action could fail if the target instance type is unavailable in the availability zone for some reason. Your AWS environment might show the instance type as available, but when the scaling action executes, the following error displays in AWS:

```
Cannot modify the instance class because there are no instances of the requested class available in the current instance's availability zone. Please try your request again at a later time.
```


NOTE:

For details about this error, see this [AWS page](#).

When this error occurs, Intersight Workload Optimizer modifies the default Database Server policy to exclude the instance type from its scaling list. When the Database Server is available again, Intersight Workload Optimizer adds it back to the scaling list. For details about this list, see [Cloud Instance Types \(on page 168\)](#).

Estimated On-demand Costs for Cloud Database Servers

Intersight Workload Optimizer considers a variety of factors when calculating *Estimated On-demand Monthly Cost* for an AWS RDS Database Server.

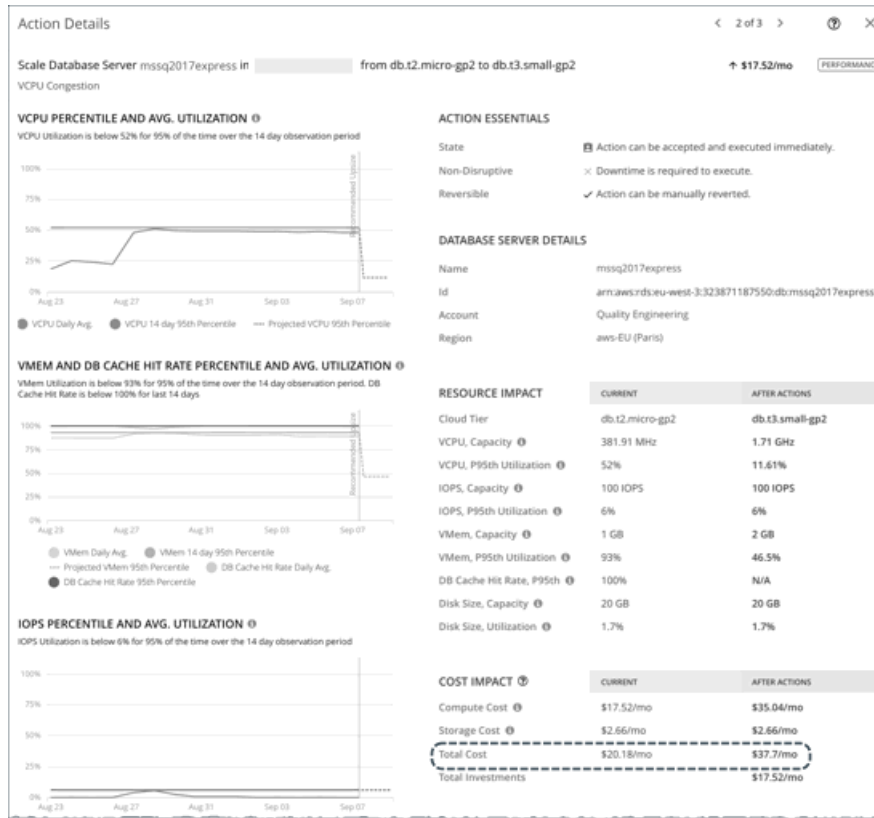

Non-Aurora Database Servers

Cost Calculation

For non-Aurora Database Servers, the calculation for Estimated On-demand Monthly Cost can be expressed as follows:

$$(\text{On-demand Compute Rate} * 730) + (\text{Provisioned Database Storage Rate} * \text{Provisioned Database Storage Amount}) + (\text{Provisioned IOPS Rate} * \text{Provisioned IOPS Amount}) = \text{Estimated On-demand Monthly Cost}$$

Where:

- **On-demand Compute Rate** is the hourly cost for a Database Server's instance type
 You can obtain on-demand rates via [Amazon RDS Pricing](#).
- **730** represents the number of hours per month that Intersight Workload Optimizer uses to estimate monthly costs.
- **Provisioned Database Storage Rate** is the hourly cost for a Database Server's provisioned database storage
 You can obtain provisioned database storage rates via [Amazon RDS Pricing](#).
- **Provisioned IOPS Rate** is the monthly cost for a Database Server's provisioned IOPS
 Provisioned IOPS apply only to Database Servers on Provisioned IOPS SSD (io1) storage. You can obtain information about Provisioned IOPS SSD storage via the [RDS User Guide](#).
 You can obtain provisioned IOPS rates via [Amazon RDS Pricing](#).

The listed items above impact cost calculations and the scaling decisions that Intersight Workload Optimizer makes. These decisions also rely on other factors, such as resource utilization percentiles and scaling constraints set in policies.

Example

Assume the following data for a pending scale action for SQL Server Express Edition (Single A-Z deployment):

	Current Values	Values After Action Execution
On-demand Compute Rate	\$0.024/hr	\$0.048/hr
Provisioned Database Storage Rate	\$0.133/hr	\$0.133/hr
Provisioned Database Storage Amount	20 GB	20 GB
Provisioned IOPS Rate	\$0.00	\$0.00
Provisioned IOPS Amount	0	0

Intersight Workload Optimizer calculates the following:

- **Current** Estimated On-demand Monthly Cost:

$$(0.024 * 730) + (0.133 * 20) + (0.00 * 0) = 20.18$$


- Estimated On-demand Monthly Cost *after* executing the action:

$$(0.048 * 730) + (0.133 * 20) + (0.00 * 0) = 37.7$$


NOTE:

Intersight Workload Optimizer rounds the calculated values that it displays in the user interface.

The Estimated On-demand Monthly Cost is projected to increase from \$20.18/month to \$37.7/month, as shown in the Details section of the pending action.

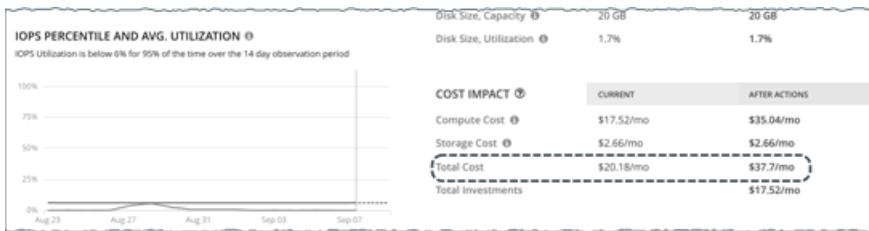

Intersight Workload Optimizer treats the action as an investment and shows an estimated investment of \$17.52/month.

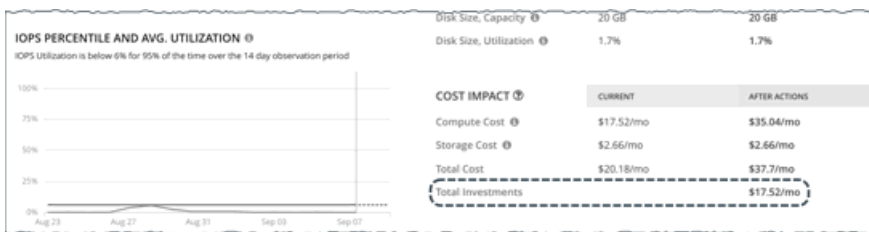

Aurora Database Servers

Cost Calculation

For Aurora Database Servers, the calculation for Estimated On-demand Monthly Cost can be expressed as follows:

$$(\text{On-demand Compute Rate} * 730) + (\text{Provisioned Database Storage Rate} * \text{Provisioned Database Storage Amount}) + (\text{I/O Request Rate} * (\text{Hourly Billed I/O Operation Count} * 730)) = \text{Estimated On-demand Monthly Cost}$$

Where:

- **On-demand Compute Rate** is the hourly cost for a Database Server's instance type
You can obtain on-demand rates via [Amazon Aurora Pricing](#).
- **730** represents the number of hours per month that Intersight Workload Optimizer uses to estimate monthly costs.
- **Provisioned Database Storage Rate** is the hourly cost for a Database Server's provisioned database storage
You can obtain provisioned database storage rates via [Amazon Aurora Pricing](#).

- **I/O Request Rate** is the cost per one million read/write I/O requests

You can obtain I/O request rates via [Amazon Aurora Pricing](#).

- **Hourly Billed I/O Operation Count** is the average sum of read and write I/O operations per hour over the last month

The listed items above impact cost calculations. Except for I/O request rate, these items affect the actual scaling decisions that Intersight Workload Optimizer makes. These decisions also rely on other factors, such as resource utilization percentiles and scaling constraints set in policies.

Example

Assume the following data for a pending scale action for Aurora MySQL-Compatible Edition:

	Current Values	Values After Action Execution
On-demand Compute Rate	\$0.164/hr	\$0.041/hr
Provisioned Database Storage Rate	\$0.10/hr	\$0.10/hr
Provisioned Database Storage Amount	100	100
I/O Request Rate	\$0.20/one million requests	\$0.20/one million requests
Hourly Billed I/O Operation Count	2000	2000

Intersight Workload Optimizer calculates the following:

- **Current** Estimated On-demand Monthly Cost:

$$(0.164 * 730) + (0.10 * 100) + ((0.20 / 1000000) * (2000 * 730)) = 130.01$$

- Estimated On-demand Monthly Cost *after* executing the action:

$$(0.041 * 730) + (0.10 * 100) + ((0.20 / 1000000) * (2000 * 730)) = 40.22$$

NOTE:

Intersight Workload Optimizer rounds the calculated values that it displays in the user interface.

Since the Estimated On-demand Monthly Cost is projected to decrease from \$130.01/month to \$40.22/month, Intersight Workload Optimizer treats the action as a cost-saving measure and shows estimated savings of \$89.79/month.

Cloud Database Server Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

For details about cloud Database Server actions, see [Cloud Database Server Actions \(on page 159\)](#) and [Non-disruptive and Reversible Scaling Actions \(on page 162\)](#).

Action	Default Setting/Mode
Database Server Scaling Actions	On
Disruptive irreversible scaling	Recommend
Disruptive reversible scaling	Recommend
Non-disruptive irreversible scaling	Recommend
Non-disruptive reversible scaling	Recommend

Scaling Sensitivity

Intersight Workload Optimizer uses a percentile of utilization over the specified observation period. This gives sustained utilization and ignores short-lived bursts.

Intersight Workload Optimizer uses these settings to calculate utilization percentiles for VCPU, VMEM and DB Cache Hit Rate, and IOPS. It then recommends actions to improve utilization based on the observed values for a given time period.

■ Aggressiveness

Attribute	Default Value
Aggressiveness	95th Percentile

When evaluating performance, Intersight Workload Optimizer considers resource utilization as a percentage of capacity. The utilization drives actions to scale the available capacity either up or down. To measure utilization, the analysis considers a given utilization percentile. For example, assume a 95th percentile. The percentile utilization is the highest value that 95% of the observed samples fall below. Compare that to average utilization, which is the average of *all* the observed samples.

Using a percentile, Intersight Workload Optimizer can recommend more relevant actions. This is important in the cloud, so that analysis can better exploit the elasticity of the cloud. For scheduled policies, the more relevant actions will tend to remain viable when their execution is put off to a later time.

For example, consider decisions to reduce capacity. Without using a percentile, Intersight Workload Optimizer never resizes below the recognized peak utilization. Assume utilization peaked at 100% just once. Without the benefit of a percentile, Intersight Workload Optimizer will not reduce resources for that Database Server.

With **Aggressiveness**, instead of using the single highest utilization value, Intersight Workload Optimizer uses the percentile you set. For the above example, assume a single burst to 100%, but for 95% of the samples, utilization never exceeded 50%. If you set **Aggressiveness** to 95th Percentile, then Intersight Workload Optimizer can see this as an opportunity to reduce resource allocation.

In summary, a percentile evaluates the sustained resource utilization, and ignores bursts that occurred for a small portion of the samples. You can think of this as aggressiveness of resizing, as follows:

- 99th Percentile – More performance. Recommended for critical Database Servers that need maximum guaranteed performance at all times, or those that need to tolerate sudden and previously unseen spikes in utilization, even though sustained utilization is low.
- 95th Percentile (Default) – The recommended setting to achieve maximum performance and savings. This assures performance while avoiding reactive peak sizing due to transient spikes, thus allowing you to take advantage of the elastic ability of the cloud.
- 90th Percentile – More efficiency. Recommended for Database Servers that can stand higher resource utilization.

By default, Intersight Workload Optimizer uses samples from the last 14 days. Use the **Max Observation Period** setting to adjust the number of days. To ensure that there are enough samples to analyze and drive scaling actions, set the **Min Observation Period**.

■ Max Observation Period

Attribute	Default Value
Max Observation Period	Last 14 Days

To refine the calculation of resource utilization percentiles, you can set the sample time to consider. Intersight Workload Optimizer uses historical data from up to the number of days that you specify as a sample period. If the Database Server has fewer days' data then it uses all of the stored historical data.

You can make the following settings:

- Less Elastic – Last 30 Days
- Recommended – Last 14 Days
- More Elastic – Last 7 Days or Last 3 Days

Intersight Workload Optimizer recommends an observation period of 14 days so it can recommend scaling actions more often. Since Database Server scaling is minimally disruptive, scaling often should not introduce any noticeable performance risks.

■ Min Observation Period

Attribute	Default Value
Min Observation Period	None

This setting ensures historical data for a minimum number of days before Intersight Workload Optimizer will generate an action based on the percentile set in **Aggressiveness**. This ensures a minimum set of data points before it generates the action.

Especially for scheduled actions, it is important that resize calculations use enough historical data to generate actions that will remain viable even during a scheduled maintenance window. A maintenance window is usually set for "down" time, when utilization is low. If analysis uses enough historical data for an action, then the action is more likely to remain viable during the maintenance window.

- More Elastic - None
- Less Elastic - 1, 3, or 7 Days

Cloud Instance Types

By default, Intersight Workload Optimizer considers all instance types currently available for scaling when making scaling decisions for Database Servers. However, you may have set up your Database Servers to *only scale to* or *avoid* certain instance types to reduce complexity and cost, or meet demand. Use this setting to identify the instance types that Database Servers can scale to.

NOTE:

Intersight Workload Optimizer automatically discovers and enforces Database Server tier exclusions configured in your AWS environment. You do not need to configure these tier exclusions in policies. To see a list of tier exclusions that are currently enforced, set the scope to one or several Database Servers and click the **Policies** tab.

Attribute	Default Value
Cloud Instance Types	None

Click **Edit** to set your preferences. In the new page that displays, expand a **cloud tier** (a family of instance types, such as *db.m1*) to see individual instance types and the resources allocated to them.

Select your preferred instance types or cloud tiers, or clear the ones that you want to avoid. After you save your changes, the main page refreshes to reflect your selections.

NOTE:

This policy setting is not available in plans.

If you selected a cloud tier and the service provider deploys new instance types to that tier later, then those instance types will automatically be included in your policy. Be sure to review your policies periodically to see if new instance types have been added to a tier. If you do not want to scale to those instance types, update the affected policies.

Scaling Target Utilization

This is the target utilization as a percentage of capacity.

Attribute	Default Value
VCPU	70
VMEM	90
IOPS	70
Storage Amount	90


These advanced settings determine how much you would like a scope of workloads to utilize their resources. These are fixed settings that override the way Intersight Workload Optimizer calculates the optimal utilization of resources. You should only change these settings after consulting with Technical Support.

While these settings offer a way to modify how Intersight Workload Optimizer recommends actions, in most cases you should never need to use them. If you want to control how Intersight Workload Optimizer recommends actions to resize workloads, you can set the aggressiveness per the percentile of utilization, and set the length of the sample period for more or less elasticity on the cloud.

Volume (Cloud)

A cloud volume is a storage device that you can attach to a VM. You can use an attached volume the same as a physical hard drive.

Synopsis

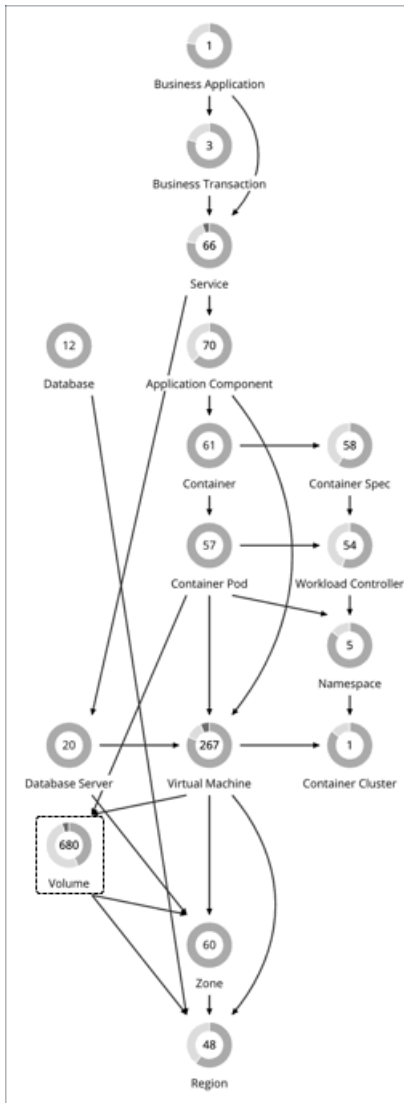

Synopsis	
Budget:	A cloud volume gains its budget by selling resources to the VMs that it serves.
Provides:	Storage resources for VMs to use: <ul style="list-style-type: none"> ■ Storage Access ■ Storage Amount

Synopsis	
	<ul style="list-style-type: none"> IO Throughput
Consumes:	Storage services provided by Zones or Regions
Discovered through:	Cloud targets

Monitored Resources

Intersight Workload Optimizer monitors the following resources for AWS and Azure volumes:

- Storage Access
 - The percentage of the volume's capacity for storage access operations (measured in IOPS) that is in use.
- IO Throughput
 - The percentage of the volume's capacity for IO throughput (measured in MB/s) that is in use.
- IO Throughput Read
 - The percentage of the volume's capacity for IO throughput Read (measured in MB/s) that is in use.
- IO Throughput Write
 - The percentage of the volume's capacity for IO throughput Write (measured in MB/s) that is in use.

Notes:

- Intersight Workload Optimizer discovers Storage Amount (disk size) for AWS/Azure volumes, but does not monitor utilization.
- For a Kubeturbo (container) deployment that includes AWS/Azure volumes, Kubeturbo monitors Storage Amount utilization for the volumes. You can view utilization information in the Capacity and Usage chart.
- Currently, Intersight Workload Optimizer does not monitor resources for GCP volumes. It only monitors their attachment state and then generates delete actions for unattached volumes.

Actions

- Scale**
 - Scale attached volumes to optimize performance and costs.
- Delete**
 - Delete unattached volumes as a cost-saving measure.

Scale Actions

Scale attached AWS/Azure volumes to optimize performance and costs.

NOTE:

Currently, Intersight Workload Optimizer does not generate scale actions for GCP volumes.

Intersight Workload Optimizer can recommend:

- Scaling within the same tier (scale up or down), or from one tier to another
 - Examples:
 - An action to scale down IOPS for a high performance volume, such as Azure Managed Ultra
 - An action to scale a volume from the *io1* to the *gp2* tier

These actions can reduce costs significantly while continuing to assure performance. In addition, they are *non-disruptive* and *reversible*.

NOTE:

For details about action disruptiveness and reversibility, see [Non-disruptive and Reversible Scaling Actions \(on page 174\)](#).

- Scaling from one tier to another and then within the new tier, in a single action
 - For example, to achieve higher IOPS performance for VMs that are premium storage capable, you might see an action to scale the corresponding volume from *Standard* to *Premium*, and then scale up volume capacity from *32GB* to *256 GB*. This action increases costs and is *irreversible*, but is more cost effective than scaling up within the original tier.


NOTE:

Not all VM types are premium storage capable. For details, see the [Azure Documentation](#).

When there are multiple disks attached to a volume, every volume scale action can potentially disrupt the same VM multiple times and some of the actions may fail due to concurrency. To mitigate these issues, Intersight Workload Optimizer identifies all volume actions associated with a particular VM and combines them into a single unit for execution, thus reducing disruptions and the chance of failures due to concurrency. This approach applies to scale actions in *Manual* or *Automated* mode.

You can create policies to control the scaling actions that Intersight Workload Optimizer generates.

- Intersight Workload Optimizer includes a policy setting that lets you choose between two outcomes – better savings (default) and better reversibility. If you choose reversibility, which can increase costs, Intersight Workload Optimizer will prioritize actions to change tiers whenever possible.

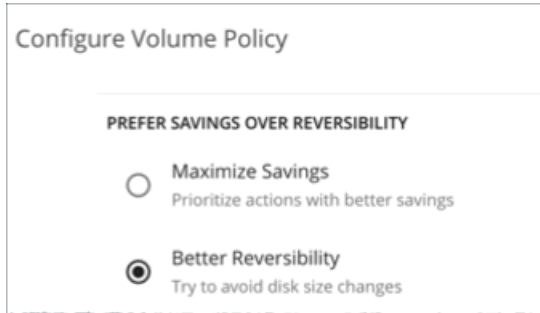

- Set scaling constraints if you want volumes to *only scale to* or *avoid* certain tiers. For details, see [Cloud Storage Tiers \(on page 175\)](#).

Delete Actions

Delete unattached volumes as a cost-saving measure. Intersight Workload Optimizer generates delete actions for AWS, Azure, and GCP volumes.

NOTE:

If you delete an Azure volume and then later deploy a new one with an identical name, charts will include historical data from the volume that you deleted.

Exceptions for Azure Site Recovery and Azure Backup Volumes

Intersight Workload Optimizer discovers Azure Site Recovery and Azure Backup volumes when you add Azure targets. Even though these volumes are always unattached, Intersight Workload Optimizer will never recommend deleting them because they are critical to business continuity and disaster recovery.

To identify Azure Site Recovery volumes, Intersight Workload Optimizer checks an Azure resource called [Recovery Services vault](#), which includes information specific to the volumes. It also checks for the `ASR-ReplicaDisk` tag, which Azure automatically assigns to the volumes.

For Azure Backup volumes, Intersight Workload Optimizer checks for the `RSVaultBackup` tag.

It is important that you do not remove these tags. If these tags have been removed for some reason, create a volume policy for the affected volumes and disable the *Delete* action in that policy.

Action Execution for Locked Volumes


For Azure environments, Intersight Workload Optimizer can recommend scale and delete actions for [locked volumes](#), but the lock level configured for the volumes may prevent some actions from executing.

- For volumes with the `ReadOnly` lock, both scale and delete actions are *not* executable.
- For volumes with the `CanNotDelete` lock, delete actions are *not* executable, but scale actions are executable.

You must sign in to Azure and then remove the locks for the affected volumes before you can execute actions. To identify the specific locks that you need to remove, open the Action Details page for a pending volume action and see the **Execution Prerequisites** section.

Volume Actions in Charts

Use the Necessary Investments and Potential Savings charts to view pending volume actions. These charts show total monthly investments and savings, assuming you execute all the actions.

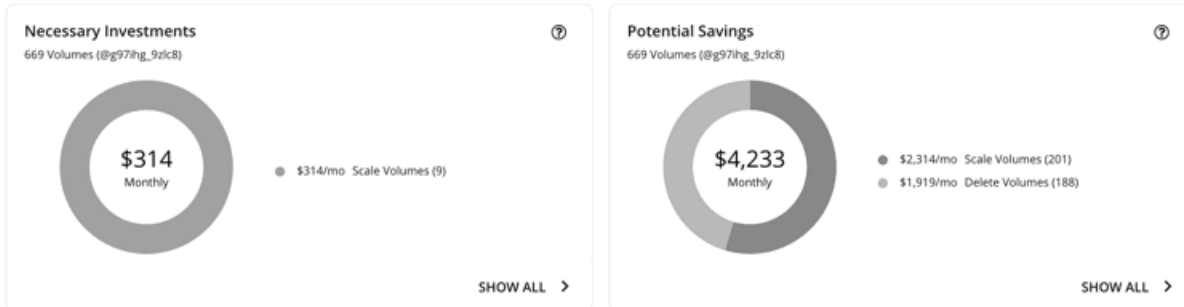

Click **Show All** for each chart to review and execute the actions.

The table shows the following:

- Actions that are pending for each volume
- Savings or investments for each volume
- For *Delete* actions in the Potential Savings chart:

Potential Savings										
DELETE ^										
AWS AZURE										
Volumes (191)										
Delete Actions 189 Savings \$2,033/mo										
EXECUTE ACTIONS										
SCALE ^										
Volumes (157)										
Volume ID	Subscription	Tier Type	Size	State	Days Unattached	Image Disk	Action Category	Savings	Action	
<input type="checkbox"/>	aks-agentpool-3	Pay-As-You-Go - Prod	Managed Premium	30 GiB	Unattached	4	/Subscripti...	SAVINGS	↓ \$5.28/mo	DETAILS
<input type="checkbox"/>	aks-agentpool-4	Pay-As-You-Go - Prod	Managed Premium	30 GiB	Unattached	4	/Subscripti...	SAVINGS	↓ \$5.28/mo	DETAILS
<input type="checkbox"/>	aks-agentpool-8	Pay-As-You-Go - Prod	Managed Premium	30 GiB	Unattached	4	/Subscripti...	SAVINGS	↓ \$5.28/mo	DETAILS
<input type="checkbox"/>	aks-agentpool-7	Pay-As-You-Go - Prod	Managed Premium	30 GiB	Unattached	4	/Subscripti...	SAVINGS	↓ \$5.28/mo	DETAILS

- Number of days a volume has been unattached
- This information helps you decide whether to take the action.

Intersight Workload Optimizer polls your cloud volumes every 6 hours, and then records their state (attached or unattached) at the time of polling. It does not account for changes in state between polls.

For newly unattached volumes, Intersight Workload Optimizer shows a dash symbol (-) if a volume has been unattached within the last 6 hours. A value of 0 (zero) means that a volume has been unattached within the last 24 hours.

Once Intersight Workload Optimizer discovers an unattached volume, it immediately recommends that you delete it. If a currently unattached volume is not deleted and is subsequently discovered as attached, Intersight Workload Optimizer removes the *Delete* action attached to it, and then resets the unattached period.

NOTE:

For volumes that have been deleted from the cloud provider and are no longer discoverable, Intersight Workload Optimizer removes them from its records after 15 days.

To see the last known VM attached to the volume, click **DETAILS**.


- For *Scale* actions in the Potential Savings or Necessary Investments chart:

Potential Savings															
SCALE		Scale Actions 201 Savings \$2,314/mo											EXECUTE ACTIONS		
Volumes (201)															
DELETE															
Volumes (188)															
<input type="checkbox"/>	Volume Name	Account	Non-Disruptive	Reversible	Tier	Disk Size	IOPS	Cost	New Tier	Disk Size	New IOPS	New Cost	Action Category	Savings	Action
<input type="checkbox"/>	snap_1rml_dotn	Dev	✗	✓	Managed ...	1 TB	5000	\$148/mo	Managed ...	1 TB	500	\$41/mo	SAVINGS	↓ \$108/mo	DETAILS
<input type="checkbox"/>	PTEricDisks2_Di	Prod	✓	✓	Managed ...	256 GB	1500	\$284/mo	Managed ...	256 GB	2143	\$180/mo	PERFORMANCE	↓ \$104/mo	DETAILS
<input type="checkbox"/>	SQLServerDyna'	Dev	✗	✓	Managed ...	1 TB	5000	\$135/mo	Managed ...	1 TB	500	\$41/mo	SAVINGS	↓ \$94/mo	DETAILS
<input type="checkbox"/>	SQLServerDyna'	Dev	✗	✓	Managed ...	1 TB	5000	\$135/mo	Managed ...	1 TB	500	\$41/mo	SAVINGS	↓ \$94/mo	DETAILS
<input type="checkbox"/>	SQLServerTestV	Dev	✗	✓	Managed ...	1 TB	5000	\$135/mo	Managed ...	1 TB	500	\$41/mo	SAVINGS	↓ \$94/mo	DETAILS
<input type="checkbox"/>	SQLServerTestV	Dev	✗	✓	Managed ...	1 TB	5000	\$135/mo	Managed ...	1 TB	500	\$41/mo	SAVINGS	↓ \$94/mo	DETAILS

- Whether actions are non-disruptive or reversible
- Changes the actions will effect (for example, changes in tiers and/or resource allocations)

When you click the **DETAILS** button for a scaling action, you will see utilization charts that help explain the reason for the action.

Utilization Charts for Volume Scaling Actions

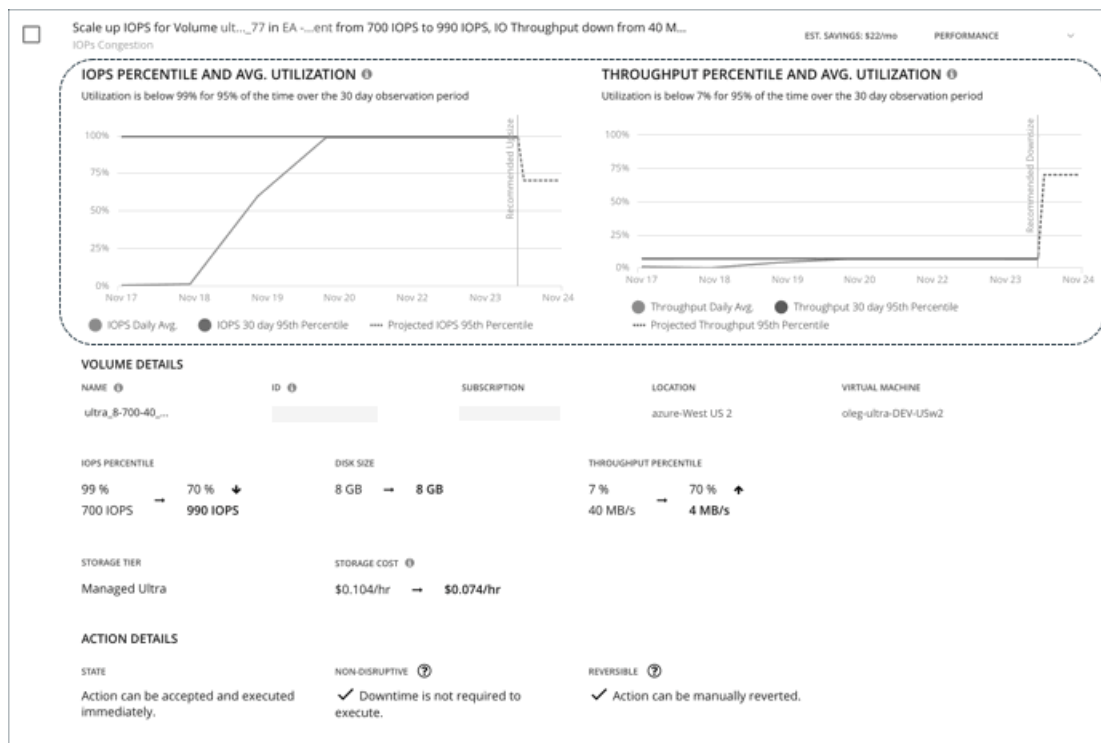

Intersight Workload Optimizer uses percentile calculations to measure IOPS and throughput more accurately, and drive scaling actions that improve overall utilization and reduce costs. When you examine the details for a pending scaling action on a volume, you will see charts that highlight resource *utilization percentiles* for a given observation period, and the projected percentiles after you execute the action.


The charts also plot *daily average utilization* for your reference. If you have previously executed scaling actions on the volume, you can see the resulting improvements in daily average utilization. Put together, these charts allow you to easily recognize utilization trends that drive Intersight Workload Optimizer's scaling recommendations.

NOTE:

You can set scaling sensitivity in volume policies to refine the percentile calculations. For details, see [Scaling Sensitivity \(on page 175\)](#).

Non-disruptive and Reversible Scaling Actions

Intersight Workload Optimizer indicates whether a pending action is non-disruptive or reversible.

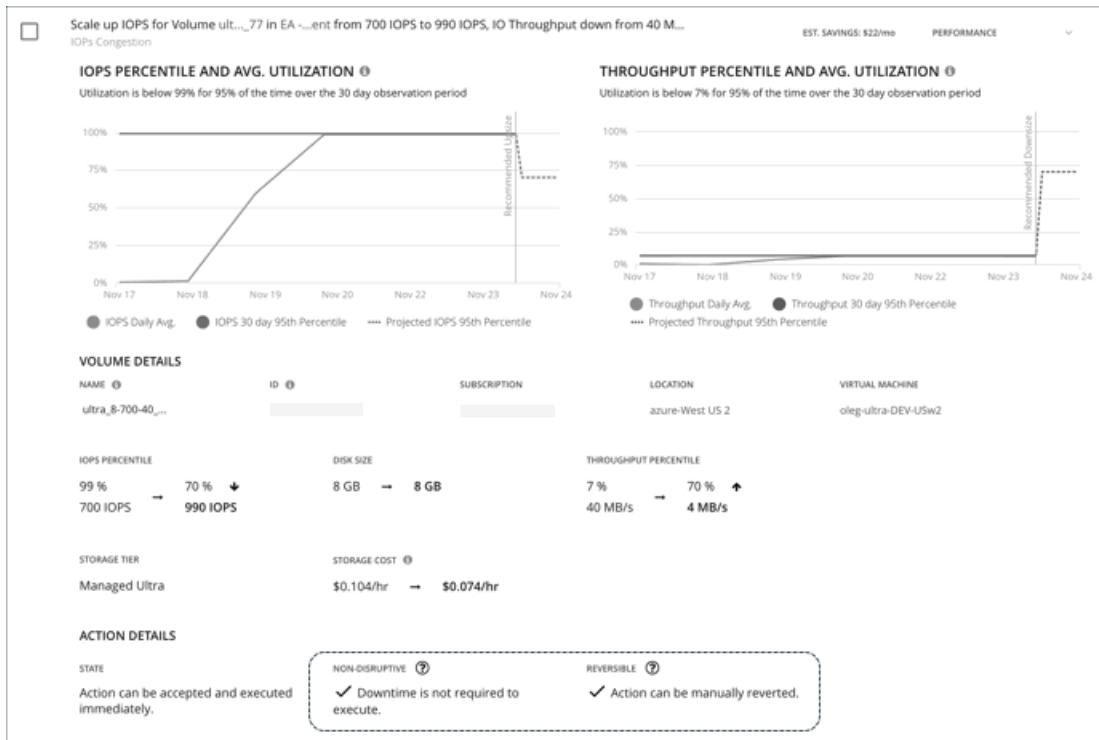

■ Non-disruptive


Executing storage scaling actions can sometimes be disruptive if the VM must be rebooted to execute a storage change. For example, Azure Standard and Premium scaling actions are *disruptive*. When a storage action is disruptive, expect a single reboot (usually 2-3 minutes of downtime).

The following scaling actions are *non-disruptive*:

- Scaling IOPS and throughput on Azure Ultra storage
- All scaling actions on AWS storage

■ Reversible

Executing storage scaling actions can sometimes be irreversible if the volume must grow in size to subsequently increase IOPS or throughput capacity. In this case, shrinking that volume's size later would not be possible. If you prefer reversible volume actions, create a volume policy and choose **Better Reversibility**.

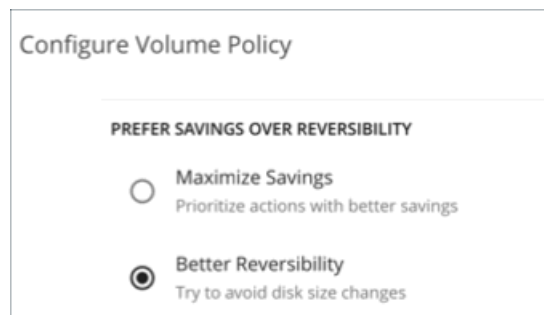

Cloud Volume Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of

your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

For details about cloud volume actions, see [Cloud Volume Actions \(on page 170\)](#).

Action	Default Mode
Scale	Manual
Delete	Manual

Prefer Savings Over Reversibility

Executing storage scaling actions can sometimes be irreversible if the volume must grow in size to subsequently increase IOPS or throughput capacity. In this case, shrinking that volume's size later would not be possible. If you prefer reversible volume actions, create a volume policy and choose **Better Reversibility**.

Scaling Sensitivity

Intersight Workload Optimizer uses a percentile of utilization over the specified observation period. This gives sustained utilization and ignores short-lived bursts.

Scaling Target IOPS/Throughput Utilization

This is the target utilization as a percentage of capacity.

Attribute	Default Value
Scaling Target IOPS/Throughput Utilization	70

Cloud Storage Tiers

By default, Intersight Workload Optimizer considers all storage tiers currently available for scaling when making scaling decisions for volumes. However, you may have set up your cloud volumes to *only scale to* or *avoid* certain tiers to reduce complexity and cost, or meet demand. Use this setting to identify the tiers that volumes can scale to.

Attribute	Default Value
Cloud Storage Tiers	None

Click **Edit** to set your preferences. In the new page that displays, select your preferred cloud tiers or clear the ones that you want to avoid. After you save your changes, the main page refreshes to reflect your selections.

Database (Cloud)

Intersight Workload Optimizer discovers SQL Databases through your Azure targets. In particular, it discovers the resources on *individual databases* that are managed under both the DTU (Database Transaction Unit) and vCore pricing models.

- DTU Pricing Model

In the DTU model, Azure bundles CPU, memory, and IOPS as a single DTU metric. Intersight Workload Optimizer actions on these databases consider both DTU and storage utilization.

- vCore Pricing Model


In the vCore model, analysis can track CPU, memory, IOPS, and throughput metrics in isolation. Intersight Workload Optimizer actions on these databases are driven by CPU, memory, IOPS, throughput and storage utilization.

NOTE:

For more information about the DTU and vCore models, see the [Azure documentation](#).

AWS RDS databases appear as *Database Server* entities in the supply chain. For details, see [Database Server \(Cloud\) \(on page 158\)](#).

Synopsis

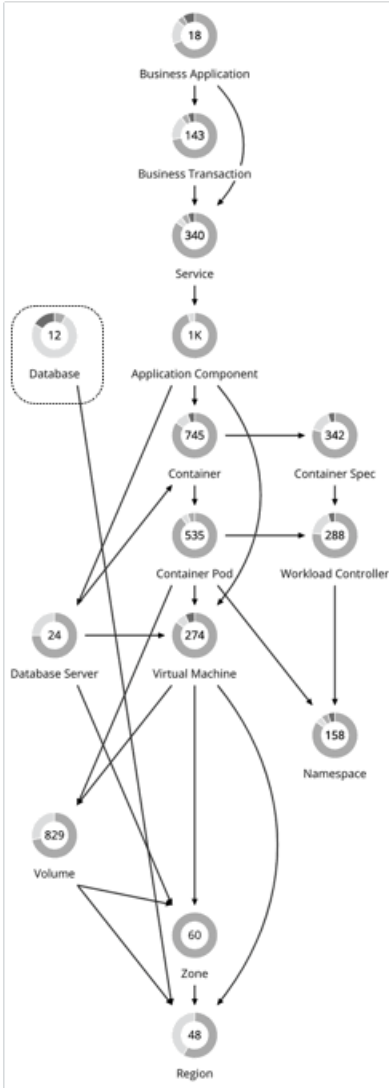

Synopsis	
Budget:	A database has unlimited budget.
Provides:	Transactions to end users
Consumes:	<ul style="list-style-type: none"> ■ DTU Pricing Model: DTU and storage resources in an Azure region ■ vCore Pricing Model: vCPU, vMem, IOPS, throughput, and storage resources in an Azure region
Discovered through:	Azure targets

Actions analysis also considers levels of concurrent workers and concurrent sessions, to constrain instance type selection. In all cases, Intersight Workload Optimizer database scaling actions aim to increase resource utilization and reduce costs while complying with business policies.

Monitored Resources

The resources that Intersight Workload Optimizer can monitor depend on the pricing model in place for the given database entity.

- DTU Pricing Model
 - DTU
 - DTU capacity for the database. DTU represents CPU, memory, and IOPS/IO Throughput bundled as a single commodity.
 - Storage
 - Storage capacity for the database.
- vCore Pricing Model
 - Virtual Memory (VMem)
 - The utilization of VMem allocated to the Database instance
 - Virtual CPU (VCPU)
 - The utilization of VCPU allocated to the Database instance
 - Storage Access (IOPS)
 - The rate of input and output operations per second utilized by the Database instance
 - Throughput
 - The throughput utilization of transaction log write IO available to the Database instance
 - Storage
 - Storage capacity for the database.

Intersight Workload Optimizer drives scaling actions based on the utilization of these resources, and treats the following limits as constraints when it makes scaling decisions:

- Maximum concurrent sessions
 - Maximum number of database connections at a time.
- Maximum concurrent workers
 - Maximum number of database processes that can handle queries at a time.

Actions

Scale

- DTU Model
 - Scale DTU and storage resources to optimize performance and costs.
- vCore Model
 - Scale vCPU, vMem, IOPS, throughput and storage resources to optimize performance and costs.


Points to consider:

- Intersight Workload Optimizer will *not* recommend:
 - Scaling from one pricing model to another
 - Scaling vCore databases to instance types running Gen4 hardware. This hardware generation is nearing end-of-life and pricing information can no longer be retrieved via the Azure API.
 - Scaling vCore databases on the [serverless compute tier](#)
 - Scaling provisioned memory for vCore databases on the Hyperscale service tier. VMem utilization data is currently unavailable for Hyperscale due to an issue in the Azure API.
- On DTU databases, a single action can scale both DTU and storage. On vCore databases, a single action can scale vCPU, vMem, IOPS, throughput, and storage.

- In some cases, Intersight Workload Optimizer might recommend scaling up storage, even if there is no storage pressure on the database, to take advantage of storage provided at no extra cost. For example, Intersight Workload Optimizer might recommend scaling from the S3 to the S0 tier because of low DTU and storage utilization. Since the S0 tier includes 250 GB of storage at no extra cost, Intersight Workload Optimizer will also recommend scaling up to this storage amount. If you want to scale DTU but keep the storage amount unchanged, adjust the values for aggressiveness (percentile) and observation period in your database policies.

Actions in Charts

Use the Necessary Investments and Potential Savings charts to view pending database actions. These charts show total monthly investments and savings, assuming you execute all the actions.

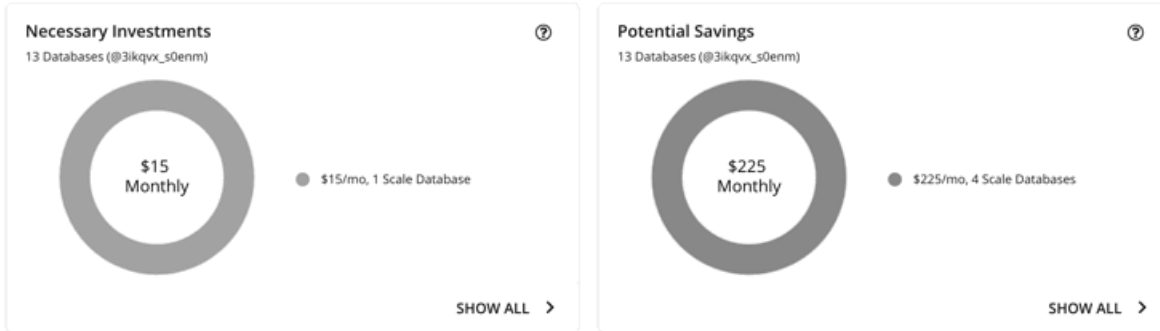


Click **Show All** for each chart to review and execute the actions.

The table shows the following:

- Actions that are pending for each database
- Savings or investments for each database

Utilization Charts for Scale Actions

Intersight Workload Optimizer uses percentile calculations to measure resource utilization, and drive scaling actions that improve overall utilization and reduce costs. When you examine the details for a pending scaling action on a database, you will see charts that highlight resource *utilization percentiles* for a given observation period, and the projected percentiles after you execute the action.

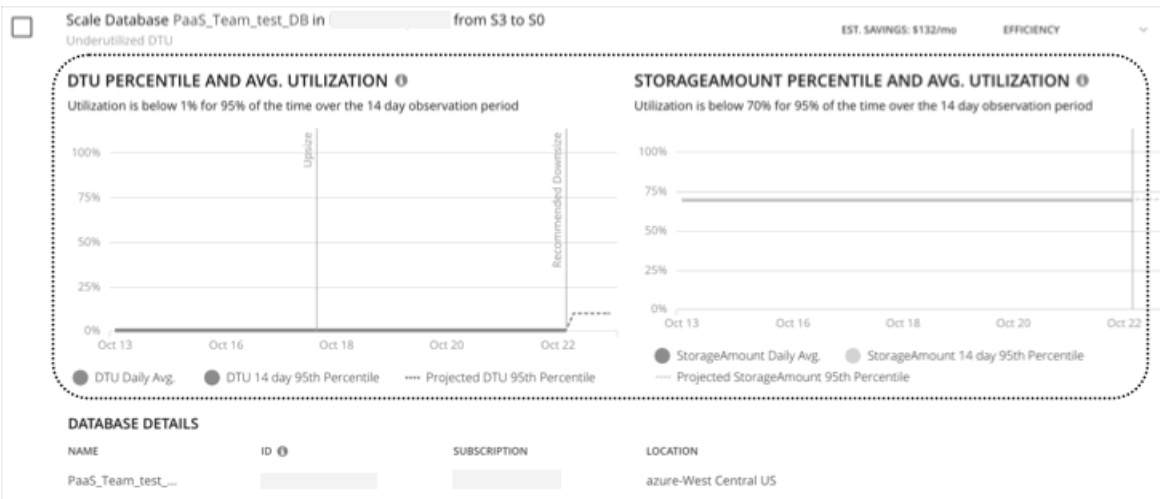

The charts also plot *daily average utilization* for your reference. If you have previously executed scaling actions on the database, you can see the resulting improvements in daily average utilization. Put together, these charts allow you to easily recognize utilization trends that drive Intersight Workload Optimizer's scaling recommendations.

NOTE:

You can set scaling constraints in database policies to refine the percentile calculations. For details, see [Aggressiveness and Observation Period \(on page 182\)](#).

Non-disruptive and Reversible Scaling Actions

All scaling actions shown in the Action Center view and Action Details page are non-disruptive and reversible.

For actions to scale vCore databases from General Purpose or Business Critical to Hyperscale, there are certain caveats associated with reversing such actions. To learn more, see the [Azure documentation](#).

Estimated On-demand Costs for Cloud Databases

Intersight Workload Optimizer considers a variety of factors when calculating *Estimated On-demand Monthly Cost* for an Azure SQL Database.

RESOURCE IMPACT		
	CURRENT	AFTER ACTIONS
Cloud Tier	S3	50
DTU, Capacity	100	10
DTU, P95th Utilization	1%	10%
Storage Amount, Capacity	300 GB	250 GB
Storage Amount, P95th Utilization	1%	1.2%

COST IMPACT		
	CURRENT	AFTER ACTIONS
Compute Cost	\$146.91/mo	\$14.69/mo
Storage Cost	\$11.05/mo	\$0.00/mo
Total Cost	\$157.96/mo	\$14.69/mo
Total Savings		\$143.27/mo

Azure SQL DTU Databases

Cost Calculation

For Azure SQL DTU Databases, the calculation for Estimated On-demand Monthly Cost can be expressed as follows:

$$(\text{On-demand Compute Rate} * 730) + (\text{Provisioned Database Storage Rate} * (\text{Provisioned Database Storage Amount} - \text{Performance Level Included Storage})) = \text{Estimated On-demand Monthly Cost}$$

Where:

- On-demand Compute Rate** is the **hourly** cost for a Database's instance type
 You can obtain on-demand rates via [Azure SQL Database Pricing](#).
- 730** represents the number of hours per month that Intersight Workload Optimizer uses to estimate monthly costs.
- Provisioned Database Storage Rate** is the cost for 1 GB / mo. of a Database's provisioned storage
 You can obtain provisioned database storage rates via [Azure SQL Database Pricing](#).
- Performance Level Included Storage** is the storage amount included in the price of the selected Performance Level of a DTU Database
 You can obtain information on DTU storage limits via [DTU Storage Limits](#).

The listed items above impact cost calculations and the scaling decisions that Intersight Workload Optimizer makes. These decisions also rely on other factors, such as resource utilization percentiles and scaling constraints set in policies.

Example

Assume the following data for a pending scale action for an Azure SQL DTU Database:

	Current Values	Values After Action Execution
On-demand Compute Rate	\$0.20125/hr	\$0.020125/hr
Provisioned Database Storage Rate	\$0.221 per 1 GB/Mo.	\$0.221 per 1 GB/Mo.
Performance Level Included Storage	250 GB	250 GB
Provisioned Database Storage Amount	300 GB	250 GB

Intersight Workload Optimizer calculates the following:

- *Current* Estimated On-demand Monthly Cost:

$$(\$0.20125 * 730) + (\$0.221 * (300 - 250)) = \$157.96/\text{Mo.}$$
- Estimated On-demand Monthly Cost *after* executing the action:

$$(\$0.020125 * 730) + (\$0.221 * (250 - 250)) = \$14.69/\text{Mo.}$$

NOTE:

Intersight Workload Optimizer rounds the calculated values that it displays in the user interface.

The Estimated On-demand Monthly Cost is projected to decrease from \$157.96/month to \$14.69/month, as shown in the Details section of the pending action.

COST IMPACT ?	CURRENT	AFTER ACTIONS
Compute Cost ⓘ	\$146.91/mo	\$14.69/mo
Storage Cost ⓘ	\$11.05/mo	\$0.00/mo
Total Cost	\$157.96/mo	\$14.69/mo
Total Savings		\$143.27/mo

Intersight Workload Optimizer treats the action as a saving, and shows an estimated savings of \$143.27/month.

COST IMPACT ?	CURRENT	AFTER ACTIONS
Compute Cost ⓘ	\$146.91/mo	\$14.69/mo
Storage Cost ⓘ	\$11.05/mo	\$0.00/mo
Total Cost	\$157.96/mo	\$14.69/mo
Total Savings		\$143.27/mo

Azure SQL vCore Databases

Cost Calculation

For Azure SQL vCore Databases, the calculation for Estimated On-demand Monthly Cost can be expressed as follows:

$$(\text{On-demand Compute Rate} * 730) + (\text{SQL License Rate} * 730) + (\text{Provisioned Database Storage Rate} * (\text{Provisioned Database Storage Amount} + \text{Log Space Allocated})) = \text{Estimated On-demand Monthly Cost}$$

Where:

- **On-demand Compute Rate** is the hourly cost for a Database's instance type
You can obtain on-demand rates via [Azure SQL Database Pricing](#).
- **730** represents the number of hours per month that Intersight Workload Optimizer uses to estimate monthly costs.
- **SQL License Rate** is the hourly cost for a Database's SQL license
You can obtain SQL license rates via [Azure SQL Database Pricing](#).
Note: "Pay as you go" prices in the link above represent the sum of compute and license costs, while "Azure Hybrid Benefit Price" values represent compute costs only.
- **Provisioned Database Storage Rate** is the cost for 1 GB / mo. of a Database's provisioned storage
You can obtain provisioned database storage rates via [Azure SQL Database Pricing](#).
- **Log Space Allocated** is the log storage space automatically allocated to single Database instance by Azure.
Note: Log storage space is considered in database cost calculations, but not reflected in Storage capacity.
You can obtain provisioned database storage rates via [Azure SQL Database Pricing](#).

The listed items above impact cost calculations and the scaling decisions that Intersight Workload Optimizer makes. These decisions also rely on other factors, such as resource utilization percentiles and scaling constraints set in policies.

Example

Assume the following data for a pending scale action for an Azure SQL vCore Database:

	Current Values	Values After Action Execution
On-demand Compute Rate	\$1.068/hr	\$0.304/hr
SQL License Rate	\$0.799728/hr	\$0.199932/hr
Provisioned Database Storage Rate	\$0.115/hr	\$0.115/hr
Provisioned Database Storage Amount	32 GB	5 GB

Intersight Workload Optimizer calculates the following:

- **Current Estimated On-demand Monthly Cost:**
 $(\$1.068 * 730) + (\$0.799728 * 730) + (\$0.115 * (32 + 9.6)) = \$1368.23/\text{Mo.}$
- **Estimated On-demand Monthly Cost *after* executing the action:**
 $(\$0.304 * 730) + (\$0.199932 * 730) + (\$0.115 * (5 + 1.5)) = \$368.62/\text{Mo.}$

NOTE:

Intersight Workload Optimizer rounds the calculated values that it displays in the user interface.

Since the Estimated On-demand Monthly Cost is projected to decrease from \$1368.23/month to \$368.62/month, Intersight Workload Optimizer treats the action as a cost-saving measure and shows estimated savings of \$999.61/month.

Cloud Database Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

For details about cloud database actions, see [Cloud Database Actions \(on page 177\)](#).

Action	Default Mode
Cloud DB Scale	Manual

Scaling Sensitivity

Intersight Workload Optimizer uses a percentile of utilization over the specified observation period. This gives sustained utilization and ignores short-lived bursts.

Intersight Workload Optimizer uses these settings to calculate utilization percentiles for DTU and storage. It then recommends actions to improve utilization based on the observed values for a given time period.

■ Aggressiveness

Attribute	Default Value
Aggressiveness	95th Percentile

When evaluating performance, Intersight Workload Optimizer considers resource utilization as a percentage of capacity. The utilization drives actions to scale the available capacity either up or down. To measure utilization, the analysis considers a given utilization percentile. For example, assume a 95th percentile. The percentile utilization is the highest value that 95% of the observed samples fall below. Compare that to average utilization, which is the average of *all* the observed samples.

Using a percentile, Intersight Workload Optimizer can recommend more relevant actions. This is important in the cloud, so that analysis can better exploit the elasticity of the cloud. For scheduled policies, the more relevant actions will tend to remain viable when their execution is put off to a later time.

For example, consider decisions to reduce capacity. Without using a percentile, Intersight Workload Optimizer never resizes below the recognized peak utilization. Assume utilization peaked at 100% just once. Without the benefit of a percentile, Intersight Workload Optimizer will not reduce resources for that database.

With **Aggressiveness**, instead of using the single highest utilization value, Intersight Workload Optimizer uses the percentile you set. For the above example, assume a single burst to 100%, but for 95% of the samples, utilization never exceeded 50%. If you set **Aggressiveness** to 95th Percentile, then Intersight Workload Optimizer can see this as an opportunity to reduce resource allocation.

In summary, a percentile evaluates the sustained resource utilization, and ignores bursts that occurred for a small portion of the samples. You can think of this as aggressiveness of resizing, as follows:

- 99th Percentile – More performance. Recommended for critical databases that need maximum guaranteed performance at all times, or those that need to tolerate sudden and previously unseen spikes in utilization, even though sustained utilization is low.
- 95th Percentile (Default) – The recommended setting to achieve maximum performance and savings. This assures performance while avoiding reactive peak sizing due to transient spikes, thus allowing you to take advantage of the elastic ability of the cloud.
- 90th Percentile – More efficiency. Recommended for databases that can stand higher resource utilization.

By default, Intersight Workload Optimizer uses samples from the last 14 days. Use the **Max Observation Period** setting to adjust the number of days.

■ Max Observation Period

Attribute	Default Value
Max Observation Period	Last 14 Days

To refine the calculation of resource utilization percentiles, you can set the sample time to consider. Intersight Workload Optimizer uses historical data from up to the number of days that you specify as a sample period. If the database has fewer days' data then it uses all of the stored historical data.

You can make the following settings:

- Less Elastic – Last 30 Days
- Recommended – Last 14 Days
- More Elastic – Last 7 Days or Last 3 Days

Intersight Workload Optimizer recommends an observation period of 14 days so it can recommend scaling actions more often. Since Azure SQL DB scaling is minimally disruptive, with near-zero downtime, scaling often should not introduce any noticeable performance risks.

NOTE:

For more information about Azure scaling downtimes, see the [Azure documentation](#).

■ **Min Observation Period**

Attribute	Default Value
Min Observation Period	None

This setting ensures historical data for a minimum number of days before Intersight Workload Optimizer will generate an action based on the percentile set in **Aggressiveness**. This ensures a minimum set of data points before it generates the action.

Especially for scheduled actions, it is important that resize calculations use enough historical data to generate actions that will remain viable even during a scheduled maintenance window. A maintenance window is usually set for "down" time, when utilization is low. If analysis uses enough historical data for an action, then the action is more likely to remain viable during the maintenance window.

- More Elastic - None
- Less Elastic - 7 Days

Cloud Instance Types

By default, Intersight Workload Optimizer considers all instance types currently available for scaling when making scaling decisions for databases. However, you may have set up your cloud databases to *only scale to* or *avoid* certain instance types to reduce complexity and cost, or meet demand. Use this setting to identify the instance types that databases can scale to.

Attribute	Default Value
Cloud Instance Types	None

Click **Edit** to set your preferences. In the new page that displays, expand a **cloud tier** (a family of instance types, such as *Premium*) to see individual instance types and the resources allocated to them.

Select your preferred instance types or cloud tiers, or clear the ones that you want to avoid. After you save your changes, the main page refreshes to reflect your selections.

NOTE:

This policy setting is not available in plans.

If you selected a cloud tier and the service provider deploys new instance types to that tier later, then those instance types will automatically be included in your policy. Be sure to review your policies periodically to see if new instance types have been added to a tier. If you do not want to scale to those instance types, update the affected policies.

Scaling Target Utilization

The utilization that you set here specifies the percentage of the existing capacity that Intersight Workload Optimizer will consider to be 100% of capacity.

The settings you make depend on the pricing model in place for the workloads in the policy scope. To meet a target DTU utilization, the workloads must be members of a DTU pricing model. To meet individual VCPU, VMEM, or IOPs/Throughput targets, the workloads must be members of a vCore pricing model.

Attribute	DTU Pricing: Default Value	vCore Pricing: Default Value
Scaling Target DTU Utilization	70	N/A
VCPU	N/A	70
VMEM	N/A	90

Attribute	DTU Pricing: Default Value	vCore Pricing: Default Value
IOPs/Throughput	N/A	70
Storage Amount Utilization	90	90


These advanced settings determine how much you would like a scope of workloads to utilize their resources. These are fixed settings that override the way Intersight Workload Optimizer calculates the optimal utilization of resources. You should only change these settings after consulting with Technical Support.

While these settings offer a way to modify how Intersight Workload Optimizer recommends actions, in most cases you should never need to use them. If you want to control how Intersight Workload Optimizer recommends actions to resize workloads, you can set the aggressiveness per the percentile of utilization, and set the length of the sample period for more or less elasticity on the cloud.

Zone

A Zone represents an Availability Zone in your public cloud account or subscription. A zone is a location within a given region that serves as a datacenter to host the workloads that you run in your environment.

Synopsis

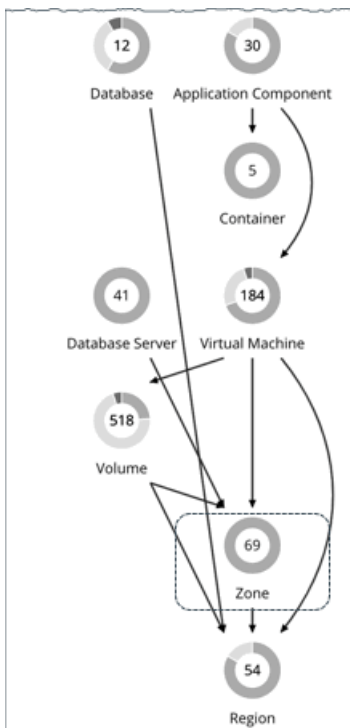

Synopsis	
Budget:	Intersight Workload Optimizer assumes a Zone has infinite resources.
Provides:	Compute and storage resources to VMs.
Consumes:	Region resources.
Discovered through:	Intersight Workload Optimizer discovers Zones through public cloud targets.

Monitored Resources

For public cloud environments, Intersight Workload Optimizer discovers the resources that an availability zone provides, including:

- **Templates**
The templates and template families that each zone or region delivers. This includes template capacity and cost for workload resources.
- **Account Services**
These include storage modes, services the accounts offer for enhanced metrics, and services for different storage capabilities.
- **Relational Database Services (RDS)**
The RDS capabilities each cloud account provides.
- **Storage Tiers**
Intersight Workload Optimizer discovers the storage tier that supports your workloads, and uses the tier pricing to calculate storage cost.
- **Billing**
Intersight Workload Optimizer discovers the billing across the zones and regions to predict costs in the future, and to track ongoing costs. This includes comparing on-demand pricing to discount billing.

Intersight Workload Optimizer monitors the following resources for a Zone:

- **Virtual Memory**
The percentage utilized of memory capacity for all the workloads in the zone.
- **Virtual CPU**
The percentage utilized of VCPU capacity for all the workloads in the zone.
- **Storage Access**
For environments that measure storage access, the percentage utilized of access capacity for the zone.
- **Storage Amount**
The percentage utilized of storage capacity for the zone.
- **IO Throughput**
For environments that measure IO throughput, the percentage utilized of throughput capacity for the zone.
- **IO Throughput Read**
For environments that measure IO throughput read, the percentage utilized of throughput capacity for the zone.
- **IO Throughput Write**
For environments that measure IO throughput write, the percentage utilized of throughput capacity for the zone.
- **Net Throughput**
For environments that measure Net throughput, the percentage utilized of throughput capacity for the zone.
- **Net Throughput Inbound**
For environments that measure Net throughput Inbound, the percentage utilized of throughput inbound capacity for the zone.
- **Net Throughput Outbound**
For environments that measure Net throughput Outbound, the percentage utilized of throughput outbound capacity for the zone.

Actions


None

Intersight Workload Optimizer does not recommend actions for a cloud zone.

Region

A Region represents a geographical area that is home to one or more Availability Zones. Regions are often isolated from each other, and you can incur a cost for data transfer between them.

Synopsis

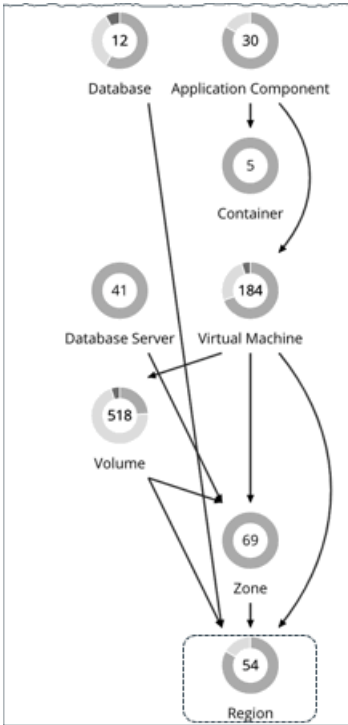

Synopsis	
Budget:	Intersight Workload Optimizer assumes a Region has infinite resources.
Provides:	Hosting and storage resources to Zones.
Consumes:	NA
Discovered through:	Cloud service accounts, such as accounts on Amazon AWS, or subscriptions on Microsoft Azure.

Monitored Resources

Intersight Workload Optimizer does not monitor resources directly from the region, but it does monitor the following resources, aggregated for the Zones in a region:

- Virtual Memory
The percentage utilized of memory capacity for workloads in the zones.
- Virtual CPU
The percentage utilized of VCPU capacity for workloads in the zones.
- Storage Access
For environments that measure storage access, the percentage utilized of access capacity for the zones.
- Storage Amount
The percentage utilized of storage capacity for the zones.
- IO Throughput

- For environments that measure IO throughput, the percentage utilized of throughput capacity for the zones.
- IO Throughput Read
 - For environments that measure IO throughput read, the percentage utilized of throughput capacity for the zones.
- IO Throughput Write
 - For environments that measure IO throughput write, the percentage utilized of throughput capacity for the zones.
- Net Throughput
 - For environments that measure Net throughput, the percentage utilized of throughput capacity for the zones.
- Net Throughput Inbound
 - For environments that measure Net throughput Inbound, the percentage utilized of throughput inbound capacity for the zones.
- Net Throughput Outbound
 - For environments that measure Net throughput Outbound, the percentage utilized of throughput outbound capacity for the zones.


Actions

None

Intersight Workload Optimizer does not recommend actions for a cloud region.

Entity Types - On-prem Infrastructure

Intersight Workload Optimizer discovers and monitors the entities that make up your on-prem infrastructure, and recommends actions to assure performance for the applications that consume resources from these entities.

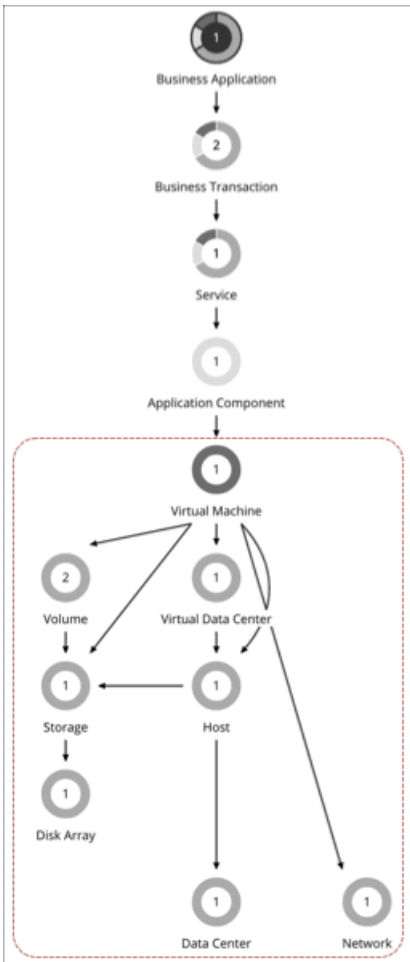


Virtual Machine (On-prem)

A virtual machine (VM) is a software emulation of a physical machine, including OS, virtual memory and CPUs, and network ports. VMs host applications, or they provide resources to container platforms.

NOTE:

Kubernetes nodes are represented as Virtual Machines in the Intersight Workload Optimizer supply chain. For details about nodes, see [Virtual Machine \(Kubernetes Node\) \(on page 121\)](#).

Synopsis

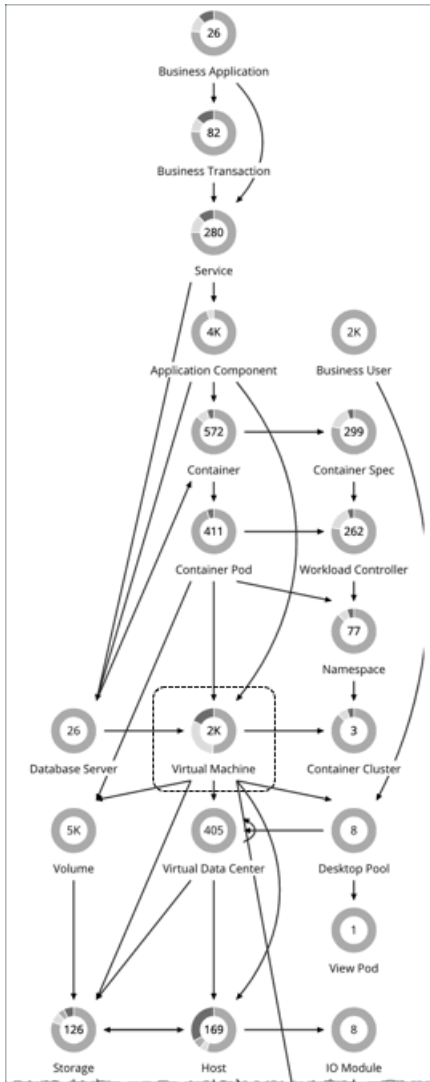

Synopsis	
Budget:	<p>A VM gains its budget by selling resources to the applications it hosts. If utilization is high enough, Intersight Workload Optimizer can allocate more resources to the VM, provision another instance, or move the VM to a host that has more resources.</p> <p>If utilization falls off, the VM loses budget. On the public cloud, if the budget isn't enough to pay for the host services, Intersight Workload Optimizer can post an action to suspend the VM.</p>
Provides:	<p>Resources for hosted applications to use:</p> <ul style="list-style-type: none"> VMEM

Synopsis	
	<ul style="list-style-type: none"> ■ VCPU ■ VStorage ■ IOPS (storage access operations per second) ■ Latency (capacity for disk latency in ms) ■ Memory and CPU Requests (for Kubernetes environments)
Consumes:	<ul style="list-style-type: none"> ■ Physical host resources, including CPU and Mem ■ Storage
Discovered through:	Hypervisor targets

Monitored Resources

Intersight Workload Optimizer monitors the following resources for a VM:

- Virtual Memory (VMem)
 - The utilization of the VMem allocated to the hosting VM
- Virtual CPU (VCPU)
 - The utilization of the VCPU allocated to the hosting VM
- Virtual Storage (VStorage)
 - The utilization of the virtual storage capacity allocated for the VM
- Storage Access Operations Per Second (IOPS)
 - The utilization of IOPS allocated for the VStorage on the VM
- Latency
 - The utilization of latency allocated for the VStorage on the VM
 - Measured in milliseconds (ms)

Actions

- **Resize**
 - Resize resource capacity

Change the capacity of a resource that is allocated for the VM. For example, a resize action might recommend increasing the VMem available to a VM. Before recommending this action, Intersight Workload Optimizer verifies that the VM's cluster can adequately support the new size. If the cluster is highly utilized, Intersight Workload Optimizer will recommend a move action, taking into consideration the capacity of the new cluster and compliance with existing placement policies.

For hypervisor targets, Intersight Workload Optimizer can resize vCPU by changing the VM's socket or cores per socket count. For details, see [VCPU Scaling Controls \(on page 198\)](#).
 - Resize resource reservation

Change the amount of a resource that is reserved for a VM. For example, a VM could have an excess amount of memory reserved. That can cause memory congestion on the host – A resize action might recommend reducing the amount reserved, freeing up that resource and reducing congestion
 - Resize resource limit

Change the limit that is set on the VM for a resource. For example, a VM could have a memory limit set on it. If the VM is experiencing memory shortage, an action that decreases or removes the limit could improve performance on that VM.
- **Move**

Move a VM due to:

 - High resource utilization on VM or host
 - Excess IOPS or latency in VStorage
 - Workload placement violation

- Underutilized host (move VM before suspending host)
- **Move VM Storage (Volume)**
Move a VM's volume due to excess utilization of the current datastore, or for more efficient utilization of datastores in the environment.
- **Reconfigure**
Change a VM's configuration to comply with a policy.
For hypervisor targets, Intersight Workload Optimizer can reconfigure VMs that violate vCPU scaling policies. For details, see [VCPU Scaling Controls \(on page 198\)](#).
- **Reconfigure VM Storage**
Reconfigure overutilized storage resources by adding VStorage capacity. For underutilized storage resources, remove VStorage capacity.

Tuned Scaling for On-prem VMs

For resizing VMs, Intersight Workload Optimizer includes tuned scaling action settings. These settings give you increased control over the action mode for various resize actions. With this feature, you can automate resize actions within a normal range (the tuned scaling range), and direct Intersight Workload Optimizer to take more conservative actions when resizes are outside the range.

For example, consider resizing VMs to add more memory. As memory demand increases on a VM, Intersight Workload Optimizer can automatically allocate more memory. If the hosted application is in a runaway state (always requesting more memory) and ultimately falls outside of the normal range, Intersight Workload Optimizer will not automate memory resize for the VM.

To configure tuned scaling:


1. Create a VM policy.
2. Under **Action Automation**, configure the action mode for the various resize actions.
 - VCPU Resize Up
 - VCPU Resize Down
 - VCPU Resize Above Max
 - VCPU Resize Below Min
 - VMEM Resize Up
 - VMEM Resize Down
 - VMEM Resize Above Max
 - VMEM Resize Below Min

NOTE:

Resize Up and **Resize Down** settings are for conditions within the tuned scaling range, while **Above Max** and **Below Min** settings are for outlying conditions.

3. Under **Operational Constraints**, specify the tuned scaling range.
 - VCPU Resize Max Threshold
 - VCPU Resize Min Threshold
 - VMEM Resize Max Threshold
 - VMEM Resize Min Threshold

For example, assume the following settings:

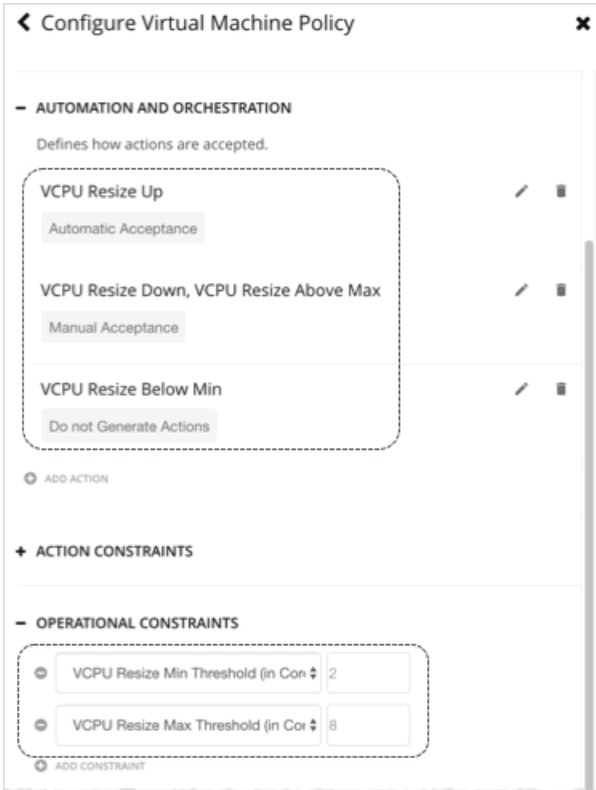

As VCPU utilization for a VM changes over time, Intersight Workload Optimizer handles resize actions as follows.

Current	Resize Request	Action Mode	Result
6 VCPUs	Resize up to 8 VCPUs	Automatic Since the VM will have 8 VCPUs after the requested resize, which is within the VCPU Resize Max threshold of 8, Intersight Workload Optimizer executes the VCPU Resize Up action automatically.	8 VCPUs
8 VCPUs	Resize up to 10 VCPUs	Manual Since the VM will have 10 VCPUs after the requested resize, which is above the VCPU Resize Max threshold of 8, Intersight Workload Optimizer posts the VCPU Resize Up action (as a pending action) and provides the option to execute that action through the user interface.	10 VCPUs (if you executed the pending action)
10 VCPUs	Resize down to 2 VCPUs	Manual Since the VM will have 2 VCPUs after the requested resize, which is within the VCPU Resize Min threshold	2 VCPUs (if you executed the pending action)

Current	Resize Request	Action Mode	Result
		of 2, Intersight Workload Optimizer posts the VCPU Resize Down action (as a pending action) and provides the option to execute that action through the user interface.	
2 VCPUs	Resize down to 1 VCPU	Not Generated Since the VM will have 1 VCPU after the requested resize, which is below the VCPU Resize Min threshold of 2, Intersight Workload Optimizer does not generate the VCPU Resize Down action to comply with the policy.	2 VCPUs

Action policies include scope to determine which entities will be affected by the given policy. It's possible for two or more policies to affect the same entities. As is true for other policy settings, tuned scaling uses the most conservative settings for the affected entities. The effective action mode will be the most conservative, and the effective tuned scaling range will be the narrowest range (the lowest MAX and highest MIN) out of the multiple policies that affect the given entities. For more information, see [Policy Scope \(on page 75\)](#).

You can schedule automation policies to take effect during a certain window of time. You can include tuned scaling settings in a scheduled window, the same as you can schedule other policy settings. For more information, see [Policy Schedule \(on page 76\)](#).















On-prem VM Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

For details about on-prem VM actions, see [On-prem VM Actions \(on page 190\)](#).

Action	Default Mode	vCenter	Hyper-V
Move	Manual		
Reconfigure	Recommend		
Start	Manual		
Storage Move	Recommend		
Provision (Kubernetes nodes only)	Manual		
Suspend (Kubernetes nodes only)	Manual		
vCPU Resize Up (uses tuned scaling)	Manual		

Action	Default Mode	vCenter	Hyper-V
vCPU Resize Above Max (uses tuned scaling)	Recommend		
vCPU Resize Down (uses tuned scaling)	Manual		
vCPU Resize Below Min (uses tuned scaling)	Recommend		
vMem Resize Up (uses tuned scaling)	Manual		
vMem Resize Above Max (uses tuned scaling)	Recommend		
vMem Resize Down (uses tuned scaling)	Manual		
vMem Resize Below Min (uses tuned scaling)	Recommend		

Non-disruptive Mode

VM actions include the modifier, **Enforce Non Disruptive Mode**. When you enable this modifier, Intersight Workload Optimizer ensures that a resize action in *Automatic* or *Manual* mode will not require a reboot or any other disruption to the affected VM. If the action will disrupt the VM, Intersight Workload Optimizer posts the action in *Recommend* mode.

Attribute	Default Setting
Enforce Non-disruptive Mode	Off

This setting has no effect on actions set to *Recommend* mode. Intersight Workload Optimizer will continue to post those actions for you to evaluate.

You can enforce non disruptive mode in the default VM policy, and then schedule action policies to automate resize actions during downtimes. Be aware that scheduled actions do not respect the enforced non disruptive mode – Scheduled resize actions will execute during the scheduled window even if they require a reboot. This is useful for setting up certain action behaviors, but you must be aware that enforced non disruptive mode has no effect on scheduled actions.

NOTE:

When you configure a schedule window for a VM resize action, to ensure Intersight Workload Optimizer will execute the action during the scheduled time, you must turn off the **Enforce Non Disruptive Mode** setting for that scheduled policy. Even if you turn the setting off for the global policy, you still must turn the setting off for your scheduled policy. Otherwise Intersight Workload Optimizer will not execute the resize action.

Hypervisor VMEM for Resize

For on-prem environments, Intersight Workload Optimizer discovers VMEM utilization and can recommend actions to resize the VMEM capacity on a VM. For environments that do not include Applications and Databases as targets, the data that analysis uses to make these recommendations comes from the underlying hypervisors. However, that data is not always sufficient to result in accurate resize recommendations. Use the **Use Hypervisor VMEM for Resize** setting to determine how to generate VMEM recommendations.

Attribute	Default Setting
Hypervisor VMEM for Resize	On

■ On

When your environment includes Applications and Databases as targets, Intersight Workload Optimizer uses the VMEM metrics those targets discover. If a scope of VMs does not fall under those targets, then analysis *will* generate VMEM resize actions for that scope. In this case, analysis uses the VMEM metrics it discovers from the underlying hypervisors.

■ Off

When your environment includes Applications and Databases as targets, Intersight Workload Optimizer uses the VMEM metrics those targets discover. If a scope of VMs does not fall under those targets, then analysis *will not* generate VMEM resize actions for that scope.

Shared Nothing Migration


If you have enabled both storage and VM moves, Intersight Workload Optimizer can perform shared-nothing migrations, which move the VM and the stored VM files simultaneously. For example, assume a VM on a host also uses local storage on that host. In that case, Intersight Workload Optimizer can move that VM and move its data to a different datastore in a single action.

Attribute	Default Setting
Shared-nothing Migration	Off

Currently, the following targets support shared-nothing migrations:

- vSphere, versions 5.1 or greater
- VMM for Hyper-V 2012 or later

Because of this feature's potential impact on performance, it is turned off by default. Intersight Workload Optimizer recommends enabling it only on VMs that need it. To do this, you must first set the action mode for VM and storage moves to either *Manual* or *Automatic*, and then enable the feature in a VM policy.

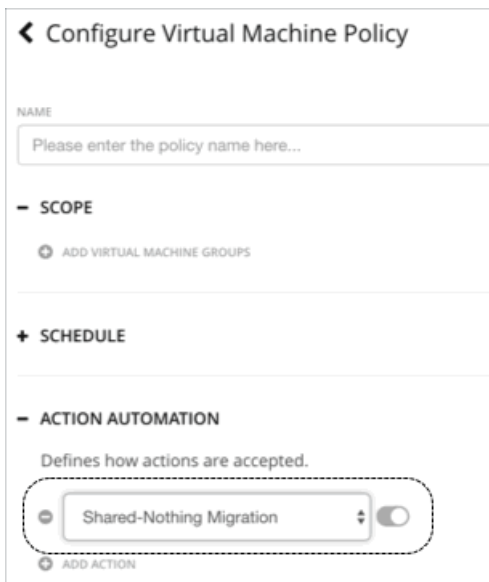

If a policy that enables this feature conflicts with a more conservative policy, the latter policy wins. For example, if compute move is set to *Manual*, storage move is set to *Recommend*, and shared-nothing migration is turned on, shared-nothing migration is in effect but remains in *Recommended* state.

NOTE:

Intersight Workload Optimizer does not simulate shared-nothing migrations in plans.

Resize Thresholds (Operational Constraints)

Intersight Workload Optimizer uses these settings to set up **tuned scaling** actions for on-prem VMs. Tuned scaling gives you increased control over the action mode for various resize actions. With this feature, you can automate resize actions within a normal range (the tuned scaling range), and direct Intersight Workload Optimizer to take more conservative actions when resizes are outside the range.

For details about tuned scaling, see [Tuned Scaling for On-prem VMs \(on page 191\)](#).

Attribute	Default Value
VCPU Resize Max Threshold (in Cores)	64

Attribute	Default Value
	Tuned Scaling Range Upper Limit
VCPU Resize Min Threshold (in Cores)	1 Tuned Scaling Range Lower Limit
VMEM Resize Max Threshold (MB)	131072 Tuned Scaling Range Upper Limit
VMEM Resize Min Threshold (MB)	512 Tuned Scaling Range Lower Limit

Resize VStorage

The default setting disables resize actions. This is usually preferred because VStorage resize requires that you reformat the storage. The increment constant takes effect if you enable resizing.

Attribute	Default Setting/Value
Resize VStorage	Disabled
Increment constant for VStorage [GB]	None If you enable resize, Intersight Workload Optimizer uses the default value of 1024. You can change this to a different value.

vCPU Scaling Controls

For details, see [VCPU Scaling Controls \(on page 198\)](#).

Resize Increments

These increments specify how many units to add or subtract when resizing the given resource allocation for a VM.

Attribute	Default Value
Increment constant for VMEM [MB]	1024

NOTE:

Starting in version 8.5.7, vCPU resize increments are configured in conjunction with vCPU scaling controls. Any increment value configured in a previous version stays in effect and displays under **vCPU Scaling Controls > Change MHz legacy behavior**. For details, see [VCPU Scaling Controls \(on page 198\)](#).

For VMem, you should not set the increment value to be lower than what is necessary for the VM to operate. If the VMem increment is too low, then it's possible that Intersight Workload Optimizer would allocate insufficient VMem for the machine to operate. For a VM that is under utilized, Intersight Workload Optimizer will reduce VMem allocation by the increment amount, but it will not leave a VM with zero VMem. For example, if you set this to 1024, then Intersight Workload Optimizer cannot reduce the VMem to less than 1024 MB.

Rate of Resize

When resizing resources for a VM, Intersight Workload Optimizer calculates the optimal values for VMem, VCPU and VStorage. But it does not necessarily make a change to that value in one action. Intersight Workload Optimizer uses the Rate of Resize setting to determine how to make the change in a single action.

Attribute	Default Value
Rate of Resize	Medium (2)

■ Low

Change the value by one increment, only. For example, if the resize action calls for increasing VMem, and the increment is set at 1024, Intersight Workload Optimizer increases VMem by 1024 MB.

- **Medium**

Change the value by an increment that is 1/4 of the difference between the current value and the optimal value. For example, if the current VMem is 2 GB and the optimal VMem is 10 GB, then Intersight Workload Optimizer will raise VMem to 4 GB (or as close to that as the increment constant will allow).

- **High**

Change the value to be the optimal value. For example, if the current VMem is 2 GB and the optimal VMem is 8 GB, then Intersight Workload Optimizer will raise VMem to 8 GB (or as close to that as the increment constant will allow).

Consistent Resizing

Attribute	Default Setting
Enable Consistent Resizing	Off

For groups in scoped policies:

When you create a policy for a group of VMs and turn on Consistent Resizing, Intersight Workload Optimizer resizes all the group members to the same size, such that they all support the top utilization of each resource commodity in the group. For example, assume VM A shows top utilization of CPU, and VM B shows top utilization of memory. A resize action would result in all the VMs with CPU capacity to satisfy VM A, and memory capacity to satisfy VM B.

NOTE:

For consistent resizing in on-prem environments, if the VMs in the group have different core speeds, then CPU scaling actions might not be consistent. For example, if you set the maximum target CPU size to 2, Intersight Workload Optimizer might recommend resizing to more than 2 CPUs to account for the VMs with slower cores.

To avoid this problem, be sure that the group only includes VMs with the same core speed.

For an affected resize, the Actions List shows individual resize actions for each of the VMs in the group. To avoid the possibility of resizing VMs disruptively at the same time, you must create automation policies with non-overlapping schedules. For example, if VMs A and B are in the same consistent resizing group, create two policies that resize the VMs at different times of the day.

- For Policy 1, set the scope to a group containing VM A and enable resize automation between, say, 01:00 and 01:45.
- For Policy 2 set the scope to a group containing VM B and enable resize automation between 02:00 and 02:45.

Reasons to employ Consistent Resizing for a group include:

- **Load Balancing**

If you have deployed load balancing for a group, then all the VMs in the group should experience similar utilization. In that case, if one VM needs to be resized, then it makes sense to resize them all consistently.

When working with Consistent Resizing, consider these points:

- You should not mix VMs in a group that has a Consistent Resizing policy, with other groups that enable Consistent Resizing. One VM can be a member of more than one group. If one VM (or more) in a group with Consistent Resizing is also in another group that has Consistent Resizing, then both groups enforce Consistent Resizing together, for all their group members.
- For any group of VMs that enables Consistent Resizing, you should not mix the associated target technologies. For example, one group should not include VMs that are on Hyper-V and vCenter platforms.
- Charts that show actions and risks assign the same risk statement to all the affected VMs. This can seem confusing. For example, assume one VM needs to resize to address vCPU risk, and 9 other VMs are set to resize consistently with it. Then charts will state that 10 VMs need to resize to address vCPU risks.

Ignore NVMe Constraints

Intersight Workload Optimizer recognizes when a VM instance includes an NVMe driver. To respect NVMe constraints, it will not recommend a move or resize to an instance type that does not also include an NVMe driver. If you ignore NVMe constraints, then Intersight Workload Optimizer is free to resize or move the instance to a type that does not include an NVMe driver.

Attribute	Default Setting
Ignore NVMe Constraints	Off

Placement Policies

Intersight Workload Optimizer supports placement policies for on-prem VMs, as follows:

- You can create placement policies to enforce constraints for VM placements.
 - For example, the VMs in a consumer group can only run on a host that is in the provider group. You can limit the number of consumers that can run on a single provider – for hosts in the provider group, only 2 instances of VMs in the consumer group can run on the same host. Or no more than the specified number of VMs can use the same storage device.
- For VMs that require paid licenses, you can create placement policies that set up certain hosts to be the VMs' preferred license providers. Intersight Workload Optimizer can then recommend consolidating VMs or reconfiguring hosts in response to changing demand for licenses.

For more information, see [Creating Placement Policies \(on page 62\)](#).


NOTE:

For VMM targets, Cisco automatically imports your Availability Sets, representing them as placement policies for the affected infrastructure. To see these availability sets, go to the **Settings > Policies** page and click **Imported Placement Policies**.

For more information, see [Importing Workload Placement Policies \(on page 62\)](#).

vCPU Scaling Controls

Intersight Workload Optimizer represents the compute capacity of a VM in MHz and vCPUs. The following diagram shows how a VM with four vCPUs can be configured differently in terms of sockets and cores.

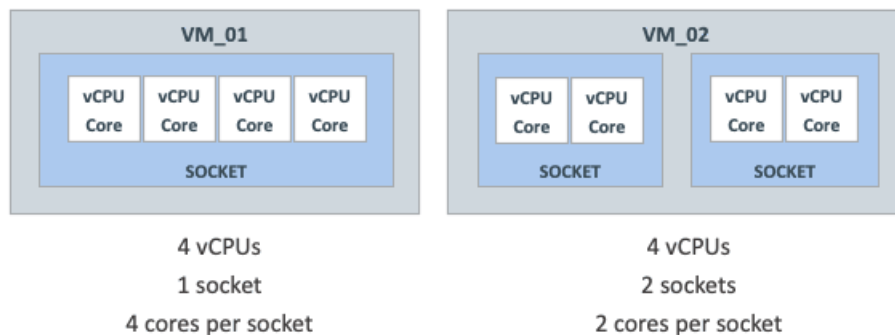

Intersight Workload Optimizer can resize the compute capacity by changing the number of sockets or cores per socket, depending on:

- The policy assigned to the VM
 - [On-prem VM policies \(on page 193\)](#) include vCPU Scaling Controls that give you granular control over how VM compute resources are *resized* to maintain performance or *reconfigured* to comply with your operational policies. You can create policies for different VM groups based on their resource needs and characteristics, and decide whether to automate resize and reconfigure actions in those policies.
- The hypervisor that manages the VM
 - Hypervisor targets have varying degrees of support for vCPU Scaling Controls. VMware vSphere supports all scaling controls, while Hyper-V and Nutanix AHV provide limited support. For details, see the *Hypervisor Support* section below.

vCPU Scaling Control Modes and Options

Intersight Workload Optimizer provides **simple** and **advanced** controls to automate compute resource management actions in compliance with your policies. It also provides a **legacy** control based on units of MHz.

The controls you choose depend on your operational policies regarding the VM configuration of sockets and cores per socket, and your choice of hypervisor. For example, your operational policies may dictate a certain VM configuration that must be

respected when resizing a VM's compute resources. Changing sockets is the least disruptive, but for some workloads, it may be preferable to change cores per socket due to socket licensing or operating system constraints. For larger VMs where Non-Uniform Memory Access (NUMA) must be considered for performance reasons, it may be preferable to balance vCPUs across host sockets.

The following tables explain the exact operation for each mode.

Simple Controls

Simple controls change compute resources based on units of vCPU.

vCPU Scaling Option	Unit	Sockets	Cores Per Socket	Resize Action	Reconfigure Action
Change virtual CPUs	vCPUs	Intersight Workload Optimizer decides	Reconfigured to 1 core per socket	<ul style="list-style-type: none"> ■ Non-disruptive if hot-add is enabled and VM sockets are increasing ■ Disruptive if VM cores per socket does not equal 1, even if hot-add is enabled 	Disruptive

Advanced Controls

Advanced controls allow you to change sockets or cores per socket, and configure additional options.

vCPU Scaling Option	Unit	Sockets	Cores Per Socket	Resize Action	Reconfigure Action
Change sockets	1 socket	Intersight Workload Optimizer decides	Preserve VM cores per socket	Non-disruptive if hot-add is enabled and VM sockets are increasing	Not generated
Change sockets	1 socket	Intersight Workload Optimizer decides	User-specified VM cores per socket	<ul style="list-style-type: none"> ■ Non-disruptive if hot-add is enabled ■ Disruptive if VM cores per socket does not match user-specified value 	Disruptive if VM cores per socket does not match user-specified value
Change cores per socket	1 core per socket	Preserve VM sockets	Intersight Workload Optimizer decides	Disruptive	Not generated
Change cores per socket	1 core per socket	Match host sockets	Intersight Workload Optimizer decides	Disruptive	<ul style="list-style-type: none"> ■ Non-disruptive if hot-add is enabled and VM

vCPU Scaling Option	Unit	Sockets	Cores Per Socket	Resize Action	Reconfigure Action
					sockets are increasing ■ Disruptive if cores per socket is changed
Change cores per socket	1 core per socket	User-specified VM sockets	Intersight Workload Optimizer decides	Disruptive	■ Non-disruptive if hot-add is enabled and VM sockets are increasing ■ Disruptive if cores per socket is changed

Legacy Controls

Legacy controls change compute resources based on units of MHz.

vCPU Scaling Option	Unit	Sockets	Cores Per Socket	Resize Action	Reconfigure Action
MHz legacy behavior	MHz	Intersight Workload Optimizer decides	■ Assumes 1 core per socket ■ Execution preserves actual cores per socket	Non-disruptive if hot-add is enabled and VM sockets are increasing	Not generated

Points to consider:

- If [non-disruptive mode \(on page 194\)](#) is enabled, disruptive actions are not automated and must be executed manually.
- Older Guest OSES and applications may be sensitive to changes in the vCPU architecture that could result in power-on issues or kernel panics/BSODs. Some workloads require manual help with such changes, so always test certain classes of applications and guest operating systems before enabling any automation that changes the vCPU architecture. Use the Intersight Workload Optimizer knowledge of the application domain and Guest OS to scope them out of policies.

Scaling Option: Change Virtual CPUs

In this scaling option, Intersight Workload Optimizer adds or removes compute resources in increments of vCPUs. To achieve this, it changes the number of VM sockets and enforces 1 core per socket (if not already enforced).


- If a VM requires a change to compute resources, Intersight Workload Optimizer generates a resize vCPU action that assumes 1 core per socket. If the VM currently does not have 1 core per socket, Intersight Workload Optimizer reconfigures it to 1 core per socket as part of action execution.
- If a VM is already optimally sized, but its current cores per socket is not 1, Intersight Workload Optimizer generates a reconfigure vCPU action to change cores per socket to 1, thereby bringing the VM into compliance with the policy.

This scaling option is ideal under the following scenarios:


- Your environment has a large number of small VMs where precise vCPU scaling is the priority.
- You have VMs that already have 1 core per socket and require on-demand upsizes on these VMs to be non-disruptive.

For example, a VM currently has 1 socket and 2 cores per socket, and applies a policy that changes vCPU in increments of 1.

- If Intersight Workload Optimizer determines that the VM needs to increase compute capacity by 1 vCPU (i.e., from 2 to 3 vCPUs), a resize up action changes sockets from 2 to 3, and cores per socket from 2 to 1.

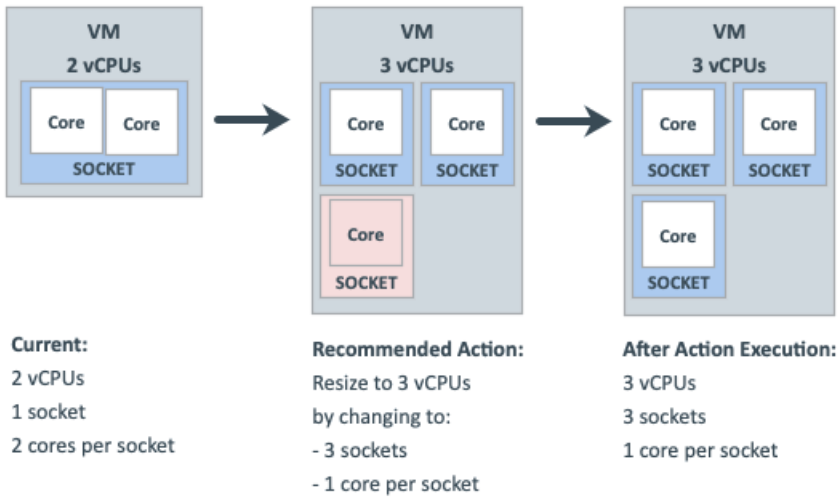

- When the same VM needs to reduce compute capacity by 1 vCPU (i.e., from 3 to 2 vCPUs), a resize down action changes sockets from 3 to 2.

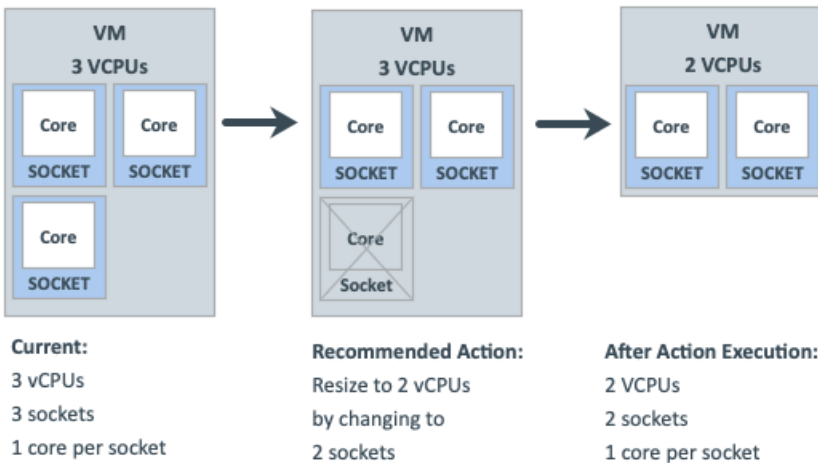

Scaling Option: Change Sockets

In this scaling option, Intersight Workload Optimizer adds or removes compute resources by changing VM sockets.

- If a VM requires a change to compute resources, Intersight Workload Optimizer generates a resize vCPU action that considers the current cores per socket value (if the 'Preserve existing VM cores per socket' option is set) or uses the user-specified cores per socket value. If the VM's current cores per socket value violates a policy (i.e., does not match the user-specified value), Intersight Workload Optimizer reconfigures the VM's cores per socket value as part of action execution, thereby bringing the VM into compliance with the policy, while at the same time providing the required change to compute resources.
- If a VM is already optimally sized, but its current cores per socket value violates a policy (i.e., does not match the user-specified value, if set), Intersight Workload Optimizer generates a reconfigure vCPU action to change cores per socket to the user-specified value, thereby bringing the VM into compliance with the policy.

Change Sockets and Preserve VM Cores Per Socket


In this scaling option, Intersight Workload Optimizer adds or removes compute resources by changing VM sockets in increments of 1, and preserves VM cores per socket.

This scaling option is ideal under the following scenarios:


- You require Intersight Workload Optimizer to leave the VM cores per socket configuration unchanged for operational policy reasons (such as compliance with an application support contract policy).
- You have VMs that need to upsize non-disruptively to meet rising application demand.
- You have VMs with even numbers of cores per socket and are required to scale in even increments of vCPUs.

For example, a VM currently has 1 socket and 4 cores per socket, and applies a policy that changes sockets and preserves VM cores per socket. Intersight Workload Optimizer has determined that the VM requires a change in compute capacity of 1 vCPU.

- To increase compute capacity by 1 vCPU, a resize up action adds 1 socket. Because this new socket must have 4 cores to preserve VM cores per socket, the end result is 2 sockets with a total of 8 vCPUs.

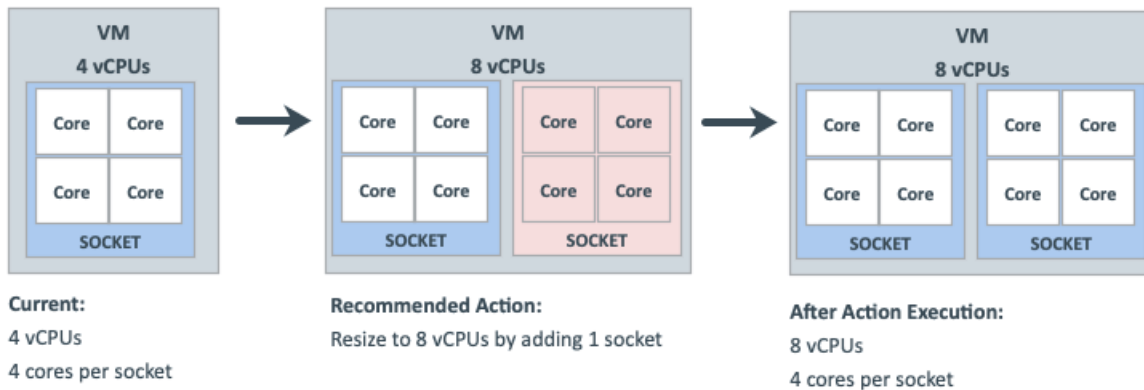

- It is not possible to reduce compute capacity by 1 vCPU because the VM is already at the smallest achievable size. Therefore, no action generates.

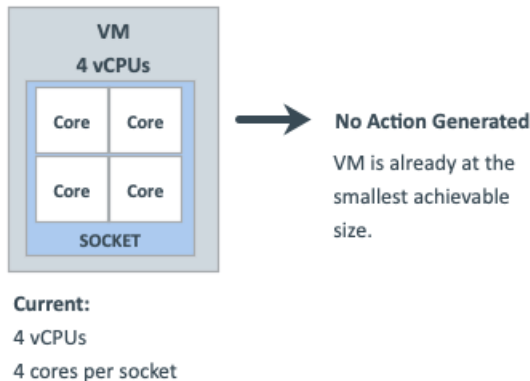

Change Sockets and Specify Cores Per Socket


In this scaling option, Intersight Workload Optimizer adds or removes compute resources by changing VM sockets in increments of 1, and reconfigures VM cores per socket according to the value that you specify.

This scaling option is ideal under the following scenarios:


- You require any odd number vCPUs for a VM to be an even number, by setting an even number of cores per socket.
- You want a quick, script-less bulk disruptive conversion of VMs to a specific cores per socket without negatively impacting compute capacity (vCPUs).
- You have older Guest OSes and applications that are sensitive to vCPU architecture changes that could result in power-on issues or kernel panics/BSODs. Some workloads require manual help with such changes so always test certain classes of applications and OSes before enabling any automation that changes the vCPU architecture. Use the Intersight Workload Optimizer knowledge of the application domain and Guest OS to scope them out of policies.

For example, a VM currently has 1 socket and 4 cores per socket, and applies a policy that changes sockets and enforces the user-specified 1 core per socket. Intersight Workload Optimizer has determined that the VM is already optimally sized, so a resize action is not necessary.

- Since the VM is in violation of policy, Intersight Workload Optimizer changes sockets from 1 to 4, and cores per socket from 4 to 1.

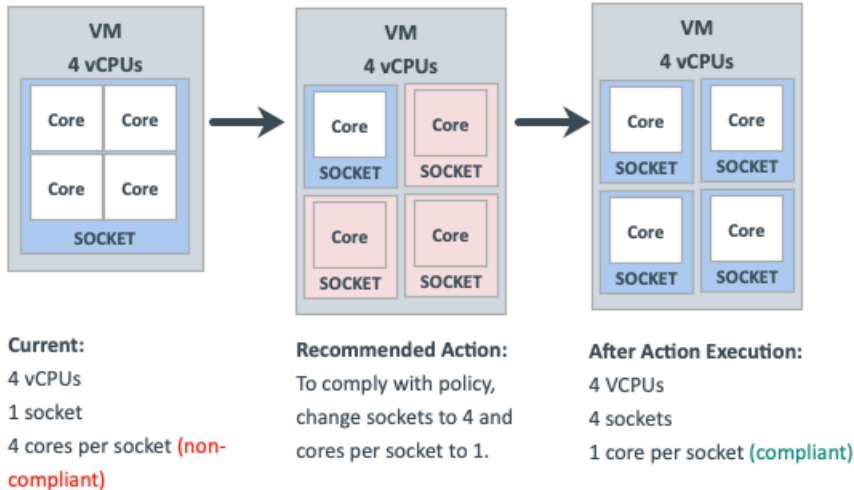

- When the VM is compliant with policy, no action generates.

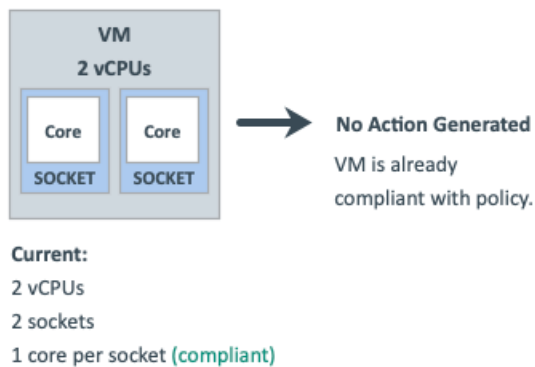

Scaling Option: Change Cores Per Socket

In this scaling option, Intersight Workload Optimizer adds or removes compute resources by changing the VM cores per socket.

- If a VM requires a change to compute resources, Intersight Workload Optimizer generates a resize vCPU action that considers the current socket value (if the 'Preserve existing VM sockets' option is set), respects the user-specified socket value, or matches VM sockets to the host socket value. If the VM's current socket value violates a policy (i.e., does not match the user-specified or host socket value), Intersight Workload Optimizer reconfigures the VM's socket value as part of action execution, thereby bringing the VM into compliance with the policy while at the same time providing the required change to compute resources.
- If a VM is already optimally sized, but its current socket value violates a policy, Intersight Workload Optimizer generates a reconfigure vCPU action to change the sockets to the user-specified or host socket value, thereby bringing the VM into compliance with the policy.

Older Guest OSes and applications may be sensitive to vCPU architecture changes that could result in power-on issues or kernel panics/BSODs. Some workloads require manual help with such changes so always test certain classes of applications and OSes before enabling any automation that changes the vCPU architecture. Use the Intersight Workload Optimizer knowledge of the application domain and Guest OS to scope them out of policies.

Change Cores Per Socket and Preserve VM Sockets

In this scaling option, Intersight Workload Optimizer adds or removes compute resources by changing the VM cores per socket in increments of 1, and preserves VM sockets.

This scaling option is ideal under the following scenarios:


- You require Intersight Workload Optimizer to leave the VM sockets configuration unchanged for operational policy reasons (such as socket-based licensing or compliance with an application support contract policy).
- You have VDI VMs that are at their maximum Guest OS socket limitation, but require more compute resources.
- You have VMs that are configured with NUMA considerations.

NOTE:


You can also use the 'Match Host Sockets' scaling option (discussed below) for NUMA sensitive VMs.

For example, a VM currently has 1 socket and 4 cores per socket, and applies a policy that changes cores per socket and preserves VM sockets. Intersight Workload Optimizer has determined that the VM requires a change in compute capacity of 1 vCPU.

- To increase compute capacity by 1 vCPU, a resize up action changes cores per socket from 4 to 5.

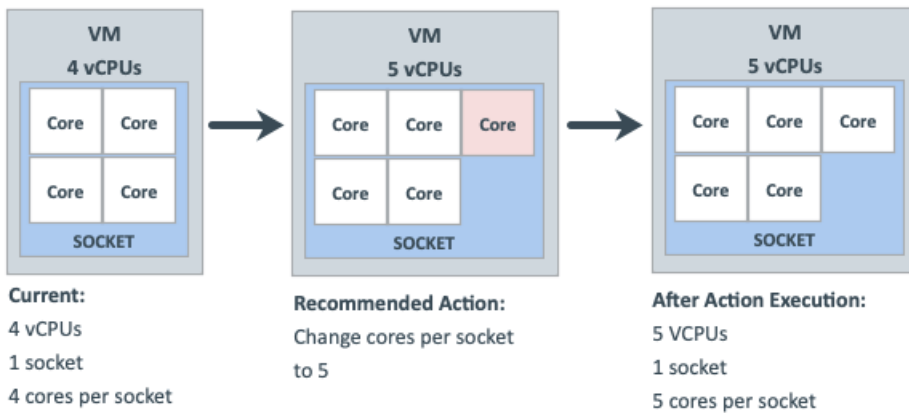

- To reduce compute capacity by 1 vCPU, a resize down action changes cores per socket from 4 to 3.

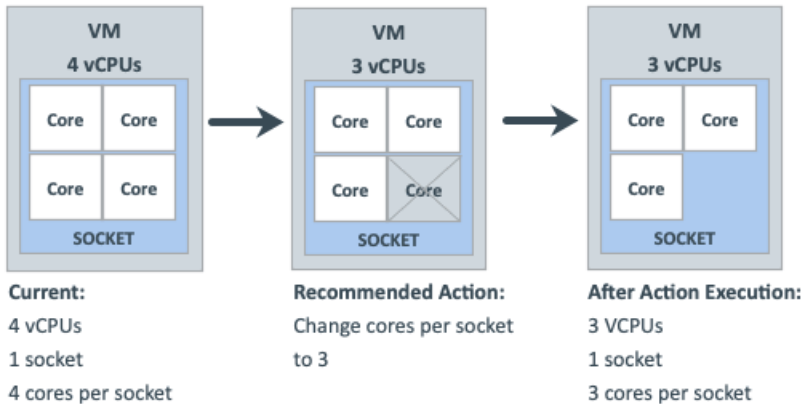

Change Cores Per Socket and Match Host Sockets


In this scaling option, Intersight Workload Optimizer reconfigures VM sockets to match the number of host sockets, thereby balancing vCPUs evenly across physical sockets. It also changes VM cores per socket to maintain the same compute capacity (vCPU).

This scaling option is ideal under the following scenarios:

- You have large VMs that may realize a performance benefit from reflecting the physical host CPU architecture within the Guest OS so that the application can optimize thread memory access to within a NUMA node.
- You have NUMA sensitive VMs that are migrating between hosts with different CPU architectures. Intersight Workload Optimizer can place the VMs on the best host and then generate an action to reconfigure the VMs to match the host sockets automatically. You can attach a schedule to the policy to automate disruptive reconfigure actions within a maintenance window.

For example, a VM currently has 1 socket and 4 cores per socket, and is on a host with 1 socket. The VM applies a policy that changes cores per socket and matches host sockets. Intersight Workload Optimizer has determined that the VM is already optimally sized, so a resize action is not necessary.

When the host socket value changes from 1 to 2, the VM is suddenly in violation of policy. To bring the VM into compliance while maintaining the same vCPU capacity (since the VM is already optimally sized), Intersight Workload Optimizer must distribute 4 cores between 2 sockets. The end result is 2 sockets and 2 cores per socket.

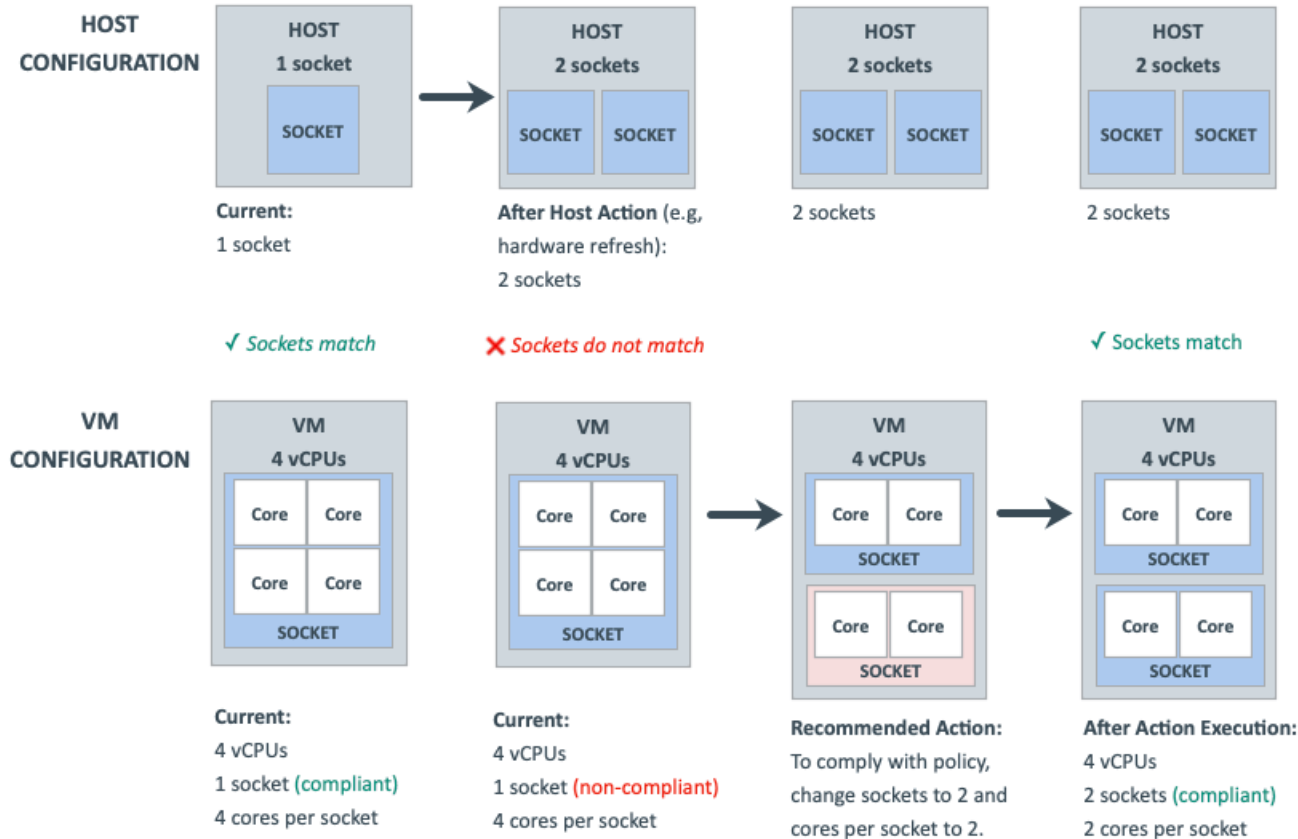


Change Cores Per Socket and Specify Sockets

In this scaling option, Intersight Workload Optimizer reconfigures VM sockets according to the value that you specify, and changes VM cores per socket to maintain the same compute capacity (vCPU).


This scaling option is ideal if you have VMs that require a specific socket value for operational policy reasons (such as socket-based licensing or compliance with an application support contract policy).

For example, a VM currently has 1 socket and 2 cores per socket, and applies a policy that changes cores per socket and enforces the user-specified 2 sockets. Intersight Workload Optimizer has determined that the VM is already optimally sized, so a resize action is not necessary.

- Since the VM is in violation of policy, Intersight Workload Optimizer changes sockets from 1 to 2, and cores per socket from 2 to 1.

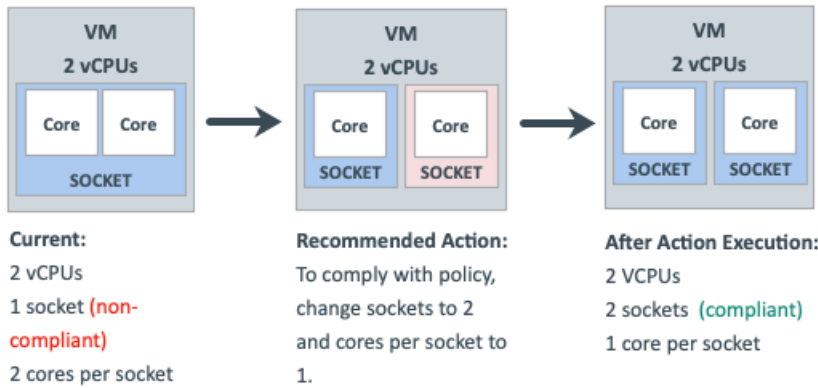

- When the VM is compliant with policy, no action generates.

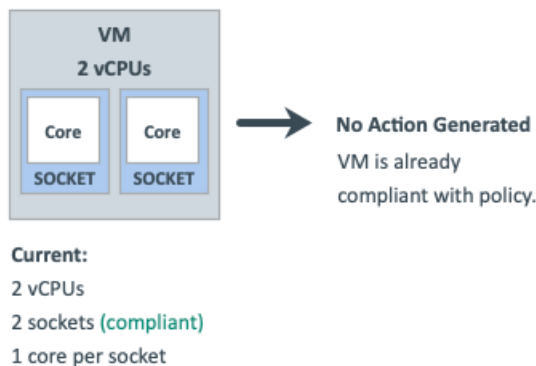

Scaling Option: Change MHz Legacy Behavior

In this scaling option, Intersight Workload Optimizer adds or removes compute resources in increments of MHz (1800 MHz by default).

If a VM requires a change to compute resources, Intersight Workload Optimizer generates a resize vCPU action that assumes 1 core per socket, regardless of the VM's actual cores per socket.

If Intersight Workload Optimizer discovers the actual number of cores per socket as part of action execution, it adjusts the action accordingly.

For example, a VM currently has 4 vCPUs with 2 sockets and 2 cores per socket. Intersight Workload Optimizer may generate an action to resize from 4 to 5 vCPUs. However, as part of action execution, the VM socket count changes from 2 to 3, so the end result is 6 vCPUs. Conversely, the same VM may have an action to resize from 4 to 3 vCPUs, but nothing changes as part of action execution.

Hypervisor Support

For **VMware vSphere**, Intersight Workload Optimizer supports all vCPU scaling options, including changing a VM's number of sockets or cores per socket. Increasing the number of sockets is non-disruptive if CPU hot-add is enabled on a VM, while reducing the socket count always requires a restart and is therefore disruptive.

For **Hyper-V** and **Nutanix AHV**, cores per socket and hot-add features have varying degrees of support.

vCPU Scaling Option	vSphere	Hyper-V	Nutanix AHV (Single Core)	Nutanix AHV (Multi Core)
Change virtual CPUs	Supported	Supported	Supported	Not supported by hypervisor

vCPU Scaling Option	vSphere	Hyper-V	Nutanix AHV (Single Core)	Nutanix AHV (Multi Core)
Change sockets - Preserve existing VM cores per socket	Supported	Supported	Supported	Supported
Change sockets - User specified cores per socket	Supported	Not supported by hypervisor	Not supported by hypervisor	Not supported by hypervisor
Change cores per socket - Preserve existing VM sockets	Supported	Not supported by hypervisor NOTE: Intersight Workload Optimizer assumes one core per socket and only changes sockets.	Not supported by Intersight Workload Optimizer	Not supported by Intersight Workload Optimizer
Change cores per socket - Match host sockets				
Change cores per socket - User specified sockets				

Tie Breakers

When a single VM applies multiple conflicting policies, Intersight Workload Optimizer uses the following tie breakers that follow the principle of least disruptive and most conservative:

- vCPU Scaling Control

"Sockets" wins over "Cores per socket" wins over "Virtual CPU" wins over "MHz legacy behavior".

NOTE:

Policies created before the introduction of vCPU scaling controls (i.e., any policy before version) will continue to use the "MHz legacy behavior" option but will not be enforced when policy conflicts arise. You can remove these policies or update them to use the newer scaling controls.

- Sockets setting

"Preserve existing VM cores per socket" wins over "User-specified core per socket".

- Cores Per Socket setting

"Preserve existing VM sockets" wins over "User-specified socket" wins over "Match host sockets".

- User-specified value

The lowest value wins.

- Increment Size value

The lowest value wins.

For example, assume a VM belonging to two groups that apply different policies. Policy A changes cores per socket and matches host sockets, while Policy B changes sockets and preserves cores per socket. In this scenario, the VM applies Policy B. Changing sockets wins over changing cores per socket because it is less disruptive.

To see which policies are in effect after the tie-break decision, set the scope to a VM or group of VMs and then click the Policies tab.

Policy Cookbook

Tips:

- Use the following filters when searching for or creating VM groups:
 - Number of vCPUs
 - Number of Sockets
 - Cores per Socket
 - Target Type

- Hot-Add Enabled
- For the least disruptive on-demand upsize of vCPU, enable hot-add on the VM and change sockets while preserving cores per socket.
- For the most precise compute resource management, change cores per socket.
- For NUMA considerations, change cores per socket and match host sockets.
- Check Guest OS application and license compatibility when changing vCPU architecture and before automating actions.


How to...

- Manage VM compute capacity by changing the number of vCPUs in increments of 2.
A VM will be reconfigured if required to use 1 core per socket, and resized by changing sockets. Actions are disruptive if the VM does not already have 1 core per socket or if hot-add is not enabled.
 1. Create a group of VMs that can have 1 core per socket and scale in sockets.
 2. Assign the group a policy with the following settings:
 - vCPU Scaling Controls
 - Change: Virtual CPU
 - Increment size: 2
 - (Optional) vCPU Resize Min/Max Threshold
- Reconfigure all odd-numbered vCPU VMs to be even-numbered, and then manage compute in even numbers of CPUs.
A VM will be reconfigured if required to use 2 cores per socket, and resized by changing sockets. Actions are disruptive if the VM does not already have 2 cores per socket or if hot-add is not enabled.
 1. Create a group of VMs that can have 2 cores per socket and scale in sockets.
 2. Assign the group a policy with the following settings:
 - vCPU Scaling Controls
 - Change: Sockets
 - User specified cores per socket: 2
 - (Optional) vCPU Resize Min/Max Threshold
- Ensure that large VMs always balance their vCPU cores across all physical host sockets (for example, NUMA VMs and Database Server VMs).
A VM will be reconfigured if its socket count does not match the host socket count. The cores per socket count may be adjusted to maintain the overall compute capacity (number of vCPUs). Resize actions are disruptive because cores per socket will change. Reconfigure actions are non-disruptive if VM sockets are increasing, hot-add is enabled, and there are no changes to cores per socket.
 1. Create a group of VMs using the filters that you require to identify typically larger VMs.
 2. Assign the group a policy with the following settings:
 - vCPU Scaling Controls
 - Change: Cores per socket
 - Sockets: Match host sockets
 - (Optional) vCPU Resize Min/Max Threshold
- Keep VMs to 2 sockets only and manage compute by changing cores.
VMs in the group will be reconfigured to 2 sockets if required, and resized by changing the cores per socket count while keeping the sockets fixed at 2, thus ensuring compliance with socket-based licensing. Resize actions are disruptive because cores per socket will change. Reconfigure actions are non-disruptive if VM sockets are increasing, hot-add is enabled, and there are no changes to cores per socket.
 1. Create a VM group containing the socket-licensed VMs.
 2. Assign the group a policy with the following settings:
 - vCPU Scaling Controls
 - Change: Cores per socket
 - User specified sockets: 2
 - (Optional) vCPU Resize Min/Max Threshold

Database Server (On-prem)

For on-prem, a Database Server is a database discovered through one of the associated database application targets or through APM solutions.

Synopsis

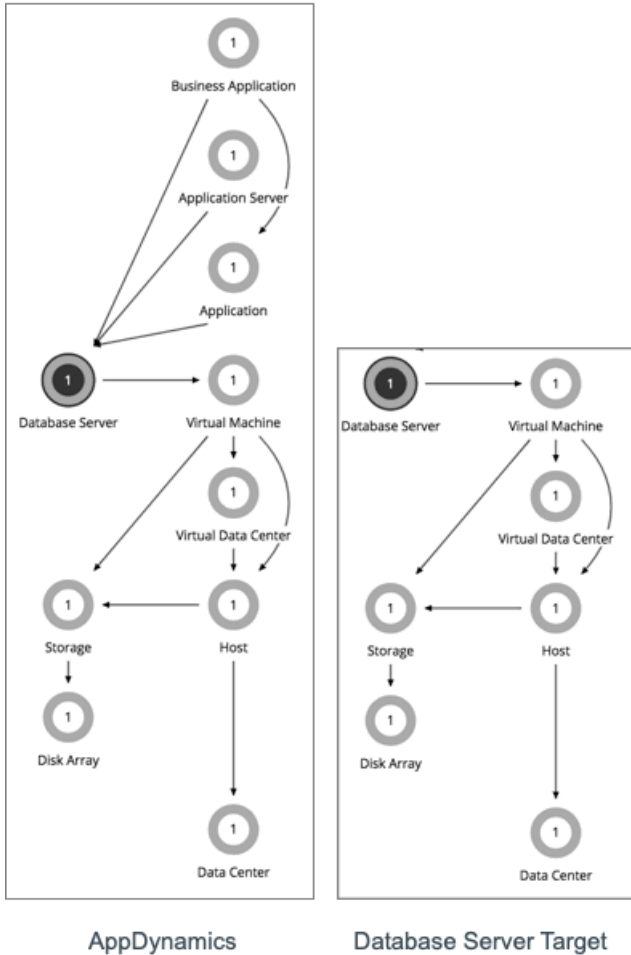

Synopsis	
Budget:	On-prem Database Servers have unlimited budget.
Provides:	<ul style="list-style-type: none"> ■ Response Time, Transactions, DBmem, Cache Hit Rate, and TransactionLog to end users ■ Connections to Application Components
Consumes:	VM resources, including VCPU, VMem, and VStorage
Discovered through:	<ul style="list-style-type: none"> ■ AppDynamics targets ■ Database Server targets ■ Dynatrace MySQL and MSSQL processes ■ NewRelic Infrastructure Integration (NRI): MySQL, MsSql, MongoDB, OracleDB

Monitored Resources

Intersight Workload Optimizer monitors the following resources for an on-prem Database Server:

- Virtual Memory (VMem)
 - The utilization of the VMem allocated to the hosting VM
 - Measured in Kilobytes (KB)
- Transactions
 - The utilization of the allocated transactions per second for the given entity
 - Measured in transactions per second.
- DBMem
 - The memory utilized by the database, as a percentage of the memory capacity that is allocated to the database. Note that this resource is more accurate than the VMem resource on the hosting VM. With this resource, Intersight Workload Optimizer can drive resize and move actions based on the memory consumed by the database, not the memory consumed by the VM.
- Connections
 - The utilization of the connection capacity. Only applicable to database servers
 - Measured in Connections
- DB Cache Hit Rate
 - The percentage of accesses that result in cache hits.
 - Measured as a percentage of hits vs total attempts (%)

Actions

Resize

Resize the following resources:

- Connections
- DBMem
 - Resize actions are driven by metrics on the Database Server, instead of metrics on the hosting VM. Intersight Workload Optimizer uses DB memory and cache hit rate metrics to decide whether resize actions are necessary.
- Transaction Log
 - Resize actions based on the Transaction Log resource depend on support for vStorage in the underlying hypervisor technology. Because current versions of Hyper-V do not provide API support for vStorage, Intersight Workload Optimizer cannot support Transaction Log resize actions for database servers running on the Hyper-V platform.

On-prem Database Server Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

Action	Default Mode
Resize	Manual
Resize DBMem (Up/Down)	Manual

Transaction SLO

Transaction SLO determines the upper limit for acceptable transactions per second. When the number of transactions reaches the given value, Intersight Workload Optimizer sets the risk index to 100%.

Attribute	Default Setting/Value
Enable Transaction SLO	Off
Transaction SLO	None If you enable SLO, Intersight Workload Optimizer uses the default value of 10. You can change this to a different value.

Response Time SLO

Response time SLO determines the upper limit for acceptable response time (in milliseconds). If response time reaches the given value, Intersight Workload Optimizer sets the risk index to 100%.

Attribute	Default Setting/Value
Enable Response Time SLO	Off Intersight Workload Optimizer estimates SLO based on monitored values.
Response Time SLO [ms]	None If you enable SLO, Intersight Workload Optimizer uses the default value of 2000. You can change this to a different value.

DBMem Utilization

The utilization that you set here specifies the percentage of the existing capacity that Intersight Workload Optimizer will consider to be 100% of capacity.

Attribute	Default Value
DBMem Utilization (%)	100

For example, a value of 80 means that Intersight Workload Optimizer considers 80% utilization to be 100% of capacity. Intersight Workload Optimizer recommends actions that avoid utilization beyond the given value.

DBMem Scaling Increment

This increment specifies how many units to add or subtract when scaling DBMem.


Attribute	Default Value
DBMem Scaling Increment (MB)	128

Do not set the increment value to be lower than what is necessary for the database server to operate. If the increment is too low, then it's possible there would be insufficient DBMem. When reducing allocation, Intersight Workload Optimizer will not leave a database server with less than the increment value. For example, if you use the default 128, then Intersight Workload Optimizer cannot reduce DBMem to less than 128 MB.

Volume (On-prem)

On-prem volumes represent VM disks discovered by hypervisor targets. A VM will have one volume for each configured disk and another volume (representing the configuration) that always moves with Disk 1.

Synopsis

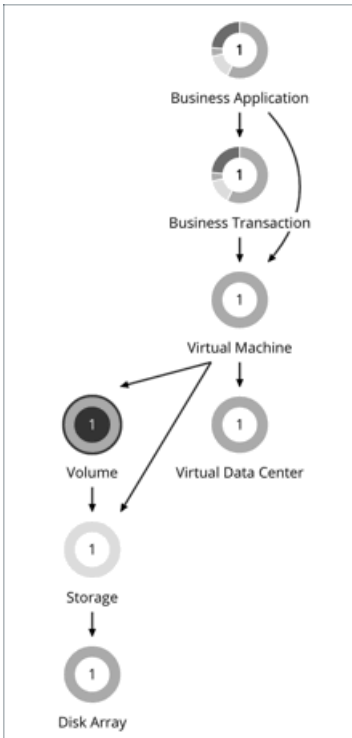

Synopsis	
Budget:	An on-prem volume gains its budget by selling resources to the VMs that it serves.
Provides:	Storage resources for VMs to use. Set the scope to a volume and view the Entity Information chart to see a list of VM-related files (such as VMDKs) contained in the volume. Set the scope to a VM to see a list of volumes attached to the VM.
Consumes:	Datacenter resources
Discovered through:	Hypervisor targets

Actions

Move

Move a VM's volume due to excess utilization of the current datastore, or for more efficient utilization of datastores in the environment. To evaluate and execute actions, set the scope to the VM to which a volume is attached.

NOTE:

The default global policy includes a setting that directs Intersight Workload Optimizer to use relevant metrics when analyzing and recommending actions for volumes. For details, see [Enable Analysis of On-prem Volumes \(on page 69\)](#).

On-prem Volume Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Placement Policies

By default, all on-prem volumes associated with a storage will move together rather than independently. You can create placement policies to place individual volumes on groups of storage. To ensure successful placement, be sure to also turn on the setting `Enable Analysis of On-prem Volumes` in the default global policy.

For more information, see [Creating Placement Policies \(on page 62\)](#) and [Enable Analysis of On-prem Volumes \(on page 69\)](#)

Action Automation and Orchestration

Action	Default Mode
Move	Manual

Cloud Storage Tiers

This policy setting works with plans that simulate migration of on-prem volumes to the cloud. When you create the policy, be sure to set the scope to on-prem volumes and then select the cloud storage tiers that they can migrate to. Intersight Workload Optimizer treats these tiers as constraints when you run a Migrate to Cloud plan that includes the volumes defined in the policy.

Attribute	Default Value
Cloud Storage Tiers	None

Click **Edit** to set your preferences. In the new page that displays, expand a **cloud tier** (a family of instance types, such as *Premium*) to see individual instance types.

Select your preferred instance types or cloud tiers, or clear the ones that you want to avoid. After you save your changes, the main page refreshes to reflect your selections.

Virtual Datacenter (Private Cloud)

A virtual datacenter (vDC) is a collection or pool of resources that groups the resources around specific requirements or business needs. In private cloud environments, Intersight Workload Optimizer discovers the infrastructure that provides resources to the cloud, and the workloads that run on the cloud. To manage these resources, private clouds organize the infrastructure into Provider and Consumer Virtual Datacenters.

NOTE:


Different targets use different names to refer to Virtual Datacenters. In the Intersight Workload Optimizer supply chain, these entities are all represented by Consumer and Provider VDCs, as follows:

Intersight Workload Optimizer	vCenter Server	VMM
Consumer VDC	Resource Pool (Child)	Tenant or TenantQuota
Provider VDC	Resource Pool (Root)	Cloud

Provider Virtual Datacenters

A provider virtual datacenter (vDC) is a collection of physical resources (hosts and datastores) within a cloud stack. The cloud administrator has access to these resources, and defines the datacenter members. A Provider vDC is created to manage resources that will be allocated to external customers through one or more Consumer vDCs.

Synopsis

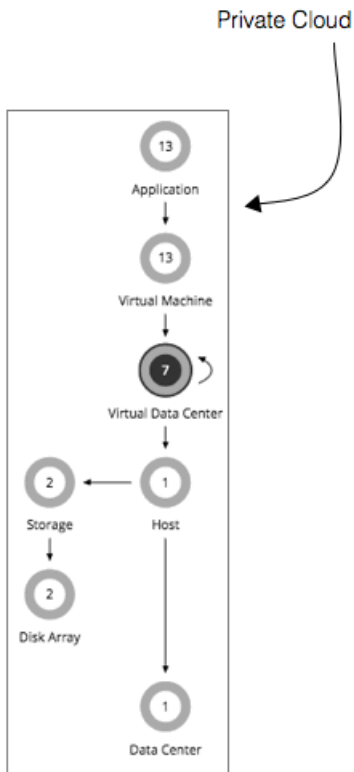

Synopsis	
Budget:	A Provider vDC gains its budget by selling resources to the Consumer vDCs that it hosts. If utilization falls off, the datacenter loses budget. Ultimately, if the budget isn't enough to pay for the services it consumes, Intersight Workload Optimizer will recommend decommissioning the Provider vDC.
Provides:	Physical resources such as hosts and datastores to Consumer vDCs.
Consumes:	Hosts and datastores from the physical infrastructure
Discovered through:	Intersight Workload Optimizer discovers vDCs through private cloud stack managers.

Monitored Resources

Intersight Workload Optimizer monitors the following resources for a Provider vDC:

- Memory (Mem)
 - The utilization of the Datacenter's memory reserved or in use
 - Measured in Kilobytes (KB)
- CPU
 - The utilization of the Datacenter's CPU reserved or in use
 - Measured in Megahertz (MHz)
- Storage
 - The utilization of the storage attached to the Provider vDC.
 - Measured in Kilobytes (KB)

Actions


None

Intersight Workload Optimizer does not recommend actions for a Virtual Datacenter. Instead, it recommends actions for the entities that provide resources to the Virtual Datacenter.

Consumer Virtual Datacenters

A Consumer Virtual Datacenter (vDC) is a collection of resources that are available for external customers to manage workload through the private cloud. It is an environment customers can use to store, deploy, and operate virtual systems. Consumer Datacenters use the resources supplied by a Provider Datacenter.

Synopsis

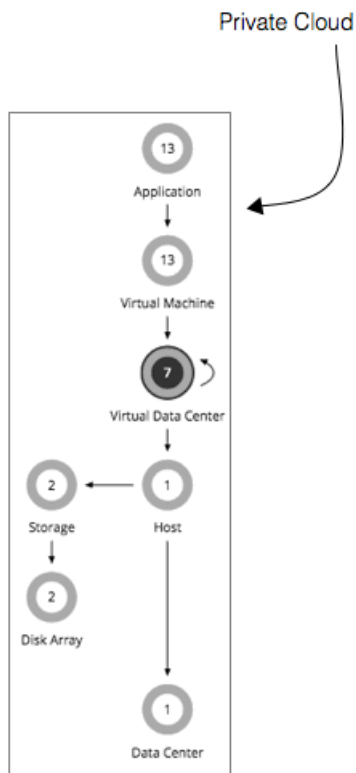

Synopsis

Budget:	<p>A Consumer vDC gains its budget as a function of its activity. The higher the utilization of the vDC, the more Intersight Workload Optimizer assumes the vDC is selling its services to a user. If utilization is high enough on a Consumer vDC, Intersight Workload Optimizer can increase resources for the vDC. If utilization falls off, Intersight Workload Optimizer can reduce resource capacity, or ultimately recommend terminating the vDC.</p> <p>Intersight Workload Optimizer can also resize VMs through the Consumer vDC in response to changes in VM utilization.</p>
Provides:	Resources to host virtual systems.
Consumes:	Provider vDC
Discovered through:	Intersight Workload Optimizer discovers vDCs through cloud stack managers.

While users can see some of the physical resources that support the Consumer vDC, consumer-level users cannot modify these physical resources. Users of Consumer vDCs make changes to how the virtual devices are deployed in that environment, but they must ask the Provider vDC administrator to add more physical resources to be used by the Consumer vDC. Likewise, Intersight Workload Optimizer can change resources on the VMs running in the vDC, but it does not make any changes to physical resources through this vDC.

Monitored Resources

Intersight Workload Optimizer monitors the following resources for a Consumer vDC:

- **Memory (Mem)**
The utilization of the Datacenter's memory reserved or in use
Measured in Kilobytes (KB)
- **CPU**
The utilization of the Datacenter's CPU reserved or in use
Measured in Megahertz (MHz)
- **Storage**
The utilization of the storage attached to the Consumer vDC.
Measured in Kilobytes (KB)

Actions

Intersight Workload Optimizer does not recommend actions to perform on a Consumer vDC. Instead, it recommends actions to perform on the entities running in the Provider vDC.

Host


For on-prem environments, a host is a server that runs processes, including hypervisor processes to host virtual workloads. Note that a host is not necessarily a physical piece of hardware. A VM can be set up as a server that runs a hypervisor, and in turn it can host other VMs within its processing space. However, it's most usual to use physical hardware as your hosts.

NOTE:

To support vSAN storage in your environment, you can deploy HCI Hosts. Intersight Workload Optimizer discovers the vSAN as a storage entity that consumes resources from the underlying hosts. For more information, see [vSAN Storage \(on page 226\)](#).

On the public cloud a host is an availability zone. This is where your cloud workloads run. For details, see [Zone \(on page 184\)](#).

Synopsis

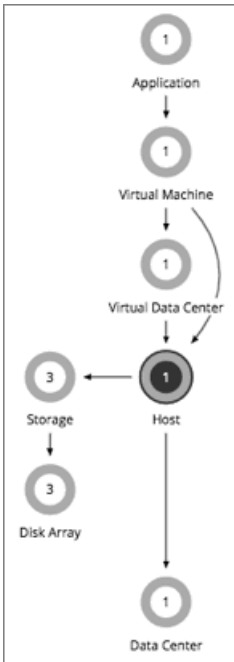

Synopsis	
Budget:	A host gains its budget by selling resources to the workloads that run on it. The more workloads running on a host, the more budget the host has to purchase storage and datacenter resources. If utilization of a host is high enough, Intersight Workload Optimizer can recommend that you provision a new one. If utilization falls off, the host loses budget. Ultimately, if the budget isn't enough to pay for the services it consumes, Intersight Workload Optimizer will recommend to suspend or power off the host.
Provides:	Host resources for VMs to use: <ul style="list-style-type: none"> ■ Mem (Kbytes) ■ CPU (MHz) ■ IO (throughput on the I/O bus) ■ Net (network throughput) ■ Swap (swap rate capacity measured in bytes/sec) ■ Ballooning (sharing of memory among hosted VMs) ■ CPU Ready Queue (wait time on the queue in ms)
Consumes:	Datacenter resources (physical space, cooling, etc.) and storage.
Discovered through:	Intersight Workload Optimizer discovers hosts through hypervisor targets. For some hypervisor vendors, the host is the target, and for others the hosts are managed by the specified target.

Monitored Resources

Intersight Workload Optimizer monitors the following resources on a host:

- Memory (Mem)
 - The utilization of the PM's memory reserved or in use
 - Measured in Kilobytes (KB)
- CPU
 - The utilization of the PM's CPU reserved or in use

- Measured in Megahertz (MHz)
- IO
 - The utilization of the PM's IO adapters
 - Measured in Kilobytes per second (KB/s)
- Net
 - The utilization of data through the PM's network adapters
 - Measured in Kilobytes per second (KB/s)
- Swap
 - The utilization of the PM's swap space
 - Measured in Kilobytes (KB)
- Balloon
 - The utilization of shared memory among VMs running on the host. ESX-only
 - Measured in Kilobytes (KB)
- CPU Ready
 - The utilization of the PM's allocated ready queue capacity (measured in Kbytes) that is in use, for 1, 2, and 4 CPU ready queues. ESX-only
 - Measured in Megahertz (MHz)

Actions

- **Start**
 - Start a suspended host when there is increased demand for physical resources.
- **Provision**
 - Provision a new host in the environment when there is increased demand for physical resources. Intersight Workload Optimizer can then move workloads to that host.
- **Suspend**
 - When physical resources are underutilized on a host, move existing workloads to other hosts and then suspend the host.

NOTE:

Intersight Workload Optimizer discovers VMware HA configurations in clusters, and considers the reserved resources in its calculations. For tolerated host failures, or a reserved percentage of cluster resources, Intersight Workload Optimizer automatically sets utilization constraints for that cluster. If you configure a failover host, Intersight Workload Optimizer reserves that host for HA and will not move VMs to it.

DRS Automation Settings

Intersight Workload Optimizer automatically discovers DRS automation settings for vSphere hosts managed through vCenter. When you set the scope to a vSphere host and then view the Entity Information chart, the following information displays:

- Vendor Automation Mode
 - The chart shows the automation mode discovered from vCenter – Not Automated, Partially Automated, or Fully Automated.
- Vendor Migration Level
 - Intersight Workload Optimizer assigns a vendor migration level based on the migration level discovered from vCenter. The chart only shows the assigned migration level (i.e., the Intersight Workload Optimizer Vendor Migration Level).

Intersight Workload Optimizer Vendor Migration Level	vCenter Migration Level
1 (Conservative)	5
2 (Less Conservative)	4
3 (Moderate)	3
4 (Less Aggressive)	2










Intersight Workload Optimizer Vendor Migration Level	vCenter Migration Level
5 (Aggressive)	1

Host Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

For details about host actions, see [Host Actions \(on page 218\)](#).

Action	Default Mode	vCenter	Hyper-V	UCS
Start	Recommend			
Suspend	Recommend			
Provision	Recommend			

For ServiceNow:

- Host provision actions will not generate a CR.
- For host suspend actions to succeed, it must be enabled in the given hypervisor, and there must be no VMs currently running on that host.

Maintenance Automation Avoidance

Attribute	Default Setting
Maintenance Automation Avoidance	30 minutes

The Maintenance Automation Avoidance setting applies to vCenter environments with DRS clusters. Intersight Workload Optimizer uses this setting when:

- Intersight Workload Optimizer actions to move VMs from one host to another are automated.
- The DRS [automation level](#) is *Fully Automated*, regardless of [migration threshold](#).

NOTE:

Intersight Workload Optimizer automatically discovers DRS automation levels and migration thresholds and displays them in the Entity Information chart for hosts.

- Host maintenance is in effect.

This setting prevents action conflicts between Intersight Workload Optimizer and DRS.

When a host enters maintenance mode, DRS starts to move VMs on the host to other hosts to prepare for maintenance. In response, Intersight Workload Optimizer clears all pending actions to and from the host. For example, assume a cluster with Host_01, Host_02, and Host_03. When Host_01 enters maintenance mode, Intersight Workload Optimizer removes the following pending actions from the system:

- Move a VM on Host_01 to Host_02.
This prevents a potential conflict with a DRS action that moves the VM to Host_03.
- Move a VM on Host_02 to Host_01.
Since Host_02 and Host_03 are not in maintenance mode, Intersight Workload Optimizer might recommend moving the VM from Host_02 to Host_03 as an alternative action.

In addition, Intersight Workload Optimizer treats a host entering or in maintenance mode as uncontrollable and stops generating actions for the host. The host remains uncontrollable after it leaves maintenance mode, but is within the Maintenance Automation Avoidance period that you specified. During rolling host maintenance operations on DRS clusters, where hosts undergo maintenance on a staggered basis, this gives DRS a window (30 minutes by default) to move VMs from hosts entering maintenance to hosts that have recently left maintenance, thereby avoiding any potential conflict.

When the Maintenance Automation Avoidance period is over, Intersight Workload Optimizer treats the host as controllable and resumes action generation. At this stage, it is assumed that all critical DRS activities on the host have been completed, so Intersight Workload Optimizer actions should be safe to execute.

The following table summarizes Intersight Workload Optimizer's response at various stages of maintenance.

Maintenance Status	DRS Activities	Host Status in Intersight Workload Optimizer	Intersight Workload Optimizer Pending Actions	Intersight Workload Optimizer New Actions
Host is entering maintenance mode.	Increased number of DRS activities moving VMs away from the host entering maintenance	X Uncontrollable (Maintenance)	# Removed from the system	X Not generated
Host is in maintenance mode.	Maintenance tasks on the host	X Uncontrollable (Maintenance)	N/A	X Not generated
Host has left maintenance mode but is within the Maintenance Automation Avoidance window.	Increased number of DRS activities moving VMs away from other hosts entering maintenance	X Uncontrollable (Maintenance)	N/A	X Not generated
Host has left maintenance mode and is outside the Maintenance Automation Avoidance window.	Minimal number of DRS activities on the host	# Controllable	N/A	# Generated

Points to consider:

- You can set a different Maintenance Automation Avoidance value that aligns with your host maintenance practices. For example, if moving VMs back to a host typically takes an hour, specify a value of 60.
- You can set a global value in the default policy for hosts, or specific values in automation policies that you create for your clusters.
- For rolling maintenance of hosts in a cluster, where hosts undergo maintenance on a staggered basis, there could be a point in the process where some or all hosts are uncontrollable. This means that Intersight Workload Optimizer cannot recommend actions to alleviate pressure on overburdened hosts. As such, these hosts could lose performance while they are uncontrollable.
- This setting has no effect on clusters where the DRS automation level is *Manual* or *Partially Automated*. As soon as a host enters maintenance mode, Intersight Workload Optimizer automates the first action to move a VM to another host, and then stops recommending actions. After the host leaves maintenance mode, Intersight Workload Optimizer automates actions to manage the performance of the cluster as normal.

Utilization Constraints

Utilization constraints affect the actions Intersight Workload Optimizer recommends as it manages your environment. Intersight Workload Optimizer recommends actions that avoid using these resources beyond the given settings. The values you set here specify what percentage of the existing capacity that Intersight Workload Optimizer will consider to be 100% of capacity.

Attribute	Default Value
Memory Overprovisioned Percentage	1000
Net Throughput	50
Ready Queue Utilization	50
Memory Utilization	100
IO Throughput	50
CPU Overprovisioned Percentage	1000
CPU Utilization	100
Swapping Utilization	20

For example:

- Setting 50 for Net Throughput means that Intersight Workload Optimizer considers 50% utilization of that throughput to be 100% of capacity and 25% utilization to be 50% of capacity
- Setting 1000 for Memory Overprovisioned Percentage means that overprovisioning memory by 5 times the physical capacity shows up as 50% utilization of the Mem Overprovisioned capacity in Intersight Workload Optimizer
- Setting 100 for Memory Utilization means that Intersight Workload Optimizer capacity reflects the physical capacity for this resource

Desired State

The desired state for your environment is an n-dimensional sphere that encompasses the fittest conditions your environment can achieve.

Attribute	Default Value
Diameter	10
Center	70

The multiple dimensions of this sphere are defined by the resource metrics in your environment. Metric dimensions include VMem, storage, CPU, etc. While the metrics on the devices in your environment can be any value, the desired state, this n-dimensional sphere, is the subset of metric values that assures the best performance while achieving the most efficient utilization of resources that is possible.

The Desired State settings define the center of the sphere as well as its diameter. This is a way for you to customize what Intersight Workload Optimizer considers to be the desired state.

Setting the center of the sphere chooses the priority for Intersight Workload Optimizer analysis. If you set the balance in favor of efficiency, Intersight Workload Optimizer tends to place more VMs on fewer physical hosts, and to give them storage capacity from fewer data stores. As a result, high utilization can have more impact on QoS. With a balance in favor of performance, Intersight Workload Optimizer tends to spread virtual loads across more physical devices. This can result in the provisioning of excess resources.

The diameter setting determines the range of deviation from the center that can encompass the desired state. If you specify a large diameter, Intersight Workload Optimizer will have more variation in the way it distributes workload across hosting devices.

As you move each slider, a tooltip displays the numerical value of the setting. **Center** indicates the percentage of resource utilization you want, within the range you specify as **Diameter**. For example, if you want utilization of 75%, plus or minus 10%, then you would set **Center** = 75 and **Diameter** = 20. Intersight Workload Optimizer recommends actions that tend toward this desired state much as possible, given the dependencies within the current environment.

NOTE:

The setting for Target Utilization can have an effect on plans that you run. If you disable provisioning and suspension for hosts and datastores, then you should always set Center and Diameter to their default values.

Placement Policies

You can create placement policies that merge multiple clusters into a single logical group for the purpose of workload placement.

For example, you can merge three host clusters in a single provider group. This enables Intersight Workload Optimizer to move workload from a host in one of the clusters to a host in any of the merged clusters to increase efficiency in your environment.

For more information, see [Creating Placement Policies \(on page 62\)](#).

NOTE:


For vCenter, Cisco automatically imports any vSphere Host DRS rules when DRS is enabled, and displays them on the **Settings > Policies** page under **Imported Placement Policies**.

For more information, see [Importing Workload Placement Policies \(on page 62\)](#).

Chassis

A chassis houses the servers that are part of a computing fabric. It provides compute, memory, storage, and bandwidth resources.

Synopsis



Synopsis	
Budget:	A Chassis has unlimited budget.
Provides:	Chassis resources (physical space, cooling, etc.).
Consumes:	N/A
Discovered through:	Intersight Workload Optimizer discovers Chassis through fabric manager targets.

NOTE:

When Intersight Workload Optimizer discovers that blade servers housed in a particular chassis have been designated as vCenter hosts, the supply chain stitches the blade servers and chassis to the corresponding vCenter datacenter to establish their relationship. When you set the scope to that datacenter and view the Health chart, you will see the blade servers in the list of hosts. In addition, when the datacenter is included in a merge policy (a policy that merges datacenters for the purpose of VM placement), the VMs in the blade servers apply the policy, allowing them to move between datacenters as necessary.

Monitored Resources

Intersight Workload Optimizer monitors the following resources for the servers in a chassis:

- Power
 - Electricity being consumed by the Chassis
 - Measured in Watts (W)
- Cooling
 - The percentage of the acceptable temperature range that is utilized by this chassis. As the chassis temperature nears the high or low running temperature limits, this percentage increases.

Actions

None

Intersight Workload Optimizer does not recommend actions for a chassis.


Datacenter

A datacenter is the sum of VMs, PMs, datastores, and network devices that are managed by a given hypervisor target. A datacenter provides compute, memory, storage, and bandwidth resources.

NOTE:

For public cloud environments, a datacenter is the cloud region. The hosts that get resources from the datacenter are availability zones within that region. For details, see [Region \(on page 186\)](#) and [Zone \(on page 184\)](#).

Synopsis



Synopsis	
Budget:	A Datacenter has unlimited budget.
Provides:	Compute, memory, storage, and bandwidth resources
Consumes:	N/A
Discovered through:	Intersight Workload Optimizer discovers Datacenters through hypervisor targets.

NOTE:

When Intersight Workload Optimizer discovers that blade servers housed in a particular chassis have been designated as vCenter hosts, the supply chain stitches the blade servers and chassis to the corresponding vCenter datacenter to establish their relationship. When you set the scope to that datacenter and view the Health chart, you will see the blade servers in the list of hosts. In addition, when the datacenter is included in a merge policy (a policy that merges datacenters for the purpose of VM placement), the VMs in the blade servers apply the policy, allowing them to move between datacenters as necessary.

Monitored Resources

Intersight Workload Optimizer does not monitor resources directly from the datacenter, but it does monitor the following resources, aggregated for the hosts in a datacenter:

- Memory (Mem)

- The utilization of the PM's memory reserved or in use
Measured in Kilobytes (KB)
- CPU
The utilization of the PM's CPU reserved or in use
Measured in Megahertz (MHz)
- IO
The utilization of the PM's IO adapters
Measured in Kilobytes per second (KB/s)
- Net
The utilization of data through the PM's network adapters
Measured in Kilobytes per second (KB/s)
- Swap
The utilization of the PM's swap space
Measured in Kilobytes (KB)
- Balloon
The utilization of shared of memory among VMs running on the host. ESX-only
Measured in Kilobytes (KB)
- CPU Ready
The utilization of the PM's allocated ready queue capacity (measured in Kbytes) that is in use, for 1, 2, and 4 CPU ready queues. ESX-only
Measured in Kilobytes (KB)

Actions

None

Intersight Workload Optimizer does not recommend actions for a datacenter. Instead, it recommends actions for the entities running in the datacenter.

Placement Policies


For vCenter environments, you can create placement policies that merge datacenters to support cross-vCenter moves. In this case, where a datacenter corresponds to a given vCenter target, the merged clusters can be in different datacenters. In this case you must create two merge policies; one to merge the affected datacenters, and another to merge the specific clusters.

For more information, see [Creating Placement Policies \(on page 62\)](#).

Storage

Intersight Workload Optimizer represents storage as Datastores. A Datastore is a logical grouping of one or more physical storage devices that serve workload storage requirements.

Synopsis



Synopsis	
Budget:	A Datastore gains its budget by selling resources to the VMs it serves. If utilization of a Datastore is high enough, Intersight Workload Optimizer can recommend that you provision a new one.
Provides:	Host resources for VMs to use: <ul style="list-style-type: none"> ■ Storage amount ■ IOPS (storage access operations per second) ■ Latency (capacity for disk latency in ms)
Consumes:	Disk arrays (or aggregates)
Discovered through:	Intersight Workload Optimizer discovers on-prem Datastores through hypervisor targets and storage controllers.

Monitored Resources

Intersight Workload Optimizer monitors the following resources for a datastore:

- **Storage Amount**
The utilization of the datastore's capacity
Measured in Megabytes (MB)
- **Storage Provisioned**
The utilization of the datastore's capacity, including overprovisioning.
Measured in Megabytes (MB)
- **Storage Access Operations Per Second (IOPS)**
The summation of the read and write access operations per second on the datastore
Measured in Operations per second

NOTE:

When it generates actions, Intersight Workload Optimizer does not consider IOPS throttling that it discovers on storage entities. Analysis uses the IOPS it discovers on Logical Pool or Disk Array entities.

- **Latency**
The utilization of latency on the datastore
Measured in Milliseconds (ms)

Storage Actions

- **Move**
For high utilization of physical storage, move datastore to a different disk array (aggregate).
- **Provision**

For high utilization of storage resources, provision a new datastore.

- **Resize**

Increase or decrease the datastore capacity.

- **Start**

For high utilization of storage resources, start a suspended datastore.

- **Suspend**

For low utilization of storage resources, move served VMs to other datastores and suspend this one.

- **Delete**

Delete a datastore or volume that has been suspended for a period of time.


Storage resize actions use Intersight Workload Optimizer tuned scaling settings. This gives you increased control over the action mode Intersight Workload Optimizer will use for the affected actions. For an overview of tuned scaling, see [Tuned Scaling for On-prem VMs \(on page 191\)](#).

You can create placement policies to enforce constraints for storage move actions. For example, you can have a policy that allows storage to only move to certain disk arrays, or a policy that prevents storage from moving to certain disk arrays.

For more information, see [Creating Placement Policies \(on page 62\)](#).

vSAN Storage

Overview

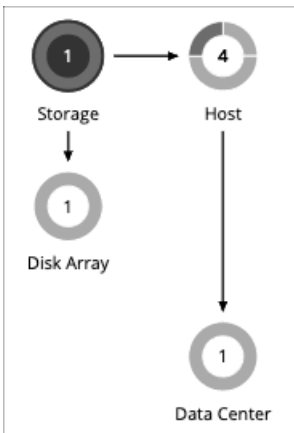

For environments that use hyperconverged infrastructure to provide storage on a vSAN, Intersight Workload Optimizer can discover the storage provided by a host cluster as a single Storage entity. This Storage entity represents the full storage capacity that is provided by that host cluster.

Intersight Workload Optimizer supports VMware vSAN, but does not support stretched vSAN clusters. Adding stretched clusters can cause the generation of incorrect storage recommendations and actions.

Intersight Workload Optimizer supports VMware vSAN.

vSAN Storage Capacity

When you consider vSAN capacity, you need to compare *Raw Capacity* with *Usable Capacity*.

- Raw Capacity
- Intersight Workload Optimizer discovers Raw Capacity configured in vCenter and uses it to calculate Usable Capacity. Raw Capacity displays in the Entity Information chart.
- Usable Capacity

Intersight Workload Optimizer calculates Usable Capacity and then uses the calculated value to drive scaling actions. Intersight Workload Optimizer can recommend scaling the Storage Amount, Storage Provisioned, or Storage Access capacity. Usable Capacity displays in the Capacity and Usage chart.

Usable Capacity Calculation

To calculate Usable Capacity, Intersight Workload Optimizer considers a variety of attributes, including:

- Raw Capacity and Largest Host Capacity

Intersight Workload Optimizer compares the Raw Capacity for all the hosts in the cluster and then uses the largest value as Largest Host Capacity.

- RAID Factor

Intersight Workload Optimizer calculates RAID Factor based on the *Failures to Tolerate* (FTT) value and *Redundancy Method* that it discovers. FTT specifies how many failures a given cluster can tolerate, while Redundancy Method specifies the RAID level for the cluster.

FTT	Redundancy Method	RAID Factor
0	RAID1	1
1	RAID1	1/2
2	RAID1	1/3
1	RAID5/6	3/4
2	RAID5/6	2/3

NOTE:

If discovery fails for some reason, Intersight Workload Optimizer uses a RAID Factor of 1.

- Host Capacity Reservation, Slack Space Percentage, and Compression Ratio

You can control the values for these attributes in storage policies. For details about these attributes and their effect on usable capacity calculations, see [Hyper-converged Infrastructure Settings \(on page 231\)](#).

The calculation for Usable Capacity can be expressed as:

$$\text{Usable Capacity} = (\text{Raw Capacity} - \text{Largest Host Capacity} * \text{Host Capacity Reservation}) * \text{Slack Space Percentage} * \text{RAID Factor} * \text{Compression Ratio}$$

If the result of the calculation is zero or a negative value, Intersight Workload Optimizer sets the Usable Capacity to 1 MB.

Capacity and Usage Chart for vSAN Storage

The **Capacity and Usage** chart for vSAN storage shows two Storage Amounts - *Consumed* (bought) and *Provided* (sold). This is because vSAN storage can buy and sell commodities to hosts.

For the *Provided* Storage Amount, the *Capacity* value corresponds to *Usable Capacity*, while the *Used* value indicates utilization.

Entity Information Chart for vSAN Storage

The **Entity Information** chart includes the following information:

- HCI Technology Type

The technology that supports this storage cluster. For this release, Intersight Workload Optimizer supports VMware vSAN technology.

- Capacity

Intersight Workload Optimizer displays rounded values for the following, which might be slightly different from the values it discovers from vCenter:

- Raw Capacity

The sum of the Raw Capacity that each storage capacity device provides.

- Raw Free Space

How much of the Raw Capacity is not currently in use.

- Raw Uncommitted Space

In terms of Raw Capacity, how much space is available according to your thin/thick provisioning.

- Redundancy Method and Failures to Tolerate

Redundancy Method specifies the RAID level employed for the cluster. RAID level impacts how much Usable Capacity you can see for a given Raw Capacity. You can use a RAID calculator to determine how the RAID level impacts your Usable Capacity.

Failures to Tolerate specifies how many capacity device failures a given cluster can tolerate. In practical terms, this means how many hosts can come down at the same time, without affecting storage. This value should match the RAID level.

Actions to Add vSAN Capacity

To scale up storage amount, you add additional hosts that are configured to include their storage in the vSAN array.

When you scope the session to the vSAN storage, you can see actions to scale:

- Storage Amount
- Storage Provisioned
- Storage Access

The action to scale up the storage indicates the amount of storage you need to add. It appears as a recommended action. In fact, to add storage you must add a new host.

When you scope the session to hosts that provide the capacity devices to the storage, you can see the following actions that are related to scaling up the storage capacity:

- Scale up StorageAmount for Storage [MyVsanStorageCluster]
- Provision Host [VSAN_HostName]

The action to provision a host includes details about the storage cluster. Because you need to manually add hosts to your on-prem environment, this appears as a recommended action.

Planning With vSAN Storage

For *Hardware Replace* and *Custom* plans, you can use HCI Host templates to add vSAN capacity. These represent the hosts that add storage capacity to a vSAN cluster. For more information, see [HCI Host Template Settings \(on page 369\)](#).

Under certain circumstances, *Add Virtual Machines* plans can fail to place workloads, or it can fail to generate actions to increase storage capacity by provisioning new hosts.

- If you scope the plan to a user-created group that only provides vSAN storage, or to a discovered storage cluster group, then the plan can fail to place VMs with multiple volumes. This can occur for VMs that use conventional storage (not vSAN) along with vSAN storage.
- If you scope the plan to a vSAN host group and add VMs, the plan can fail to increase storage capacity by provisioning new hosts. For example, assume you scope the plan to a vSAN host group and add 20 VMs to the environment. In that case, you need hosts to provide compute capacity for the VMs, and you also need hosts to provide storage capacity. The plan can represent the compute provisioning correctly, but it can incorrectly fail to add more storage capacity to the vSAN.
- If the vSAN RAID type is `Raid6/FTT=2`, if you scope the plan to any vSAN groups then the plan will fail to place any of the VMs.

Storage Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

The following are the storage actions and automation support for environments that do not include Disk Array Storage Controllers as targets. For details about these actions, see [Storage Actions \(on page 225\)](#).

Action	Default Mode	vCenter	Hyper-V
Delete (Volume)	Recommend	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>
Suspend	Manual	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>
Delete (Datastore)	Disabled	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>
Move	Recommend	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>
Provision	Recommend	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>
Start	Recommend	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>
Resize (Up, Down, Above Max, or Below Min - using tuned scaling)	Recommend	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>

For datastores on disk arrays:

Action	Default Mode	NetApp ONTAP	VMAX	Pure Storage
Delete (Volume)	Recommend	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>
Suspend	Manual	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>
Delete (Datastore)	Disabled	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>
Move	Recommend	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>
Provision	Recommend	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>
Start	Recommend	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>
Resize (Up, Down, Above Max, or Below Min - using tuned scaling)	Recommend	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>	<input type="button" value="Rcmd"/>

For ServiceNow:

- Storage suspend and vSAN storage resize actions will not generate a CR.
- Currently Intersight Workload Optimizer can only execute a CR for storage provision actions on Pure and Dell Compellent storage.

Utilization Constraints

Utilization constraints affect the actions Intersight Workload Optimizer recommends as it manages your environment. Intersight Workload Optimizer recommends actions that avoid using these resources beyond the given settings. The values you set here specify what percentage of the existing capacity that Intersight Workload Optimizer will consider to be 100% of capacity.

Attribute	Default Value
Storage Amount Utilization	90

Attribute	Default Value
IOPS Utilization	100
Latency Utilization	100

For example, setting 90 for Storage Amount Utilization means that Intersight Workload Optimizer considers 90% utilization of the physical storage to be 100% of capacity.

Storage Settings

Attribute	Default Setting/Value
Directories to Ignore	\\.dvsData.*\\\.snapshot.*\\\.vSphere-HA.*\\\.naa.*\\\.etc.* lost +found.*
Files to Ignore	Empty String
Storage Latency Capacity [ms]	100
Storage Overprovisioned Percentage	200
IOPS Capacity	50000

■ Wasted Storage Management

You can make settings to control how Intersight Workload Optimizer tracks and reports on wasted storage in your environment. Wasted storage is any disk space devoted to files that are not required for operations of the devices or applications in your environment. Wasted storage may indicate opportunities for you to free up disk space, and provide more storage capacity to running VMs and applications.

NOTE:

It's possible that a single datastore can be managed by more than one instance of vCenter Server. Browsing over such a datastore can result in conflicting values for wasted storage in reports and in the Improve Overall Efficiency dashboard. You should not enable datastore browsing for a scope that includes such a datastore.

If there are groups of datastores you don't want to track for wasted storage, set the given scope and disable datastore browsing there. If you prefer not to use Intersight Workload Optimizer resources to track wasted storage, leave the global setting checked.

The settings for **Directories to Ignore** and **Files to Ignore** specify directories and files that Intersight Workload Optimizer will not consider when looking for wasted data storage space. Separate items in these lists with the OR bar ("|").

■ Storage Latency Capacity

This sets the maximum storage latency to tolerate on a datastore, in ms. The default setting is 100 ms.

Intersight Workload Optimizer measures the latency experienced by all VMs and hosts that access the datastore. Assume a default setting of 100 ms. If a datastore exhibits latency of 50 ms, then the Intersight Workload Optimizer will show latency utilization of 50%.

For VMAX environments, Intersight Workload Optimizer discovers SLO for storage latency that you set in VMAX and uses it in analysis. However, if you set a higher storage latency value in a Intersight Workload Optimizer policy, analysis will use that value instead.

■ Storage Overprovisioned Percentage

Storage Overprovisioned Percentage sets how much overprovisioning Intersight Workload Optimizer assumes when recommending actions for VM datastores. For example, if a datastore has a 30 GB capacity, and Storage Overprovisioned Percentage is set to 200, Intersight Workload Optimizer will treat the datastore as though it has a capacity of 60 GB, or 200% of the actual datastore capacity.

■ IOPS Capacity

IOPS Capacity is the IOPS setting for individual datastores. To set a specific capacity for one group of datastores, select that group as the property scope and override the global setting for that scope.

Note that IOPS capacity for a disk array takes precedence – Datastores that are members of a disk array always have the IOPS capacity that is set to the disk array.

Intersight Workload Optimizer considers these settings when calculating utilization percentage. For example, assume IOPS Capacity of 500 for datastores. If utilization on a datastore is 250 IOPS, then the datastore is at 50% of capacity for that metric.

Scaling Constraints

Rate of Resize

Intersight Workload Optimizer uses the Rate of Resize setting to determine how to make storage resize changes in a single action.

Attribute	Default Value
Rate of Resize	High (3)

- **Low**

Change the value by one increment only.

- **Medium**

Change the value by an increment that is 1/4 of the difference between the current value and the optimal value.

- **High**

Change the value to be the optimal value.

This default value ensures that resizing to the desired state can be achieved in a single action. This is more efficient than smaller, incremental resizes.

Increment Constant for Storage Amount

This setting controls how many GB to add or subtract when resizing the allocation for a datastore.

Attribute	Default Value
Increment Constant for Storage Amount [GB]	100 GB

Hyperconverged Infrastructure Settings

Intersight Workload Optimizer considers these settings when calculating capacity and utilization for hyperconverged environments.

Attribute	Default Setting/Value
Host Capacity Reservation	1
Host IOPS Capacity	50000
Slack Space Percentage	25
Compression Ratio	1
Usable Space Includes Compression	Off

NOTE:

Intersight Workload Optimizer uses Host Capacity Reservation, Slack Space Percentage, and Compression Ratio to calculate vSAN usable capacity and drive scaling actions. For more information about usable capacity and how it is calculated, see [vSAN Storage \(on page 226\)](#).

- **Host Capacity Reservation**

When a host must be taken out of service for maintenance, vSphere will evacuate the data from that host and move it to other hosts in the cluster to maintain the integrity of the replication demanded by the storage policy. For this to happen, there must be enough free raw capacity available to accept the data being evacuated.

Intersight Workload Optimizer uses this setting to determine how many hosts worth of capacity it should subtract from the raw capacity amount before calculating usable capacity. This is not the same as redundancy. It does not specify how the array distributes data to maintain integrity.

■ **Host IOPS Capacity**

In addition to calculating usable capacity, Intersight Workload Optimizer needs an estimate of datastore IOPS capacity (storage access). Intersight Workload Optimizer uses the value that you set to provide an estimate of effective IOPS capacity for each host in the cluster. Total IOPS capacity is the number of hosts in the cluster multiplied by Host IOPS Capacity.

■ **Slack Space Percentage**

It is recommended that a vSAN datastore never be filled to prevent vSphere from moving objects/files around the cluster to balance the datastore across all the hosts.

Intersight Workload Optimizer reduces usable capacity by the percentage that you set.

■ **Compression Ratio**

vSAN supports both deduplication and compression, which may increase the amount of usable capacity on the datastore. Intersight Workload Optimizer does not try to predict the deduplication or compression ratio, but you can choose to include a compression ratio into the usable capacity calculation. This captures the ratio achieved both by compression and deduplication.

The compression ratio that you set acts as a multiplier on the raw capacity to calculate usable capacity. For example, a compression ratio of 2 would double the amount of usable capacity. The default value of 1 means no compression.

■ **Usable Space Includes Compression**

Turn this on if you want Intersight Workload Optimizer to consider the compression ratio when calculating storage utilization and capacity. Whether this is on or off, Intersight Workload Optimizer always considers compression when calculating utilization of StorageProvisioned.

Placement Policies

Intersight Workload Optimizer supports placement policies for storage and storage clusters.


- You can create placement policies to enforce constraints for storage move actions. For example, you can have a policy that allows storage to only move to certain disk arrays, or a policy that prevents storage from moving to certain disk arrays.
- You can create placement policies that merge multiple clusters into a single logical group for the purpose of workload placement.

For more information, see [Creating Placement Policies \(on page 62\)](#).

Logical Pool

A logical pool represents storage resources that are managed together and presented as a single storage system. Intersight Workload Optimizer analysis identifies performance and efficiency opportunities for a logical pool. For example, it can recommend moving resources into or out of a logical pool, or aggregating resource capacity within the pool.

Synopsis

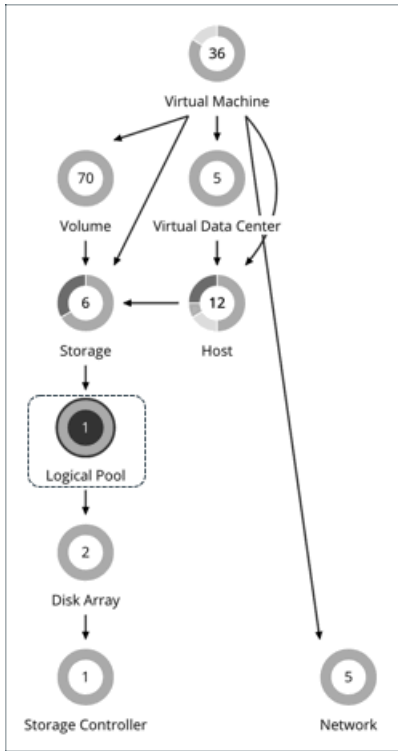

Synopsis	
Budget:	N/A
Provides:	Storage resources
Consumes:	Disk array resources
Discovered through:	Storage targets

Monitored Resources

Intersight Workload Optimizer monitors the following resources for a logical pool:

- **Storage Amount**
The utilization of the logical pool's capacity.
Measured in Megabytes (MB)
- **Storage Provisioned**
The utilization of the logical pool's capacity, including overprovisioning.
Measured in Megabytes (MB)
- **Storage Access Operations Per Second (IOPS)**
The summation of the read and write access operations per second on the logical pool.
Measured in Operations per second
- **Latency**
The utilization of latency on the logical pool.
Measured in milliseconds (ms)

Logical Pool Actions

- **Resize**

- Provision
- Move
- Start
- Suspend

Logical Pool Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

Action	Default Mode
Suspend	Disabled
Start	Disabled
Resize	Recommend
Move	Disabled
Provision	Disabled

Storage Settings

Attribute	Default Value
Storage Latency Capacity [ms]	100
Storage Overprovisioned Percentage	200
IOPS Capacity	50000

- **Storage Latency Capacity**

This sets the maximum storage latency to tolerate on a logical pool, in ms. The default setting is 100 ms.

- **Storage Overprovisioned Percentage**

Storage Overprovisioned Percentage sets how much overprovisioning Intersight Workload Optimizer assumes when recommending actions for logical pools.

- **IOPS Capacity**

IOPS Capacity is the IOPS setting for individual logical pools.


NOTE:

Intersight Workload Optimizer discovers storage latency and IOPS capacities that you set in your environment (for example VMAX) and uses them in its analysis. These capacities will be overridden by values that you set in Intersight Workload Optimizer policies.

Disk Array

A Disk Array (an aggregate) is a data storage system made up of multiple disk drives. For example, a RAID is an aggregate that implements redundancy and other data management features. A disk array provides storage volumes to serve the storage requirements of physical machines. It uses the resources of one storage controller, which manages the disk array operation.

Synopsis

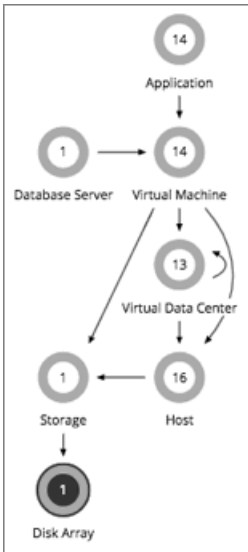

Synopsis	
Budget:	A disk array gains its budget by selling resources to the datastores it serves. If utilization of a disk array is high enough, Intersight Workload Optimizer can recommend that you provision a new one.
Provides:	Storage resources for datastores to use: <ul style="list-style-type: none"> ■ Storage amount ■ Storage Provisioned ■ IOPS (storage access operations per second) ■ Latency (capacity for disk latency in ms)
Consumes:	Storage controllers
Discovered through:	Intersight Workload Optimizer discovers disk arrays through storage controller targets.

Monitored Resources

Intersight Workload Optimizer monitors the following resources for a disk array:

NOTE:

Not all targets of the same type provide all possible commodities. For example, some storage controllers do not expose CPU activity. When a metric is not collected, its widget in the UI will display no data.

- Storage Amount
 - The utilization of the Disk Array's capacity.
 - Measured in Megabytes (MB)
- Storage Provisioned
 - The utilization of the Disk Array's capacity, including overprovisioning.
 - Measured in Megabytes (MB)
- Storage Access Operations Per Second (IOPS)
 - The summation of the read and write access operations per second on the disk array
 - Measured in Operations per second
- Latency

The utilization of latency, computed from the latency of each device in the disk array.
 Measured in milliseconds (ms)

Disk Array Actions





- **Provision**
 For high utilization of the disk array’s storage, provision a new disk array (recommendation, only).
- **Start**
 For high utilization of disk array, start a suspended disk array (recommendation, only).
- **Suspend**
 For low utilization of the disk array’s storage, move VMs to other datastores and suspend volumes on the disk array (recommendation, only).
- **Move**
 (Only for NetApp Cluster-Mode) For high utilization of Storage Controller resources, Intersight Workload Optimizer can move an aggregate to another storage controller. The storage controllers must be running.
 For high IOPS or latency, a move is always off of the current disk array. All the volumes on a given disk array show the same IOPS and Latency, so moving to a volume on the same array would not fix these issues.
- **Move VM**
 For high utilization of Storage on a volume, Intersight Workload Optimizer can move a VM to another volume. The new volume can be on the current disk array, on some other disk array, or on any other datastore.
 For high IOPS or latency, a move is always off of the current disk array. All the volumes on a given disk array show the same IOPS and Latency, so moving to a volume on the same array would not fix these issues.
- **Move Datastore**
 To balance utilization of disk array resources, Intersight Workload Optimizer can move a datastore to another array.

Disk Array Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

The following table describes the default action mode for disk array actions and automation support for environments that have Disk Array Storage Controllers as targets.

Action	Default Mode	NetApp ONTAP	VMAX	Pure Storage
Move	Disabled			
Provision	Recommend			
Resize (up)	Recommend			
Start	Recommend			
Suspend	Disabled			

Action Automation for NetApp Storage Systems

For NetApp storage systems, the actions Intersight Workload Optimizer can automatically perform depend on the NetApp version you are running, and whether the system is running in cluster mode:

Automated Action	Cluster-Mode
Move VM between datastores, on the same disk array	Yes
Move VM between datastores on different disk arrays	Yes
Move Datastore between disk arrays on the same storage controller	Yes
Move Datastore between disk arrays on different storage controllers	Yes
Resize Storage	Yes
Resize Disk Array	No – Resize up, only

In addition, for a system running in Cluster-Mode, Intersight Workload Optimizer can recommend moving an aggregate to another storage controller.

Utilization Constraints

Utilization constraints affect the actions Intersight Workload Optimizer recommends as it manages your environment. Intersight Workload Optimizer recommends actions that avoid using these resources beyond the given settings. The values you set here specify what percentage of the existing capacity that Intersight Workload Optimizer will consider to be 100% of capacity.

Attribute	Default Value
Storage Amount Utilization	90

Storage Settings

Set capacity for specific storage resources.

Attribute	Default Value
IOPS Capacity A generic setting for disk array IOPS capacity (see Disk Array IOPS Capacity below).	5000
VSeries LUN IOPS Capacity	5000
7.2k Disk IOPS Capacity	800
10k Disk IOPS Capacity	1200
15k Disk IOPS Capacity	1600
SSD Disk IOPS Capacity	50000
Disk Array IOPS Capacity	10000
Storage Overprovisioned Percentage	200
Storage Latency Capacity [ms]	100

NOTE:

Intersight Workload Optimizer discovers storage latency and IOPS capacities that you set in your environment (for example VMAX) and uses them in its analysis. These capacities will be overridden by values that you set in Intersight Workload Optimizer policies.

■ IOPS Capacity

The capacity of IOPS (IO operations per second) that your storage devices can support. Intersight Workload Optimizer considers these settings when calculating utilization percentage. For example, assume IOPS Capacity of 5000 for a disk array. If utilization on the array is 2500 IOPS, then the disk array is at 50% of capacity for that metric.

Note that the IOPS setting for an array will determine IOPS calculations for all the storage on that array. If you made different IOPS settings for individual datastores hosted by the array, Intersight Workload Optimizer ignores the datastore settings and uses the disk array settings.

- Various Disk IOPS Capacity settings (**SSD Disk IOPS**, **7.2k Disk IOPS**, etc)

IOPS capacity settings for the different types of physical drives that are discovered on a disk array. If the storage controller exposes the types of disks in the array, Intersight Workload Optimizer uses multiples of these values to calculate the IOPS capacity of the disk array.

- **Disk Array IOPS Capacity**

Some disk arrays do not expose data for their individual disks – This is typical for flash arrays, or arrays that aggregate storage utilization across multiple tiers. Intersight Workload Optimizer uses this setting for the IOPS capacity of such disk arrays. Set it to the global scope to specify IOPS capacity for all disk arrays. To override this setting, set a disk array or group of disk arrays as the property scope, and then set the value you want for **IOPS Capacity**.

NOTE:

The user interface shows a disk array entity for any array that is discovered through a valid disk array or storage controller target. It also shows *placeholder* disk arrays for disk arrays that are not discovered through a configured target. For example, you might have disk arrays that Intersight Workload Optimizer does not natively support. Or you might have storage that is not hosted by any disk array. Such *placeholder* disk array entities appear with the string "DiskArray-" prefixed to their names. The user interface allows you to set IOPS Capacity to these placeholders, but those settings have no effect. To set IOPS Capacity for that storage, you must set it to the individual datastores.


■ **Storage Overprovisioned**

This setting indicates how much overprovisioning Intersight Workload Optimizer assumes when recommending actions for disk arrays. For example, if a disk array has a 30 TB capacity, and DiskArray Overprovisioned Percentage is set to 200, Intersight Workload Optimizer will treat the datastore as though it has a capacity of 60 TB, or 200% of the actual disk array capacity.

Storage Controller

A Storage Controller is a device that manages one or more disk arrays. The storage controller provides CPU cycles to perform storage management tasks for each disk array it manages.

Synopsis



Synopsis	
Budget:	A storage controller gains its budget by selling resources to the disk arrays it manages. If utilization of the storage controller’s CPU resources is high enough, Intersight Workload Optimizer can recommend that you provision a new one and move disk arrays (aggregates) to it.
Provides:	CPU resources to manage disk arrays.
Consumes:	NA

Synopsis	
Discovered through:	Intersight Workload Optimizer directly accesses storage controller targets.

Monitored Resources

Intersight Workload Optimizer monitors the following resources for a storage controller:

- CPU
 - The utilization of the Storage Controller's allocated CPU
 - Measured in Megahertz (MHz)
- Storage Amount
 - The utilization of the storage controller's capacity. The storage allocated to a storage controller is the total of all the physical space available to aggregates managed by that storage controller.
 - Measured in Megabytes (MB)

NOTE:

In NetApp environments, the storage controller shows 100% utilization when there are no more disks in a `SPARE` state that the storage controller can utilize in an aggregate. This does not indicate that the storage controller has no capacity.

Actions

Provision




For high utilization of the storage controller's CPU, provision a new storage controller, and then move disk arrays to it.

Storage Controller Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

Actions for individual Disk Array Storage Controllers:

Action	Default Mode	NetApp ONTAP	VMAX	Pure Storage
Provision	Disabled			

Utilization Constraints

Utilization constraints affect the actions Intersight Workload Optimizer recommends as it manages your environment. Intersight Workload Optimizer recommends actions that avoid using these resources beyond the given settings. The values you set here specify what percentage of the existing capacity that Intersight Workload Optimizer will consider to be 100% of capacity.

Attribute	Default Value
Storage Amount Utilization	90 Maximum allowed utilization of storage that is managed by the Storage Controller.
CPU Utilization	100 Maximum allowed utilization of Storage Controller CPU (from 20 to 100).

Storage Settings

Set capacity for specific storage resources.


Attribute	Default Value
IOPS Capacity	5000
Storage Latency Capacity [ms]	100

IO Module

An IO Module connects the compute resources on a chassis to the fabric domain via the Fabric Interconnect. It provides the servers on the chassis with Net resources. Typical installations provide two IO Modules per chassis.

Intersight Workload Optimizer supports IO Modules when you have installed the Fabric Control Module license.

Synopsis

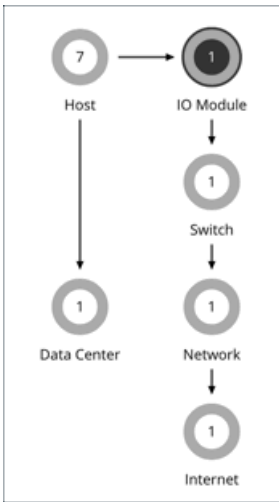

Synopsis	
Budget:	An IO Module gains its budget by selling Net resources to a physical machine.
Provides:	Net resources
Consumes:	Chassis and Fabric Interconnect
Discovered through:	Intersight Workload Optimizer discovers IO Modules through the fabric managers that use them.

Monitored Resources

Intersight Workload Optimizer monitors the following resources for an IO Module:

- NetThroughput**
 Rate of message delivery over a port
 Measured in Megabits per second (Mb/s)

Actions


None

Intersight Workload Optimizer does not recommend actions for an IO Module.

Switch

A switch connects servers in a computing fabric to the fabric's network and storage resources. It provides network bandwidth to the servers in the platform.

Synopsis

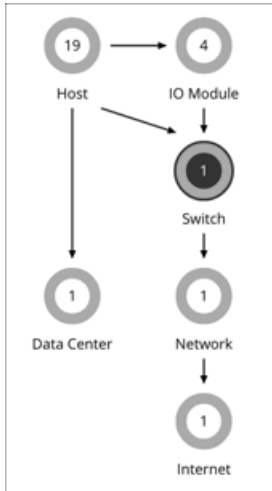

Synopsis	
Budget:	A switch gains its budget by selling Net resources to the IO Modules.
Provides:	Net resources
Consumes:	N/A
Discovered through:	Intersight Workload Optimizer discovers switches through managers of fabric platforms (such as UCS) that use them.

Monitored Resources

Intersight Workload Optimizer monitors the following resources for a switch:

- NetThroughput
 - Rate of message delivery over a port
 - Measured in Mb/s
- PortChannel
 - Amalgamation of ports with a shared net throughput and utilization
 - Measured in Mb/s

Actions

Resize






Resize PortChannel for a switch to increase bandwidth.

Switch Policies

Intersight Workload Optimizer ships with default settings that we believe will give you the best results from our analysis. These settings are specified in a set of default automation policies for each type of entity in your environment. For some scopes of your environment, you might want to change these settings. For example, you might want to change *action automation* or *constraints* for that scope. You can create policies that override the defaults for the scopes you specify.

Action Automation and Orchestration

For environments that have Fabric Managers as targets:

Action	Default Mode	Cisco UCS
Resize	Recommend	
Start	Recommend	
Provision	Recommend	
Suspend	Disabled	
Move	Disabled	

Utilization Constraints

Utilization constraints affect the actions Intersight Workload Optimizer recommends as it manages your environment. Intersight Workload Optimizer recommends actions that avoid using these resources beyond the given settings. The values you set here specify what percentage of the existing capacity that Intersight Workload Optimizer will consider to be 100% of capacity.

Attribute	Default Value
Switch Net Throughput	70



Plans: Looking to the Future

CONFIGURATION

- Product Trust
- Max Host Utilization Level: DC14\DC14-Cluster (80%)
- Hosts Action Settings
 - Provision for Hosts enabled
 - Suspend for Hosts enabled
- Virtual Machines Action Settings
 - Scale for Virtual Machines enabled

RESULTS OVERVIEW PLAN ACTIONS (170)

Plan has 38 unplaced workloads

Plan Summary

	Current	After Plan	Difference	%
Virtual Machines	30	30	0	0 %
Hosts	3	15	12	▲ 400 %
Storage	6	14	8	▲ 133.3 %
CPU	6 Cores	32 Cores	26	▲ 433.3 %
Memory	12 GB	246.5 GB	234.5 GB	▲ 1958.3 %
Storage Amount	3.6 GB	6.3 GB	2.7 GB	▲ 50 %
Host Density	10:1	2:1	8:1	▼ 80 %
Storage Density	5:1	2:1	3:1	▼ 60 %

Use the Plan Page to run simulations for what-if scenarios that explore possibilities such as:

- Reducing cost while assuring performance for your workloads
- Impact of scaling resources
- Changing hardware supply
- Projected infrastructure requirements
- Optimal workload distribution to meet historical peaks demands
- Optimal workload distribution across existing resources

How Plans Work

To run a plan scenario, Intersight Workload Optimizer creates a snapshot copy of your real-time market and modifies that snapshot according to the scenario. It then uses the Economic Scheduling Engine to perform analysis on that plan market. A scenario can modify the snapshot market by changing the workload, adding or removing hardware resources, or eliminating constraints such as cluster boundaries or placement policies.

As it runs a plan, Intersight Workload Optimizer continuously analyzes the plan market until it arrives at the optimal conditions that market can achieve. When it reaches that point, the Economic Scheduling Engine cannot find better prices for any of the resources demanded by the workload – the plan stops running, and it displays the results as the plan's desired state. The display includes the resulting workload distribution across hosts and datastores, as well as a list of actions the plan executed to achieve the desired result.


For example, assume a scenario that adds virtual machines to a cluster. To run the plan, Intersight Workload Optimizer takes a snapshot of the current market, and adds the VMs to the specified cluster. Intersight Workload Optimizer then runs analysis on the plan market, where each entity in the supply chain shops for the resources it needs, always looking for a better price – looking for those resources from less-utilized suppliers. This analysis continues until all the resources are provided at the best possible price.

The results might show that you can add more workload to your environment, even if you reduce compute resources by suspending physical machines. The recommended actions would then indicate which hosts you can take offline, and how to distribute your virtual machines among the remaining hosts.

Idle Workloads

Plans calculate optimal placement and optimal resource allocation for the given workload. However, plans do not include *idle* workloads. This is because an idle VM shows no utilization, so the plan cannot determine optimal placement or what percentage of allocated resources that workload will require when it restarts.

Plan Management

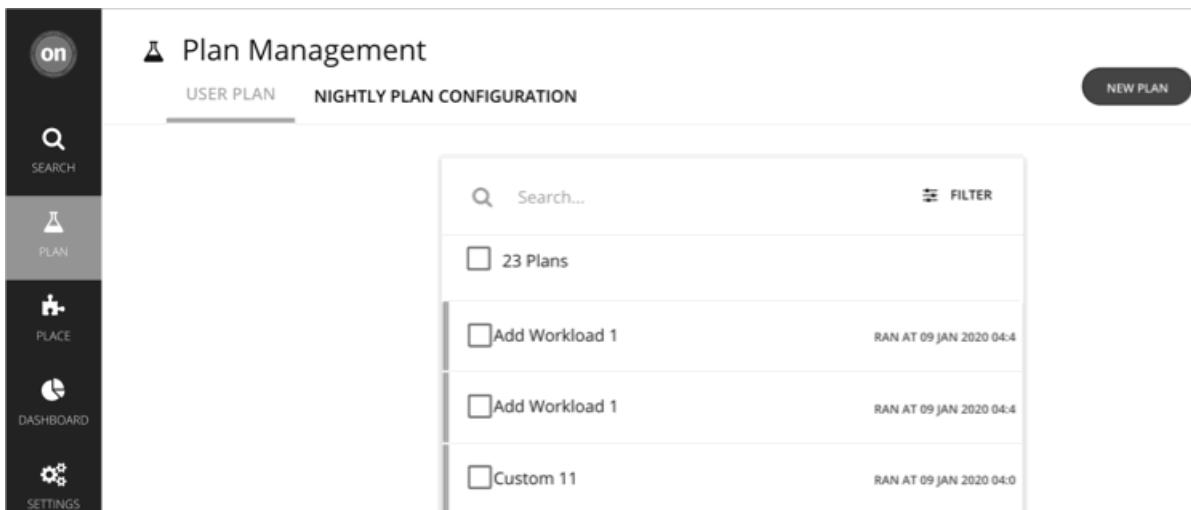

The Plan Management Page is your starting point for creating new plans, viewing saved plans, and deleting saved plans that you don't need anymore. To display this page, click **Plan** in the Intersight Workload Optimizer navigation bar.

- Create new plans

To create a new plan, click the **NEW PLAN** button. See [Setting Up Plan Scenarios \(on page 245\)](#).

- View saved plans

After you create and run a plan, Intersight Workload Optimizer saves it and then shows it in the Plan Management Page. You can open the saved plan to review the results, or you can change its configuration and run it again.

NOTE:

You can also view saved plans from the Search page, under the **Plans** category.

- Delete saved plans
To delete a saved plan, turn on the plan's checkbox and then click the **Delete** button.
- Configure nightly plans
Intersight Workload Optimizer runs nightly plans to calculate headroom for the clusters in your on-prem environment. For each cluster plan, you can set which VM template to use in these calculations. See [Configuring Nightly Plans \(on page 299\)](#).

Setting Up Plan Scenarios

A plan scenario specifies the overall configuration of a plan. Creating the plan scenario is how you set up a what-if scenario to see the results you would get if you changed your environment in some way.

This topic walks you through the general process of setting up a plan scenario.


1. Plan Entry Points

You can begin creating a plan scenario from different places in the user interface:

- From the Plan Page
Navigate to the Plan Page and click **NEW PLAN**. This plan has no scope. You will specify the scope after selecting the plan type.
- From the **Overview**
To start a plan scenario from the **Overview**, you must first go to the **Search** page to set the scope.
Set the scope to *a specific* Account, Billing Family, VM Group, or Region to start an Optimize Cloud plan.
 - Cloud scope
If you set the scope to *a specific* Account, Billing Family, VM Group, or Region, you can start an Optimize Cloud or Buy VM Reservations plan.
 - On-prem scope
If you set the scope to *a specific* Cluster, Datacenter, Group, Storage Cluster, or Virtual Datacenter, you can start any plan. You may need to go through additional steps, depending on your chosen plan type. For example, if you scope to a cluster and choose the Add Virtual Machines plan type, the plan wizard prompts you to select the most suitable templates for the VMs you plan to add to the cluster.
 - Container cluster scope
If you set the scope to *a specific* Container Platform Cluster, you can start an Optimize Container Cluster plan.
For details, see [Scoping the Intersight Workload Optimizer Session \(on page 27\)](#).
After setting the scope, the **Plan** button appears in the **Overview**.

2. Plan Types


Select from the list of plan types. For more information, see [Plan Scenarios and Types \(on page 250\)](#).

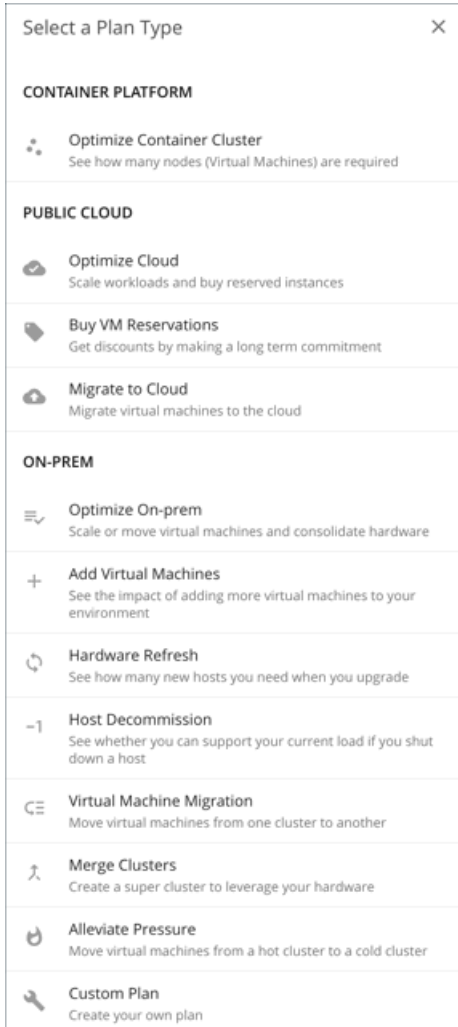

Intersight Workload Optimizer opens the appropriate plan wizard.


3. Plan Wizards

Each plan type includes a wizard to guide you through creating the scenario. The wizard leads you through the required configuration steps to create a plan that answers a specific question. After you make the required settings, you can skip ahead and run the plan, or continue through all the optional steps.

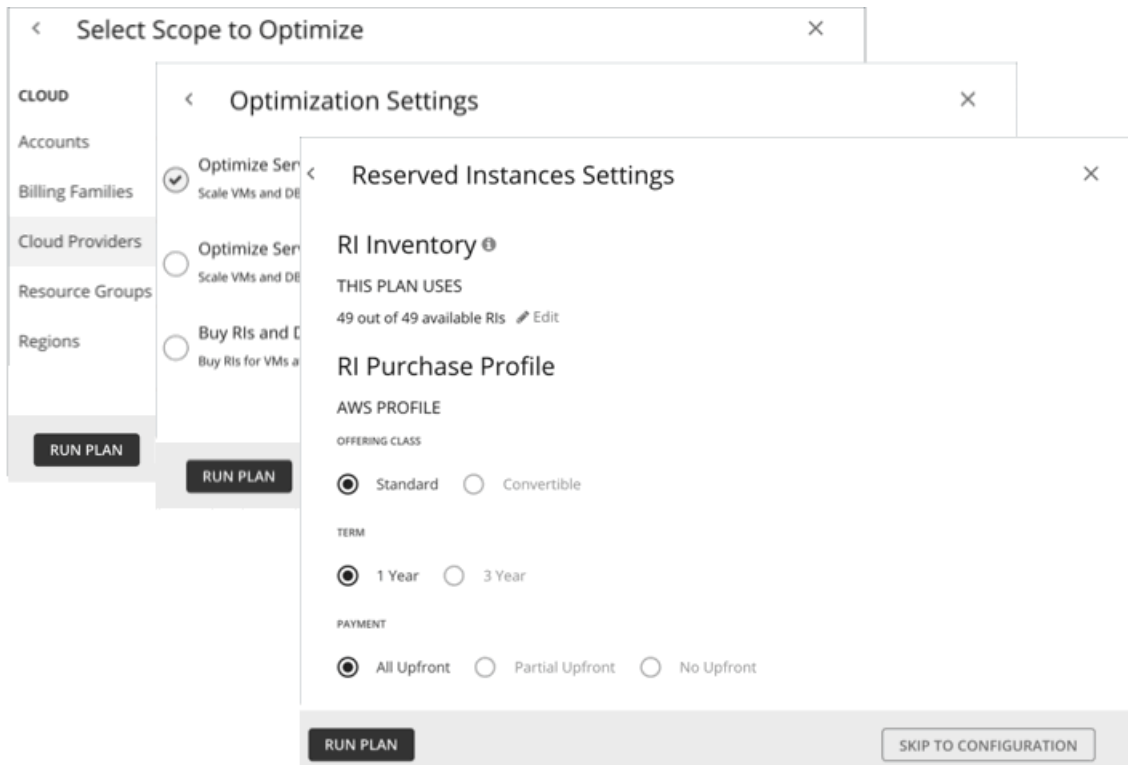

4. Plan Scope

All plans require a scope. For example, to configure an Optimize Cloud plan, you set the scope to all or specific cloud providers or accounts.

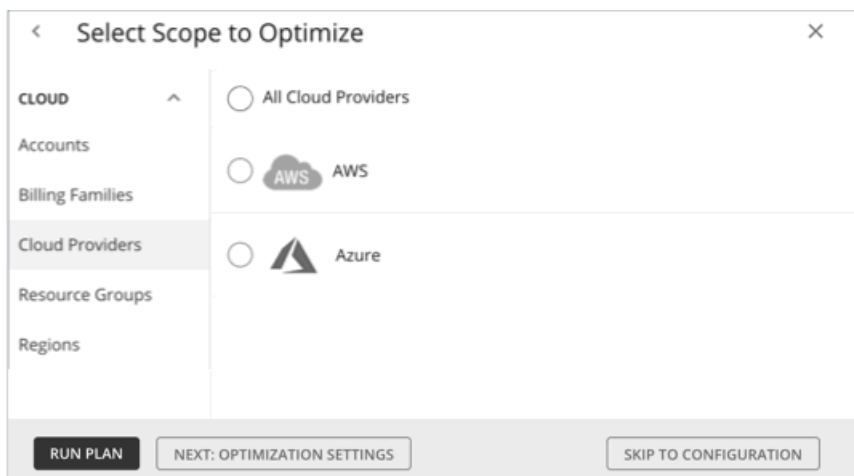


It usually helps to focus on a subset of your environment. For a very large environment, scoped plans run faster.

To narrow the scope, select a group from the list on the left side of the page. The page then refreshes to include only the entities belonging to that group.

Use **Search** or **Filter** to sort through a long list.


5. Additional Plan Information

The wizard prompts you for any additional information required to run the plan. For example, for a Hardware Refresh plan, you need to identify the hosts that will replace the scoped hosts. For a Migrate to Cloud plan, you need to identify the cloud service provider, region, or group you want the scoped workloads to migrate to.

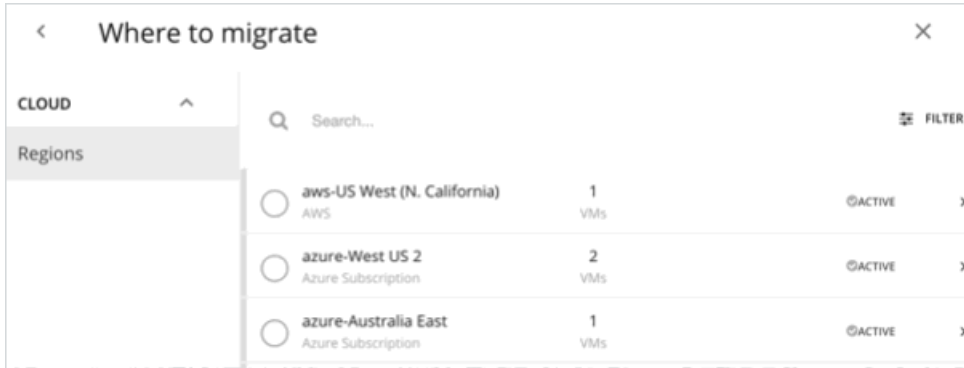

6. Run the Plan

After you provide the minimum required information for running a plan, the wizard shows you the following options:

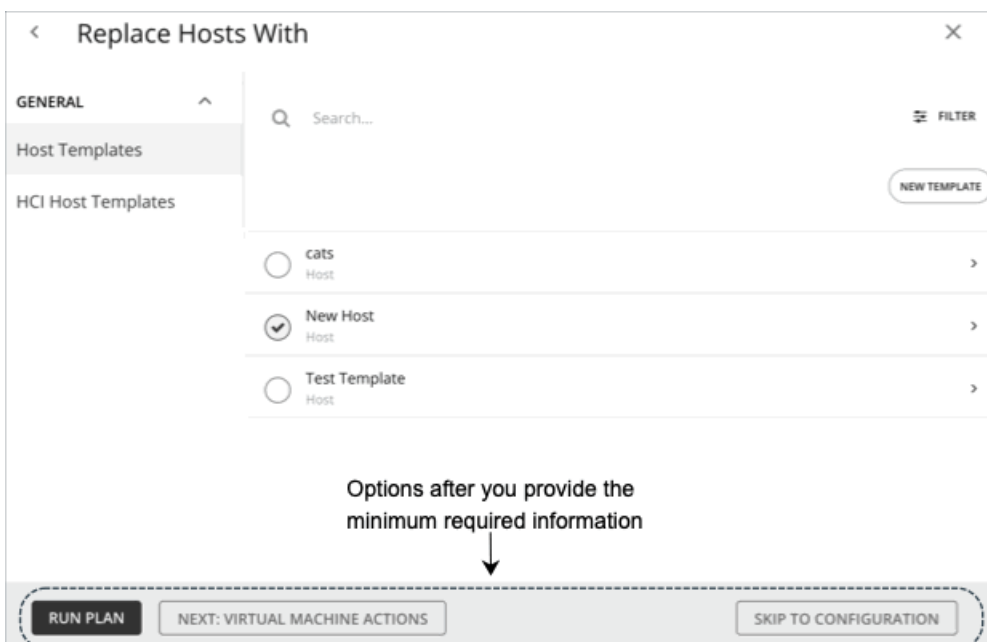

- **Run Plan:** Immediately run the plan.
- **Next: [Step]:** Continue with the rest of the wizard and then run the plan.
- **Skip to Configuration:** Skip the rest of the wizard and go to the Plan Page to:
 - Customize the plan settings.
 - See a preview of the plan scenario.
 - Run the plan.


NOTE: For a custom plan, the only option available is **Configure Plan**. Click this button to open the Plan Page, configure the plan settings, and then run the plan.

7. The Plan Page


The Plan Page first displays if you skip the wizard or as soon as you run a plan.

For a plan with a large scope, it might take some time before you see the results. You can navigate away from the Plan Page and check the status in the Plan Management Page. You can also cancel a plan that is in progress.

The Plan Page shows the following sections:

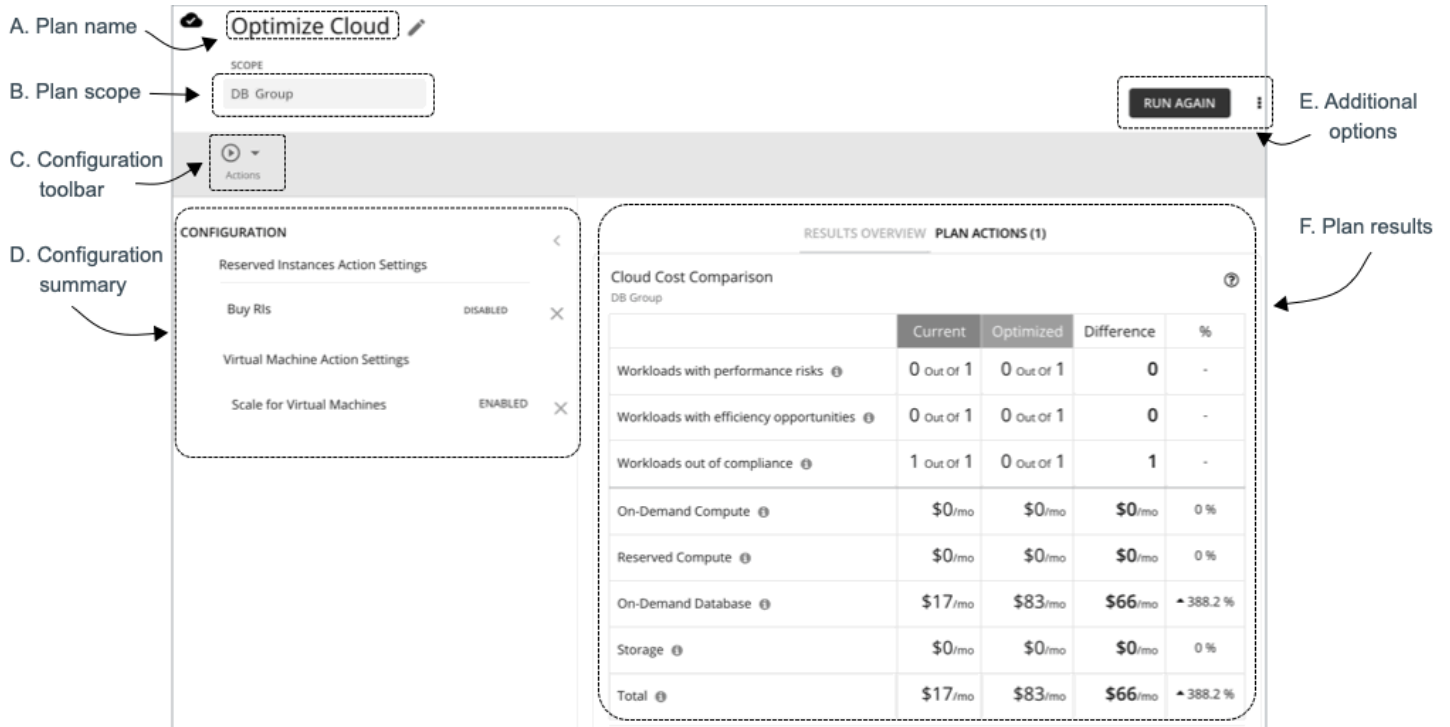

Plan Page Sections	Description
A. Plan name	Intersight Workload Optimizer automatically generates a name when you create a new plan. Change the name to something that helps you recognize the purpose of this plan.
B. Plan scope	Review the scope that you set in a previous step. NOTE: It is not possible to change the scope of the plan in the Plan Page. You will need to start over if you want a different scope. To start over, go to the top-right section of the page, click the More options icon (⋮), and then select New Plan .
C. Configuration toolbar	Configure additional settings for the plan. You can name the plan, change workload demand and the supply of resources, and specify other changes to the plan market. The toolbar items that display depend on the plan you are creating.
D. Configuration summary	Review the plan's configuration settings. You can remove any setting by clicking the x mark on the right. Use the toolbar on top to change the settings. As you make changes to the plan scenario, those changes immediately appear in the Configuration summary.
E. Additional options	See what else you can do with the plan. <ul style="list-style-type: none"> ■ Run / Run Again: <ul style="list-style-type: none"> – If a plan has not run, click Run and then check the plan results. – If the plan has run and you want to run it again with a different set of configuration settings, click Run Again. This runs the plan scenario against the market in its current state. ■ ⋮ : Click to see more options.

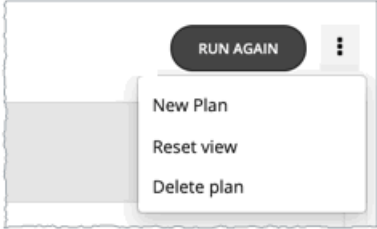
Plan Page Sections	Description
	 <ul style="list-style-type: none"> – New Plan: Configure a new plan. You can choose this option if you want to change the scope of the current plan, which requires that you start over and configure a new plan. – Reset view: Restore charts to their default views. For example, if you changed the commodities displayed in the Optimized Improvements or Comparison charts, you can discard those changes by choosing this option. – Delete plan: Choose if you no longer need the plan.
F. Plan results	<p>Review the results in the charts provided.</p> <p>For a plan that has not run, you will see a Scope Preview chart and a one-time message instructing you to run the plan.</p>

8. Plan Management

All the plans you have created display in the [Plan Management Page \(on page 244\)](#).

Plan Scenarios and Types

To simulate different plan scenarios, Intersight Workload Optimizer provides the following general types of plans:

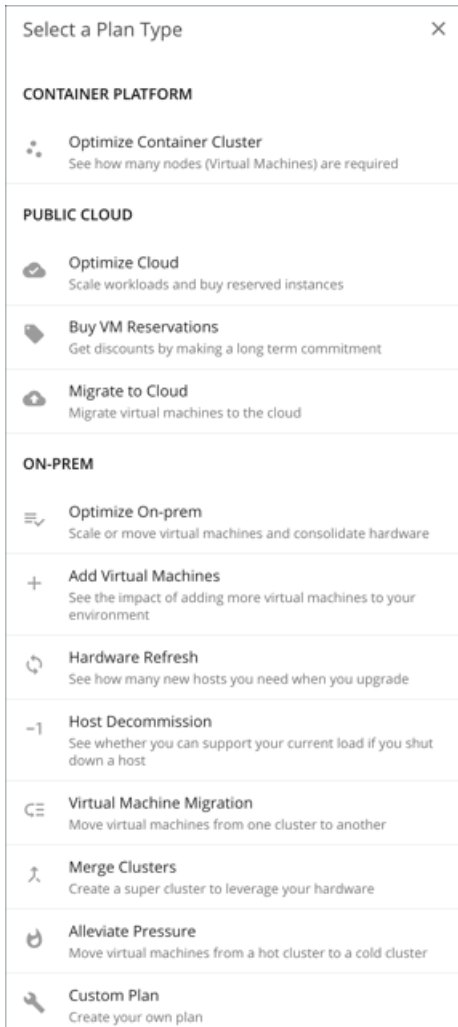

Optimize Container Cluster

Run an Optimize Container Cluster plan to identify performance and efficiency opportunities for a single Kubernetes cluster. The results show the optimal number of nodes you need to assure performance for your existing workloads, and the impact of actions on the health of your container workloads and infrastructure.

Optimize Cloud

For the scope of your public cloud environment that you want to examine, run a plan to see all the opportunities you have to reduce cost while assuring performance for your workloads. This includes suggestions to buy [discounts \(on page 25\)](#), comparisons of template and storage usage, and a comparison of current to optimized cost.

Buy VM Reservations

Run the Buy VM Reservations plan to see the most cost-effective [discount \(on page 25\)](#) purchases that will continue to assure performance for your cloud VMs.

Migrate to Cloud

A Migrate to Cloud plan simulates migration of on-prem VMs to the cloud, or migration of VMs from one cloud provider to another.

NOTE:

For migrations within your on-prem environment, use the *Virtual Machine Migration* plan type.

Optimize On-prem

See the effects of executing certain actions, such as scaling virtual machines, suspending hosts, or provisioning storage, to your on-prem environment.

Add Virtual Machines

Adding virtual machines increases the demand that you place on your environment's infrastructure. You can set up a plan to add individual VMs or groups of VMs in your environment, or based on templates.

Hardware Refresh

Choose hosts that you want to replace with different hardware. For example, assume you are planning to upgrade the hosts in a cluster. How many do you need to deploy, and still assure performance of your applications? Create templates to represent the upgraded hosts and let the plan figure out how many hosts you really need.

To increase the accuracy of the plan results, Intersight Workload Optimizer analysis considers a cluster's overall resource utilization over the last ten days. The platform identifies the day within those ten days when percentile utilization for the cluster reached 90%, and then uses each VM's actual utilization data *on that day* to perform its analysis.

NOTE:

If you configure a Hardware Refresh plan to use a baseline snapshot, the plan will use that snapshot's data instead of the cluster's percentile data.

Host Decommission

If your environment includes underutilized hardware, you can use a plan to see whether you can decommission hosts without affecting the workloads that depend on them.

Virtual Machine Migration

Use this plan type to simulate workload migrations within your on-prem environment.

You can see whether you have enough resources to move your workload from its current provider group to another. For example, assume you want to decommission one datacenter and move all its workload to a different datacenter. Does the target datacenter have enough physical resources to support the workload move? Where should that workload be placed? How can you calculate the effect such a change would have on your overall infrastructure?

To calculate this information, create a plan that:

- Limits the plan scope to two datacenters (or clusters) – the one you will decommission, and the one that will take on the extra workload
- Removes all the hardware from the decommissioned datacenter
- Calculates workload placement across datacenter (or cluster) boundaries
- Does not provision new hardware to support the workload

Merge Clusters

See the effects of merging two or more clusters. For example, you can see if merging the clusters would require provisioning additional storage to support current demand, or if ignoring cluster boundaries would improve performance and efficiency.

Alleviate Pressure

Choose a cluster that shows bottlenecks or other risks to performance, and check to see the minimal changes you can make by migrating some workloads to another cluster. The cluster that is showing risks is a *hot* cluster, and the cluster you will migrate to is a *cold* cluster.

Custom Plan

With a custom plan, you skip directly to the plan configuration after specifying the plan scope, and set up whatever type of scenario you want.

You would also choose **Custom Plan** if you need to run plans that include containers and container pods.

Optimize Container Cluster Plan

Optimize Container Cluster 1 ✎

SCOPE: Kubernetes-PT-AKS RUN AGAIN ⬇️ ⋮

+ Add 🗑️ Remove ⏸️ Actions

CONFIGURATION

- Container Spec Action Settings
 - Scale for ContainerSpec ENABLED ✕
- Container Pod Action Settings
 - Move for Container Pods ENABLED ✕
- Virtual Machines Action Settings
 - Provision for Virtual Machines ENABLED ✕
 - Suspend for Virtual Machines ENABLED ✕
 - Scale for Virtual Machines ENABLED ✕

RESULTS OVERVIEW | PLAN ACTIONS (258)

Optimize Container Cluster Summary ⓘ

Kubernetes-PT-AKS

	Current	After Plan	Difference	%
Container Pods	118	113	5	▼ 4.2 %
Virtual Machines	8	7	1	▼ 12.5 %
Pod Density	14.8 : 1	16.1 : 1	1.3 : 1	▲ 8.8 %
Cluster CPU Capacity	20 Cores	22 Cores	2 Cores	▲ 10 %
Cluster Memory Capacity	74 GB	82.9 GB	8.9 GB	▲ 12.1 %
Cluster Allocatable CPU	19.2 Cores	21.1 Cores	2 Cores	▲ 10.3 %
Cluster Allocatable Memory	53.8 GB	62.6 GB	8.8 GB	▲ 16.4 %
Cluster CPU Overcommitment	261 %	223.2 %	37.8 %	▼ 14.5 %
Cluster Memory Overcommitment	83.7 %	45.4 %	38.3 %	▼ 45.8 %

SHOW ALL >

Run an Optimize Container Cluster plan to identify performance and efficiency opportunities for a single Kubernetes cluster. The results show the optimal number of nodes you need to assure performance for your existing workloads, and the impact of actions on the health of your container workloads and infrastructure. For example, you can see how container resize actions change the limits and requests allocated per namespace, or how node provision/suspend actions impact allocatable capacity for the cluster. For a cluster in the public cloud, the results also include the cost impact of node actions.


You can scope the plan to a:

- Standalone container cluster
- Container cluster in an on-prem or public cloud environment
- Container cluster stitched to applications via Data Ingestion Framework (DIF)

Scoping to a group within a Kubernetes cluster (such as a group of nodes) is currently not supported.


Configuring an Optimize Container Cluster Plan

You can start an Optimize Container Cluster plan when you open the Plan page or set the scope to a Kubernetes cluster. For an overview of setting up plan scenarios, see [Setting Up Plan Scenarios \(on page 245\)](#).

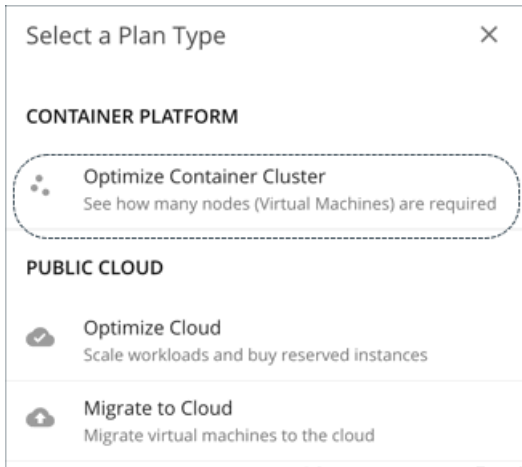

1. Scope

Select a Kubernetes cluster to optimize.

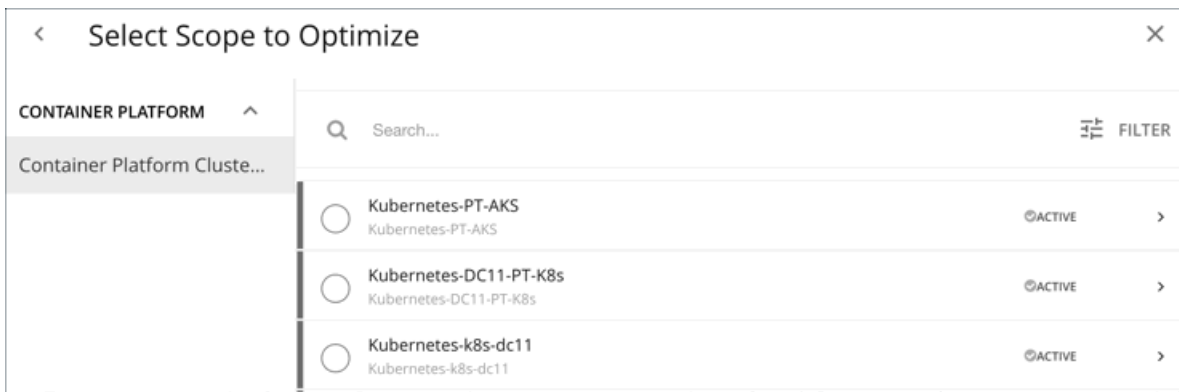


Scoping to a group within a Kubernetes cluster (such as a group of nodes) is currently not supported.

NOTE:

After selecting a cluster, you can skip the next step (**Optimization Settings**) and run the plan. Intersight Workload Optimizer runs the **Full Optimization** scenario in this case.

2. Optimization Settings

Choose from the given optimization scenarios.

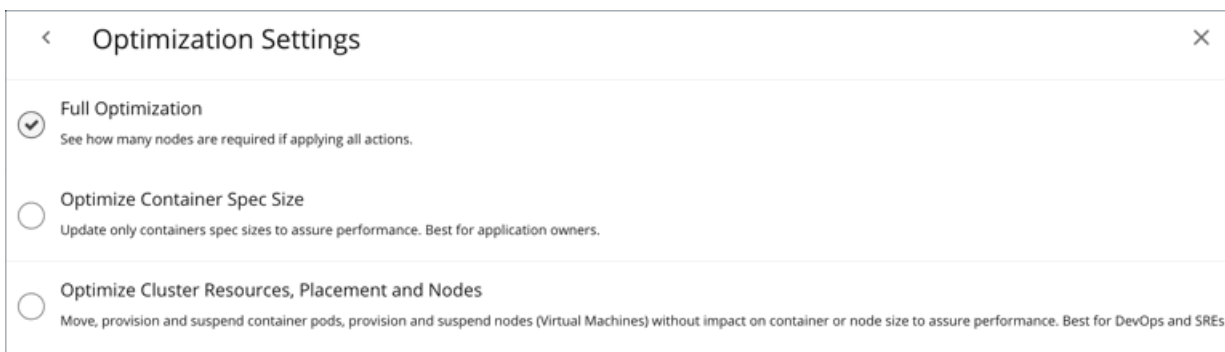

■ Full Optimization

Intersight Workload Optimizer will recommend all relevant actions to optimize the cluster. For example, it can recommend provisioning nodes or resizing containers to meet application demand, or moving pods from one node to another to reduce congestion.

Intersight Workload Optimizer can recommend the following actions:

- Resize namespace compute resource quotas
- Resize container limits and requests
- Move pods
- Provision or suspend nodes
- Scale volumes

NOTE:

For a cluster in the public cloud, Intersight Workload Optimizer shows the cost impact of actions on nodes and volumes, to help you track your cloud spend. Intersight Workload Optimizer only reports the costs attached to these actions, and does *not* perform cost analysis on the cluster.

For a cluster in an on-prem environment, Intersight Workload Optimizer can also recommend the following actions:

- Move VMs
- Provision or suspend hosts
- Provision or suspend storage

■ **Optimize Container Spec Size**

Intersight Workload Optimizer will only recommend resizing container limits and requests. This is ideal for application owners who manage the containers that their applications run on, but not the underlying container infrastructure.

■ **Optimize Cluster Resources, Placement, and Nodes**

Intersight Workload Optimizer will recommend *all* relevant actions, *except* resizing container limits and requests. This is ideal for teams who oversee the health of your container infrastructure, and want to evaluate the impact of *not* rightsizing workloads.

After selecting an optimization scenario, you can:

- Run the plan.
Or
- Choose **Skip to Configuration** to configure additional settings. See the next section for details.

(Optional) Additional Plan Settings

You can fine tune your selected optimization scenario or include additional scenarios before you run the plan.

- Enable or disable actions

Fine tune your optimization scenario by enabling or disabling actions for containers, pods, or nodes. For example, you may have selected **Full Optimization**, but only for containers, nodes, and pods that are allowed to move. In this case, you would disable move actions for the pods that should never move.

For clusters in on-prem environments, you can also enable or disable actions for hosts and storage.

IMPORTANT:

To avoid seeing inaccurate plan results, do *not* disable all actions.

- Add pods

See resource changes if you add more pods to the cluster. For example, you might need to provision nodes to accommodate the new pods.

Select an existing pod within or outside the selected Kubernetes cluster, and then specify how many copies to add. The plan simulates adding pods with the same resources as the selected pod.

- Remove pods or nodes

See the effect of removing pods or nodes from the cluster. For example, pod density could improve significantly if you remove pods that you no longer need, or certain pods might become unplaced if you remove nodes.

Working with Optimize Container Cluster Plan Results

After the plan runs, you can view the results to see how the plan settings you configured affect your environment.

Optimize Container Cluster 1 ✎

SCOPE

Kubernetes-PT-AKS

RUN AGAIN ↓ ⋮

+ Add
🗑️ Remove
⏸️ Actions

CONFIGURATION

- ▶ Container Spec Action Settings
 - Scale for ContainerSpec ENABLED ✕
- ▶ Container Pod Action Settings
 - Move for Container Pods ENABLED ✕
- ▶ Virtual Machines Action Settings
 - Provision for Virtual Machines ENABLED ✕
 - Suspend for Virtual Machines ENABLED ✕
 - Scale for Virtual Machines ENABLED ✕

RESULTS OVERVIEW
PLAN ACTIONS (258)

Optimize Container Cluster Summary ⓘ

Kubernetes-PT-AKS

	Current	After Plan	Difference	%
Container Pods	118	113	5	▼ 4.2 %
Virtual Machines	8	7	1	▼ 12.5 %
Pod Density	14.8 : 1	16.1 : 1	1.3 : 1	▲ 8.8 %
Cluster CPU Capacity	20 Cores	22 Cores	2 Cores	▲ 10 %
Cluster Memory Capacity	74 GB	82.9 GB	8.9 GB	▲ 12.1 %
Cluster Allocatable CPU	19.2 Cores	21.1 Cores	2 Cores	▲ 10.3 %
Cluster Allocatable Memory	53.8 GB	62.6 GB	8.8 GB	▲ 16.4 %
Cluster CPU Overcommitment	261 %	223.2 %	37.8 %	▼ 14.5 %
Cluster Memory Overcommitment	83.7 %	45.4 %	38.3 %	▼ 45.8 %

SHOW ALL >

General Guidelines

Familiarize yourself with these common terms that appear in many sections of the plan results:

- A container pod represents the compute demand from a running pod.
- A Kubernetes node (virtualized or bare metal) is represented as a VM.
- *Used* (or *Usage*) values represent actual resource consumption. For example, a node that consumes 100 MB of memory has a used value of 100 MB.
- *Utilization* values represent used/usage values against capacity. For example, a node that consumes 100 MB of memory against a total capacity of 500 MB has a utilization value of 20%.

256

Cisco Systems, Inc. www.cisco.com

Optimize Container Cluster Summary

RESULTS OVERVIEW PLAN ACTIONS (258)

Optimize Container Cluster Summary ?				
Kubernetes-PT-AKS				
	Current	After Plan	Difference	%
Container Pods	118	113	5	▼ 4.2 %
Virtual Machines	8	7	1	▼ 12.5 %
Pod Density	14.8 : 1	16.1 : 1	1.3 : 1	▲ 8.8 %
Cluster CPU Capacity	20 Cores	22 Cores	2 Cores	▲ 10 %
Cluster Memory Capacity	74 GB	82.9 GB	8.9 GB	▲ 12.1 %
Cluster Allocatable CPU	19.2 Cores	21.1 Cores	2 Cores	▲ 10.3 %
Cluster Allocatable Memory	53.8 GB	62.6 GB	8.8 GB	▲ 16.4 %
Cluster CPU Overcommitment	261 %	223.2 %	37.8 %	▼ 14.5 %
Cluster Memory Overcommitment	83.7 %	45.4 %	38.3 %	▼ 45.8 %

SHOW ALL >

This chart shows how your container environment and the underlying resources will change after you execute the actions that the plan recommends. The chart shows the following information:

- **Container Pods**

Count of active container pods in the plan.

- **Virtual Machines**

Count of active nodes in the plan. This chart does not count "non-participating" entities in the real-time market, such as suspended nodes.

- **Pod Density**

Average number of pods per node.

For the total number of pods against the node capacity (maximum pods per node), see the **Number of Consumers** data in the following charts:

- Nodes (VMs) Optimized Improvements
- Nodes (VMs) Comparison
- Container Cluster Optimized Improvements
- Container Cluster Comparison

- **Cluster CPU Capacity**

Total CPU capacity for the cluster. The 'After Plan' result indicates how much CPU capacity will result in the optimal number of nodes required to run workloads.

- **Cluster Memory Capacity**

Total memory capacity for the cluster. The 'After Plan' result indicates how much memory capacity will result in the optimal number of nodes required to run workloads.

- **Cluster Allocatable CPU**

Total amount of cluster CPU [available](#) for pod requests. The 'After Plan' result indicates how much of the allocatable CPU capacity will change if you provision or suspend nodes.

- **Cluster Allocatable Memory**

Total amount of cluster memory [available](#) for pod requests. The 'After Plan' result indicates how much of the allocatable memory capacity will change if you provision or suspend nodes.

■ Cluster CPU Overcommitment

(Only for containers with CPU limits) This indicates whether the CPU limits exceed the capacity of the underlying nodes. A value greater than 100% indicates overcommitment. Intersight Workload Optimizer manages cluster resources by actual utilization and limit rightsizing so that you can run more workloads with less risk.

Intersight Workload Optimizer only calculates overcommitment in plans. The calculation can be expressed as:

$$\text{Overcommitment} = \text{Sum of CPU limits for all containers} / \text{Sum of CPU capacity for all nodes}$$


■ Cluster Memory Overcommitment

(Only for containers with memory limits) This indicates whether the memory limits exceed the capacity of the underlying nodes. A value greater than 100% indicates overcommitment. Intersight Workload Optimizer manages cluster resources by actual utilization and limit rightsizing so that you can run more workloads with less risk.

Intersight Workload Optimizer only calculates overcommitment in plans. The calculation can be expressed as:

$$\text{Overcommitment} = \text{Sum of memory limits for all containers} / \text{Sum of memory capacity for all nodes}$$

Optimize Container Cluster Actions

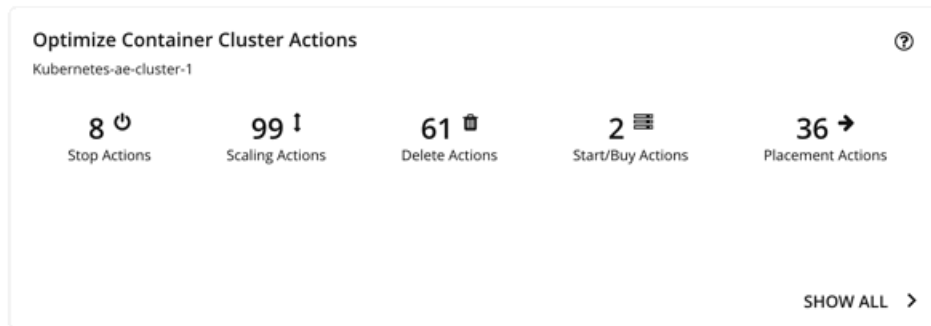

This chart summarizes the actions that you need to execute to achieve the plan results. For example, you might need to resize limits and requests for containers (via the associated Workload Controllers) to address performance issues. Or, you might need to move pods from one node to another to reduce congestion.

Smarter redistribution and workload rightsizing also drive cluster optimization, resulting in the need to provision node(s) based on application demand, or to defragment node resources to enable node suspension.

Intersight Workload Optimizer can recommend the following actions:

- Resize namespace compute resource quotas
- Resize container limits and requests

NOTE:

Executing several container resize actions can be very disruptive since pods need to restart with each resize. For replicas of the container scale group(s) related to a single Workload Controller, Intersight Workload Optimizer consolidates resize actions into one *merged action* to minimize disruptions. When a merged action has been executed (via the associated Workload Controller), all resizes for all related container specifications will be changed at the same time, and pods will restart once.

- Move pods
- Provision or suspend nodes
- Scale volumes


NOTE:

For a cluster in the public cloud, Intersight Workload Optimizer shows the cost impact of actions on nodes and volumes, to help you track your cloud spend. Intersight Workload Optimizer only reports the costs attached to these actions, and does *not* perform cost analysis on the cluster. See the Optimized Savings and Optimized Investments charts for more information.

For an on-prem cluster, Intersight Workload Optimizer can also recommend the following actions:

- Move VMs
- Provision or suspend hosts
- Provision or suspend storage

Optimized Savings

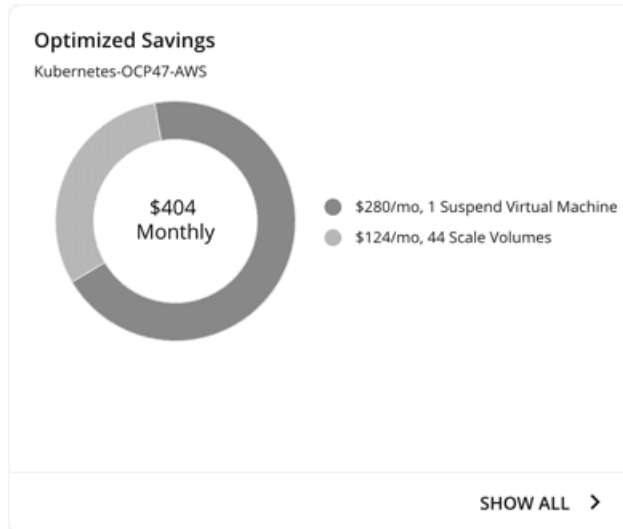

For a cluster in the public cloud, Intersight Workload Optimizer shows the savings you would realize if you execute the actions (such as node suspension) that the plan recommends to increase infrastructure efficiency. Note that efficiency is the driver of this action, *not* cost. Cost information is included to help you track your cloud spend.

The chart shows total monthly savings. Click **Show All** to view the actions with cost savings.


Optimized Investments



For a cluster in the public cloud, Intersight Workload Optimizer shows the costs you would incur if you execute the node and volume scaling actions that the plan recommends to address performance issues. For example, if some applications risk losing performance, Intersight Workload Optimizer can recommend provisioning nodes to increase capacity. This chart shows how these actions translate to an increase in expenditure. Note that performance and efficiency are the drivers of these actions, *not* cost. Cost information is included to help you plan for the increase in capacity.

The chart shows total monthly investments. Click **Show All** to view the actions that require investments.


Nodes (VMs) Optimized Improvements

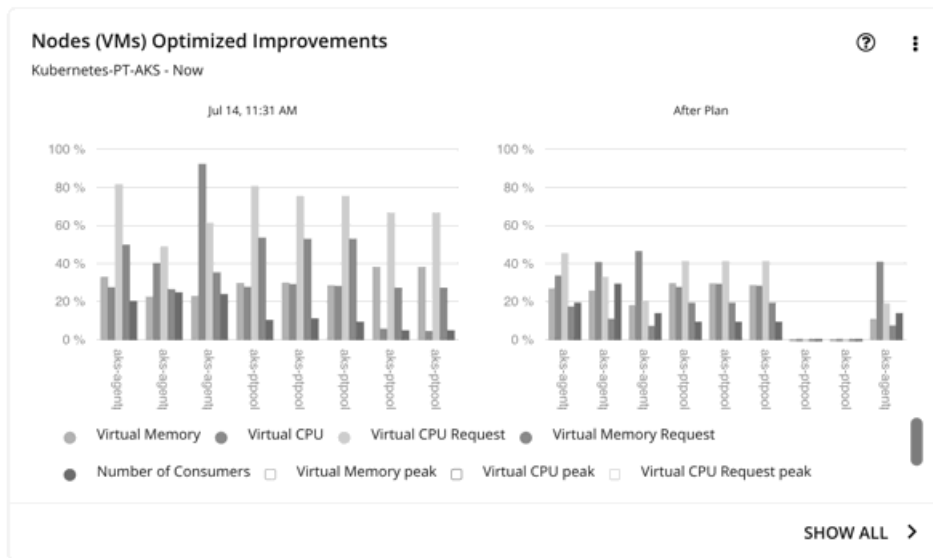

This chart compares the following before and after the plan:


- Utilization of the following for all nodes:
 - vMem
 - vCPU
 - vMem Request
 - vCPU Request
- Number of pods consuming resources against the maximum pod capacity for all the nodes

Nodes (VMs) Comparison

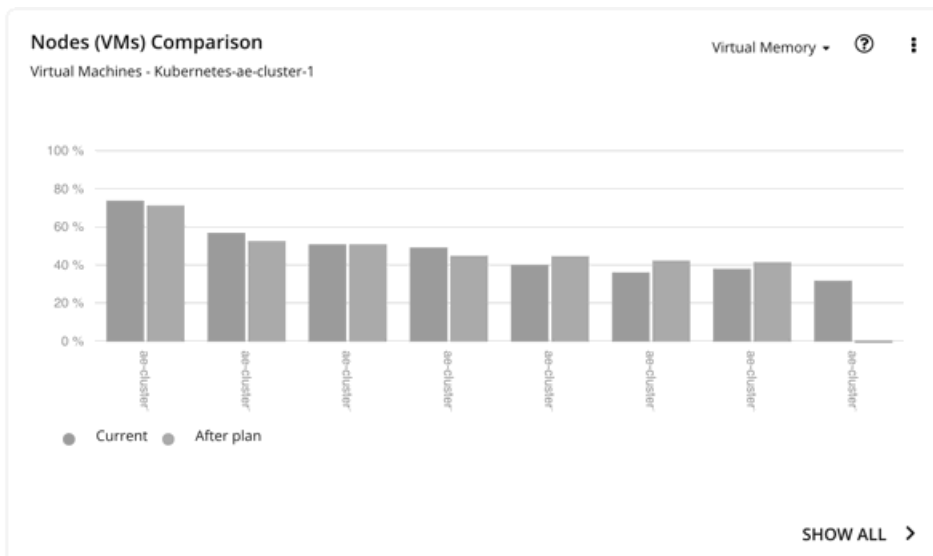

This chart compares node resource utilization (one metric at a time) before and after the plan.

Namespace Quotas Optimized Improvements

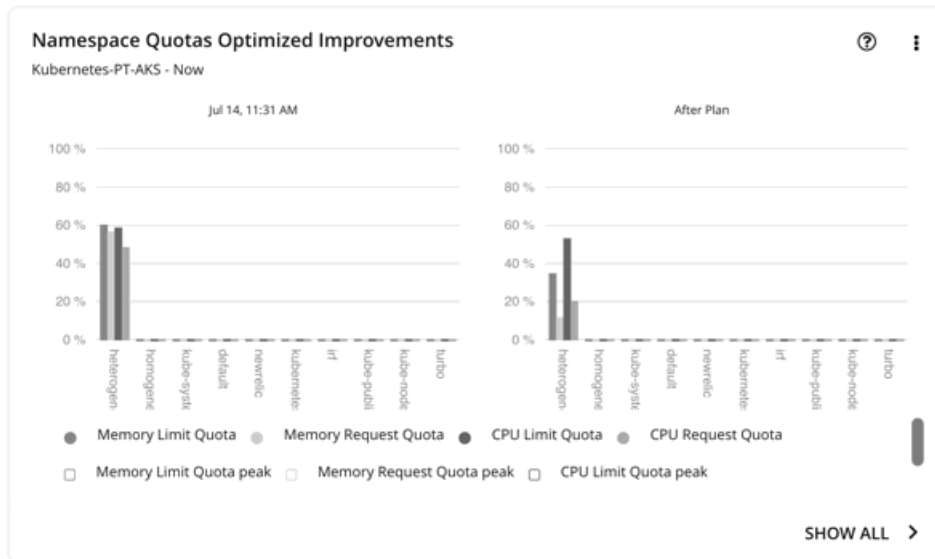


This chart shows pod utilization of resource quotas defined in namespaces. Resource quotas include:

- CPU Limit Quota
- Memory Limit Quota
- CPU Request Quota
- Memory Request Quota

For namespaces without defined quotas, utilization is 0 (zero).

With or without quotas, you can see the sum of pod limits and requests per namespace. Go to the top-right section of the Plan Results page, click the download button, and select **Namespace**. Utilization data in the downloaded file shows these limits and requests. You can also compare usage values in the Namespaces Comparison chart.

Namespaces Comparison

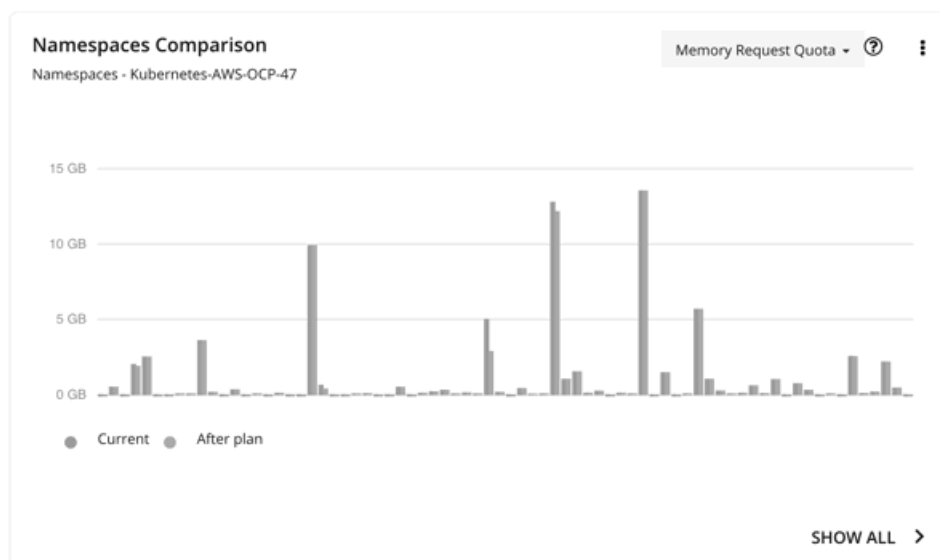

This chart compares namespace quota usage (one metric at a time) before and after the plan.

Use this chart to see how container resizing changes the limits and requests allocated per namespace, whether you leverage quotas or not.

To achieve the 'After Plan' results, click **Show All**. In the Details page that opens, go to the Name column and then click the namespace link. This opens another page with a list of pending actions for the namespace.

Namespaces Comparison

Name	Current			After Plan		
	Memory Limit Quota Capacity	Memory Limit Quota Used	Memory Limit Quota Utilization	Memory Limit Quota Capacity	Memory Limit Quota Used	Memory Limit Quota Utilization
robotshop	25 GB	3.6 GB	14.6 %	25 GB	3.6 GB	14.6 %

Namespace robotshop


OVERVIEW DETAILS POLICIES **ACTIONS (22)**

Search... FILTER

APPLY SELECTED

- Resize VMem Limit,VCPU Limit for Workload Controller mysql
Underutilized VMem Limit, VCPU Limit Congestion in Container Spec mysql PERFORMANCE >
- Resize VMem Limit,VCPU Limit for Container Spec mysql
Underutilized VMem Limit, VCPU Limit Congestion in Container Spec mysql PERFORMANCE >

Namespace Resources Comparison

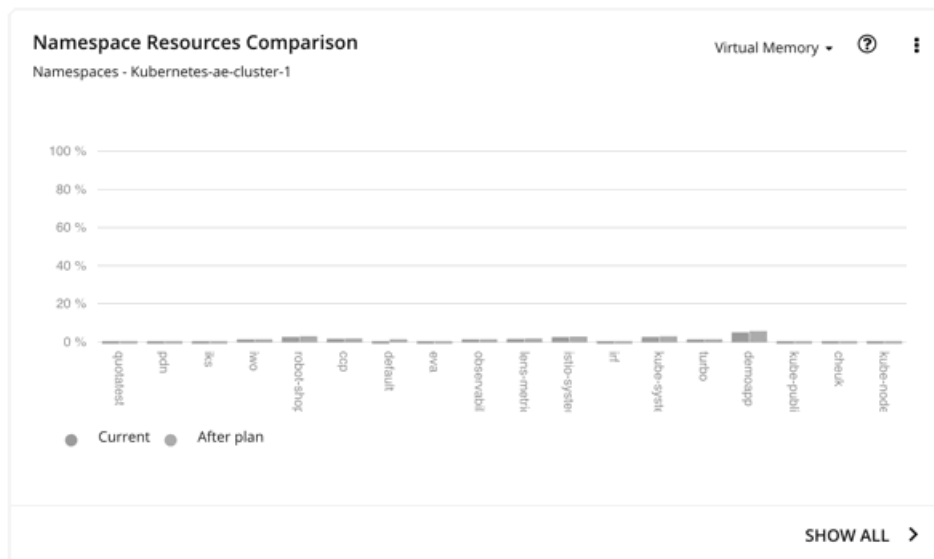


This chart shows how much cluster resources per namespace are utilized by pods. Utilization can be expressed as follows:

$$\text{Utilization} = \frac{\text{Sum of actual vMem/vCPU used by pods}}{\text{vMem/vCPU capacity for the cluster}}$$

This information helps you understand which namespaces use the most cluster resources. You can also use it for showback analysis. vMem and vCPU utilized by pods in the namespaces would change when the number of nodes changes as a result of executing the plan actions.

This chart is especially useful if you do not have resource quotas defined in your namespaces.

Container Cluster Optimized Improvements

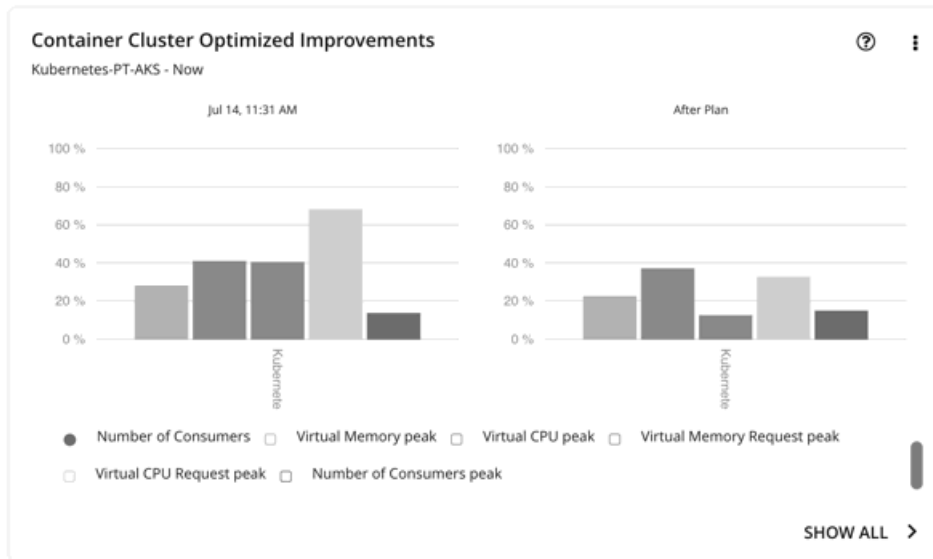

This chart shows the following, assuming you execute all actions in the plan:

- Changes to the utilization of cluster resources
- Overcommitment values

Container Cluster Comparison



This chart compares the following before and after the plan:

- Utilization of cluster resources (one metric at a time)
- Overcommitment values

Optimized Improvements for Hosts, Storage, and Virtual Machines

Use these charts if you ran the plan on an on-prem Kubernetes cluster. These charts show how the utilization of resources would change assuming you accept all of the actions listed in the Plan Actions chart

Hosts, Storage Devices, and Virtual Machines Comparison


Use these charts if you ran the plan on an on-prem Kubernetes cluster. These charts show how the utilization of a particular commodity (such as memory or CPU) for each entity in the plan would change if you execute the recommended actions.

NOTE:


For the Storage Devices Comparison chart, if you set the view to **VM Per Storage** and click **Show all**, the total number of VMs sometimes does not match the number in the Summary chart. This happens if there are VMs in the plan that use multiple storage devices. The Storage Devices Comparison chart counts those VMs multiple times, depending on the number of storage devices they use, while the Plan Summary chart shows the actual number of VMs.

Downloading Plan Results

To download results for nodes, namespaces, or the container cluster, click the download button at the top-right section of the Plan Results page.

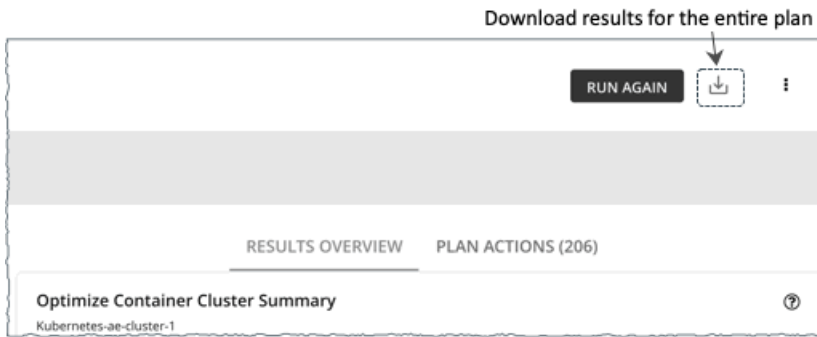

You can also download the plan results shown in individual charts. Click the **Show All** button for a chart, and then the download button at the top-right section of the Details page.

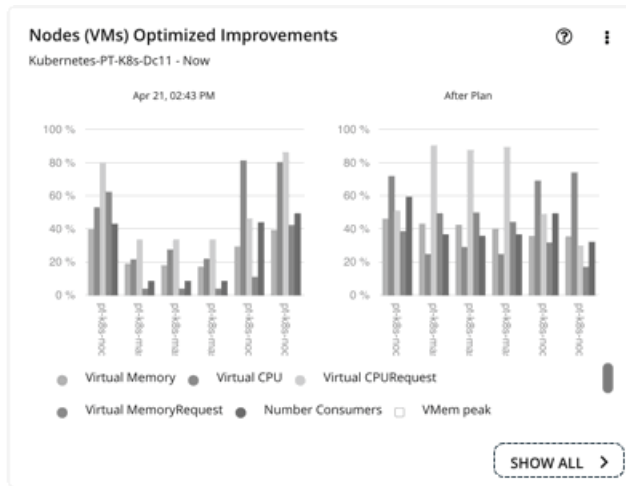

The screenshot shows the detailed data table for the chart above. It has a 'Download' button at the top right. The table has the following structure:

Virtual Machine Name	Container Cluster	Number Consu...	Number Consu...	Virtual CPU	Virtual CPU	Virtual CPURE...	Virtual CPURE...
pt-k8s-node-2	Kubernetes-PT-KB...	49.1 %	49.1 %	80 %	82.1 %	86.1 %	86.1 %
pt-k8s-node-1	Kubernetes-PT-KB...	42.7 %	42.7 %	52.7 %	59.5 %	79.5 %	79.5 %

Download results shown in chart


For charts that display infinite capacities (for example, the Namespaces Comparison chart), the downloaded file shows an unusually high value, such as 1,000,000,000 cores, instead of the ∞ symbol.

Re-Running the Plan

You can run the plan again with the same or a different set of configuration settings. This runs the plan scenario against the market in its current state, so the results you see might be different, even if you did not change the configuration settings.

Use the toolbar on top of the Configuration section to change the configuration settings.


NOTE:

It is not possible to change the scope of the plan in the Plan Page. You will need to start over if you want a different scope. To start over, go to the top-right section of the page, click the More options icon (), and then select **New Plan**.

When you are ready to re-run the plan, click **Run Again** on the top-right section of the page.

Optimize Cloud Plan

Run the Optimize Cloud plan to see how you can maximize savings while still assuring performance for your applications and workloads. This plan identifies ways to optimize your costs by choosing the best templates (most adequate compute resources), regions, accounts, or resource groups to host your workloads. The plan also identifies workloads that can change over to discounted pricing, and it compares your current costs to the costs you would get after executing the plan recommendations.

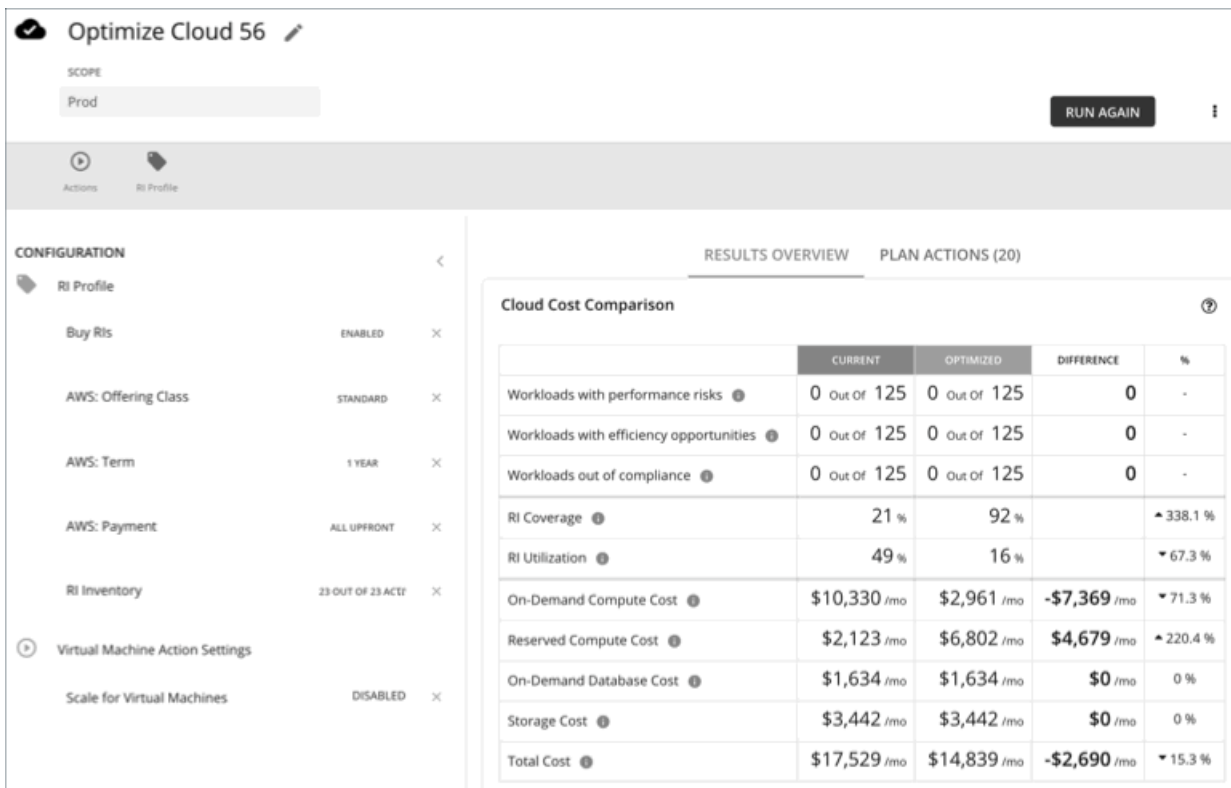

The screenshot shows the 'Optimize Cloud 56' interface. On the left, there is a 'CONFIGURATION' sidebar with various settings like 'Buy Rts', 'AWS: Offering Class', 'AWS: Term', 'AWS: Payment', 'RI Inventory', and 'Virtual Machine Action Settings'. The main area is titled 'RESULTS OVERVIEW' and contains a 'Cloud Cost Comparison' table. The table compares 'CURRENT' and 'OPTIMIZED' costs across various categories, showing a total cost reduction of \$2,690 per month.


	CURRENT	OPTIMIZED	DIFFERENCE	%
Workloads with performance risks	0 Out Of 125	0 Out Of 125	0	-
Workloads with efficiency opportunities	0 Out Of 125	0 Out Of 125	0	-
Workloads out of compliance	0 Out Of 125	0 Out Of 125	0	-
RI Coverage	21 %	92 %	▲ 338.1 %	
RI Utilization	49 %	16 %	▼ 67.3 %	
On-Demand Compute Cost	\$10,330 /mo	\$2,961 /mo	-\$7,369 /mo	▼ 71.3 %
Reserved Compute Cost	\$2,123 /mo	\$6,802 /mo	\$4,679 /mo	▲ 220.4 %
On-Demand Database Cost	\$1,634 /mo	\$1,634 /mo	\$0 /mo	0 %
Storage Cost	\$3,442 /mo	\$3,442 /mo	\$0 /mo	0 %
Total Cost	\$17,529 /mo	\$14,839 /mo	-\$2,690 /mo	▼ 15.3 %

Configuring an Optimize Cloud Plan

For an overview of setting up plan scenarios, see [Setting Up Plan Scenarios \(on page 245\)](#).


1. Scope

You can scope by:

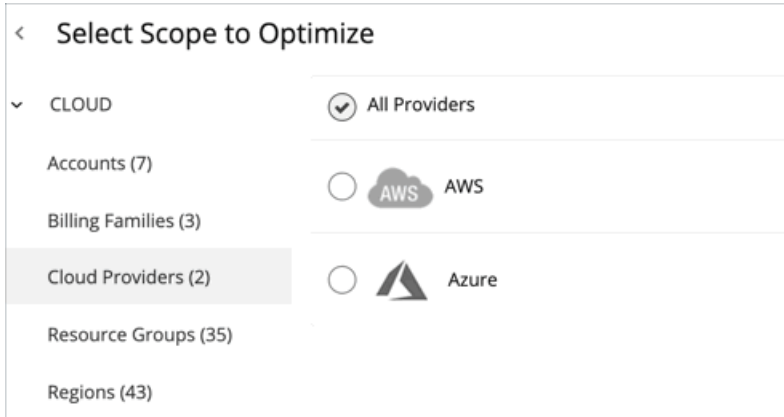

- **Accounts**
Choose an AWS account or Azure subscription for the plan's scope. If you choose an Account for the scope, then the plan will not recommend discount purchases. To optimize discount purchases for a limited scope, choose a Billing Family.
- **Billing Families**
Include discount purchases in the planning for a scope that is limited to a single billing family. The plan calculates discount purchases through the billing family's master account.
- **Cloud Providers**
See how you can optimize all your AWS or Azure workloads.
- **Resource Groups**
Intersight Workload Optimizer discovers Azure resource groups. You can select one or more resource groups for the plan scope.
- **Regions**
Focus the plan on a provider's region.

2. Optimization Settings

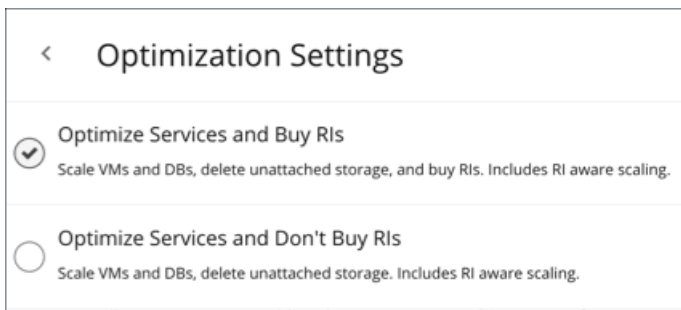

Choose from the given optimization options. Note that if you set a plan's scope to a resource group, Intersight Workload Optimizer will optimize services without recommending discount purchases.


If your goal is to purchase discounts for VMs at their current sizes, use the Buy VM Reservations plan type. For details, see [Buy VM Reservations Plan \(on page 280\)](#).

NOTE:

If you turn on the **Disable All Actions** setting in the global default policy and then run an Optimize Cloud plan with VM scaling and discount purchases enabled, the plan results show inaccurate discount recommendations.

Turn off **Disable All Actions** to resolve this issue. Be aware that after you turn off this setting, it will take Intersight Workload Optimizer a week to reflect accurate results in Optimize Cloud plans.

3. Reserved Instances Settings

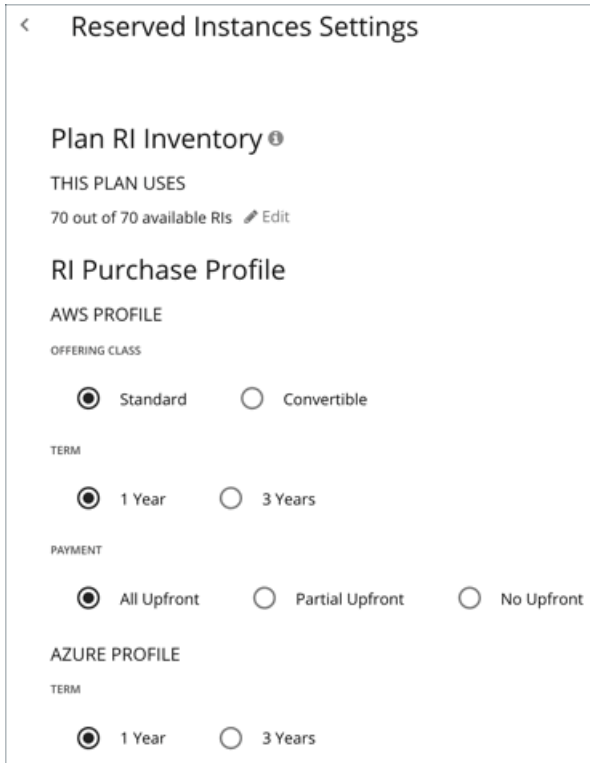

For **Plan RI Inventory**, the discounts for the current scope are selected by default. Click **Edit** to make changes.

For **RI Purchase Profile**, the settings that you have set up for real-time analysis are selected by default. You can change the settings to see how they affect costs.

- **Offering Class**

For AWS environments, choose the offering class that corresponds to the RI types that you typically use in your environment.

- **Term**

For AWS and Azure environments, choose the payment terms you contract for your discounts. TERM can be one of **1 Year** or **3 Year**. Typically, longer term payment plans cost less per year.

- **Payment**

The payment option that you prefer for your AWS RIs:

- All Upfront – You make full payment at the start of the RI term.
- Partial Upfront – You make a portion of the payment at the start of the term, with the remain cost paid at an hourly rate.
- No Upfront – You pay for the RIs at an hourly rate, for the duration of the term.

Working With Optimize Cloud Plan Results


After the Optimize Cloud plan runs, you can view the results to see how you can maximize savings or make other improvements to your cloud environment.

The plan results:

- Compare current to optimized costs, including on-demand compute, discounted compute, on-demand database, and storage costs
- Compare current and optimized breakdowns of templates used
- Compare breakdowns of storage tiers in use

- Project the discount coverage (how many workloads are covered by discounted pricing) and utilization (percentage of discounts that are active)
- Show the cost benefit of moving workloads from on-demand to discounted pricing

Viewing the Results

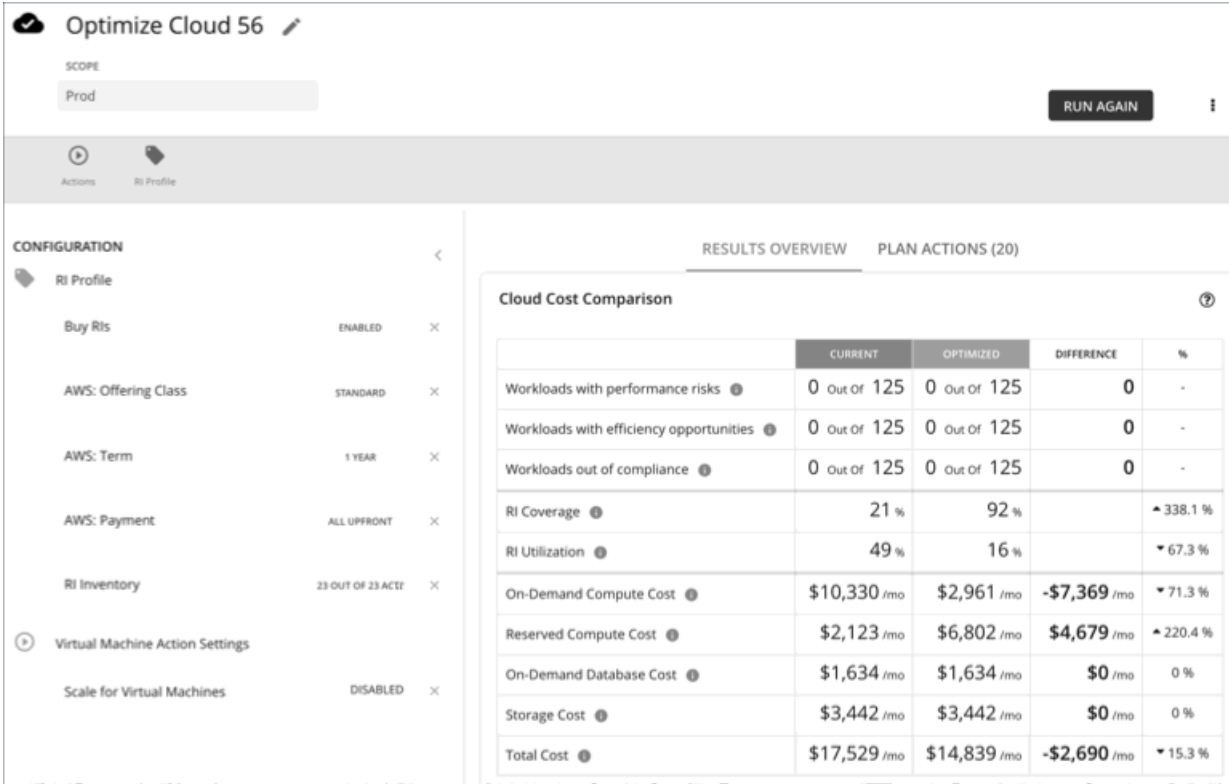

The plan results include the following charts:

- **Cloud Cost Comparison**

This chart highlights any difference in cost as a result of optimization. For example, undersized VMs risk losing performance and should therefore scale up. This could contribute to an increase in cost. On the other hand, oversized VMs can scale down to less expensive instances, so cost should go down. The values under the % column indicate the percentage of VMs that are affected by optimization cost calculations.

Intersight Workload Optimizer can also recommend that you purchase discounts to reduce costs. The analysis looks at workload history to identify workloads that can move from on-demand to discounted pricing. This considers the count of workloads in a family, plus their hours of active-state condition, to arrive at the discounts you should purchase. Since discounted costs are incurred at the account level, the Cloud Cost Comparison chart will present discounted costs or charges when you scope to an account or group of accounts (including a billing family).

For AWS clouds, Intersight Workload Optimizer can get the information it needs to display license costs for database instances. For Azure clouds, Intersight Workload Optimizer does not display database license costs because Azure does not make that information available.

- **Workload Mapping**

This chart shows the types of tiers you currently use, compared to the tiers the plan recommends, including how many of each type, plus the costs for each.

To see a detailed breakdown of the template costs, click **SHOW CHANGES** at the bottom of the chart.


- **Volume Tier Summary**

This chart shows the current distribution of volumes that support your workloads, and the optimized distribution if you execute the actions that the plan recommends.

The difference in the result reflects the number of unattached volumes. To see a list of unattached volumes, click **Show changes** at the bottom of the chart.

■ Discount Inventory

This chart lists the cloud provider discounts discovered in your environment. For a tabular listing, click **Show All** at the bottom of the chart. In the tabular listing, you can see if a discount expired before the specified purchase date.

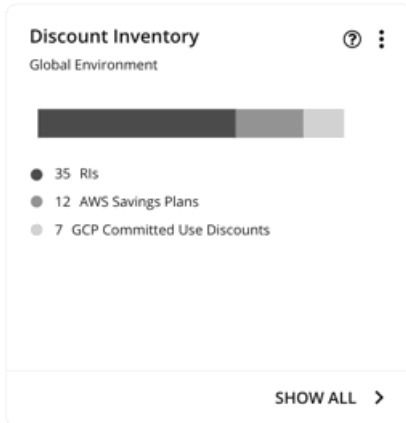


■ Recommended RI Purchases

Intersight Workload Optimizer can recommend purchasing instance types at a discounted rate to help you increase the percentage of VMs covered by discounted pricing and reduce on-demand costs. This chart shows your pending purchases. Download the list of purchases and then send it your cloud provider or representative to initiate the purchase process.

NOTE:

Purchase actions should be taken along with the related VM scaling actions. To purchase discounts for VMs at their current sizes, run a [Buy VM Reservation Plan \(on page 280\)](#).

Currently, Intersight Workload Optimizer can recommend purchase actions for AWS and Azure. Purchase actions for GCP will be introduced in a future release.

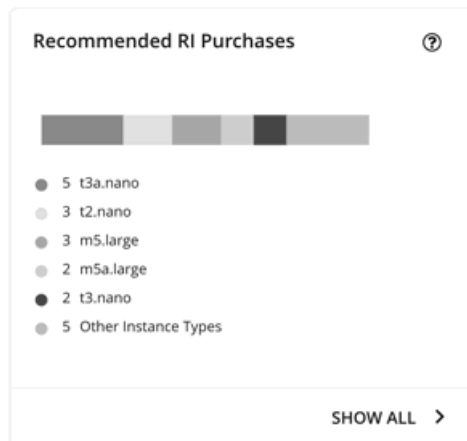

Click **Show All** to see a table with details for each discount.

The table shows the properties, up-front cost, and break-even period for each discount. The break-even period is the time at which savings will exceed the up-front cost, rounded to the month. The Cost Impact column indicates the monthly savings you would realize when you buy a specific discount.

When you choose one or more check boxes, the total count, up-front cost, and savings appear at the top.

Viewing Plan Actions


Click the **Plan Actions** tab on top of the page to view a list of actions that you need to execute to achieve the plan results.

RESULTS OVERVIEW		PLAN ACTIONS (20)	
<input type="text" value="Search..."/>		FILTER	
Buy 1 t3a.nano RIs for [redacted] in aws-US East (Ohio)	EST. SAVINGS: \$0.404/mo	EFFICIENCY	>
Increase RI Coverage by 79%			
Buy 2 t3a.nano RIs for [redacted] in aws-US East (Ohio)	EST. SAVINGS: \$2.03/mo	EFFICIENCY	>
Increase RI Coverage by 85%			
Buy 1 t3a.nano RIs for [redacted] in aws-US Eas...ia)	EST. SAVINGS: \$1.37/mo	EFFICIENCY	>
Increase RI Coverage by 99%			

Re-Running the Plan

You can run the plan again with the same or a different set of configuration settings. This runs the plan scenario against the market in its current state, so the results you see might be different, even if you did not change the configuration settings.

Use the toolbar on top of the Configuration section to change the configuration settings.




- **Actions**

Use this to enable or disable automatic Scale actions for the virtual machines in the plan.

- **RI Settings**

See [Reserved Instance Settings \(on page 267\)](#).

NOTE:

It is not possible to change the scope of the plan in the Plan Page. You will need to start over if you want a different scope. To start over, go to the top-right section of the page, click the More options icon (), and then select **New Plan**.

When you are ready to re-run the plan, click **Run Again** on the top-right section of the page.

Migrate to Cloud Plan

Unplaced Virtual Machines: Lift&Shift: 69; Optimized: 66

RESULTS OVERVIEW LIFT & SHIFT ACTIONS (1437) OPTIMIZED ACTIONS (1725)

	LIFT & SHIFT	OPTIMIZED	DIFFERENCE	%
Virtual Machines with performance risks	99 Out Of 684	0 Out Of 687	99	-
Virtual Machines with efficiency opportunities	588 Out Of 684	0 Out Of 687	588	-
On-Demand Compute Cost	\$113,460 /mo	\$23,214 /mo	-\$90,246 /mo	▼ 79.5 %
Reserved Compute Cost	\$9,816 /mo	\$19,229 /mo	\$9,413 /mo	▲ 95.9 %
Storage Cost	\$32,183 /mo	\$40,397 /mo	\$8,214 /mo	▲ 25.5 %
Total Cost	\$155,459 /mo	\$82,840 /mo	-\$72,619 /mo	▼ 46.7 %

A Migrate to Cloud plan simulates migration of on-prem VMs to the cloud, or migration of VMs from one cloud provider to another. This plan focuses on optimizing performance and costs by choosing the most suitable cloud resources for your VMs and the volumes they use. To further optimize your costs, the plan can recommend moving workloads from on-demand to discounted pricing, and purchasing more discounts.

The plan calculates costs according to the billing and price adjustments that you have negotiated with your cloud provider. Costs include compute, service (such as IP services), and license costs. The plan also calculates discount purchases for VMs that can benefit from discounted pricing.

NOTE:

If your instance of Intersight Workload Optimizer is inoperative for a period of time, that can affect the cost calculations. To calculate costs for a VM that it will migrate to the cloud, Intersight Workload Optimizer considers the VM's history. For example, if the VM has been stable for 16 of the last 21 days, then Intersight Workload Optimizer will plan for that VM to use a discount. In this way, the plan calculates the best cost for the migration. However, if Intersight Workload Optimizer is inoperative for any time, that can impact the historical data such that the plan will *not* recognize a VM as stable, even though it is.

Points to consider:

- AWS includes EC2 Spot Instances that offer steep discounts. A plan that migrates from AWS to Azure will not migrate VMs that run on Spot Instances.
- Do not use this plan type to migrate within the same cloud provider (for example, moving VMs from one Azure subscription to another) as a way to test the effect on pricing. The results from such a plan would not be reliable.
- For migrations within your on-prem environment, use the *Virtual Machine Migration* plan type.
- Before migrating, consider turning on a setting in the default global policy that enables metrics collection for on-prem volumes attached to VMs. This allows Intersight Workload Optimizer to make more accurate placement decisions for the VMs and volumes you are migrating. For details, see [Enable Analysis of On-prem Volumes \(on page 69\)](#).

The plan results show:


- Projected costs
- Actions to execute your migration and optimize costs and performance
- Optimal cloud instances to use, combining efficient purchase of resources with assured application performance
- The cost benefit of moving workloads from on-demand to discounted pricing
- Discounts you should purchase

Configuring a Migrate to Cloud Plan

For an overview of setting up plan scenarios, see [Setting Up Plan Scenarios \(on page 245\)](#).

1. Scope


Select the VMs that you want to migrate. You can select VM groups and/or individual VMs.

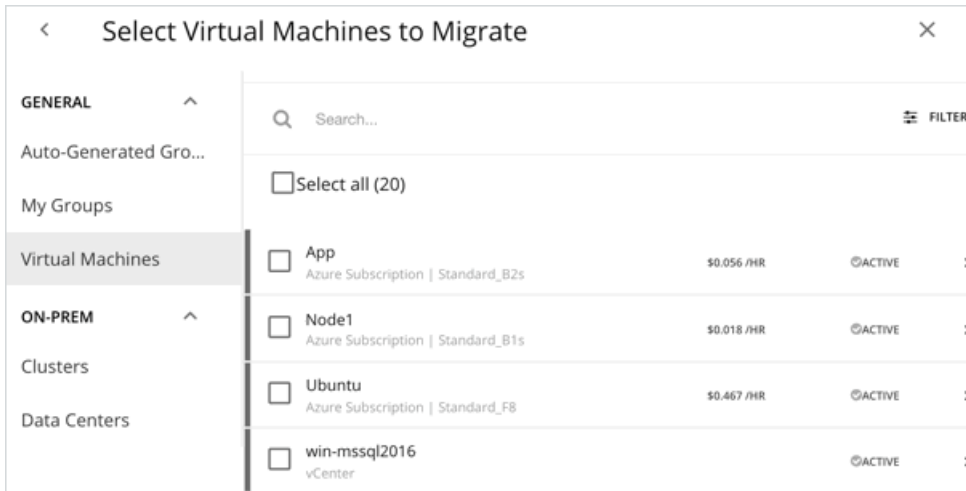


If you select an Auto Scaling Group, Intersight Workload Optimizer simulates migrating the VMs individually, and not as a group.

2. Where to Migrate

Choose a billing account (AWS account or Azure subscription).

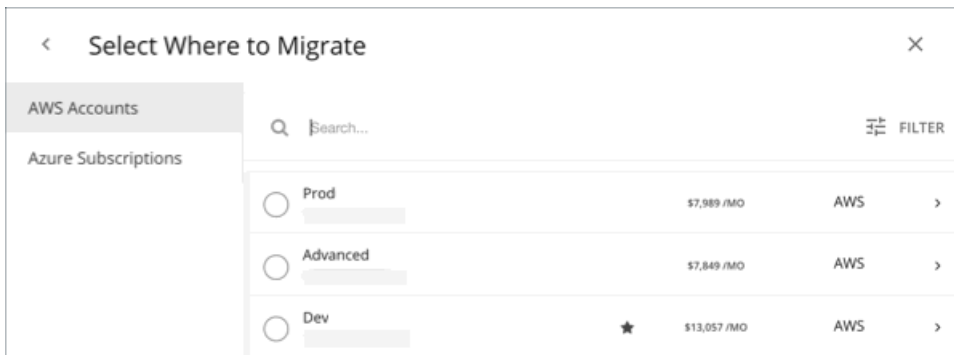

Choose a region. Intersight Workload Optimizer shows all the regions that you can access from your target cloud accounts.

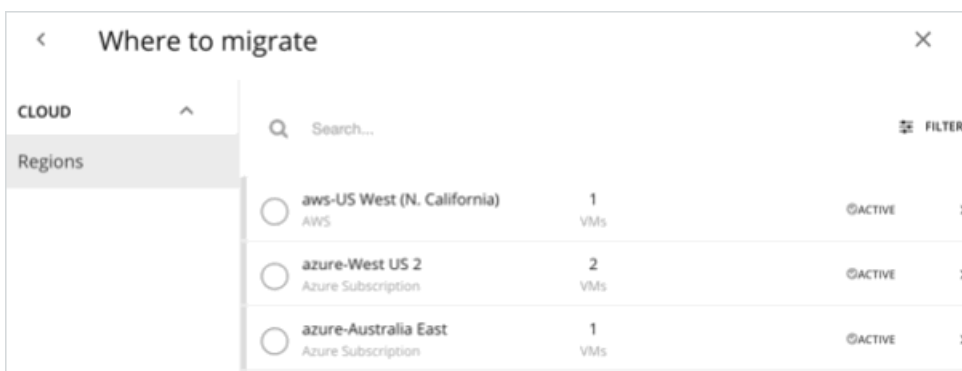

By default, Intersight Workload Optimizer considers all instance types in the selected region when making placement decisions for the scoped VMs and the volumes they use. However, you may have set up constraints in policies that limit migration to

certain instance types. If there are VMs and volumes in your scope that are affected by those policies, Intersight Workload Optimizer will only consider the instance types defined in the policies.

3. Licensing (OS Migration Profile)

Select an OS Profile for this migration.

Licensing

Include OS cost
The plan includes OS cost per VM as part of the migration.

BYOL ("Bring your own license")
The plan does not include OS cost as part of the migration. Use this option if you have purchased Azure Hybrid Benefit.

Custom OS
The plan includes OS cost based on your selections.

SOURCE OS	TARGET OS	BYOL
Linux	Linux	<input checked="" type="checkbox"/>
RHEL	RHEL	<input checked="" type="checkbox"/>
SLES	SLES	<input checked="" type="checkbox"/>
Windows	Windows	<input checked="" type="checkbox"/>

On the cloud, instances usually include an OS platform to run processes on the VM. As you migrate VMs to the cloud, you can specify the OS you prefer to run. You can keep the same OS that the original VM has, or map it to a different OS.

- **Include OS cost**

As Intersight Workload Optimizer calculates placement for the migrated workloads, it will include costs for instances that provide the same OS that the VM already has.

- **BYOL (Bring your own license)**

This is the same as the **Include OS cost** option, except the plan does not include OS licensing costs in any of the cost calculations for on-cloud placement.


- **Custom OS**

For each of the listed OS types, map the migrated VM to the OS you choose. The OS types are:

- Linux – Any open source distribution of Linux. For the migration, Intersight Workload Optimizer will choose instances that provide the Linux platform that the cloud service provider delivers as a free platform. Note that this is always BYOL, because it assumes a free OS license.
- RHEL (Red Hat Enterprise Linux)
- SLES (SUSE Linux Enterprise Server)
- Windows

If you enable **BYOL** for RHEL, SLES, or Windows, Intersight Workload Optimizer assumes that you are paying for the OS license, and will not include the license cost in the plan results. If you do not enable **BYOL**, Intersight Workload Optimizer gets the license cost from the service provider and includes that cost in the plan results.

4. Reserved Instances Settings

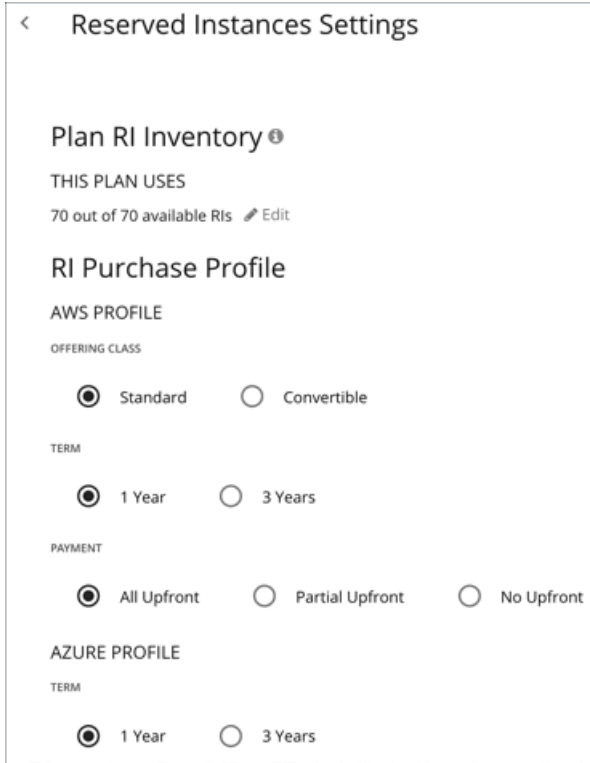

For **Plan RI Inventory**, the discounts for the current scope are selected by default. Click **Edit** to make changes.

For **RI Purchase Profile**, the settings that you have set up for real-time analysis are selected by default. You can change the settings to see how they affect costs.

- Offering Class

For AWS environments, choose the offering class that corresponds to the RI types that you typically use in your environment.

- Term

For AWS and Azure environments, choose the payment terms you contract for your discounts. TERM can be one of **1 Year** or **3 Year**. Typically, longer term payment plans cost less per year.

- Payment

The payment option that you prefer for your AWS RIs:

- All Upfront – You make full payment at the start of the RI term.
- Partial Upfront – You make a portion of the payment at the start of the term, with the remain cost paid at an hourly rate.
- No Upfront – You pay for the RIs at an hourly rate, for the duration of the term.

Working With Migrate to Cloud Plan Results

The Migrate to Cloud plan results show the cloud resources and costs for the VMs you plan to migrate, and the actions required for migration.

The screenshot displays the 'Migrate to Public Cloud 85' configuration page. It shows the migration source as 'HawthorneHC, DC24-Data...' and the destination as 'aws-US West (N. California)'. A 'RUN AGAIN' button is visible. The left sidebar contains configuration options for Licensing, RI Profile, AWS Offering Class (STANDARD), AWS Payment (ALL UPFRONT), AWS Term (1 YEAR), and RI Inventory (0 OUT OF 0 ACTIVE). The main content area features a 'RESULTS OVERVIEW' section with a 'CLOUD COST COMPARISON' table for 'aws-US West (N. California)'. The table compares 'LIFT & SHIFT' and 'OPTIMIZED' scenarios across various cost categories.

	LIFT & SHIFT	OPTIMIZED	DIFFERENCE	%
Virtual Machines with performance risks	99 Out Of 684	0 Out Of 687	99	-
Virtual Machines with efficiency opportunities	588 Out Of 684	0 Out Of 687	588	-
On-Demand Compute Cost	\$113,460 /mo	\$23,214 /mo	-\$90,246 /mo	▼ 79.5 %
Reserved Compute Cost	\$9,816 /mo	\$19,229 /mo	\$9,413 /mo	▲ 95.9 %
Storage Cost	\$32,183 /mo	\$40,397 /mo	\$8,214 /mo	▲ 25.5 %
Total Cost	\$155,459 /mo	\$82,840 /mo	-\$72,619 /mo	▼ 46.7 %

Intersight Workload Optimizer shows results for two migration scenarios:

- **Lift & Shift**

Lift & Shift migrates your VMs to cloud instances that match their current resource allocations.

- **Optimized**

As Intersight Workload Optimizer runs the plan, it looks for opportunities to optimize cost and performance. For example, it might discover overprovisioned VMs after analyzing the historical utilization of VM resources. If you were to migrate such VMs to instances that match their current allocations, then you would spend more than necessary. For an optimized migration, Intersight Workload Optimizer can recommend migrating to less expensive instances while still assuring performance, and then show the resulting savings. In addition, when you examine the actions for an optimized migration, you will see charts that plot the historical utilization data used in the analysis.

Results Overview

The Results Overview section shows the following:

- **Unplaced VMs**

If the plan's scope includes VMs that cannot be migrated, the results include a notification indicating the number of VMs. Click **Show Details** to see the list of VMs and the reasons for their non-placement.

The screenshot shows a notification banner with a warning icon and the text: 'Unplaced Virtual Machines: Lift&Shift: 69; Optimized: 66'. A 'SHOW DETAILS' button is located on the right side of the banner. Below the banner, the 'RESULTS OVERVIEW' section is partially visible, showing the 'CLOUD COST COMPARISON' table.

The charts in the plan results do not count these VMs.

Intersight Workload Optimizer displays adjusted CPU values for unplaced VMs. These values are the actual metrics used in analysis and are calculated using [benchmark data](#). CPU values shown in other places (such as the Capacity and Usage chart) are unadjusted values obtained from targets.

- **Cloud Cost Comparison Chart**

This chart highlights any difference in cost as a result of optimization. For example, undersized VMs risk losing performance and should therefore scale up. This could contribute to an increase in cost. On the other hand, oversized VMs can scale down to less expensive instances, so cost should go down. The values under the % column indicate the percentage of VMs that are affected by optimization cost calculations.


CLOUD COST COMPARISON				
aws-US West (N. California)				
	LIFT & SHIFT	OPTIMIZED	DIFFERENCE	%
Virtual Machines with performance risks	99 Out Of 684	0 Out Of 687	99	-
Virtual Machines with efficiency opportunities	588 Out Of 684	0 Out Of 687	588	-
On-Demand Compute Cost	\$113,460 /mo	\$23,214 /mo	-\$90,246 /mo	▼ 79.5 %
Reserved Compute Cost	\$9,816 /mo	\$19,229 /mo	\$9,413 /mo	▲ 95.9 %
Storage Cost	\$32,183 /mo	\$40,397 /mo	\$8,214 /mo	▲ 25.5 %
Total Cost	\$155,459 /mo	\$82,840 /mo	-\$72,619 /mo	▼ 46.7 %

NOTE:

For Azure, the results do not include the license cost for the migrated VMs.

■ **Virtual Machine Mapping Chart**


This chart gives a breakdown of the instance types that the plan recommends for the migration, including how many of each is needed.

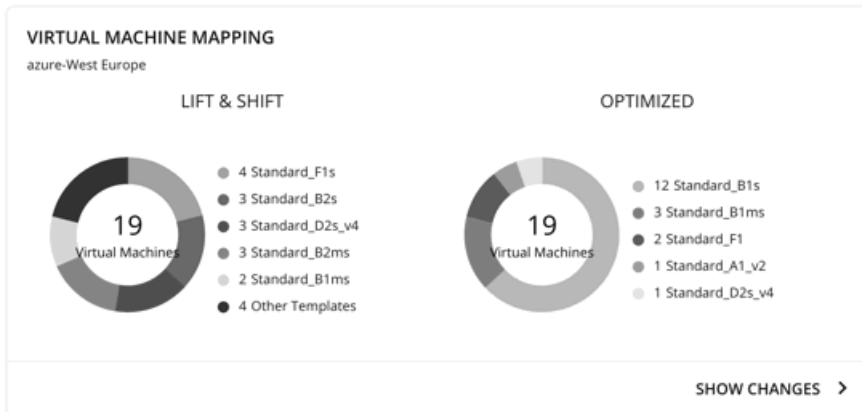

Click **Show Changes** to see a table with details for each VM in the plan. The table maps VMs to instance types. It also shows the properties and monthly cost for each instance type, and indicates whether Intersight Workload Optimizer recommends buying discounts. Under the **Actions** column, click **Details** to compare Lift & Shift and Optimized actions.

■ **Volume Tier Summary Chart**

This chart gives a breakdown of the volume types that the plan recommends for the migration, including how many of each is needed.

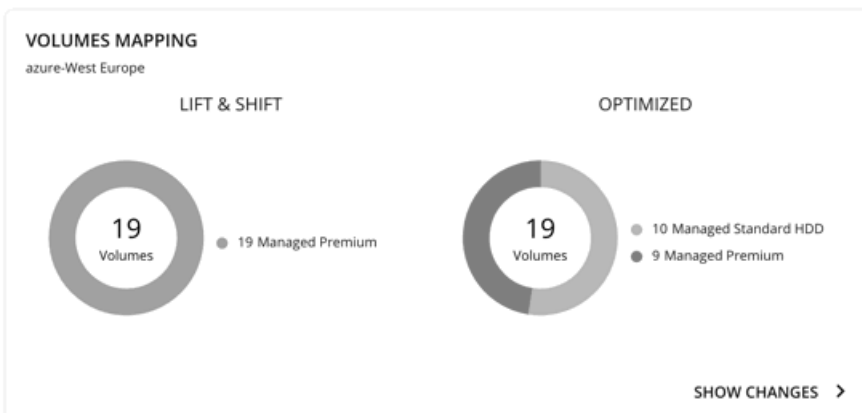

Click **Show Changes** to see a table with details for each volume in the plan. The table maps the volumes you plan to migrate to the volume types that Intersight Workload Optimizer recommends. It also shows the properties and monthly cost for each volume type. Under the **Actions** column, click **Details** to compare Lift & Shift and Optimized actions.


■ **Recommended RI Purchases Charts**

Intersight Workload Optimizer can recommend purchasing instance types at a discounted rate to help you increase the percentage of VMs covered by discounted pricing and reduce on-demand costs. This chart shows your pending purchases. Download the list of purchases and then send it your cloud provider or representative to initiate the purchase process.

NOTE:

Purchase actions should be taken along with the related VM scaling actions. To purchase discounts for VMs at their current sizes, run a [Buy VM Reservation Plan \(on page 280\)](#).

Currently, Intersight Workload Optimizer can recommend purchase actions for AWS and Azure. Purchase actions for GCP will be introduced in a future release.

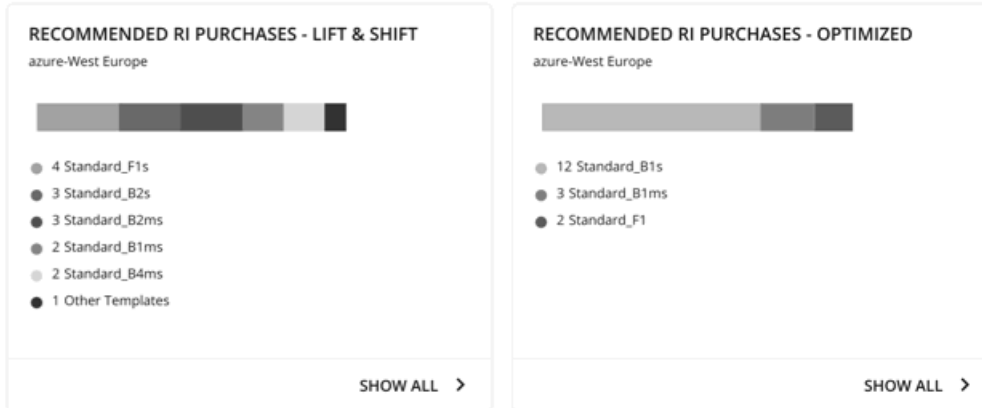

To identify VMs that are good candidates for discounted pricing, Intersight Workload Optimizer analysis considers the history of a VM (by default, the last 21 days), and it looks for:

- Activity
If the VM's VCPU utilization percentile is 20% or higher, then Intersight Workload Optimizer considers it an active VM.
- Stability
If there have been no start, stop, or resize actions for the VM for 16 of the last 21 days, then Intersight Workload Optimizer considers it stable.

If the current discount inventory cannot support the VM, or if supporting it would exceed your desired coverage, then Intersight Workload Optimizer can recommend purchasing additional discounts.

Click **Show All** to see a table with details for each discount.

The table shows the properties, up-front cost, and break-even period for each discount. The break-even period is the time at which savings will exceed the up-front cost, rounded to the month. The Cost Impact column indicates the monthly savings you would realize when you buy a specific discount.

When you choose one or more check boxes, the total count, up-front cost, and savings appear at the top.

Click **Details** under the **Actions** column to compare Lift & Shift and Optimized actions.

NOTE:

The plan assumes that a discount will always be less expensive than its on-demand counterpart. However, this is not always the case. There might be billing details from service providers that could lead to recommendations to move to a discounted instance type that is more expensive than running on demand.

Plan Actions

Intersight Workload Optimizer shows separate tabs for **Lift & Shift** and **Optimized** migration actions. You can download the list of actions as a CSV file.

RESULTS OVERVIEW		LIFT & SHIFT ACTIONS	OPTIMIZED ACTIONS
<input type="text" value="Search..."/> FILTER		↓	
Move Virtual Machine Latest 6.4.x from hp-d1563.e...com to aws-...ia)	Lift & Shift migration	EST. INVESTMENT: \$184/mo	>
Move Virtual Volume Vol-Latest 6...s03 from NIM...s03 to aws-U...ia)	Lift & Shift migration	EST. INVESTMENT: \$60/mo	>
Move Virtual Machine turbonomic....82 from hp-...com to aws-US ...ia)	Lift & Shift migration	EST. INVESTMENT: \$184/mo	>
Move Virtual Volume Vol...s02 from NIMHF40:Operations...s02 to ...	Lift & Shift migration	EST. INVESTMENT: \$119/mo	>

For *Optimized* migrations, when you expand an action on a VM, you will see charts that track VCPU and VMem utilization for that VM. With these charts, you can easily recognize the utilization trends that Intersight Workload Optimizer analyzed to determine the most efficient instance for the VM.



For more information about these charts, see [Utilization Charts \(on page 59\)](#).

Uploading Plan Results to Azure Migrate

Intersight Workload Optimizer can upload the plan results and additional plan information to the Azure Migrate portal as part of your migration process. This feature is only available for plans that simulate on-prem VM migration to an Azure region.

Uploaded information includes:

- Basic information for the on-prem VMs, including OS Name and Machine Name
- Target Azure region, VM size, and storage type

NOTE:

Azure Migrate does not support automatic selection of OS Disk or manual selection of Ultra Storage disk tiers as part of a migration plan.

- Discount recommendations

- OS license recommendations (based on the licensing option that you selected for the plan)

NOTE:

The Azure Migrate portal displays standardized information provided by third-party migration assessment solutions, including Intersight Workload Optimizer. Microsoft might not support displaying some information unique to Intersight Workload Optimizer.


Before uploading the results, be sure to complete the following tasks:

1. Create a project in the Azure Migrate portal.
2. Add Intersight Workload Optimizer as a migration assessment solution to the project.
3. Set the necessary permissions in the Azure Migrate portal. Open Resource Explorer and configure the following operations:
 - Microsoft.Migrate/migrateprojects/read
 - Microsoft.Migrate/migrateprojects/solutions/read
 - Microsoft.Migrate/migrateprojects/solutions/getconfig/action

Consult the Azure documentation for information on completing these tasks.

When you are ready to upload:

1. Click **Upload** at the top-right corner of the Plan Page.

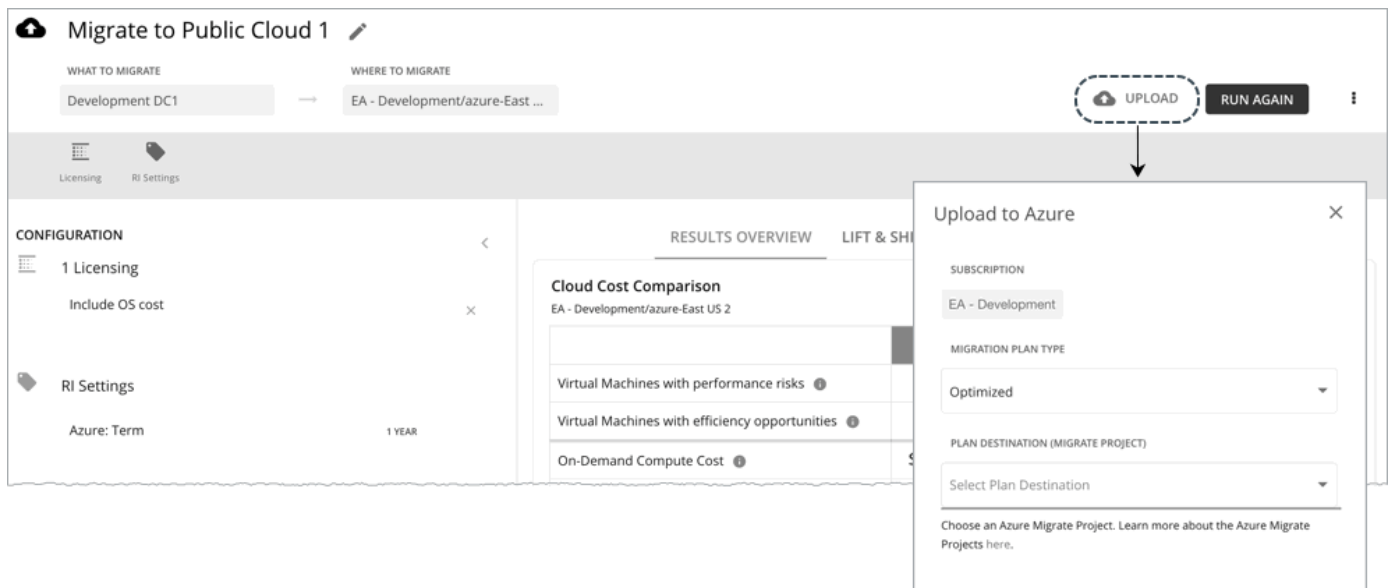

2. Specify the following:
 - Migration Plan Type
Choose to migrate either the 'Lift & Shift' or 'Optimized' results.
 - Plan Destination (Migrate Project)
Select from the list of Azure Migrate projects. These are the projects belonging to the Azure subscription that you selected for the plan. If you have not created a project for the subscription, go to the Azure Migrate portal and create one.

WARNING:

Uploading to a project with existing plan results overwrites those results.

The upload will fail if another upload targeted at the same destination is already in progress.

3. Click **Submit**.
The Plan Page updates to display the upload status. Refresh the page periodically to check:
 - If the upload task completed without problems
 - Any upload issues for individual entities
4. When the upload is complete, log in to the Azure Migrate portal and go to the project you selected as the plan destination.

The project should now display the uploaded information. Use the migration tools identified for the project to start the actual migration.

NOTE:


Repeat the upload procedure if you re-ran the plan and want to upload the new results.

Re-Running the Plan

You can run the plan again with the same or a different set of configuration settings. This runs the plan scenario against the market in its current state, so the results you see might be different, even if you did not change the configuration settings.


Use the toolbar on top of the Configuration section to change the configuration settings.

NOTE:

It is not possible to change the scope of the plan in the Plan Page. You will need to start over if you want a different scope. To start over, go to the top-right section of the page, click the More options icon (), and then select **New Plan**.

When you are ready to re-run the plan, click **Run Again** on the top-right section of the page.

Buy VM Reservations Plan

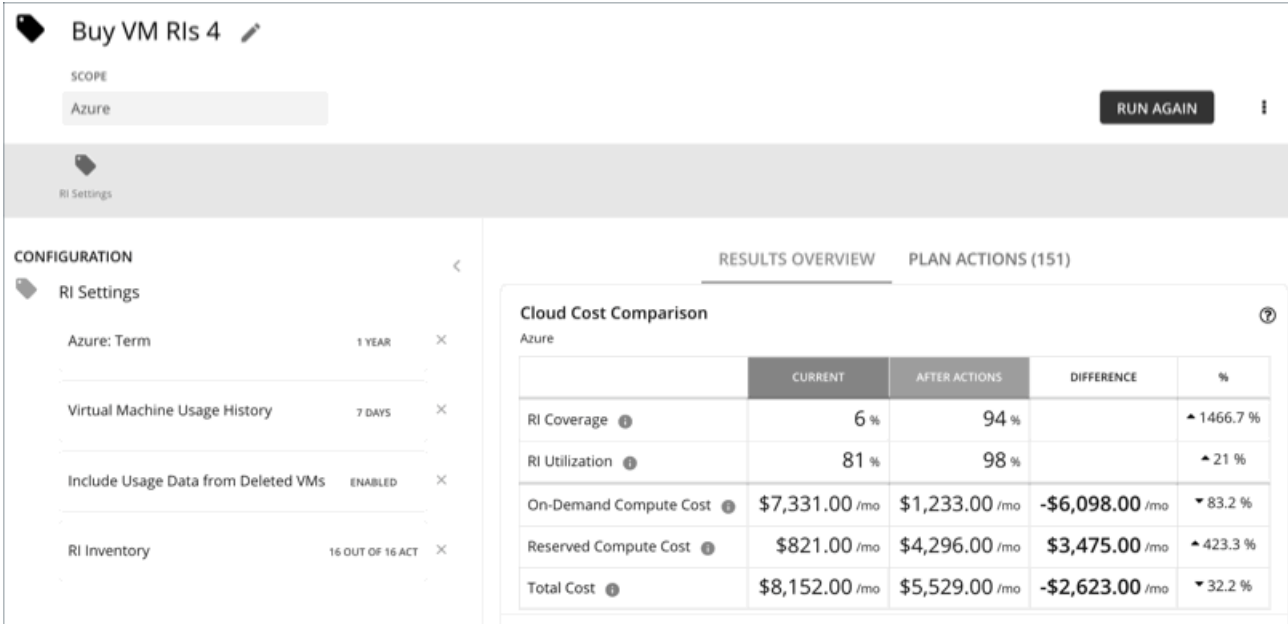

The screenshot shows the 'Buy VM Ris 4' plan configuration page. The scope is set to 'Azure'. A 'RUN AGAIN' button is visible in the top right. The left sidebar shows configuration settings for 'RI Settings', including 'Azure: Term' (1 YEAR), 'Virtual Machine Usage History' (7 DAYS), 'Include Usage Data from Deleted VMs' (ENABLED), and 'RI Inventory' (16 OUT OF 16 ACT). The main content area displays a 'Cloud Cost Comparison' table for Azure, comparing current costs to costs after actions.

	CURRENT	AFTER ACTIONS	DIFFERENCE	%
RI Coverage	6 %	94 %		▲ 1466.7 %
RI Utilization	81 %	98 %		▲ 21 %
On-Demand Compute Cost	\$7,331.00 /mo	\$1,233.00 /mo	-\$6,098.00 /mo	▼ 83.2 %
Reserved Compute Cost	\$821.00 /mo	\$4,296.00 /mo	\$3,475.00 /mo	▲ 423.3 %
Total Cost	\$8,152.00 /mo	\$5,529.00 /mo	-\$2,623.00 /mo	▼ 32.2 %


Run the Buy VM Reservations plan to see discount purchase opportunities that can significantly reduce on-demand costs for your cloud VMs. When calculating purchases, Intersight Workload Optimizer evaluates all purchasing options for your selected scope and usage data for the VMs in that scope. It then compares your current costs to the costs you would get after executing the plan recommendations.

Currently, Intersight Workload Optimizer can recommend purchase actions for AWS and Azure. Purchase actions for GCP will be introduced in a future release.

Configuring a Buy VM Reservations Plan

For an overview of setting up plan scenarios, see [Setting Up Plan Scenarios \(on page 245\)](#).

1. Scope

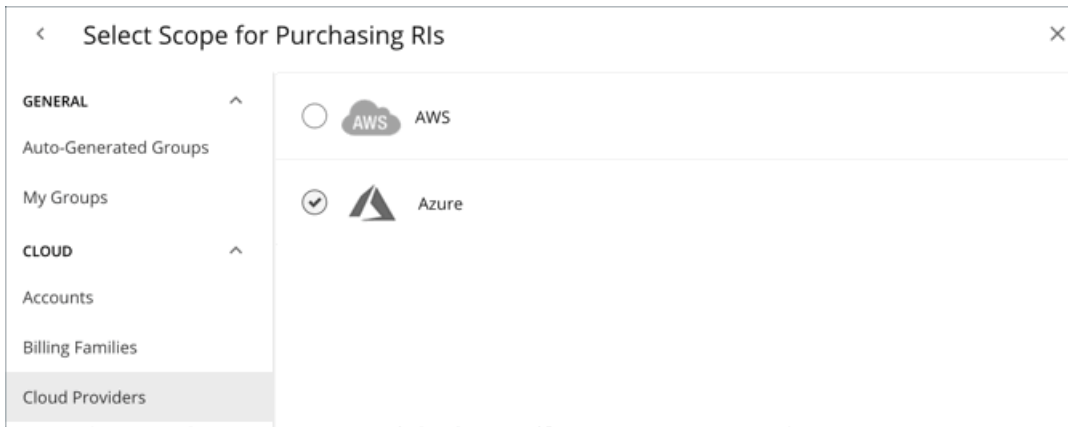

You can scope by:

- Accounts
Choose AWS accounts or Azure subscriptions for the plan's scope.
- Billing Families
Include discount purchases for a billing family. The plan calculates discount purchases through the billing family's master account.
- Cloud Providers
See purchase opportunities for your AWS or Azure environment.
- Regions
Focus the plan on a cloud provider's region.

2. RI Settings

<

RI Settings

Purchase RIs ?

AWS PROFILE

OFFERING CLASS

Standard Convertible

TERM

1 Year 3 Years

PAYMENT

All Upfront Partial Upfront No Upfront

VIRTUAL MACHINE USAGE

BASED ON THE PAST

1 DAY 7 DAYS 14 DAYS 30 DAYS

TERMINATED VIRTUAL MACHINES

Only use data from active VMs

Use data from active and deleted VMs (Support CI/CD pipeline)

Discount Inventory ?

This plan uses 18 out of 18 available RIs ✎ EDIT

Purchase RIs

Allow the plan to buy discounts based on the following configurations:

■ Profile

The settings that you have set up for real-time analysis are selected by default. You can change the settings to see how they affect costs.

– Offering Class

For AWS environments, choose the offering class that corresponds to the RI types that you typically use in your environment.

– Term

For AWS and Azure environments, choose the payment terms you contract for your discounts. TERM can be one of **1 Year** or **3 Year**. Typically, longer term payment plans cost less per year.

– Payment

The payment option that you prefer for your AWS RIs:

- All Upfront – You make full payment at the start of the RI term.
- Partial Upfront – You make a portion of the payment at the start of the term, with the remain cost paid at an hourly rate.
- No Upfront – You pay for the RIs at an hourly rate, for the duration of the term.

■ Virtual Machine Usage

Specify the time frame you want the plan to use when it calculates your discount purchases.

■ Terminated Virtual Machines


- **Only use data from active VMs** – Select this option if you terminate your VMs permanently.
- **Use data from active and deleted VMs (Support CI/CD pipeline)** – Select this option if you want to use data from a CI/CD pipeline that regularly deploys and terminates VMs.

Discount Inventory

Select your discount inventory for the plan. You can use the default selection or any of the available discounts for your scope.

Working With Buy VM Reservations Plan Results

After the Buy VM Reservations runs, you can view the results to see discount and optimization opportunities for your cloud environment.

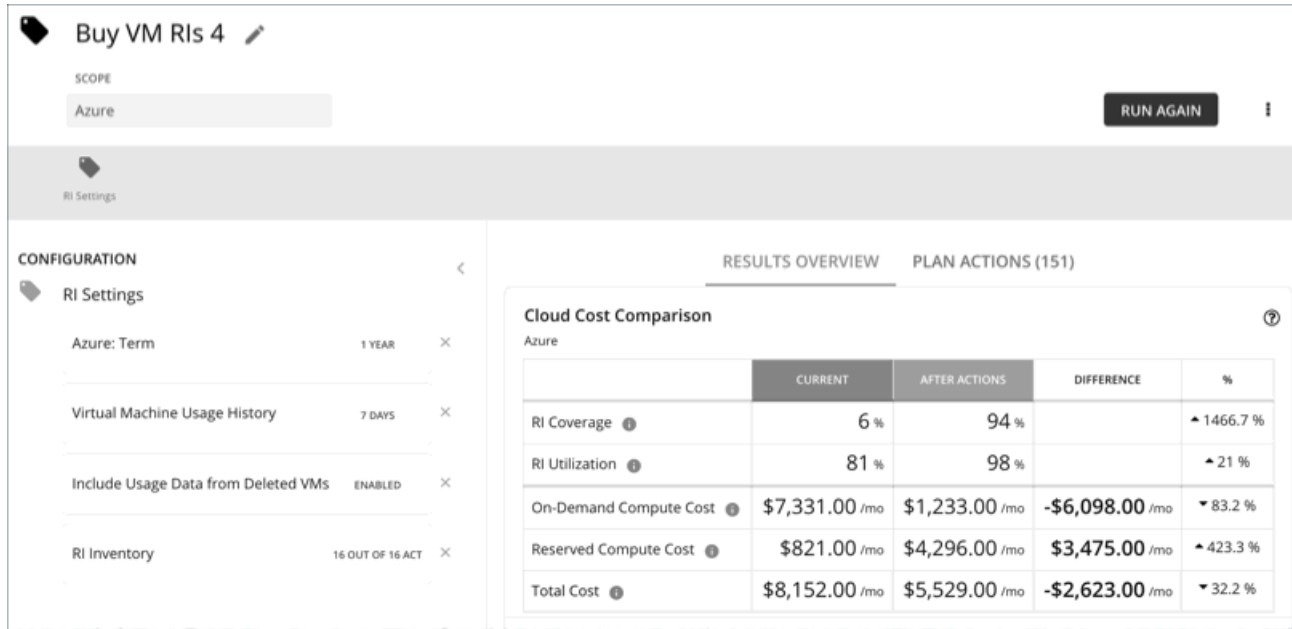

Viewing the Results

The plan results include the following charts:

■ Cloud Cost Comparison


This chart highlights changes to your existing discount coverage and utilization if you execute all the actions that the plan recommends. Actions include increasing coverage or purchasing additional instance types at a discounted rate. Your cloud provider will adjust discount allocations when the actions have completed.

- Analysis evaluates ways to increase your current discount coverage so you can take full advantage of discounted pricing.
- The plan can recommend purchase actions to reduce your costs further. The analysis looks at historical VM usage and uptime to arrive at the number of instance types you should purchase.

You can compare current and after-action costs, including on-demand compute, discounted compute, and total costs. Purchase actions increase your discounted compute cost, but can lower your on-demand compute cost significantly as discount coverage increases. The end result is a reduction to your total cost.

■ Virtual Machine Mapping


This chart shows the instance types for the VMs included in the plan.

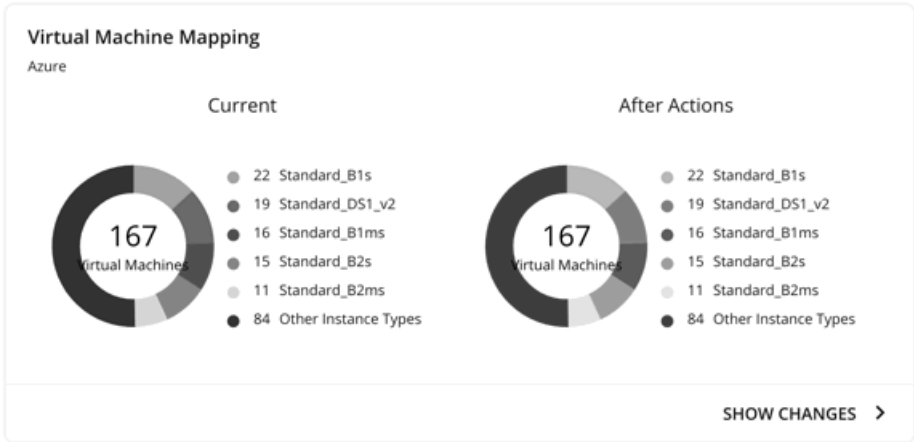

Click **Show Changes** to see details for each VM with discount coverage changes. The table maps VMs to instance types, and shows how changes in discount coverage can reduce on-demand cost.


■ **Discount Inventory**

This chart lists the cloud provider discounts discovered in your environment. For a tabular listing, click **Show All** at the bottom of the chart. In the tabular listing, you can see if a discount expired before the specified purchase date.

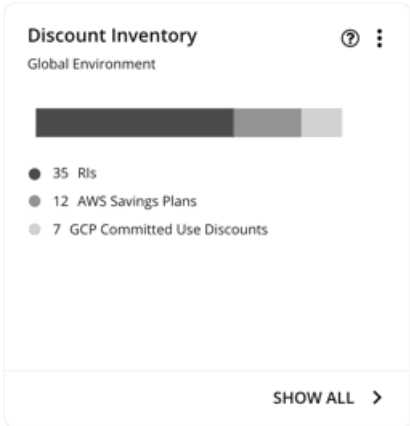

■ **Recommended RI Purchases**

Intersight Workload Optimizer can recommend purchasing instance types at a discounted rate to help you increase the percentage of VMs covered by discounted pricing and reduce on-demand costs. This chart shows your pending purchases. Download the list of purchases and then send it your cloud provider or representative to initiate the purchase process.

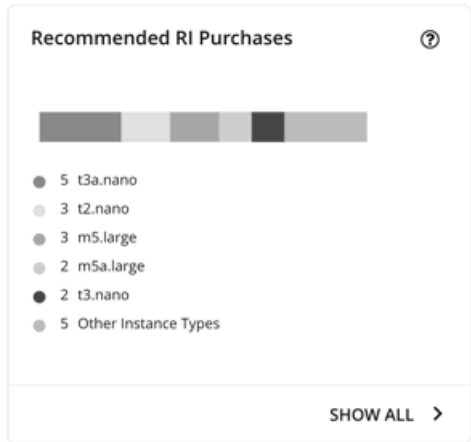

Click **Show All** to see a table with details for each discount.

The table shows the properties, up-front cost, and break-even period for each discount. The break-even period is the time at which savings will exceed the up-front cost, rounded to the month. The Cost Impact column indicates the monthly savings you would realize when you buy a specific discount.

When you choose one or more check boxes, the total count, up-front cost, and savings appear at the top.

Viewing Plan Actions

Click the **Plan Actions** tab on top of the page to view a list of actions that you need to execute to achieve the plan results.

RESULTS OVERVIEW		PLAN ACTIONS (20)	
<input type="text" value="Search..."/>		FILTER	
<input type="checkbox"/>			
Buy 1 t3.nano RIs for ██████████ in aws-US East (Ohio) Increase RI Coverage by 79%	EST. SAVINGS: \$0.404/mo	EFFICIENCY	>
Buy 2 t3a.nano RIs for ██████████ in aws-US East (Ohio) Increase RI Coverage by 85%	EST. SAVINGS: \$2.03/mo	EFFICIENCY	>
Buy 1 t3a.nano RIs for ██████████ in aws-US Eas...ia) Increase RI Coverage by 99%	EST. SAVINGS: \$1.37/mo	EFFICIENCY	>

Re-Running the Plan

You can run the plan again with the same or a different set of configuration settings. This runs the plan scenario against the market in its current state, so the results you see might be different, even if you did not change the configuration settings.

Use the toolbar on top of the Configuration section to change the configuration settings.

- RI Settings

Update your purchase settings to see how they impact results. For example, you can configure a longer timeframe so that the plan can include additional VM usage data in its analysis. For details, see [Purchase RIs \(on page 282\)](#).

- Discount Inventory


Use the default selection or any of the available discounts for your scope.

NOTE:

It is not possible to change the scope of the plan in the Plan Page. You will need to start over if you want a different scope. To start over, go to the top-right section of the page, click the More options icon (), and then select **New Plan**.

When you are ready to re-run the plan, click **Run Again** on the top-right section of the page.

Alleviate Pressure Plan

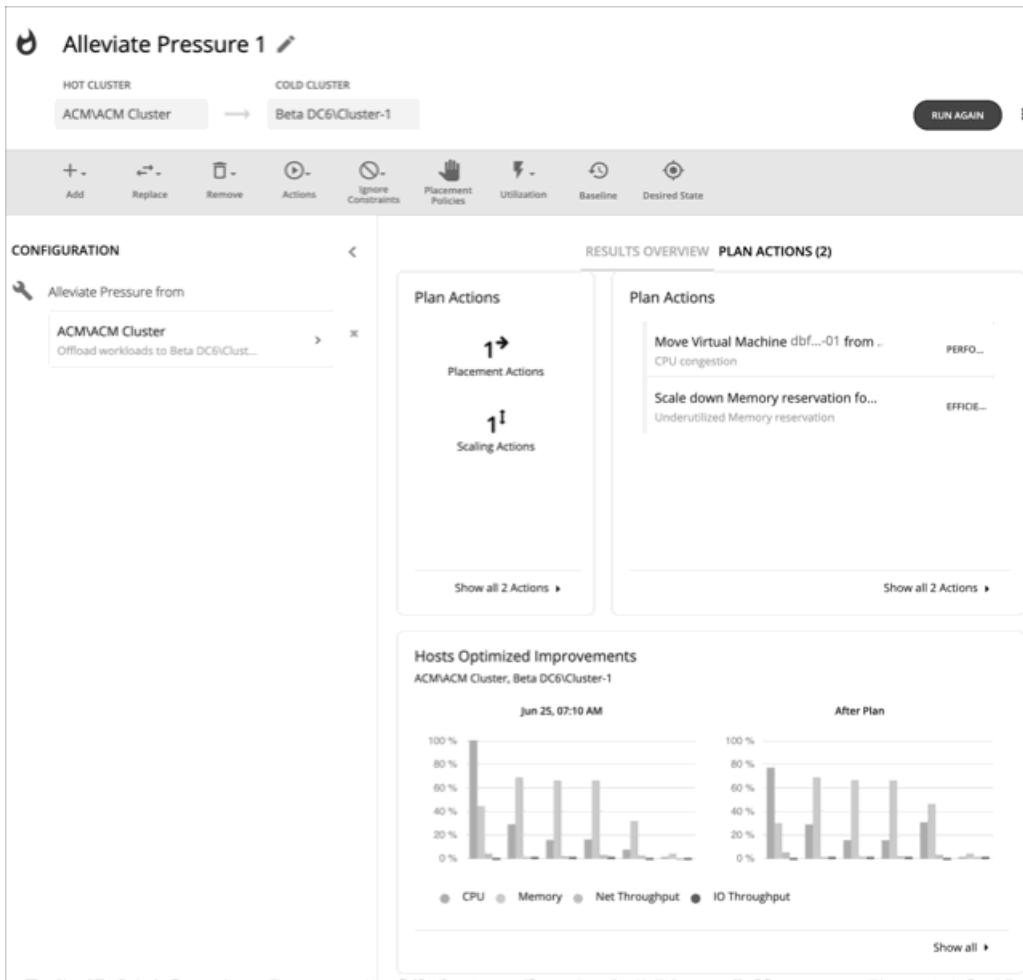

Use the Alleviate Pressure plan to find out how to migrate workloads from a stressed or *hot* cluster over to a cluster with more headroom. This plan shows the minimal changes you need to make to reduce risks on the hot cluster.

The plan results:

- Show the actions to migrate workloads from the hot cluster to the cold one
- Compare the current state of your clusters to the optimized state
- Show resulting headroom for both the hot and the cold clusters
- Show trends of workload-to-inventory over time for both clusters

Alleviate Pressure plans make use of the headroom in your clusters. Headroom is the number of VMs the cluster can support, for CPU, Memory and Storage.

To calculate cluster capacity and headroom, Intersight Workload Optimizer runs nightly plans that take into account the conditions in your current environment. The plans use the Economic Scheduling Engine to identify the optimal workload distribution for your clusters. This can include moving your current VMs to other hosts within the given cluster, if such moves would result in a more desirable workload distribution. The result of the plan is a calculation of how many more VMs the cluster can support.

To calculate VM headroom, the plan simulates adding VMs to your cluster. The plan assumes a certain capacity for these VMs, based on a specific VM template. For this reason, the count of VMs given for the headroom is an approximation based on that VM template.

To specify the templates these plans use, you can configure the nightly plans for each cluster. For more information, see [Configuring Nightly Plans \(on page 299\)](#)

NOTE:


To execute, this plan must ignore certain constraints. The plan ignores cluster constraints to allow migrating workloads from the hot cluster to the cold one. It also ignores network constraints, imported DRS policies, and any Intersight Workload Optimizer that would ordinarily be in effect.

Configuring an Alleviate Pressure Plan

For an overview of setting up plan scenarios, see [Setting Up Plan Scenarios \(on page 245\)](#).


1. Scope

The wizard first gives you a list for you to choose the hot cluster. This is the cluster that shows risks to performance. The list sorts with the most critical clusters first, and it includes the calculated headroom for CPU, Memory, and Storage in each cluster.

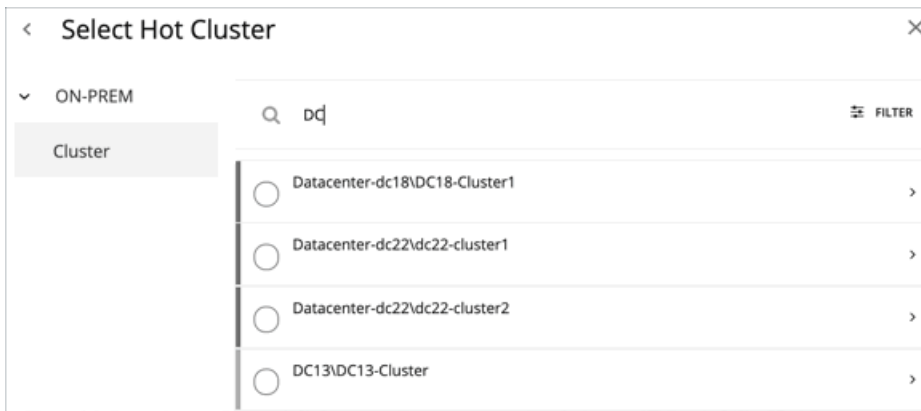


2. Cold Cluster

After you select the hot cluster, choose the cold cluster.

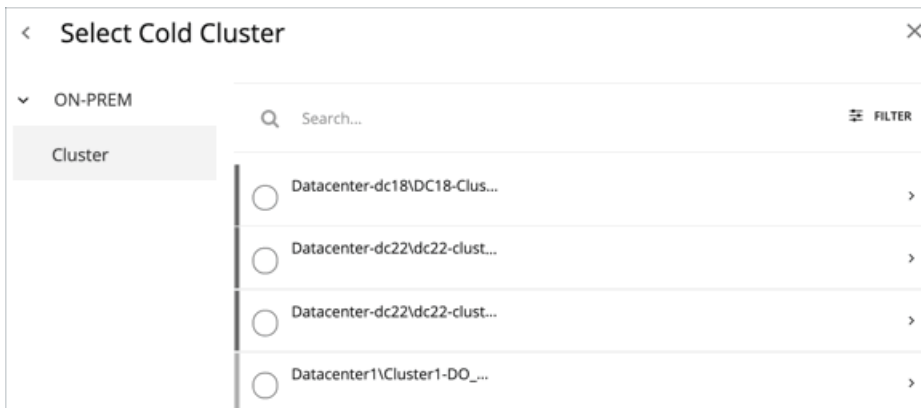

Working With Alleviate Pressure Plan Results

After the plan runs, you can view the results to see how the migration of workloads off of your hot cluster affects your environment.

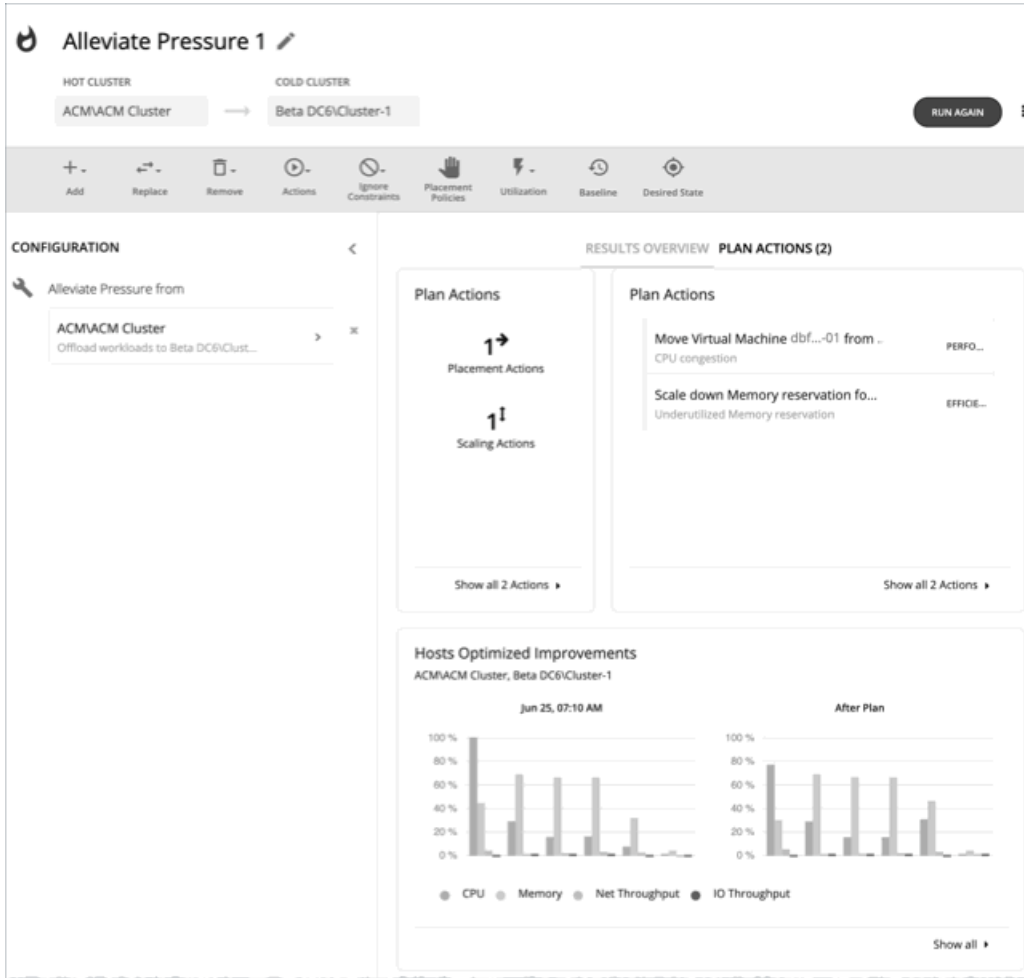

Viewing the Results

The results include the following charts:

- **Plan Actions**

You can see a list of actions to reduce the pressure on the hot cluster. It's typical to see actions to move workloads from the hot cluster over to the cold cluster. If some VMs are overprovisioned, you might see actions to reduce the capacity for those workloads.

- **Hosts Optimized Improvements**

This chart compares the current state of the hot cluster to its state after executing the plan actions. It displays the resource utilization of the cluster's hosts both before and after the plan.

- **Headroom**

With these charts, you can compare the headroom between the hot and cold clusters.

- **Virtual Machines vs Hosts and Storage**

This chart shows the total number of virtual machines, hosts, and storage in your on-prem environment, and tracks the data over time. Chart information helps you understand and make decisions around capacity and utilization, based on historical and projected demand.

Re-Running the Plan

You can run the plan again with the same or a different set of configuration settings. This runs the plan scenario against the market in its current state, so the results you see might be different, even if you did not change the configuration settings.

Use the toolbar on top of the Configuration section to change the configuration settings.



The toolbar items that display are similar to the toolbar items for a custom plan. For details, see [Configuring a Custom Plan \(on page 289\)](#).


NOTE:

It is not possible to change the scope of the plan in the Plan Page. You will need to start over if you want a different scope. To start over, go to the top-right section of the page, click the More options icon (), and then select **New Plan**.

When you are ready to re-run the plan, click **Run Again** on the top-right section of the page.

Custom Plan

For an overview of setting up plan scenarios, see [Settings Up User Plan Scenarios \(on page 245\)](#).

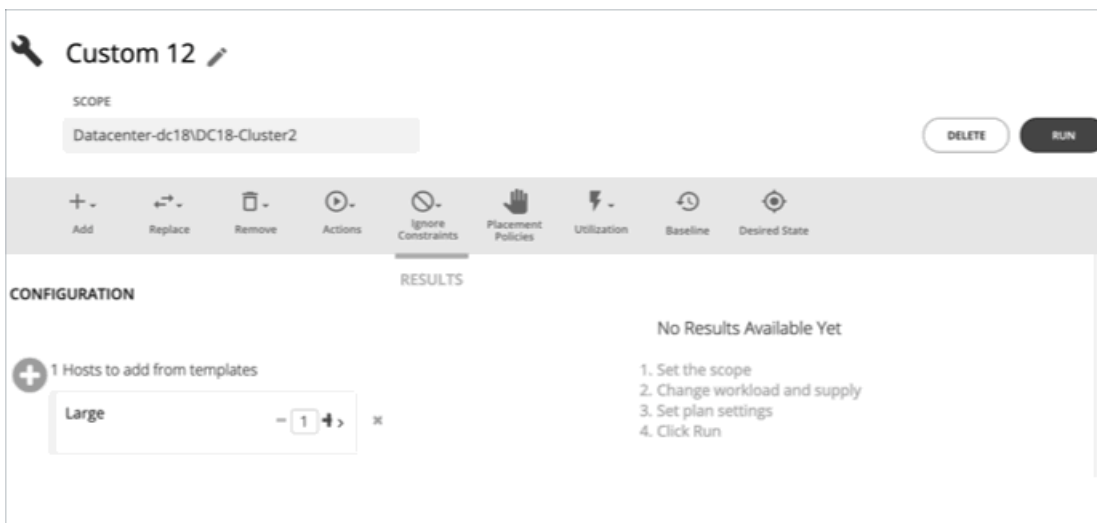


When you create a custom scenario, you specify the plan scope as an initial step, and then skip the plan wizards and jump straight into setting up the plan parameters. You can name the plan, change workload demand and the supply of resources, and specify other changes to the plan market.

Configuring a Custom Plan

For an overview of setting up plan scenarios, see [Setting Up Plan Scenarios \(on page 245\)](#).

1. Scope

Specify the plan scope and then click **Configure Plan** at the bottom of the page.

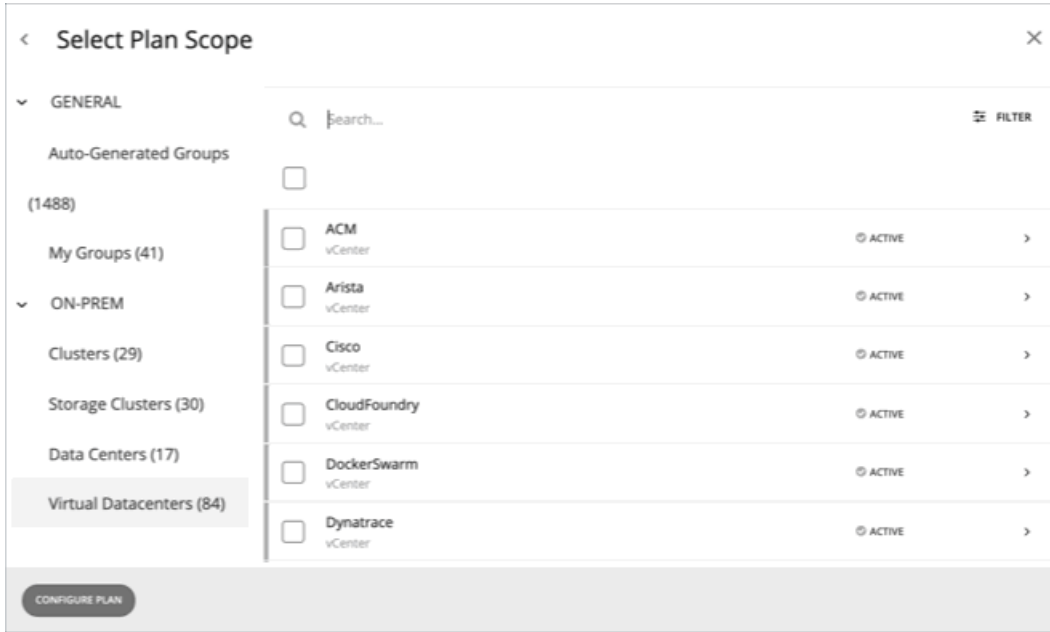


2. Plan Configuration

Use the Plan Configuration toolbar to fine-tune your plan settings. You can change workload demand and the supply of resources, and specify other changes to the plan market.



2.1. Add


Add virtual machines, hosts, or storage to your plan. For example, when you add hosts, you increase the compute resources for the plan.



Copy from an Entity or Template

Choose an entity or template to copy. This describes the new entities that Intersight Workload Optimizer will add to the plan. For example, you can run a plan that adds new VMs to a cluster. If you copy from a template, then the plan adds a new VM that matches the resource allocation you have specified for the given template.

- Option 1: Copy from an entity

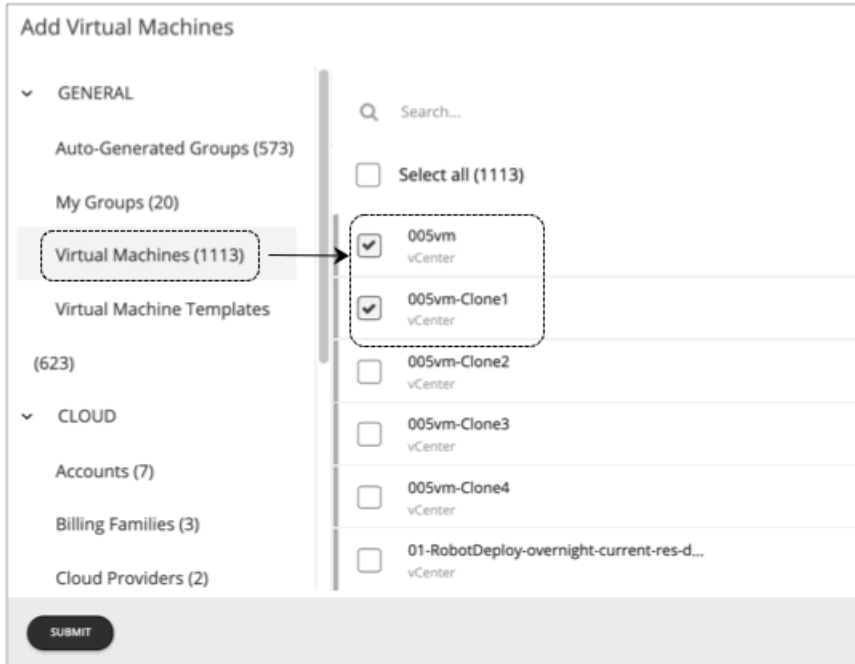

■ Option 2: Copy from a template

If no existing template is satisfactory, create one by clicking **New Template**.



NOTE:


Intersight Workload Optimizer automatically adds any new template you create to the Template Catalog page (**Settings > Templates**).

It is not possible to use templates for containers or container pods.

Use the **Filter** option to show entities or templates with certain properties (name, number of CPUs, etc.). This makes it easier to sort through a long list.


Number of Copies to Add

After choosing an entity or template, it appears as an entry in the Configuration summary. Then you can set how many copies to add.

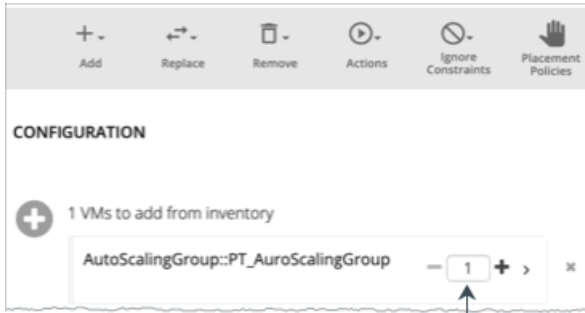

Set how many copies to add


2.2. Replace



Replacing virtual machine is a way to change the properties of VMs in your plan market. When you replace workload, you select one or more VMs that you want to change, and then you select a template to use in their place. The list of changed VMs displays in the Configuration Summary. You can delete individual entries from the this summary if necessary.

Replacing hosts or storage is a way to plan for a hardware upgrade. For example, if you replace your hosts or datastores with a more powerful template, the plan might show that you can use fewer hosts or datastores, and it will show the best placement for workloads on those entities. You begin by selecting the entities you want to replace, and when you click **REPLACE** you can then choose a template that will replace them. Note that you can only choose a single template for each set of entities you want to have replaced. You can configure different replacements in the same plan, if you want to use more than one template.


2.3. Remove

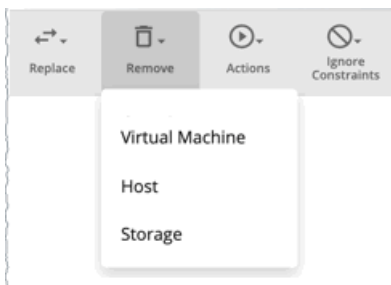

Removing virtual machines frees up resources for other workloads to use.

Removing hosts or storage means you have fewer compute or storage resources for your workloads. If you think you have overprovisioned your environment, you can run a plan to see whether fewer hosts or less storage can still support the same workload.


2.4. Actions

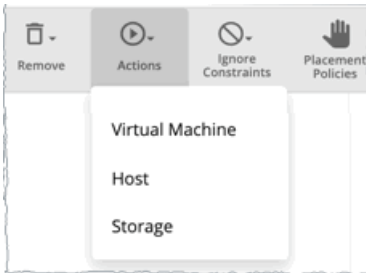

See the effect of enabling or disabling actions on the entities included in the plan. For example, you might plan for more workload but know that you don't want to add more hardware, so you disable Provision of hosts for your plan. The results would then indicate if the environment can support the additional workload.

2.5. Ignore Constraints

Choose to ignore constraints (such as placement policies) for VMs in your environment.

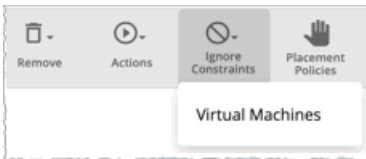

By default, VMs are constrained to the cluster, network group, datacenter, or storage group that their hosts belong to. You can choose to ignore these boundaries.


For example, by default a plan does not consider moving VMs to physical hosts outside of the current cluster. If you disable the Cluster constraint for a VM in your plan, then the plan can evaluate the results of hosting those VMs on any other physical machine within the scope of your plan. If the best results come from moving that VM to a different cluster, then the plan will show that result.

NOTE:

If you are adding hosts to a plan, and use host templates, then you must turn on **Ignore Constraints**.

2.6. Placement Policies


By default, the plan includes all the placement policies that apply to the plan scope. Also, these policies are in their real-time state (enabled or disabled).

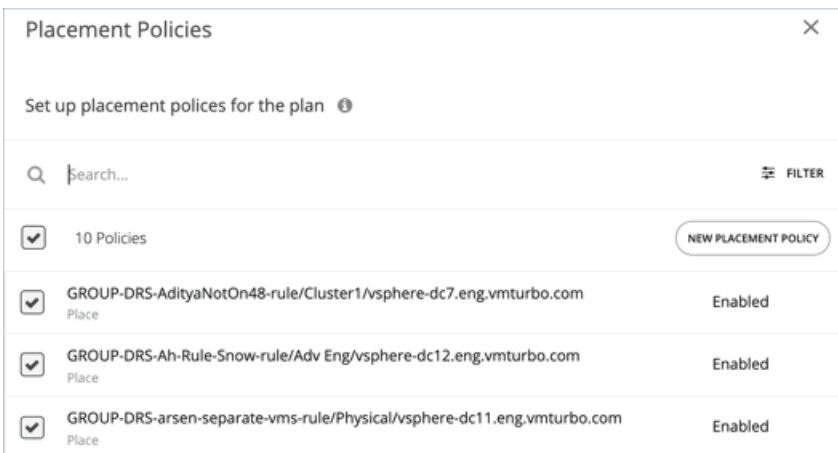

You can use these settings to enable or disable existing policies, or you can create new policies to apply only to this plan scenario. For information about creating placement policies, see [Placement Policies \(on page 62\)](#).

2.7. Utilization

Setting utilization by a certain percentage is a way to increase or decrease the workload for the scope of your plan and any entity added to the plan, or for specific groups. Intersight Workload Optimizer uses the resulting utilization values as the baseline for the plan.

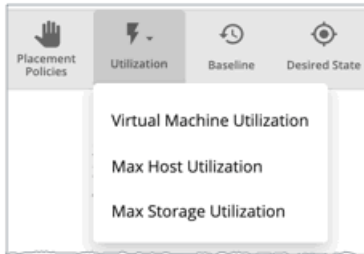


Max Host Utilization levels specify the percentage of the physical resource that you want to make available in the given plan. By default, hosts have utilization set to 100%. For a given plan, you can set the utilization to a lower value. For example, assume you want to simulate High Availability of 25% for some hosts in the plan. In that case, you can select these hosts and set their utilization levels to 75%.

Max Storage utilization levels specify the percentage of the physical resource that you want to make available in the given plan. By default, storage has utilization set to 100%. For a given plan, you can set the utilization to a lower value. For example, assume you have one data store that you want to share evenly for two clusters of VMs. Also assume that you are creating a plan for one of those clusters. In that case, you can set the datastores to 50% utilization. This saves storage resources for the other cluster that will use this storage.

2.8. Baseline

Use these settings to set up the baseline of utilization metrics for your plan.

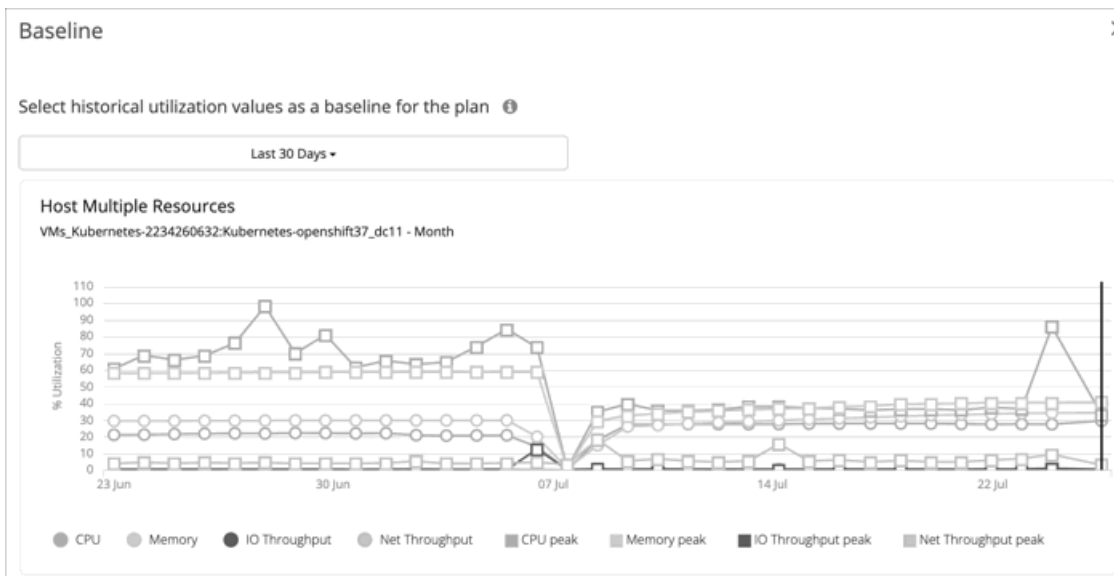


By default, the plan runs against the current state of your environment. You can set up the plan to add or remove entities, or otherwise affect the plan calculations. But the utilization metrics will be based on the current state of the plan. If you run the same plan multiple times, each run begins with a fresh view of your inventory.

You can select from the list of snapshots to load the utilization statistics from a previous time period into the plan. Use this to run the plan against utilization that you experienced in the past. For example, assume a peak utilization period for the month before the winter holidays. During the holidays you want to plan to add new capacity that can better handle that peak. You would set the baseline to the utilization you saw during that pre-holiday peak.

2.9. Desired State

The desired state is a condition in your environment that assures performance for your workloads, while it utilizes your resources as efficiently as possible and you do not overprovision your infrastructure. Intersight Workload Optimizer uses default Desired State settings to drive its analysis. You should never change the settings for real-time analysis unless you are working directly with Technical support. However, you can change the settings in a plan to see what effect a more or less aggressive configuration would have in your environment.

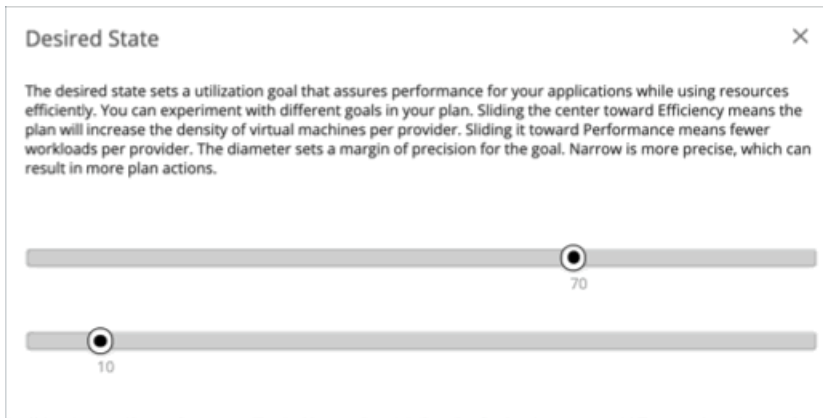


You can think of the desired state as an n-dimensional sphere that encompasses the fittest conditions your environment can achieve. The multiple dimensions of this sphere are defined by the resource metrics in your environment. Metric dimensions include VMem, storage, CPU, etc. While the metrics on the entities in your environment can be any value, the desired state, this n-dimensional sphere, is the subset of metric values that assures the best performance while achieving the most efficient utilization of resources that is possible.

The Desired State settings center this sphere on Performance (more infrastructure to supply the workload demand), or on Efficiency (less investment in infrastructure to supply the workload demand). The settings also adjust the diameter of the sphere to determine the range of deviation from the center that can encompass the desired state. If you specify a large diameter, Intersight Workload Optimizer will have more variation in the way it distributes workload across hosting devices.

For more information, see [The Desired State \(on page 10\)](#).

Working With Custom Plan Results

After the plan runs, you can view the results to see how the plan settings you configured affect your environment.

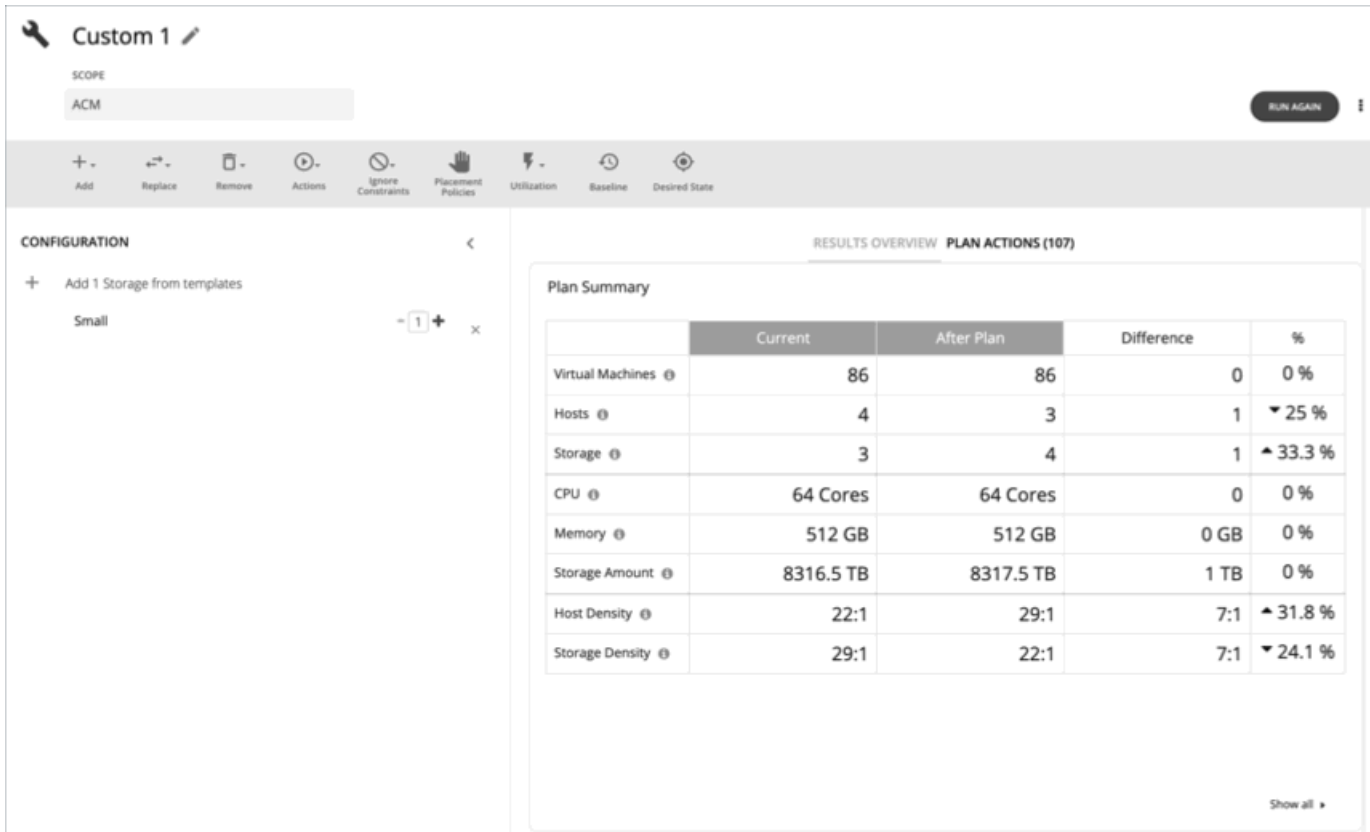

The screenshot shows the 'Custom 1' plan configuration in Cisco Cloud Manager. The 'RESULTS OVERVIEW' tab is active, displaying a 'Plan Summary' table. The table compares current resources with resources after the plan is executed. The configuration on the left shows 'Add 1 Storage from templates' with a 'Small' size selected.

	Current	After Plan	Difference	%
Virtual Machines	86	86	0	0 %
Hosts	4	3	1	▼ 25 %
Storage	3	4	1	▲ 33.3 %
CPU	64 Cores	64 Cores	0	0 %
Memory	512 GB	512 GB	0 GB	0 %
Storage Amount	8316.5 TB	8317.5 TB	1 TB	0 %
Host Density	22:1	29:1	7:1	▲ 31.8 %
Storage Density	29:1	22:1	7:1	▼ 24.1 %

Viewing the Results

The results include the following charts:

■ Plan Summary Chart

This chart compares your current resources to the resources you would get after executing the plan.

NOTE:

Under some circumstances, this chart might not count "non-participating" entities in the real-time market, such as suspended VMs or hosts in a failover state. The following charts, on the other hand, count all entities in the real-time market, regardless of state:

- Scope Preview chart (displays before you run the plan)
- Optimized Improvements and Comparison charts


If the plan's scope includes VMs that cannot be placed, the results include a notification indicating the number of VMs. Click **Show Details** to see the list of VMs and the reasons for their non-placement.

Click **Show all** at the bottom of the chart to see savings or investment costs, or to download the chart as a CSV file.

■ Plan Actions Chart

This chart summarizes the actions that you need to execute to achieve the plan results. For example, if you run an Alleviate Pressure plan, you can see actions to move workloads from the hot cluster over to the cold cluster. If some VMs are overprovisioned, you might see actions to reduce the capacity for those workloads.

The text chart groups actions by [action type \(on page 45\)](#). The list chart shows a partial list of [actions \(on page 37\)](#).

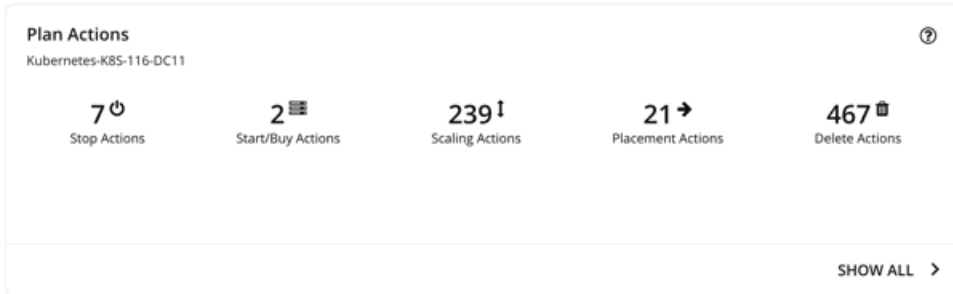


To view action details or download the list of actions as a CSV file:

- Click an action type in the text chart or an individual action in the list chart.
- Click **Show All** at the bottom of the chart.

■ Optimized Improvements Charts for Hosts, Storage, and Virtual Machines


The Optimized Improvements chart shows how the utilization of resources would change assuming you accept all of the actions listed in the Plan Actions chart.

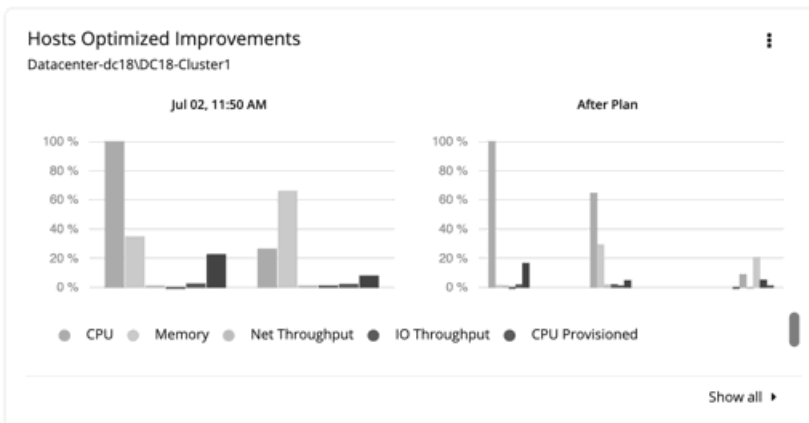


- In many of these charts, you can change the commodities on display. To do this, go to the top-right section of the chart, click the More options icon (⋮), and then select **Edit**. In the new screen that displays, go to the **Commodity** section and then add or remove commodities.
To restore the default commodities, use the **Reset view** option at the top-right section of the page.
- Click **Show all** at the bottom of the chart to see a breakdown of the current chart data by entity (for example, show CPU, Memory, and IO Throughput utilization for each host), or to download chart data as a CSV file.

■ Comparison Charts for Hosts, Storage Devices, and Virtual Machines

A Comparison chart shows how the utilization of a particular commodity (such as memory or CPU) for each entity in the plan would change if you execute the actions listed in the Plan Actions chart.

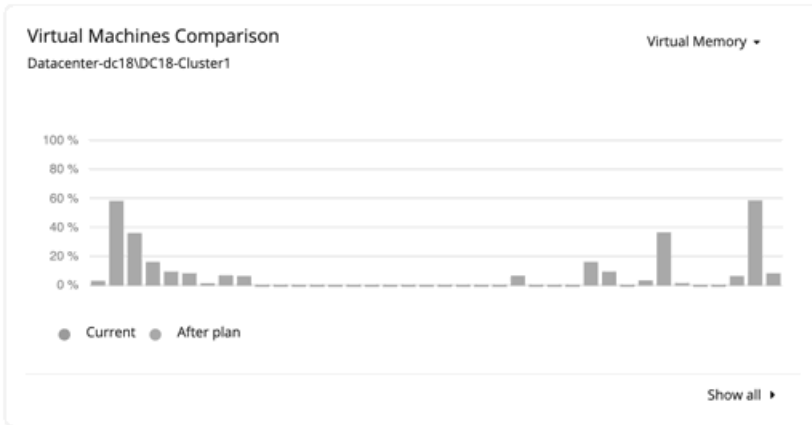

- To change the commodity displayed in the chart, go to the top-right section of a chart and then select from the list of commodities.
To restore the default commodity, go to the top-right section of the page, click the More options icon (), and then select **Reset view**.
- Click **Show all** at the bottom of the chart to show a breakdown of the current chart data by entity (for example, show Virtual Memory utilization for each virtual machine), or to download the chart as a CSV file.


NOTE:

For the Storage Devices Comparison chart, if you set the view to **VM Per Storage** and click **Show all**, the total number of VMs sometimes does not match the number in the Plan Summary chart. This happens if there are VMs in the plan that use multiple storage devices. The Storage Devices Comparison chart counts those VMs multiple times, depending on the number of storage devices they use, while the Plan Summary chart shows the actual number of VMs.

Re-Running the Plan


You can run the plan again with the same or a different set of configuration settings. This runs the plan scenario against the market in its current state, so the results you see might be different, even if you did not change the configuration settings.

Use the toolbar on top of the Configuration section to change the configuration settings.

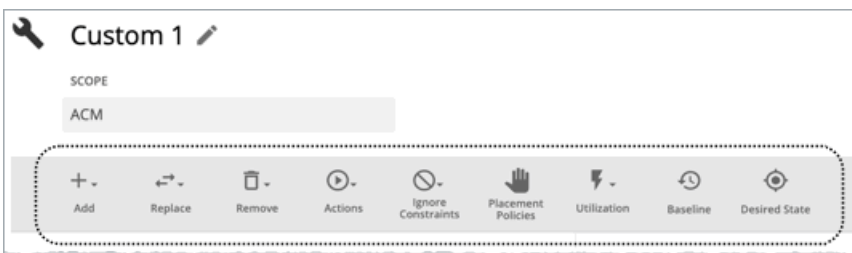

For details about these settings, see [Configuring a Custom Plan \(on page 289\)](#).

NOTE:

It is not possible to change the scope of the plan in the Plan Page. You will need to start over if you want a different scope. To start over, go to the top-right section of the page, click the More options icon (), and then select **New Plan**.

When you are ready to re-run the plan, click **Run Again** on the top-right section of the page.

Configuring Nightly Plans

The plan and its template

Expand to see template details

0 MB/s	0 MB/s	1
IO THROUGHPUT SIZE	NETWORK THROUGHPUT SIZE	NUM OF CPU
3465 MHz	0 %	1243.0769 MB
CPU SPEED	CPU CONSUMED FACTOR	MEMORY SIZE
0 %	0 MB/s	0 MB/s
MEMORY CONSUMED FACTOR	IO THROUGHPUT CONSUMED	NETWORK THROUGHPUT CONSUMED
1.344238 GB	0	20.701876 %
DISK SIZE	DISK IOPS CONSUMED	DISK CONSUMED FACTOR
AVG:GROUP-PMsByCluster_vsphere-dc18.corp.vmturbo.com_datacenter-21_domain-c567_HEADROOM MODEL		

Intersight Workload Optimizer runs nightly plans to calculate headroom for the clusters in your on-prem environment. For each cluster plan, you can set which VM template to use in these calculations.

For information about viewing cluster headroom, see [Viewing Cluster Headroom \(on page 37\)](#).

To calculate cluster capacity and headroom, Intersight Workload Optimizer runs nightly plans that take into account the conditions in your current environment. The plans use the Economic Scheduling Engine to identify the optimal workload distribution for your clusters. This can include moving your current VMs to other hosts within the given cluster, if such moves would result in a more desirable workload distribution. The result of the plan is a calculation of how many more VMs the cluster can support.

To calculate VM headroom, the plan simulates adding VMs to your cluster. The plan assumes a certain capacity for these VMs, based on a specific VM template. For this reason, the count of VMs given for the headroom is an approximation based on that VM template.

To set templates to use for the nightly plans:

1. Navigate to the Plan Page and click **NIGHTLY PLAN CONFIGURATION**.

Plan Management

USER PLAN NIGHTLY PLAN CONFIGURATION

Search... FILTER

- Plan for "Physical Machines By PM Cluster"
Template: Microsoft_SQL2008-medium
- Plan for "PMs_Beta DC6\Cluster-1"
Template: AVG:PMs_Beta DC6\Cluster-1 for last 10 days

This displays a list of all the nightly plans. Intersight Workload Optimizer creates a nightly plan for each cluster.

2. Click the plan that you want to configure.

A fly-out appears that lists all the available templates.

3. Select the template you want for this plan.

Choose the template and click **Select**.



Placement: Reserve Workload Resources

From the [Workload Placement Page](#), you can set up reservations to save the resources you will need to deploy VMs at a future date. Intersight Workload Optimizer calculates optimal placement for these VMs and then reserves the host and storage resources that they need.

To reserve VMs, you will need to choose a VM template, specify any placement constraints, set how many instances to reserve, and then indicate whether to reserve now or in the future. Because reserved VMs do not yet exist, they do not participate in the real-time market.

About VM Templates for Reservations

VM templates specify the resource requirements for each reserved VM, including:

- Compute and storage resources allocated to each VM
- Consumed factor. This is the percentage of allocated CPU, memory, or storage that the reserved VM will utilize.

For more information about these templates, see [VM Template Settings \(on page 367\)](#).

About Placement of Reserved VMs

To determine the best placement for the VMs you want to reserve, Intersight Workload Optimizer runs a plan using the last-generated data in nightly-run headroom plans.

NOTE:

If you have changed your environment by adding targets or changing policies, wait until the next run of headroom plans for the affected scope before you create reservations.

When making placement decisions, Intersight Workload Optimizer considers the following:

- Placement constraints set in the reservation
- Demand capacity

Intersight Workload Optimizer calculates demand based on the *resource allocation* and *consumed factor* set in VM templates. For example, if you want to create a reserved VM from a template that assigns 3 GB of virtual memory and a consumed factor of 50%, Intersight Workload Optimizer calculates 1.5 GB of demand capacity for the reservation.

- Overprovisioned capacity

For reserved VMs, this corresponds to the resource allocation set in VM templates. Continuing from the previous example, Intersight Workload Optimizer assumes 3 GB of overprovisioned capacity for a reserved VM created from a template that assigns 3 GB of virtual memory.

For providers (hosts and storage), Intersight Workload Optimizer calculates overprovisioned capacity. The default overprovisioned capacity is 1000% for host Mem and CPU, and 200% for storage. A host with 512 GB of memory will have an overprovisioned capacity of 5 TB (5120 GB).

Providers must have sufficient *demand* and *overprovisioned* capacity to place a reservation. Intersight Workload Optimizer analyzes the current and historical utilization of cluster, host, and storage resources to identify viable providers for the VMs when they are deployed to your on-prem environment. In this way, Intersight Workload Optimizer can prevent congestion issues after you deploy the VMs.

NOTE:

Intersight Workload Optimizer persists historical utilization data in its database so it can continue to calculate placements accurately when market analysis restarts.

The initial placement attempt either succeeds or fails.

■ Successful Initial Placements

If the initial placement attempt is successful, Intersight Workload Optimizer adds the reserved VM to your inventory.

In the previous example, a reserved VM that requires 1.5 GB of demand capacity and 3 GB of overprovisioned capacity can be placed on a host with 512 GB of memory (5 TB of overprovisioned capacity), assuming no constraints will prevent the placement.

Note that *actual* and *reserved* VMs share the same resources on providers. This means that provider capacity will change as demand from the actual VMs changes. Intersight Workload Optimizer polls your environment once per day to identify changes in provider capacity. It then evaluates if it can continue to place the reserved VMs *within the same cluster*, and then shows the latest placement status.

For example, if the host for a reserved VM is congested at the time of polling, Intersight Workload Optimizer might decide to move the VM to another host in the cluster that has sufficient capacity. In this case, the placement status stays the same (**Reserved**). Should you decide to deploy the VM at that point, you need to deploy it to the new host. If, on the other hand, there is no longer a suitable host in the cluster, the placement fails and the status changes to **Placement Failed**. Deploying the VM at that point will result in congestion. Intersight Workload Optimizer will *not* retry fulfilling the reservation.

■ Failed Initial Placements

If the initial placement attempt is unsuccessful (for example, if all providers have seen historical congestion), Intersight Workload Optimizer shows that the placement has failed and will *not* retry fulfilling the reservation.

Current and Future Reservations

You can create a current or future reservation from the Workload Placement Page.

■ Current Reservation

Intersight Workload Optimizer calculates placement immediately and then adds the reserved VMs to your inventory if placement is successful.

This reservation stays in effect for 24 hours, or until you delete it.

■ Future Reservation

Set the reservation for some time in the future.

Intersight Workload Optimizer does not calculate placement at this time – the future reservation saves the definition, and Intersight Workload Optimizer will calculate placement at the time of the reservation start date.

This reservation stays in effect for the duration that you set, or until you delete it.

Displaying the Workload Placement Page

To see the reservations that are currently in effect and to create new reservations, click the **PLACE** button in the Navigation Menu.

ALL RESERVATIONS

 Workload Placement
Workload Placement

CREATE RESERVATION

Search	Filter
<input type="text" value="Search..."/>	<input type="checkbox"/> FILTER
<input type="checkbox"/> 5 Reservations	
<input type="checkbox"/> Cud_GiantVM Cud_GiantVM 2/7/2020 - 3/7/2020 PLACEMENT_FAILED "GiantVM"	PLACEMENT F... >
<input type="checkbox"/> CudMultipleVMs 10 "Hatice_VM" placed on HawthorneDev	RESERVED >
<input type="checkbox"/> CudRes4 2 "Hatice_VM" placed on HawthorneDev	RESERVED >
<input type="checkbox"/> CudRes5 1 "Hatice_VM" placed on HawthorneDev	RESERVED >
<input type="checkbox"/> MyReservation MyReservation 2/7/2020 - 3/7/2020 RESERVED "Hatice_VM"	RESERVED >

Creating a Reservation

Reservations set aside resources for anticipated workload. While a reservation is in the RESERVED state, Intersight Workload Optimizer continually calculates placement for the reserved VMs.

To create a reservation:

1. Navigate to the Workload Placement page.
2. Create a new reservation.

CREATE RESERVATION

In the Workload Placement page, click **CREATE RESERVATION**.

Intersight Workload Optimizer displays a list of templates. Choose the template you want, and click **NEXT: CONSTRAINTS**.

3. Optionally, specify placement constraints.

In the **Constraints** section and choose which constraints to apply to this reservation.

Constraints are optional, but note that these constraints are how you ensure that the template you have chosen is viable in the given locations that Intersight Workload Optimizer will choose.

The constraints you can choose include:

- **Scope**
Choose the datacenter or host cluster that you will limit the reservation to.
- **Placement Policy**
This list shows all the placement policies have been created as **Intersight Workload Optimizer Segments**. Choose which placement policies the reservation will respect.
- **Networks**
Intersight Workload Optimizer discovers the different networks in your environment. Use this constraint to limit workload placement to the networks you choose.

When you are done setting constraints, click **NEXT: RESERVATION SETTINGS**.

4. Make the reservation settings, and create the reservation.

To finalize the reservation, make these settings:

- **RESERVATION NAME**

The name for the reservation. You should use unique names for all your current reservations. This name also determines the names of the reservation VMs that Intersight Workload Optimizer creates to reserve resources in your environment. For example, assume the name *MyReservation*. If you reserve three VMs, then Intersight Workload Optimizer creates three reservation VMs named *MyReservation_0*, *MyReservation_1*, and *MyReservation_2*.

- **VIRTUL MACHINES COUNT**

How many VMs to reserve.

NOTE:

You can include up to 100 VMs in a single reservation.

- **RESERVATION DATE**

The time period that you want the reservation to be active. Can be one of:

- Reserve Now

Use this to calculate the ideal placement for a workload that you want to deploy today. Intersight Workload Optimizer begins planning the reservation immediately when you click **CREATE RESERVATION**. The reservation stays in effect for 24 hours – At that time Intersight Workload Optimizer deletes the reservation.

- Future Reservation

This executes the reservation for the date range you specify. Intersight Workload Optimizer begins planning the reservation on the day you set for **START DATE**. The **END DATE** determines when the reservation is no longer valid. At that time, Intersight Workload Optimizer deletes the reservation.

When you are finished with the reservation settings, click **CREATE RESERVATION**. Intersight Workload Optimizer displays the new reservation in the Workload Placement page. Depending on the reservation settings and your environment, the reservation can be in one of the one of the following states:

- **UNFULFILLED**

The reservation request is in the queue, waiting for an ongoing reservation request to complete.

- **INPROGRESS**

Intersight Workload Optimizer is planning the placement of the reservation workloads.

- **FUTURE**

Intersight Workload Optimizer is waiting for the **START DATE** before it will start to plan the reservation.

- **RESERVED**

Intersight Workload Optimizer has planned the reservation, and it found providers for all the VMs in the reservation. As your environment changes, Intersight Workload Optimizer continues to calculate the placement for the reservation VMs. If at any time it finds that it cannot place all the VMs, it changes the reservation to **PLACEMENT FAILED**.

- **PLACEMENT FAILED**

Intersight Workload Optimizer cannot place all the reservation VMs. As your environment changes, Intersight Workload Optimizer continues to calculate placement for the VMs. If at any time it finds that it can place all the VMs, it changes the reservation to **RESERVED**.

- **INVALID**

An error occurred while planning the placement of the reservation VMs.

NOTE:

The list of reservations refreshes whenever you open the Workload Placement page. To see changes in reservation state, navigate away from the page, and navigate back to it again.

Managing Reservations

Click the name to open the Reservation Settings fly-out

Expand the list entry for details

Search...	FILTER
<input type="checkbox"/> 5 Reservations	
<input type="checkbox"/> Cud_GiantVM Cud_GiantVM 2/7/2020 - 3/7/2020 PLACEMENT_FAILED "GiantVM"	PLACEMENT FAILED >
<input type="checkbox"/> CudMultipleVMs 10 "Hatice_VM" placed on HawthorneDev	RESERVED >
Host hp-dl565.eng.vmturbo.com	Storage QSGRID01:NFSShare
<input type="checkbox"/> CudRes4	FUTURE >
<input type="checkbox"/> CudRes5 1 "Hatice_VM" placed on HawthorneDev	RESERVED >
<input type="checkbox"/> MyReservation MyReservation 2/7/2020 - 3/7/2020 RESERVED "Hatice_VM"	RESERVED >

Click a provider name to drill down to that entity

The PLACE page displays the current list of reservations. You can expand items in the list to see some details, or you can click to view the full details. You can also select items to delete them, which cancels the reservation or deployment.

For an entry in the RESERVED state, you can click the entry name to open the Reservation Settings fly-out.

To delete a reservation, select it in the list and click the DELETE icon.

To see details about the provider entities, or the datacenter that is hosting the reserved VMs, click that entity name.

Deploying Workloads to the Reserved Resources

When you reserve resources, you know that they will be available for you to deploy actual VMs in your environment. To deploy these VMs, you should:

1. Note the placement that your reservation has calculated.

Expand the reservation entry in the Workload Placement page and note the hosts and storage that will provide resources for your VMs.

2. Delete the reservation.

Before you deploy the reserved VMs, you should delete the reservation. This frees up the Intersight Workload Optimizer market to manage the placement of the VMs you are about to deploy.


NOTE:

When you delete a reservation from the user interface or API, Intersight Workload Optimizer only marks the reservation for deletion and waits 48 hours before permanently deleting it. You can permanently delete a reservation by using the API's `reservation_force_delete` parameter along with a DELETE call to a specific reservation. When `reservation_force_delete = true`, the system removes the reservation permanently, no matter what state it is in.

3. Deploy the actual VMs.

In your Hypervisor user interface, deploy the VMs to the hosts and storage that you noted. When you are done, Intersight Workload Optimizer will manage their placement the same as it manages the rest of your environment.

Dashboards: Focused Views

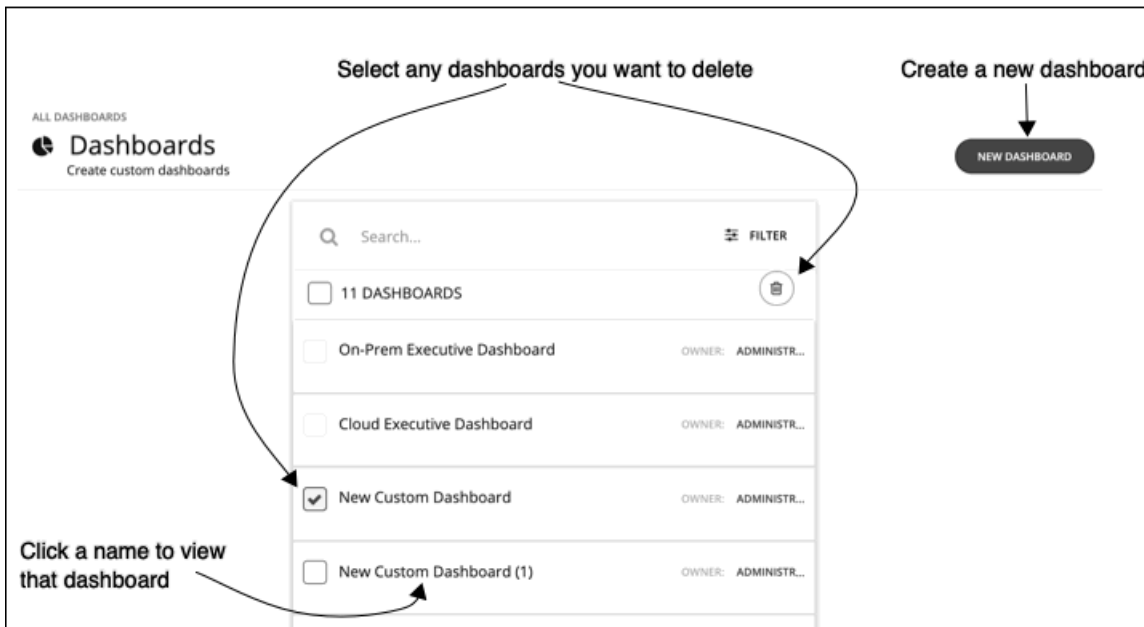

Custom views are dashboards to give you views of your environment that focus on different aspects of the environment's health. At a glance, you can gain insights into service performance health, workload improvements over time, actions performed and risks avoided, and savings in cost. For cloud environments, you can see utilization of discounts, potential savings, required investments, and the cost/performance of specific cloud accounts.

The Dashboards page lists all the dashboards that are available to you, including built-in and custom dashboards that your account can access. To view a dashboard, click its name in the list.

From the Dashboard page, you can also create your own custom dashboards.

NOTE:

In charts that show tables, if the table contains more than 500 cells, then the User Interface disables the option to export the chart as PDF. You can still export the chart as a CSV file to load in a spreadsheet.

Built-in Dashboards

Built-in Dashboards are scorecards of your environment. They demonstrate how well you are improving performance, cost, and compliance, as well as opportunities for further improvements that are available.


Intersight Workload Optimizer ships with these dashboards:

- On-Prem Executive Dashboard
- Cloud Executive Dashboard
- Container Platform Dashboard

NOTE:

Intersight Workload Optimizer ships these dashboards with default configurations. To edit a dashboard, you must log in with the administrator user account. Users logged in with that account can add or remove chart widgets, and change widget scopes. For information about editing dashboards, see [Creating and Editing Custom Dashboards \(on page 310\)](#).

On-Prem Executive Dashboard

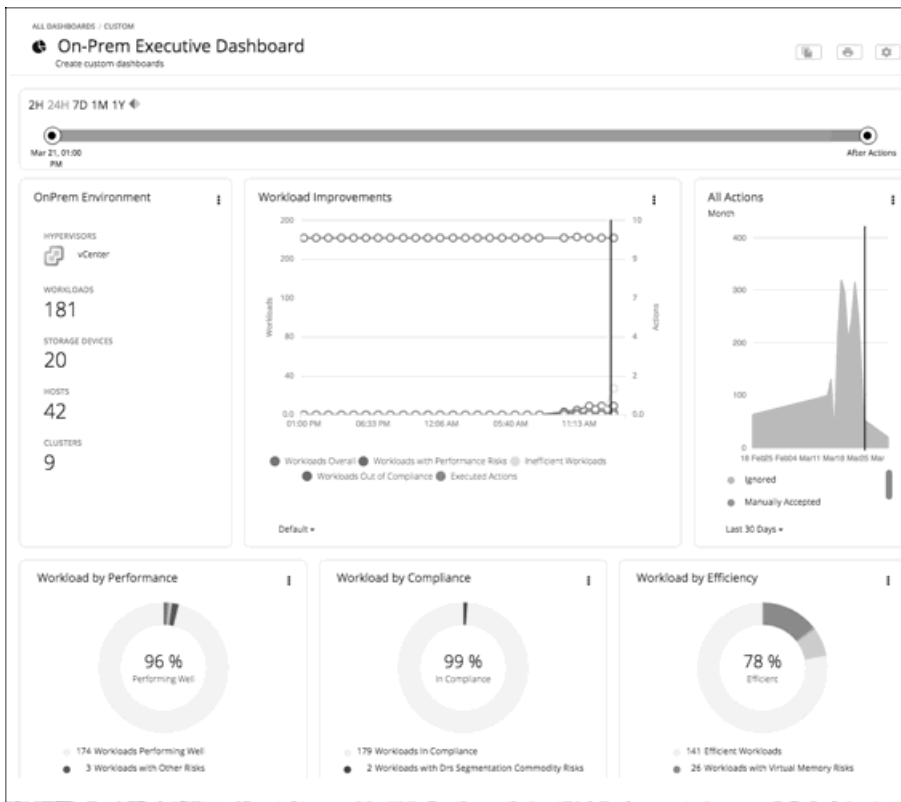


The On-Prem Executive Dashboard shows the overall performance, capacity, and compliance in your on-prem infrastructure. This includes insights into:

- Actions History
 - The **On-Prem Environment** chart widget shows you an overview of your on-prem environment that Intersight Workload Optimizer is managing and controlling. The chart displays the workloads and the infrastructure that Intersight Workload Optimizer discovered.
 - The **Workload Improvements** chart widget shows how the efficiency, performance, and policy risks associated with your workloads have disappeared as you have increased your adoption of Intersight Workload Optimizer Workload Automation. The chart tracks how your workloads have grown as your execution of actions have increased or decreased as your environment achieves and maintains its desired states over time.

- The **All Actions** chart widget shows the number of actions that Intersight Workload Optimizer has generated versus the ones executed. This gives you an understanding of where there were more opportunities for improvement that were not taken in the past versus those that are available today.
- Opportunities
 - The **Workload by Performance**, **Workload by Compliance**, and **Workload by Efficiency** chart widgets indicate workload health by showing the risks that are currently in your environment and each classification of those risks. You can click **Show Action** on the chart to reveal all of the outstanding actions that need to be taken to resolve those risks on your workloads.
 - The **Necessary Investments** and **Potential Savings** chart widgets together project how the current actions to improve performance, efficiency, and compliance will impact your costs.
- Current State
 - This chart shows the top clusters in your on-prem environment by CPU, memory, and storage capacity or utilization. In the default view, the chart shows the top clusters by CPU headroom (available capacity). It also shows time to exhaustion of cluster resources, which is useful for future planning (for example, you might need to buy more hardware).
 - The **Virtual Machines vs Hosts and Storage** and the **Virtual Machines vs Hosts and Storage -Density** chart widgets show how your overall density has improved in your on-prem environment. A high count of VMs per host or storage means that your workloads are densely packed.

Cloud Executive Dashboard

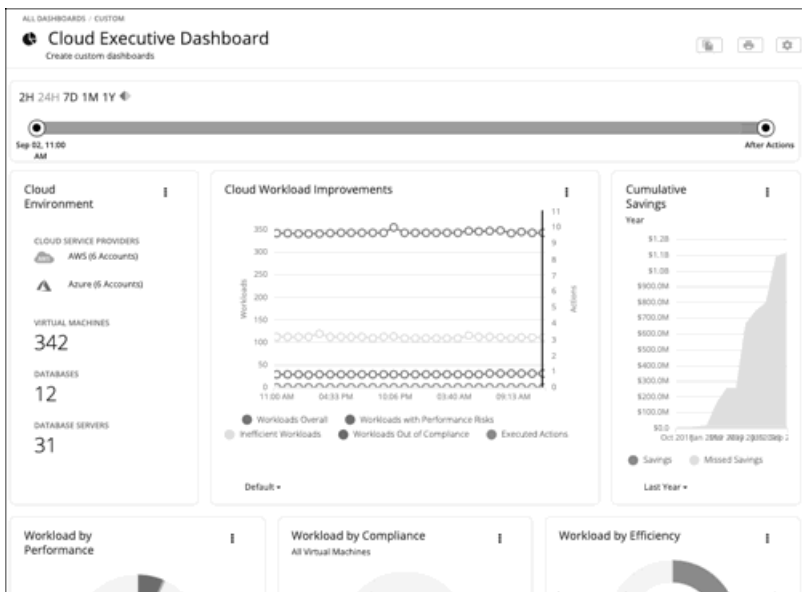

The Cloud Executive Dashboard shows your overall cloud expenditures and how you can improve performance and reduce cost. This includes insights into:

- Actions History
 - The **Cloud Environment** chart widget shows you an overview of your cloud environment that Intersight Workload Optimizer is managing and controlling. The chart displays the workloads, cloud service providers, and cloud accounts that you currently have set up as Intersight Workload Optimizer targets.
 - The **Workload Improvements** chart widget shows how the efficiency, performance, and policy risks associated with your workloads have disappeared as you have increased your adoption of Intersight Workload Optimizer Workload Automation. The chart tracks how your workloads have grown as your execution of actions have increased or decreased as your environment achieves and maintains its desired states over time.
 - The **Cumulative Savings** chart widget shows you the cost savings for executed cloud actions compared to the cloud actions that you have not executed (missed savings).

■ Opportunities

- The **Workload by Performance**, **Workload by Compliance**, and **Workload by Efficiency** chart widgets indicate workload health by showing the risks that are currently in your environment and each classification of those risks. You can click **Show Action** on the chart to reveal all of the outstanding actions that need to be taken to resolve those risks on your workloads.
- The **Necessary Investments** and **Potential Savings** chart widgets together project how the current actions to improve performance, efficiency, and compliance will impact your costs.
- **Cloud Estimated Cost** chart widget shows estimated monthly costs and investments for the cloud. Monthly cost amounts are summarized as amounts with and without actions.

■ Current State

- The **Top Accounts** chart widget shows all of the cloud accounts in your cloud environment and what the utilization is for each account. You can see the number of workloads, estimated monthly costs, saved by actions, and actions taken. In the default view, the chart shows the top cloud accounts and you can click **Show All** button to see all of the accounts. In the Show All list, you can also download the account cost data as a CSV file or PDF.
- The **Cost Breakdown by Tag** chart widget shows the tags you have assigned to your cloud resources and the costs associated with each of these tagged categories. The **Cost Breakdown by Cloud Service Provider** chart widget is an Expenses chart widget that shows your expenses for each cloud service provider.
- Usage of Discounts

Discounts reduce cost by offering a subscription-based payment plan. Intersight Workload Optimizer discovers these discounts and tracks usage patterns to identify workloads that can take advantage of discounted pricing. The Cloud Executive Dashboard shows whether you are getting the most out of your current discounts.


- [Discount Coverage \(on page 347\)](#)

This chart shows the percentage of VMs covered by discounts. If you have a high percentage of on-demand VMs, you should be able to reduce your monthly costs by increasing coverage. To increase coverage, you scale VMs to instance types that have existing capacity.

- [Discount Inventory \(on page 349\)](#)

This chart lists the cloud provider discounts discovered in your environment.

Container Platform Dashboard

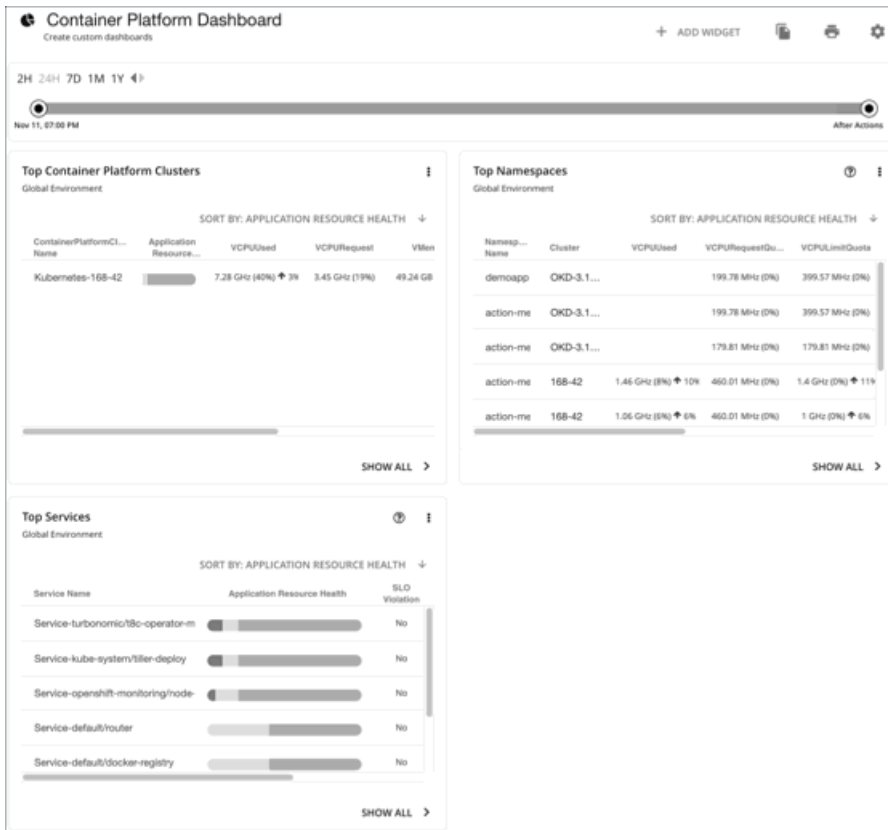

The Container Platform Dashboard shows the overall performance, capacity, and health of your container infrastructure. This includes insights into:

- **Top Container Platform Clusters**
Assess the health of your clusters and sort them by risk level.
- **Top Namespaces**
Identify namespaces that are running out of quota, and how much resources each namespace is using in both quotas and actual utilization.
- **Top Services**
Assess the impact of Services on the performance of your applications.

Creating and Editing Custom Dashboards

A custom dashboard is a view that you create to focus on specific aspects of your environment. You can create dashboards that are private to your user account, or dashboards that are visible to any user who logs into your Intersight Workload Optimizer deployment.

Two common approaches exist for creating custom dashboards:

- **Scope First**
You can create a dashboard in which all of the chart widgets focus on the same scope of your environment. For example, you might want to create a dashboard that focuses on costs for a single public cloud account. In that case, as you add chart widgets to the dashboard, you give them all the same scope.
- **Data First**

You might be interested in a single type of data for all groups of entities in your environment. For example, each chart widget in the dashboard can focus on Cost Breakdown by Cloud Service, but you set the scope of each chart widget to a different cloud region or zone.

Of course, you can mix and match, according to your needs. You can set any scopes or data sources to the chart widgets in a dashboard to set up whatever organization and focus that you want.

NOTE:

If you set a scope to your Intersight Workload Optimizer session, the specified scope does not affect your custom dashboards. For information about scoped views, see [Working With a Scoped View \(on page 27\)](#).


Creating a Dashboard

To create a custom dashboard:


1. Navigate to the Dashboards Page.
Click **More**, then display the Dashboards Page.
This page lists all dashboards that are available to you.
To view a dashboard, click its name in the list.
2. Create a new dashboard.



Click **NEW DASHBOARD** to add a new dashboard to your Intersight Workload Optimizer session. The dashboard appears with a default name and without chart widgets. The time range in the Time Slider is set to 24 hours by default.

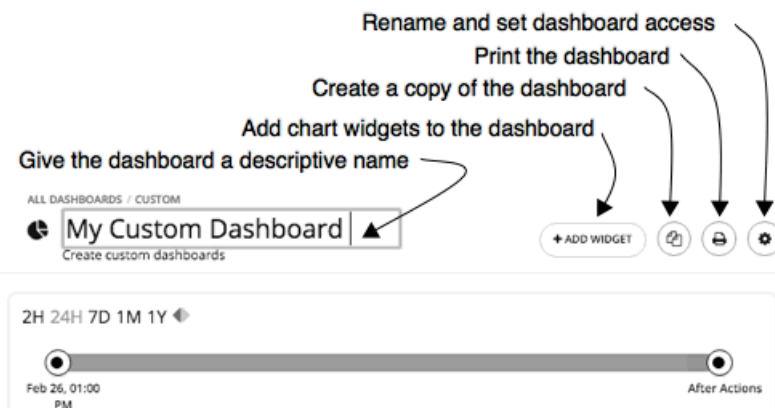

3. Name the dashboard.
Give a name that describes the dashboard. If you will share the dashboard with all Intersight Workload Optimizer users, the name will help them decide whether to view it.
4. Add chart widgets to the dashboard.



Add as many chart widgets to the dashboard as you want. See [Creating and Editing Chart Widgets \(on page 313\)](#).

5. Optionally, set the dashboard access.
Click **Gear** to change the setting.

Dashboard access can be:

- **Only Me** – The dashboard is only available to your Intersight Workload Optimizer user account.
- **All Users** – Every Intersight Workload Optimizer user can see this dashboard.

By default, access is set to **Only Me**.

As soon as you create a new dashboard, it appears in the list on the Dashboard Page. Users with access to it can click the dashboard name in the list to view it.

At any time, if you are an administrator or the dashboard owner, you can view and make the following changes to the dashboard:

- Add, edit, or delete widgets
- Change the dashboard name
- Change the dashboard access setting

For executive dashboards, only an administrator (username=administrator) can edit an executive dashboard.

Editing a Dashboard


If you have created a dashboard, you can change the name of the dashboard, its access settings, and its chart widgets. To change the chart widgets, see [Creating and Editing Chart Widgets \(on page 313\)](#).

To edit a dashboard's name or change its access settings:

1. Navigate to the Dashboards Page.
Click **More**, then display the Dashboards Page.
2. Click the name of the dashboard that you want to edit.
3. Click **Gear** in the dashboard.

In the dashboard's Edit fly-out, make your changes.

Change the dashboard name

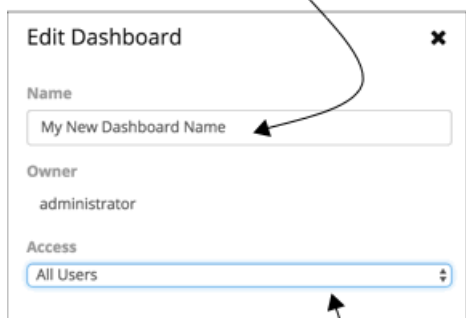

Set dashboard access

For the dashboard's access, you can set:

- **Only Me** - The dashboard is only available to your Intersight Workload Optimizer user account.
 - **All Users** - Every Intersight Workload Optimizer user can see this dashboard.
4. When you are done, close the fly-out panel.

Your changes take effect when you close the fly-out.

Deleting a Dashboard

If you are an administrator or the dashboard owner, you can delete a custom dashboard. You cannot delete executive dashboards.

To delete a custom dashboard:

1. Navigate to the Dashboards Page.
Click **More**, then display the Dashboards Page.
This page lists all dashboards that are available to you.
2. Delete one or more dashboards.

In the list, choose the checkbox for each dashboard you want to delete and click **Trash can**.

Creating and Editing Chart Widgets


Intersight Workload Optimizer displays information about your environment in various chart widgets. To focus on the information you need, you can add new chart widgets to scoped views and dashboards, and you can edit existing chart widgets. You can also pull the corners of chart widgets to resize them and change the display order of chart widgets in dashboards.

When you create or edit a chart widget, you can choose a variety of settings. For example, in the Top Utilized chart widget, if you choose Clusters as the Entity Type, you can then choose Utilization as the Data Type and Storage Provisioned as the Commodity.

Creating a Chart Widget

To create a new chart widget:

1. Click **Add Widget** to open the Widget Gallery.

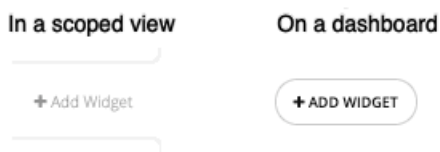

On a dashboard, click **Add Widget** at the top-right corner. In a scoped view, click **Add Widget** on the right above the charts.

2. Choose a chart widget in the Widget Gallery.

The Widget Gallery is a list of thumbnail previews of chart widgets.

You can scroll through the gallery or search it. For example, if you type "Health" in the **Search** field, the results are two chart widgets, Health and Workload Health. You can choose chart widgets from these categories:

- Actions and Impact
- Status and Details
- Cloud
- On-Prem

To see the possible displays of a specific chart widget, use the horizontal scroll bar at the bottom of the thumbnail to scroll through the display choices.

To choose a chart widget to add it to your dashboard, click the thumbnail preview.

The Widget Preview window with the Edit fly-out opens.

3. Configure the settings for your chart widget.


Chart widget settings determine the data that the chart widget will show.

In the Edit fly-out, choose the settings and click **Update Preview** to display the result in the Widget Preview pane.

When you are satisfied with your settings, click **Save**. The chart widget is added to your dashboard.

For information about settings, see [Chart Widget Settings \(on page 314\)](#).

For example:

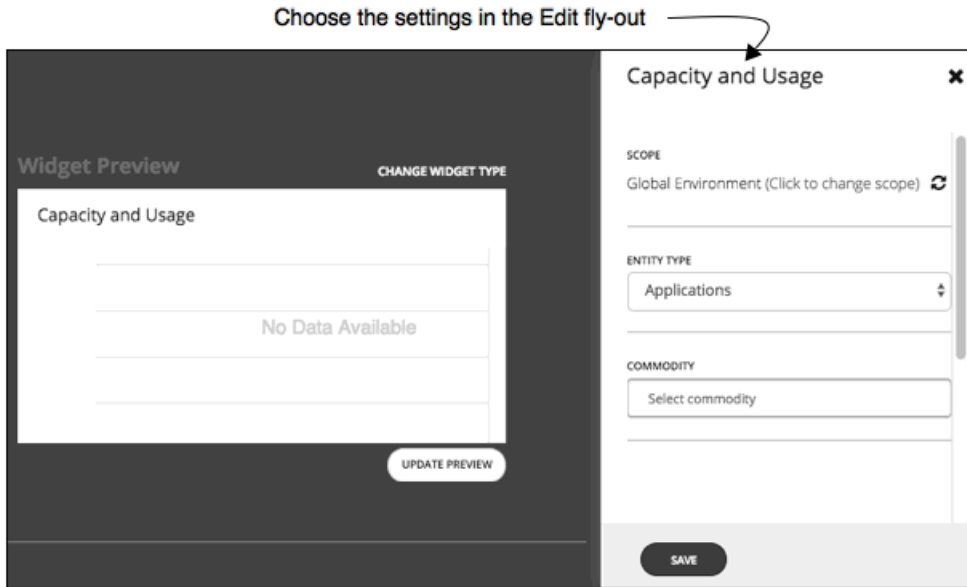

To delete a chart widget from your dashboard, choose **Delete** in the More options menu at the top-right corner of the chart widget.

Methods to Access Chart Widget Settings

Two methods exist for accessing the chart widget settings in the Edit fly-out:

- You can access the settings in the Edit fly-out when you add a chart widget to your dashboard after you click a thumbnail preview.
- For an existing chart widget in a dashboard, you can choose **Edit** in the More options menu at the top-right corner.

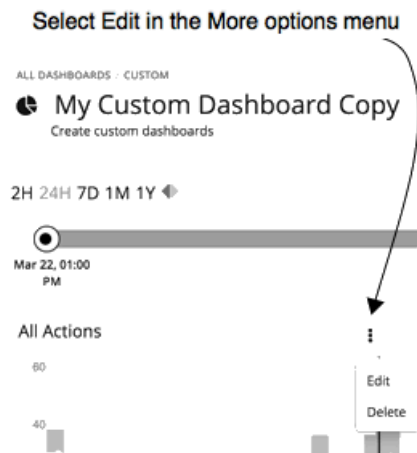


Chart Widget Settings

Chart widget settings vary according to the type of chart widget. Also, depending on the value that you choose for a setting, additional settings may appear. The following is a list of frequently-used chart widget settings:


- **Scope**
The set of entities in your environment that this chart widget represents. By default, the chart widget scope is set to **Global Environment**.

For every type of chart widget, you have the option to set the chart's scope. To do so:

1. Click **Click to change scope** to open the Select Scope fly-out.
2. In the Select Scope fly-out, choose the entity, group, or account that you want.

The ACCOUNTS tab is available depending on the type of chart widget.

Your choice appears in the **Scope** field.

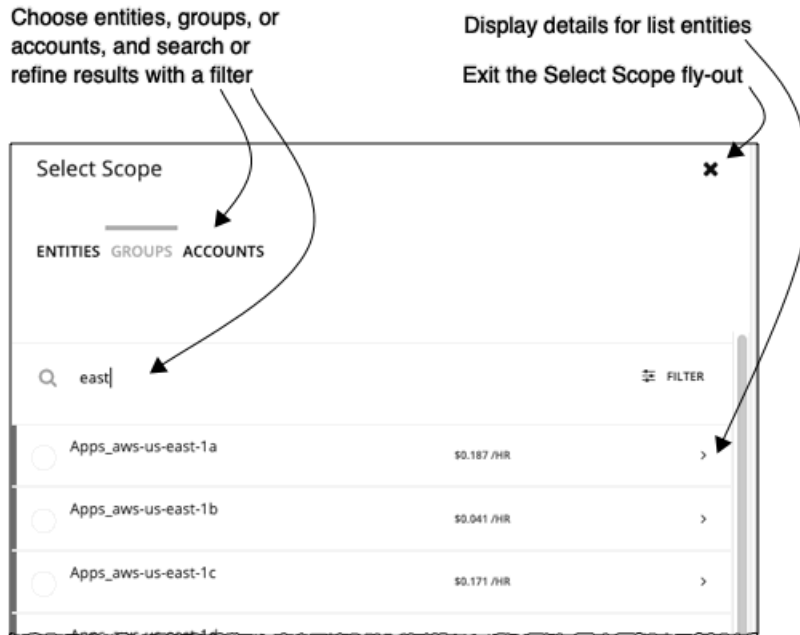

■ Timeframe

The timeframe for historical data or projections in the chart. Choices for the chart's timeframe are: Default, Last 2 Hours, Last 24 Hours, Last 7 Days, Last 30 Days, and Last Year.

If you set the timeframe to **Default**, the dashboard Time Slider controls the timeframe setting. For example, if your dashboard Time Slider is set to one month (1M), then all chart widgets with the Default timeframe in that dashboard are set to one month and show information for one month. Note that the dashboard Time Slider does not override the other specific timeframe settings.

■ Chart Type

The chart widget's display type. Most chart widgets can display horizontal bar or ring charts. Other display choices can include tabular data, band chart, stacked bar, line, or area charts.

NOTE:

For summary charts like horizontal bar and ring charts, when the legend has more than four categories, the remaining categories are represented as a fifth category named "Other."

■ Entity Type

The type of entities or their data that you want to display in this chart widget. Choices vary (for example, Applications, Hosts, Virtual Data Centers, Storage Devices, and so on).

■ Commodity

The resources that you want this chart widget to monitor. Some charts can monitor multiple commodities. Choices vary (for example, CPU, Memory, Virtual Storage, and so on).

Chart Types

Intersight Workload Optimizer provides many different types of charts in the Widget Gallery. To design dashboards, you should be familiar with the data each chart presents. These charts provide information on actions, impact, status of your environment, and details about specific entities, cloud, and on-prem environments.

Actions and Impact Chart Types

These chart widgets provide information on actions, pending actions, risks that you avoided, improvements, and potential savings or investments.

Pending Actions Charts

Pending Actions charts show the actions that Intersight Workload Optimizer recommends to improve the current state of your environment.

Chart Type


You can set the display to:

- Text
- Ring Chart
- Horizontal Bar
- List

Examples:


- Text

The text chart shows the number of actions for each action type. It gives a quick visual indication of the kinds of actions that are pending. For details, see [Action Types \(on page 45\)](#).

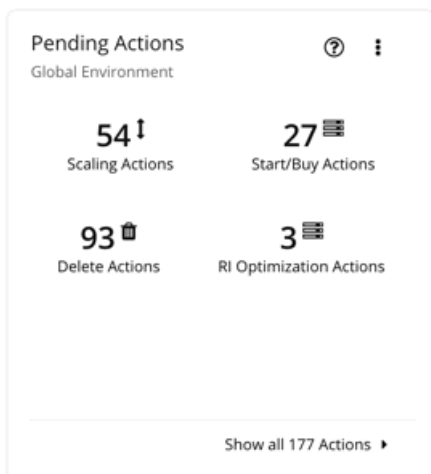


- Ring Chart

The ring chart counts the number of actions for each action type. It gives a quick visual indication of the kinds of actions that are pending. For details, see [Action Types \(on page 45\)](#).

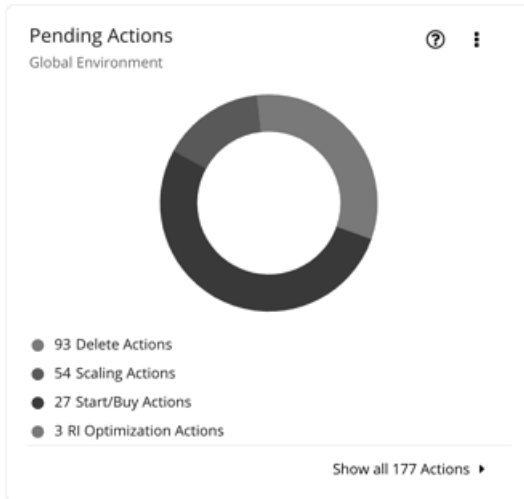


■ Horizontal Bar

The horizontal bar chart counts the number of actions for each action type. It gives a quick visual indication of the kinds of actions that are pending. For details, see [Action Types \(on page 45\)](#)

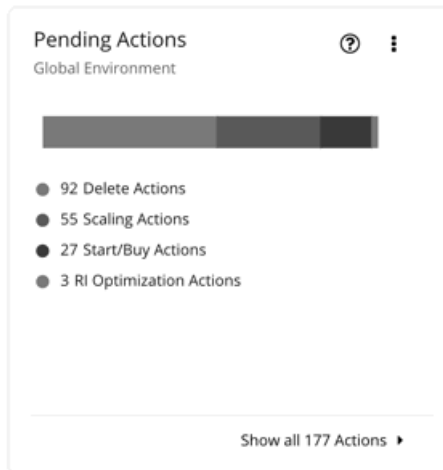

■ List

The list chart shows an abbreviated listing of the actions for the chart's scope. For details about the different actions generated by the product, see [Actions \(on page 37\)](#).

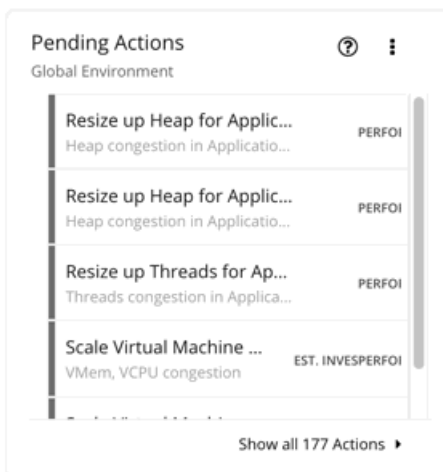

At the bottom of the chart, click **Show All Actions** to see a full list of pending actions that are in the scope of the chart, along with action details and controls to execute actions. For details, see [Pending Actions List \(on page 55\)](#).

Actions Charts

Actions charts keep a history of pending (not executed) and executed actions. These charts use historical data from the Intersight Workload Optimizer database. You can set the chart to show hourly, daily, or monthly data points.

Filter


You can filter the chart to show **All Actions** (pending and executed actions) or only **Executed Actions**.

Chart Type

You can set the display to:

- Tabular
- Area Chart
- Text
- Stacked Bar Chart

Stacked Bar Chart

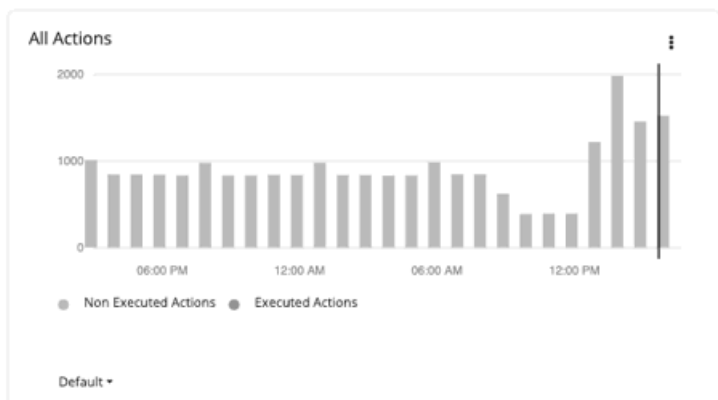

For the Stacked Bar Chart, each bar represents a time period. Hover over the bar to see the number of *unique* actions for that time period. In the default view, the bars represent actions per hour in the last 24 hours. The 2:00 PM bar, for example, shows actions between 2:00 PM and 2:59 PM.

A pending action that remains valid for an extended period of time is counted *once* for each hour, day, and month it remains pending. This also applies to pending actions that go away as conditions in the market change, but are generated again in the future. Once a pending action is executed, it is counted once (this time, as an executed action) on the hour, day, and month of execution.

Consider the following scenarios.

- An action was generated at 1:25 PM and then executed two hours later at 3:25 PM.
 - For per-hour views (Last 24 Hours or Default), the action will be counted three times – as a *pending* action in the 1:00 PM and 2:00 PM bars, and as an *executed* action in the 3:00 PM bar.
 - For per-day (Last 7 or 30 Days) or per-month (Last Year) views, the action will be counted once (as an executed action) on the day or month of execution.
- An action was generated at 6:20 PM but went away (without being executed) in the next hour. The same action was generated again the next day at 9:10 AM and was executed immediately.
 - For per-hour views, the action will be counted twice – as a pending action in the 6:00 PM bar and as an executed action in next day's 9:00 AM bar.

- For per-day views, the action will also be counted twice – as a pending action on Day 1 and an executed action on Day 2.
- For per-month views, the action will be counted once (as an executed action) on the month of execution.

Use the chart to evaluate the rate of action execution, which underscores the importance of executing actions in a timely manner. As pending actions persist, they become more challenging to track and your environment stays in a risky state longer. To reduce potential delays in executing actions, consider action automation.

Tabular Chart

To see the [full list \(on page 55\)](#) of actions, click **Show All** at the bottom of the chart.

All Actions				
DATE CREATED	ACTION DESCRIPTION	RISK TYPE	EXECUTION	DATE EXECUTED
19 Oct 2018 17:25 PM	Provision PhysicalMachine dc17-host-01.eng.vmturbo.com	Performance Assurance	Recommended	N/A
19 Oct 2018 17:25 PM	Provision PhysicalMachine dc17-host-01.eng.vmturbo.com	Performance Assurance	Recommended	N/A
19 Oct 2018 17:25 PM	Provision PhysicalMachine dc17-host-01.eng.vmturbo.com	Performance Assurance	Recommended	N/A
19 Oct 2018	Provision PhysicalMachine dc17-host-01.eng.vmturbo.com	Performance Assurance	Recommended	N/A

Default ▾ Show all ▶

Risks Avoided Charts

As you execute the actions Intersight Workload Optimizer has recommended, you improve your environment's health and avoid risks to performance or cost. These charts show how many risks you have avoided over time. For example, the charts can show how many over-provisioning and congestion risks you avoided.

Chart Type

You can set the display to:

- Text
- Ring Chart
- Horizontal Bar

Optimized Improvements Charts

Intersight Workload Optimizer automatically executes or recommends actions, depending on the policies that you set up. For the recommended actions, you can use Optimized Improvements charts to show how utilization of resources would change assuming you accept all of the [pending actions \(on page 316\)](#).

Entity Type

Entity types you can choose include:

- Business Applications
- Business Transactions
- Services
- Application Components
- Chassis
- Containers

- Container Pods
- Container Specs
- Namespaces
- Workload Controllers
- Data Centers
- Databases
- Database Servers
- Disk Arrays
- IO Modules
- Internet
- Logical Pool
- Networks
- Hosts
- Regions
- Storage Devices
- Storage Controllers
- Switches
- Virtual Data Centers
- Virtual Machines
- Volumes
- Zones


Commodity

Depending on the entity type, you can add different resource commodities that you want to measure. For a chart of Hosts, you can measure commodities such as CPU, Memory, and even network flow between VMs that are on the same host (In-Provider Flow) or on other hosts (In-DPOD or Cross-DPOD Flow).

Display

Optimized Improvements charts show two bar charts for the entities that are in scope – one for current consumption, and the other for the consumption you would expect to see if you execute all the actions.

Example: An Optimized Improvements chart for applications

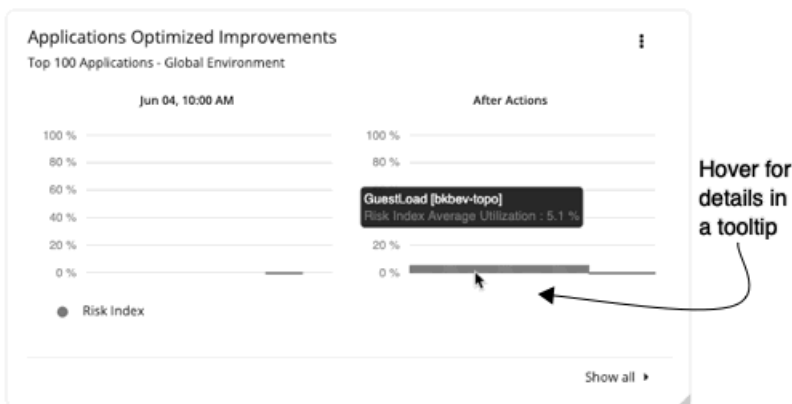

Potential Savings or Investments Charts

These charts show potential savings or necessary investments in your cloud expenditure, assuming you execute all the pending actions that Intersight Workload Optimizer identifies as a result of its analysis.

For example, if some workloads risk losing performance, Intersight Workload Optimizer might recommend scaling actions for the virtual machine to increase resources. The Necessary Investments chart shows how these actions translate to an increase in expenditure.

On the other hand, if there are pending actions to scale a virtual machine, which result in reduced monthly costs, the Potential Savings chart shows the reduced cost that would result from those actions.

This chart also track discount optimization actions. VM scaling actions may result in freed up capacity on a discounted instance type, which can now be applied to a different VM. Discount optimization actions reflect the potential savings resulting from reassigning the capacity to a different VM. These actions are not executed by Intersight Workload Optimizer users. They reflect capacity reassignment performed by your cloud provider.

The projected amounts include on-demand costs for VMs. For information about on-demand cost calculations, see [Estimated On-demand Monthly Costs for Cloud VMs \(on page 137\)](#).

Type

You can choose **Potential Savings** or **Necessary Investments**.

Chart Type

You can set the display to:

- Text
- Ring Chart
- Horizontal Bar

For the ring chart, you can click an action type (for example, **Scale Volumes**) in the chart or legend to display a filtered view of the actions list.

Show All

Click **Show all** at the bottom of the chart to see a breakdown of savings or investments by action/entity type and entity. By default, the actions are shown in order of largest amounts so you can easily identify which ones will incur the highest costs or introduce the most savings.

For example, you can see the savings you would realize if you execute all *Scale* actions on the *virtual machines* included in the chart's scope.



The table then breaks down the total savings by individual virtual machines, and includes links to the specific actions that you need to perform to realize those savings.

Potential Savings

SCALE ^

Scale Actions 92 Savings \$3,715/mo

Virtual Machines (92)

Database Servers (3)

BUY ^

Virtual Machine Name	Account	Instance Type	RI Coverage...	On-Demand Cost	New Instance Type	New RI Coverage	New On-Dema...	Savings	Action
i-09b3a3ebd5f1d7...	Dev	t2.xlarge	0%	\$0.371/hr	m5.2xlarge	100%	\$0/hr	\$271/mo	DETAILS
eks-cluster-eks-w...	Advanced	t2.xlarge	0%	\$0.371/hr	m5.2xlarge	100%	\$0/hr	\$271/mo	DETAILS

You can also compare instance types, costs, and discount coverage before and after executing the actions, allowing you to easily identify actions with the most savings.

Status and Details Chart Types

These chart widgets provide information on the status of your environment and details about specific entities.

Health Charts

Health charts show the current status of your environment, by entity type. For example, you can choose to show the health of all hosts in your environment, or the health of all the workloads running on a public cloud region.

Entity Type

Entity types you can choose include:

- Business Applications
- Business Transactions
- Services
- Application Components
- Chassis
- Containers
- Container Pods
- Container Specs
- Namespaces
- Workload Controllers
- Data Centers
- Databases
- Database Servers
- Disk Arrays
- IO Modules
- Internet
- Logical Pool
- Networks
- Hosts
- Regions
- Storage Devices
- Storage Controllers
- Switches
- Virtual Data Centers
- Virtual Machines
- Volumes
- Zones

Chart Type

You can set the display to:

- Text
- Ring Chart
- Horizontal Bar

Basic Info Charts

The Basic Info charts provide an overview of a single entity or individual Azure resource group that you have chosen as your scope.

Type

You can choose:

- **Entity Information**
This chart shows basic information (ID, Name, Type, State, Severity, Target Name, and so on) for the scoped entity or Azure resource group.
- **Related Tag Information**
This chart lists any available tag information for the scoped entity or Azure resource group. For example, in a cloud environment, if a virtual machine has tags applied to it, the chart shows those tags for the virtual machine.

Display

The chart shows the information as Tabular.

Capacity and Usage Charts

These charts list the resources for the selected entity type, showing their allocated capacity and how much of that capacity is in use.

Entity Type

Entity types you can choose include:

- Business Applications
- Business Transactions
- Services
- Application Components
- Containers
- Container Pods
- Container Specs
- Namespaces
- Workload Controllers
- Data Centers
- Database Servers
- Disk Arrays
- Logical Pool
- Networks
- Hosts
- Regions
- Zones
- Storage Devices
- Storage Controllers
- Virtual Machines
- Volumes

Commodity

Depending on the entity type, you can add different resource commodities that you want to measure. For example, for a chart of Virtual Machines, you can measure commodities such as virtual CPU, memory, and storage.

NOTE:

For a cloud database server, the chart might show incorrect *used* values for vMem and Storage Amount after an action executes. It could take up to 40 minutes for the correct values to display.

Display

The chart shows the information as Tabular.

Multiple Resources Charts

Multiple Resources charts show the historical utilization of commodities for the scoped entity or a group of entities. The vertical bar shows the current moment – plots that extend to the right project utilization into the future.

Entity Type

Entity types you can choose include:

- Business Applications
- Business Transactions
- Services
- Application Components
- Containers
- Container Pods
- Container Specs
- Namespaces
- Workload Controllers
- Data Centers
- Database Servers
- Disk Arrays
- Logical Pool
- Networks
- Hosts
- Regions
- Zones
- Storage Devices
- Storage Controllers
- Virtual Machines
- Volumes

Commodity

Depending on the entity type, you can add different resource commodities that you want to measure. For example, for a chart of volumes, you can measure commodities such as IO throughput, storage access, and storage amount.

Show Peaks

Edit the chart and choose the **Show Peaks** checkbox to include peak information in the chart.

Display

The chart shows the historical utilization and, if chosen, the peak information as a Line chart.


Resources Charts

Resources charts show the utilization of a resource over time, for the entities in the chart's scope. The chart title shows the resource that you are plotting, as well as the chart's current scope.

To see finer details about your environment, you can set up charts that show utilization of specific commodities. For example, you can set up a dashboard with a number of Resources charts with their scopes set to the same cluster. Such a dashboard gives you a detailed look at the health of that cluster. Or you could make a dashboard with each chart scoped to a different cluster, but have all the charts show the same resource utilization.

Ring Chart

For certain entity types (such as hosts, storage, and disk arrays), you will see a ring chart on the left that indicates the current overall utilization of a particular resource. Hover over the ring chart to see the following information:



- Free: Available capacity
- Used: Utilized capacity
- Reserved: Unavailable capacity due to utilization constraints

The sum of *Free* and *Used* capacity equals the total allocated capacity.

In addition to showing the currently discovered free and used capacity, Intersight Workload Optimizer also calculates *Reserved* capacity based on utilization constraints set in policies.

For example, for a cluster with 100 GB of allocated storage, Intersight Workload Optimizer might discover 80 GB of free capacity, and 20 GB of used capacity. If the cluster is currently applying a storage policy that has a utilization constraint of 90%, then Intersight Workload Optimizer will show 10 GB of reserved capacity.

Commodity

You can set a Resources chart to one of the following resources:

- **Ballooning**
Percentage of the host's ballooning capacity that is in use.
- **CPU / CPU Allocation / CPU Provisioned**
Percentage of CPU cycles that are devoted to processing instructions.
- **Connection**
The connections in use, as a percentage of the maximum connections allowed on the database. Database configuration determines the capacity for this resource.
- **DBCACHEHitRate**
Percentage utilization of the database server's allocated cache hit rate, where a greater value indicates fewer disk reads for data.
- **DBMem**
The memory in use by the database, as a percentage of the allocated capacity. Database configuration determines the capacity for this resource. Note that for databases, Intersight Workload Optimizer uses this resource to drive actions, instead of the VMem on the hosting VM. This means that actions are driven by the actual memory consumption on the database.
- **Disk Array Access**
- **Host LUN Access**
- **Heap**

The heap capacity allocated for an application. Charts show the percentage of capacity that is used by an Application Component.

- IO Throughput

Data rate through the host's IO adapter, measured in KBytes/sec.
- Memory / Memory Allocation / Memory Provisioned

Host memory, measured in Kbytes.
- Number of Disks
- Number of Replicas

For details, see [Number of Replicas chart \(on page 329\)](#).
- Net Throughput

Data rate through the host's Network adapter, measured in Kbytes/sec.
- Port Channel
- Q16 / Q1 / Q2 / Q32 / Q4 / Q64 / Q8 VCPU
- Remaining GC Capacity

Percentage of CPU time *not* spent on garbage collection (GC).
- Response Time

Percentage utilization of a resource's allocated response time.
- SLA Commodity
- Storage Access

Storage access operations per second.
- Storage Allocation
- Storage Amount
- Storage Latency

Percentage of allocated latency that is in use on the storage.
- Storage Provisioned

How much the given storage is over-subscribed. Storage Provisioned capacity is the storage capacity multiplied by the Storage Overprovisioned Percentage (200 by default). The higher this value, the greater the risk that storage is over-committed.
- Swapping

The rate of memory swapping to disk, in bytes per second.
- Tenancy Access
- Threads

Percentage of thread capacity that is consumed by an Application Component.
- Transaction

Percentage of an application's allocated transaction capacity that is in use.
- TransactionLog

The disk space devoted to transaction logging for a database.
- Virtual CPU

The allocated CPU capacity, measured in MHz.
- Virtual Memory

The allocated memory capacity, measured in Kbytes.

Note that percentages of allocated VMem are measured against the VMem limit (if set) or the allocated VMem capacity, whichever is less. This is also true in reports and recommended actions. For example, assume a VM with allocated VMem of 8 GB, but a limit of 4 GB. In this case, the percentage in a chart shows the percentage utilized of 4 GB.
- Virtual Storage

The allocated virtual storage capacity, measured in Kbytes.

Options

Choose **Show Utilization** to see averages and peaks/ lows, or **Show Capacity** to see averages and peaks/ lows versus capacity. The **Show Summary** option adds a ring chart to the view, showing the current utilization of the selected commodity.

Chart Type


You can set the following types of display:

- **Line Chart**
A line plot showing resource utilization over time. The vertical green bar shows the current moment – Plots that extend to the right project utilization into the future.
- **Band Chart**
Lines plot average capacity and average used. The chart shows a band where its thickness indicates peaks and lows.

DB Memory Chart

DB Memory (or DBMem) is the measure of memory used by a database, expressed as a percentage of the allocated capacity.

Intersight Workload Optimizer collects DB Memory data from Databases and APM Targets. For each target you add, Intersight Workload Optimizer discovers a specific set of entities, which can include self-hosted Database Servers. When you set the scope to a Database Server, the data that Intersight Workload Optimizer collected displays in the DB Memory chart.

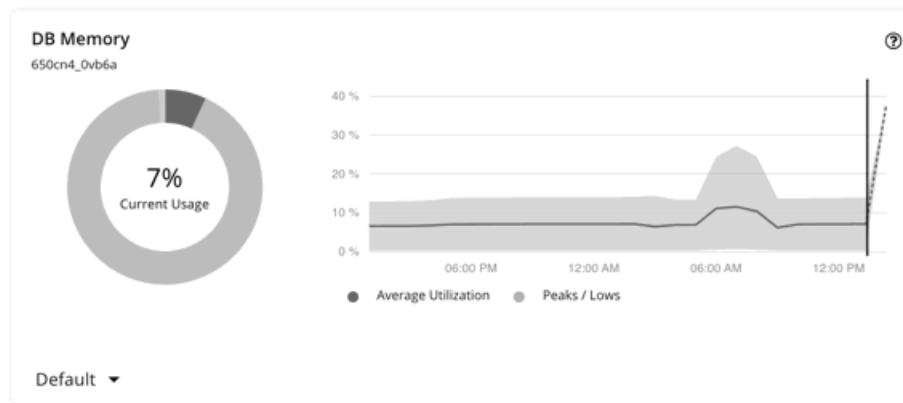

The DB Memory chart shows average and peak/low values over time. Use the selector at the bottom left section of the chart to change the time frame.

NOTE:

An empty chart could be the result of delayed discovery, target validation failure, unavailable data for the given time frame, or an unsupported Database Server (see the next section for a list of supported Database Servers).

Supported Database Servers

Data is available in the DB Memory chart for Database Servers discovered via the following targets:

Target	Supported Database Servers
AppDynamics	Oracle, MongoDB
Dynatrace	SQL, MySQL
MySQL	MySQL
Oracle	Oracle
SQL	SQL

DB Memory Resize Actions

Resize actions are driven by metrics on the Database Server, instead of metrics on the hosting VM. Intersight Workload Optimizer uses DB memory and cache hit rate metrics to decide whether resize actions are necessary.


A cache hit rate value of 100% indicates efficiency. When the hit rate reaches 100%, no action generates even if DB memory utilization is high. If utilization is low, a resize down action generates.

When the hit rate is below 100% but DB memory utilization remains low, no action generates. If utilization is high, a resize up action generates.

Heap Chart

Heap is the portion of memory allocated to individual applications.

Intersight Workload Optimizer collects Heap data from Applications and APM targets. For each target you add, Intersight Workload Optimizer discovers a specific set of entities, which can include Application Components. When you set the scope to an Application Component, the data that Intersight Workload Optimizer collected displays in the Heap chart.

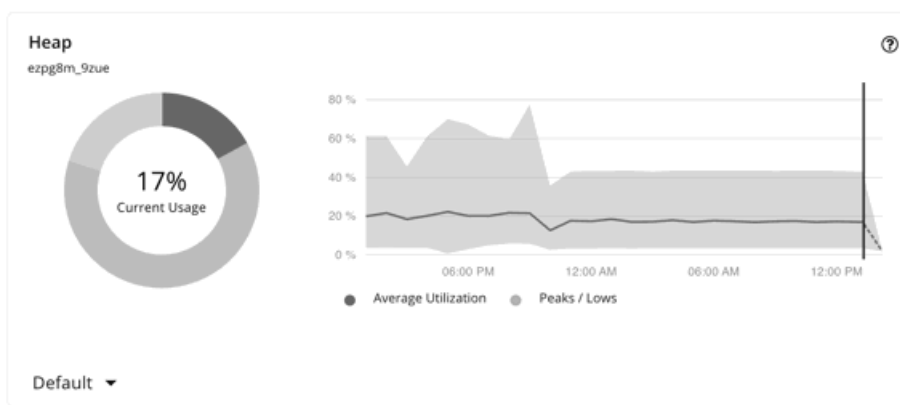

The Heap chart shows average and peak/low values over time. Use the selector at the bottom left section of the chart to change the time frame.

NOTE:

An empty chart could be the result of delayed discovery, target validation failure, unavailable data for the given time frame, or an unsupported Application Component (see the next section for a list of supported Application Components).

Supported Application Components

Data is available in the Heap chart for Application Components discovered via the following targets:

Target	Supported Application Components
AppDynamics	Java, .Net, Node.js
Dynatrace	Java applications
JVM	Java applications
New Relic	Java, Node.js
Tomcat	Java applications
WebSphere	Java applications

Heap Resize Actions

Intersight Workload Optimizer generates Heap resize actions if an Application Component sells Heap and Remaining Garbage Collection (GC) Capacity, and the underlying VM or container sells VMem. These actions are recommend-only and can only be executed outside Intersight Workload Optimizer.

NOTE:

Remaining GC Capacity is the percentage of uptime that is *not* spent on garbage collection.

Number of Replicas Chart

This chart shows the replicas of Application Components running over a given time period.

Use this chart if:

- SLO-driven scaling is enabled for a Service, and *provision* or *suspend* actions are executed by Intersight Workload Optimizer. These actions adjust the number of replicas to help you meet your SLO goals.
- Or
- Kubernetes [Horizontal Pod Autoscaler](#) (HPA) is enabled for a *Deployment*, *ReplicaSet*, or *StatefulSet* that is exposed as a Service. Intersight Workload Optimizer discovers adjustments to the number of replicas made by HPA.

The chart shows following information:

- **Capacity** values

The number of desired pod replicas configured in the Workload Controller that backs the Service. This can be configured in *Deployment*, *ReplicaSet*, *StatefulSet*, *ReplicationController* or *DeploymentConfig*.

The chart plots the *maximum* observed capacity within the given time period.

- **Used** values


The number of *ready* pods owned by the Workload Controller. Pods in other states (for example, pending pods) are not counted.

The chart plots the *average* used values within the given time period. Hover over the chart to see the minimum and maximum used values.

Response Time Chart

Response Time is the elapsed time between a request and the response to that request. Response Time is typically measured in seconds (s) or milliseconds (ms).

Intersight Workload Optimizer collects Response Time data from Applications and Databases Targets. For each target you add, Intersight Workload Optimizer discovers a specific set of entities, which can include Business Applications, Business Transactions, Services, Application Components, and self-hosted Database Servers. When you set the scope to any of these entities, the data that Intersight Workload Optimizer collected displays in the Response Time chart.

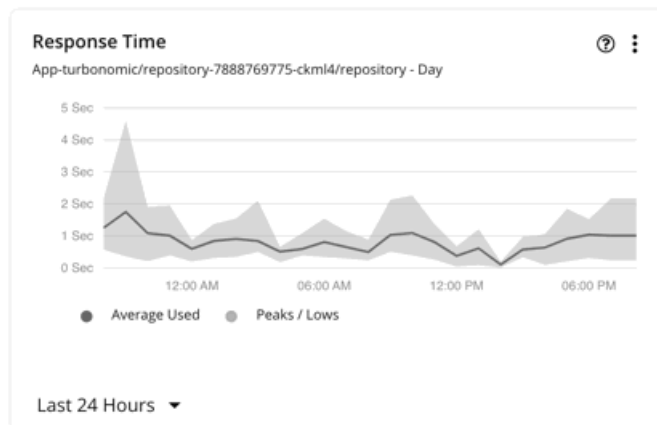

The Response Time chart shows average and peak/low values over time. Use the selector at the bottom left section of the chart to change the time frame.

NOTE:

An empty chart could be the result of delayed discovery, target validation failure, unavailable data for the given time frame, or an unsupported entity (see the next section for a list of supported entities).

Supported Entities

Data is available in the Response Time chart for the following entities:

Target	Supported Entities
AppDynamics	Business Application, Business Transaction, Service, Application Component
Dynatrace	Business Application, Service
JVM	Application Component
MySQL	Database Server
New Relic	Business Transaction, Service, Application Component, Database Server
Oracle	Database Server
SQL	Database Server
Tomcat	Application Component
WebSphere	Application Component

Response Time SLOs

To evaluate the performance of your applications and Database Servers, set Response Time SLOs (Service Level Objectives) as an operational constraint in policies. For applications, you can set the SLO at the Business Application, Business Transaction, Service, or Application Component level.

OPERATIONAL CONSTRAINTS


Transaction SLO

Enable Transaction SLO

Enable Response Time SLO

Response Time SLO [ms] ms

After you create a policy, the SLO value appears as a solid straight line in the Response Time chart. You can then gauge performance against the given SLO.

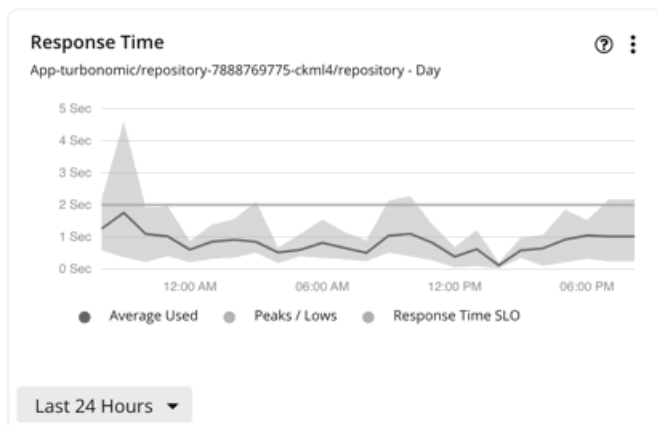

If you do not set an SLO, Intersight Workload Optimizer estimates SLO based on historical Response Time data collected from the target, and then displays the estimated value in the Capacity and Usage chart, as Response Time capacity. This estimated value is *not* reflected in the Response Time chart.

Capacity and Usage ? ⋮

SQLServer [win-dynatrace-mssql2017]

Commodity	Capacity	Used	Utilization
DB Cache Hit Rate	100 %	100 %	100%
Response Time	44.76 msec	42.65 msec	95.3%
TransactionLog	347.21 MB	71.36 MB	20.55%
Transaction	3.58 TPS	0.38 TPS	10.66%
DB Memory	6.18 GB	644.22 MB	10.19%

SHOW ALL >

NOTE:

When you set an SLO value, Response Time capacity in the Capacity and Usage chart shows as N/A.

Response Time SLOs for Kubernetes Services

When you add a Kubernetes target, Intersight Workload Optimizer discovers container platform entities, including Kubernetes Services monitored by AppDynamics, Dynatrace, and New Relic.

For horizontally scalable Kubernetes Services that collect performance metrics (or KPIs) for applications, Intersight Workload Optimizer can dynamically adjust the number of pod replicas that back those Services to help you meet SLOs (Service Level Objectives) for your applications.

To generate actions that adjust pod replicas, Kubernetes Services must be discovered by the Kubeturbo pod that you have deployed in your environment, as well as collect performance metrics via Instana or DIF (Data Ingestion Framework). In addition, Intersight Workload Optimizer requires that you turn on horizontal scaling and specify Response Time SLOs in policies for the affected Services.

< Configure Service Policy
✕

NAME

Policy_A

— SCOPE

AH-Service_GP ✕

ADD SERVICE GROUPS

+ POLICY SCHEDULE

— AUTOMATION AND ORCHESTRATION

Defines how actions are accepted.

HORIZONTAL SCALE UP, HORIZONTAL SCALE DOWN

Action Acceptance: Manual

— OPERATIONAL CONSTRAINTS

Response Time SLO [ms] 2000 ms

Enable Response Time SLO

Enable Transaction SLO

Transaction SLO 10

ADD CONSTRAINT

Response Time SLO is the desired *weighted average* response time of all Application Component replicas associated with a Service.

NOTE:


If you specified SLOs but turned off horizontal scaling in policies, no actions generate but SLO values will continue to display in the Response Time chart for Services, for your reference. This allows you to gauge performance against those SLOs.

For additional information, see [Actions for Kubernetes Services \(on page 85\)](#).

Transaction Chart

Transaction is a value that represents the per-second utilization of the transactions allocated to a given entity.

Intersight Workload Optimizer collects Transaction data from Applications and Databases Targets. For each target you add, Intersight Workload Optimizer discovers a specific set of entities, which can include Business Applications, Business Transactions, Services, Application Components, and self-hosted Database Servers. When you set the scope to any of these entities, the data that Intersight Workload Optimizer collected displays in the Transaction chart.

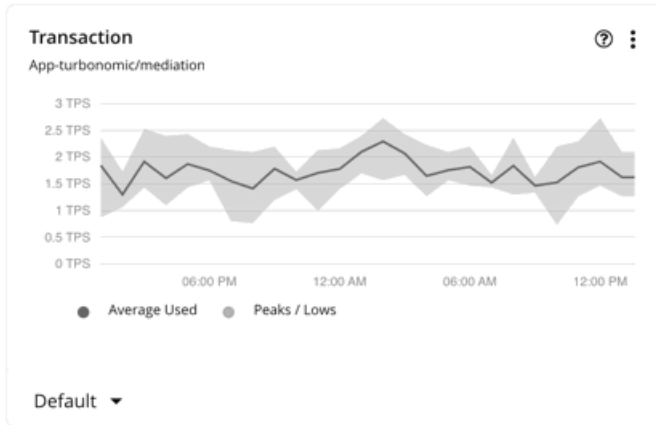

The Transaction chart shows average and peak/low values over time. Use the selector at the bottom left section of the chart to change the time frame.

NOTE:

An empty chart could be the result of delayed discovery, target validation failure, unavailable data for the given time frame, or an unsupported entity (see the next section for a list of supported entities).

Supported Entities

Data is available in the Transaction chart for the following entities:

Target	Supported Entities
AppDynamics	Business Application, Business Transaction, Service, Application Component, Database Server
Dynatrace	Business Application, Service, Database Server
MySQL	Database Server
New Relic	Business Transaction, Service, Application Component, Database Server
Oracle	Database Server
SQL	Database Server
Tomcat	Application Component
WebSphere	Application Component

Transaction SLOs

To evaluate the performance of your applications and Database Servers, set Transaction SLOs as an operational constraint in policies. For applications, you can set the SLO at the Business Application, Business Transaction, Service, or Application Component level.

OPERATIONAL CONSTRAINTS


Enable Response Time SLO

Response Time SLO [ms] ms

Enable Transaction SLO

Transaction SLO

After you create a policy, the SLO value appears as a solid straight line in the Transaction chart. You can then gauge performance against the given SLO.

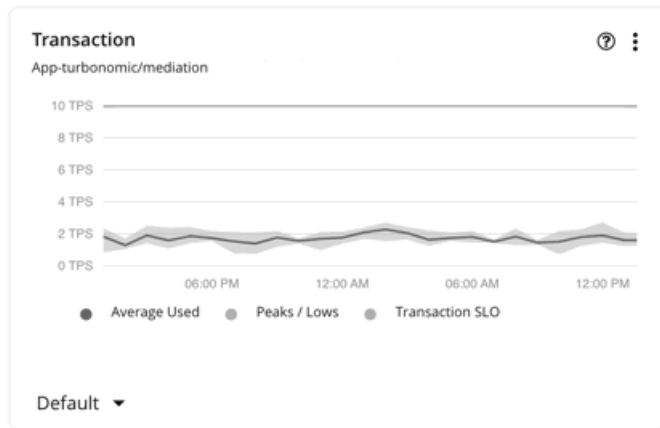

If you do not set an SLO, Intersight Workload Optimizer estimates SLO based on historical Transaction data collected from the target, and then displays the estimated value in the Capacity and Usage chart, as Transaction capacity. This estimated value is *not* reflected in the Transaction chart.

Capacity and Usage
App-turbonomic/mediation

Commodity	Capacity	Used	Utilization
Remaining GC Capacity	100 %	99.59 %	99.59%
Transaction	3.2 TPS	2.2 TPS	68.79%
Heap	24 GB	0.93 GB	3.87%
Virtual Memory	32 GB	1.54 GB	4.82%
Virtual CPU	17.6 GHz	835.07 MHz	4.74%

SHOW ALL >

NOTE:

When you set an SLO value, Transaction capacity in the Capacity and Usage chart shows as N/A.

Transaction SLOs for Kubernetes Services

When you add a Kubernetes target, Intersight Workload Optimizer discovers container platform entities, including Kubernetes Services managed by AppDynamics, Dynatrace, and New Relic.

For horizontally scalable Kubernetes Services that collect performance metrics (or KPIs) for applications, Intersight Workload Optimizer can dynamically adjust the number of pod replicas that back those Services to help you meet SLOs (Service Level Objectives) for your applications.

To generate actions that adjust pod replicas, Kubernetes Services must be discovered by the Kubeturbo pod that you have deployed in your environment, as well as collect performance metrics via Instana or DIF (Data Ingestion Framework). In addition, Intersight Workload Optimizer requires that you turn on horizontal scaling and specify Transaction SLOs in policies for the affected Services.

Transaction SLO is the maximum number of transactions per second that each Application Component replica can handle.

NOTE:

If you specified SLOs but turned off horizontal scaling in policies, no actions generate but SLO values will continue to display in the Transaction chart for Services, for your reference. This allows you to gauge performance against those SLOs.

For additional information, see [Actions for Kubernetes Services \(on page 85\)](#).

Top Utilized Charts

Top Utilized charts show the entities or groups with the most utilization.

Entity Type

Entity types you can choose include:

- [Accounts \(on page 337\)](#) (public cloud)
- Business Applications
- Business Transactions
- Services
- Application Components

- Zones
- Chassis
- [Clusters \(on page 337\)](#) (of hosts)
- Containers
- Container Pods
- Container Specs
- Namespaces
- Workload Controllers
- Data Centers
- Databases
- Database Servers
- Disk Arrays
- IO Modules
- Internet
- Logical Pool
- Networks
- Hosts
- [Resource Groups \(on page 338\)](#)
- Regions
- Storage Devices
- Storage Controllers
- Switches
- Virtual Data Centers
- Virtual Machines
- Volumes
- Wasted Files

Data Type

Depending on the entity type (for example, Clusters), you can choose **Headroom** or **Utilization** information in the chart.

Commodity

Depending on the entity type, you can add one or more different resource commodities that you want to measure.


Display

The chart lists the top entities by utilization of the commodities that you or the system has set. Depending on the entity type and scope, you can sort the information. To view the utilization details, hover over the entity to display the tooltip. For cloud entities, the estimated cost for those entities also display.

To drill down to an entity, click the entity name in the chart. This sets the scope to that entity.

Click the **ACTIONS** button for an entity to examine the actions that are pending for it, and then decide which ones are safe to execute.

Example: A top clusters chart which can be sorted by CPU headroom or CPU exhaustion.

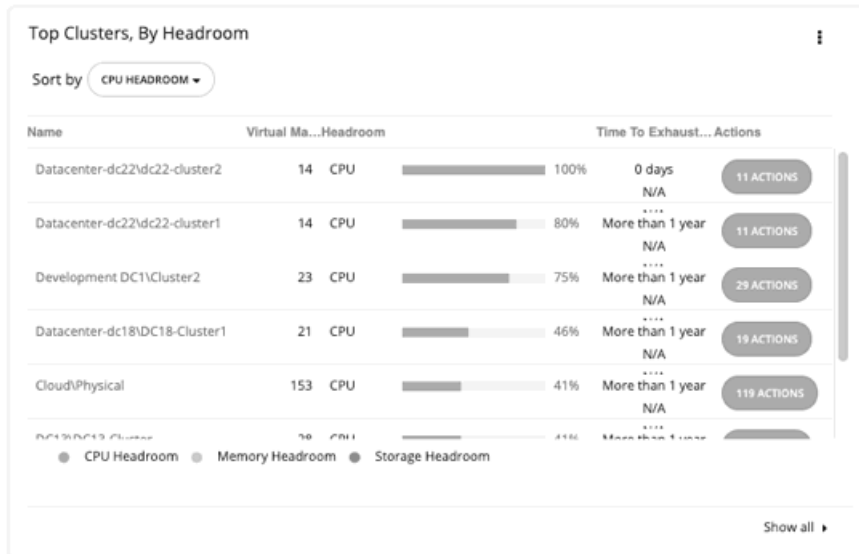

Top Clusters Chart

This chart shows the top clusters in your on-prem environment by CPU, memory, and storage capacity or utilization. In the default view, the chart shows the top clusters by CPU headroom (available capacity). It also shows time to exhaustion of cluster resources, which is useful for future planning (for example, you might need to buy more hardware).

To calculate cluster capacity and headroom, Intersight Workload Optimizer runs nightly plans that take into account the conditions in your current environment. The plans use the Economic Scheduling Engine to identify the optimal workload distribution for your clusters. This can include moving your current VMs to other hosts within the given cluster, if such moves would result in a more desirable workload distribution. The result of the plan is a calculation of how many more VMs the cluster can support.

Click the **ACTIONS** button for a given cluster to see the actions that Intersight Workload Optimizer recommends to keep cluster resources in the desired state, and then decide which ones are safe to execute.

Click **Show All** to see all of the clusters. In the Show All list, you can also download capacity data as a CSV file. Click a cluster name to set the scope to that cluster and view more details about its current capacity and health.

Top Accounts Chart

This chart lists the cloud accounts with the most pending actions. For each account, you can see the savings you would realize if you execute the pending actions. Click the **ACTIONS** button to examine these actions and decide which ones are safe to execute. You can also click an account name to set the scope to that account.

Click **Show all** to view additional information, including the number of actions that have been executed for individual accounts or workloads, along with the resulting savings. If you have multiple cloud providers, each provider will have its own tab. You can download the accounts list as a CSV file.

AWS Accounts

The chart shows the AWS master and member accounts that you have added as targets, . Accounts with a star symbol are master accounts.

NOTE:

Specific RIs can provide savings for multiple accounts. However, individual accounts show the full RI savings, which can result in exaggerated savings for that account.

Azure Accounts

The chart shows the subscriptions discovered via the service principal and EA accounts that you have added as targets.

GCP Accounts

The chart shows the folders and projects discovered via the GCP service accounts that you have added as targets.

If a service account has access to a folder with projects and subfolders, the folder displays as the top-level account. Click **Show All** to see the full resource hierarchy and top-down data. If a service account has access to a project or subfolder but not its parent folder, the project or subfolder displays as the top-level account.

Top Resource Groups Chart

This chart highlights the estimated monthly cost for the top resource groups in your cloud environment and the savings you would realize if you execute the pending actions. Click the **ACTIONS** button to examine these actions and decide which ones are safe to execute. Click a resource group to set the scope to that group.

The chart also counts actions that have been executed for individual groups, and then shows the resulting savings.

Workload Health Charts

Workload Health charts show the health of workloads from the compliance, efficiency improvement, and performance assurance perspectives. These charts use current (real-time) data for the workloads chosen for the chart widget scope.

Chart Type

You can set the display to:

- Text
- Ring Chart
- Horizontal Bar

Breakdown

You can choose:

- **Workload by Compliance**

A virtual environment can include policies that limit availability of resources. It's possible that the environment configuration violates these defined policies. In such cases, Intersight Workload Optimizer identifies the violation and recommends actions that bring the entity back into compliance.
- **Workload by Efficiency Improvement**

Efficient utilization of resources is an important part of running in the desired state. Running efficiently maximizes your investment and reduces cost. When Intersight Workload Optimizer discovers underutilized workloads, it recommends actions to optimize operations and save money.
- **Workload by Performance Assurance**

Ultimately, the reason to manage workloads in your environment is to assure performance and meet QoS goals. When Intersight Workload Optimizer detects conditions that directly put QoS at risk, it recommends associated actions to assure performance. You can consider these critical conditions, and you should execute the recommended actions as soon as possible.

Workload Health charts indicate actions that you should consider to improve the health of workloads. To see a list of actions, click **Show Actions** at the bottom of the chart.

Environment Charts

Environment charts provide an overview of your environment. They show the targets that you are managing and count the entities that Intersight Workload Optimizer has discovered through those targets. For example, you can display the cloud service providers, hypervisors, and the number of workloads.

Environment Type

You can choose one of the following views:

- Hybrid (both on-prem and cloud)
- Cloud
- On-Prem

Display

The chart shows the information as a Text chart type.

Workload Improvements Charts

Workload Improvements charts track the health of workloads in your environment over time, and map the health to the number of actions Intersight Workload Optimizer has executed in that time period.

In the chart, you can see the significance and value of executed actions:

- Workloads Overall
 - This is the total number of workloads over time.
- Workloads with Performance Risks
 - These are the workloads that are not performing well.
- Inefficient Workloads
 - These are the workloads that are running on under-utilized hosts or are not being utilized.
- Workloads Out of Compliance
 - These are the workloads that are violating a placement policy. Workloads that are not in compliance might be running on a host or placed on storage, for example, that violate a placement policy.
- Executed actions
 - Actions that Intersight Workload Optimizer executed.

The vertical line shows when the last data point was polled in your environment.

Environment Type

You can choose one of the following views:

- Hybrid (both on-prem and cloud)
- Cloud
- On-Prem

Display

The chart shows the information as a Line chart.

Cloud Chart Types

These chart widgets provide information on the status of your cloud environment.

For many cloud chart widgets that display costs and savings, Intersight Workload Optimizer uses the billing reports from your cloud service providers to build a picture of your overall costs. The data includes all costs that the service provider includes in the billing report. Intersight Workload Optimizer parses these reports into the formats that it uses for the cloud chart widgets.

NOTE:

In order for Intersight Workload Optimizer to access AWS monthly reports, you must have created a Cost and Usage report in your AWS account and you must store it in an S3 bucket.

Billing Breakdown Charts

Billing Breakdown charts show your expenditure on cloud services, so you can track overall cost, cost by region, or cost by cloud accounts. Intersight Workload Optimizer discovers pricing for cloud services through the cloud accounts and Azure subscriptions that you configured as targets.

Chart Type

You can set the display to:

- Text
- Ring Chart
- Horizontal Bar

Expenses Charts

Cisco uses billing information from your cloud provider to [track \(on page 22\)](#) compute, storage, database, IP, and data transfer costs for your workloads. Use this chart to manage your costs and see how they evolve over time.

Commodity

You can choose:

- **Billed Cost by Service Provider**

See costs over time for each cloud service provider that you use in your cloud environment.

You can open more than one account from a single service provider. If you are running workloads on different service providers, then this chart shows the distribution of costs across them.

- **Top Billed Cost by Account**

The chart shows the [cloud accounts \(on page 337\)](#) with the largest costs. The chart's legend displays up to 20 actual accounts and, if needed, an additional item labeled 'Others' that represents all accounts that are not in the top 20. Hover on a data point to see costs for individual accounts.

- **Top Billed Cost by Service**

The chart shows the services with the largest costs. The chart's legend displays up to 20 actual services and, if needed, an additional item labeled 'Others' that represents all services that are not in the top 20. Hover on a data point to see costs for individual services.

- **Workload Cost Breakdown**

This chart shows costs over time for each component of your cloud utilization. The vertical line indicates when the last data point was polled from your environment. Data points to the right of the vertical line are projections into the future.

You can see costs for:

- On-Demand Compute
- Discounted Compute
- Spot Compute
- On-Demand License
- Reserved License
- Storage
- IP (static IPs for workloads)

This chart reflects on-demand costs for VMs based on uptime and other factors. For details about on-demand cost calculations, see [Estimated On-demand Monthly Costs for Cloud VMs \(on page 137\)](#).

Chart Type

You can set the display to:

- Line Chart

- Stacked Bar Chart
- Area Chart

Chart Time Frame

As you change the time frame, Intersight Workload Optimizer divides the reported information into the appropriate time units to match that time frame. However, the source remains the same. Changing the time frame does not affect the source data or increase data polling.

Cloud Tier Breakdown Charts

Cloud Tier charts show the cloud tiers that Intersight Workload Optimizer discovers for the chart widget scope. For example, if the Chart Widget Scope is set to All Cloud VMs and the Entity Type is set to Virtual Machine, the chart shows all the cloud tiers that the workloads use.

Entity Type

You can choose any entity type in the list.

Chart Type

You can set the display to:

- Text
- Ring Chart
- Horizontal Bar

Location Charts

Location charts show cloud provider regions in a world map for which there are discovered workloads. Click on any region to examine more detailed information in a scoped view.

Display

The chart shows the regions in countries in a Map chart.

Cost Breakdown by Tag Charts

Cost Breakdown By Tag charts show the costs for tagged cloud entities that Intersight Workload Optimizer has discovered in your Azure or GCP environment. For the tagged entities in scope, the chart shows how daily costs change over time.

You choose a tag key to track, and then choose which tag values to include in the chart. Each data point aggregates the costs for all the entities with a given tag/value pair. You can display the cost breakdown in a stacked bar chart or an area chart.

Example: For this stacked bar chart, the tag **poolName** is *workload-type* and the tag **Values** are *ptpool*, *ptpool2*, and *mixwin*.

Cumulative Savings and Investments Charts

Actions for your cloud workloads usually have cost savings or investments attached to them. For example, deleting unattached volumes can lower your costs significantly (savings), while scaling a VM to a different tier to improve performance could incur additional costs (investments).

These charts highlight:

- Total *realized* savings and investments as a result of executing actions
- Total *missed* savings and investments when actions are not executed

Information in these charts can help shape your action handling policies. For example, you can start automating actions so you don't miss opportunities to assure performance at the lowest possible cost.

Scope

These charts display in the built-in Cloud Executive Dashboard and are scoped to your global environment. You can change the scope to view granular data. You can also add these charts to the default views in the Home Page or to your custom dashboards.

Another way to view granular data is to set the scope (in the supply chain or by using Search) to one or several accounts, billing families, groups, or workloads.

Scale Actions

For actions to scale workloads (VMs, Database Servers, databases, or volumes), Intersight Workload Optimizer calculates savings and investment *per workload* based on the hourly cost of the workload price difference, taking into account workload [uptime \(on page 134\)](#) and the effect of consecutive scale actions on the same workload.

- Calculated investments and savings are the total of all past scaling actions, with the exception that a scale in one direction reduces the amounts of previous actions in the opposite direction, until one or more previous actions have no more effect.

To illustrate:

Consider three consecutive scale actions for a VM and their effect on the calculation.

1. A cost increase of \$1.00 counts as an investment of \$1.00.
2. A subsequent cost decrease of \$0.25 is factored in as:
 - Savings of \$0.25 to the total amount in the Cumulative Savings chart
 - An investment of \$0.75 to the total amount in the Cumulative Investments chart
3. Another cost decrease of \$1.00 is factored in as:
 - Savings of \$1.25 to the total amount in the Cumulative Savings chart
 - An investment of \$0.00 to the total amount in the Cumulative Investments chart

By the time the third action was executed, the initial \$1.00 investment has been "undone" (investment amount is \$0.00) and is no longer considered when calculating savings and investments for the VM.

- Calculation temporarily stops for the hours that a workload is offline, and then resumes when the workload is online again and is running with the same configuration.
- Calculation stops for terminated workloads or workloads that Intersight Workload Optimizer no longer discovers.

Volume Delete Actions

For actions to delete volumes, Intersight Workload Optimizer calculates savings accumulated over one year since volume deletion, based on the hourly cost of the deleted volume. It also estimates missed savings based on the hourly cost of the workload price difference and the number of hours that pending actions remain in the system.

Chart Type


You can set the display to:

- Text and Area Chart
- Area Chart
- Text and Bar Chart

- Stacked Bar Chart
- Text

You can edit the chart to switch between the **Cumulative Savings** and **Cumulative Investments** views. You can also change the displayed data to just **Savings** or **Investments** if you do not wish to see how the savings or investment costs accumulate over time.

In this example, Intersight Workload Optimizer shows monthly realized and missed savings.

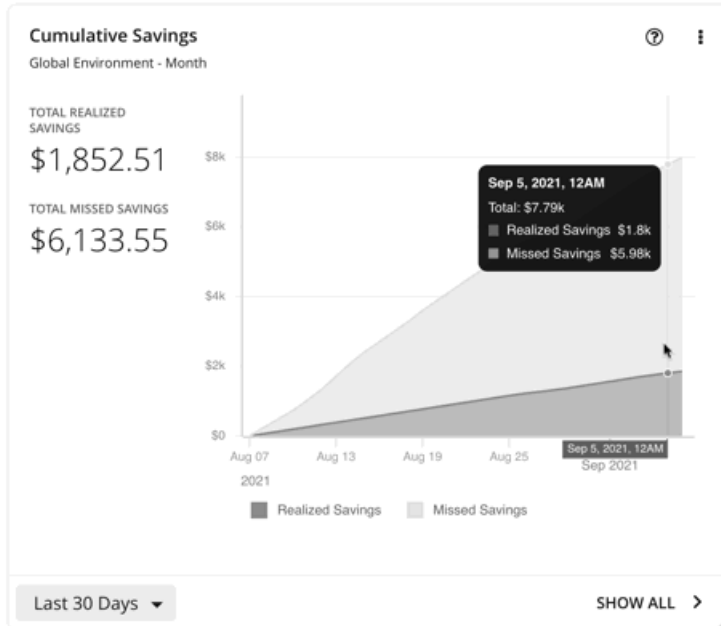

In the chart legend, you can click **Realized Savings** or **Missed Savings** to display a filtered view. Click the item again to reset the chart.

Click **Show All** at the bottom of the chart to view and download data in tabular format.

Savings and Investments Charts

Actions for your cloud workloads usually have cost savings or investments attached to them. For example, deleting unattached volumes can lower your costs significantly (savings), while scaling a VM to a different tier to improve performance could incur additional costs (investments).

These charts highlight:

- Total *realized* savings and investments as a result of executing actions
- Total *missed* savings and investments when actions are not executed

Information in these charts can help shape your action handling policies. For example, you can start automating actions so you don't miss opportunities to assure performance at the lowest possible cost.

Scope

To display these charts, add them to the default views in the Home Page or to your custom dashboards. By default, these charts are scoped to your global environment. You can change the scope to view granular data.

Another way to view granular data is to set the scope (in the supply chain or by using Search) to one or several accounts, billing families, groups, or workloads.

Scale Actions

For actions to scale workloads (VMs, Database Servers, databases, or volumes), Intersight Workload Optimizer calculates savings and investment *per workload* based on the hourly cost of the workload price difference, taking into account workload [uptime \(on page 134\)](#).

- Calculation temporarily stops for the hours that a workload is offline, and then resumes when the workload is online again and is running with the same configuration.
- Calculation stops for terminated workloads or workloads that Intersight Workload Optimizer no longer discovers.

Volume Delete Actions

For actions to delete volumes, Intersight Workload Optimizer calculates savings since volume deletion, based on the hourly cost of the deleted volume. It also estimates missed savings based on the hourly cost of the workload price difference and the number of hours that pending actions remain in the system.


Chart Type

You can set the display to:

- Text and Area Chart
- Area Chart
- Text and Bar Chart
- Stacked Bar Chart
- Text

You can edit the chart to switch between the **Savings** and **Investments** views. You can also change the displayed data to **Cumulative Savings** or **Cumulative Investments** to see how the savings or investment costs accumulate over time.

In this example, the chart shows realized and missed savings per month over the last year. It indicates higher rates of realized savings in the last two months as more actions are executed rather than kept pending.

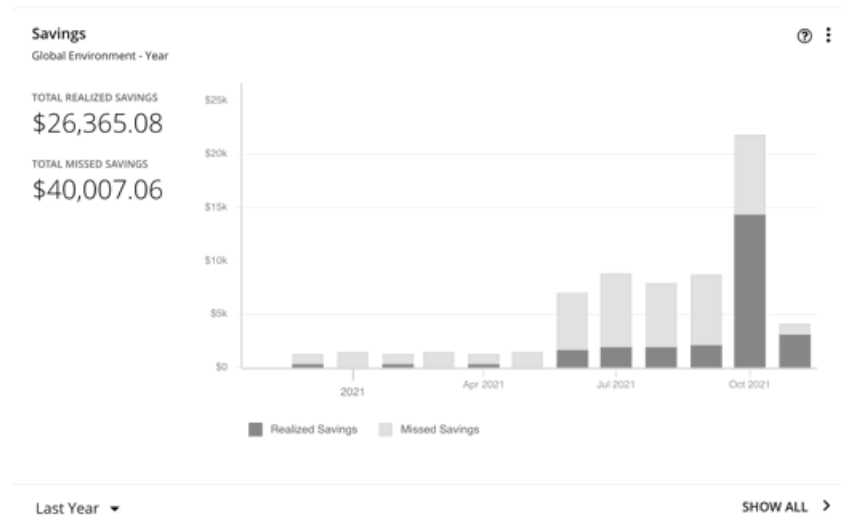

In the chart legend, you can click **Realized Savings** or **Missed Savings** to display a filtered view. Click the item again to reset the chart.

Click **Show All** at the bottom of the chart to view and download data in tabular format.


Recommended RI Purchases Charts

Intersight Workload Optimizer can recommend purchasing instance types at a discounted rate to help you increase the percentage of VMs covered by discounted pricing and reduce on-demand costs. This chart shows your pending purchases. Download the list of purchases and then send it your cloud provider or representative to initiate the purchase process.

NOTE:

Purchase actions should be taken along with the related VM scaling actions. To purchase discounts for VMs at their current sizes, run a [Buy VM Reservation Plan \(on page 280\)](#).

Currently, Intersight Workload Optimizer can recommend purchase actions for AWS and Azure. Purchase actions for GCP will be introduced in a future release.

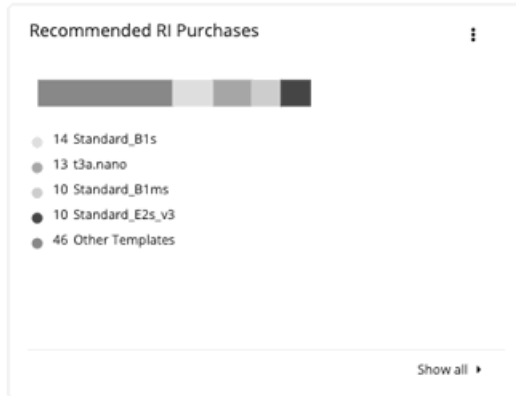

Factors Affecting Recommendations

To identify VMs that are good candidates for discounted pricing, Intersight Workload Optimizer analysis considers the history of a VM (by default, the last 21 days), and it looks for:

- **Activity**
If the VM's VCPU utilization percentile is 20% or higher, then Intersight Workload Optimizer considers it an active VM.
- **Stability**
If there have been no start, stop, or resize actions for the VM for 16 of the last 21 days, then Intersight Workload Optimizer considers it stable.

If the current discount inventory cannot support the VM, or if supporting it would exceed your desired coverage, then Intersight Workload Optimizer can recommend purchasing additional discounts.

Intersight Workload Optimizer generates purchase actions on a two-week cycle. It also generates a new set of actions if the discount inventory changes or after the platform restarts.

Be aware of the following:

- Different types of discounts have different costs, so the choice between using on-demand or discounted pricing can vary depending on your [purchase profile \(on page 373\)](#).
- Intersight Workload Optimizer can only estimate costs because the full data is only available after you complete the purchase. Estimates reflect costs you would see after scaling workloads to the newly purchased instance types. For scaling to already-purchased instance types, the chart reflects the actual costs.
- As Intersight Workload Optimizer generates purchase actions, it assumes that any other pending actions for the workload will also be executed. For example, assume a workload running on an r4.xlarge template. If Intersight Workload Optimizer recommends changing that instance type to an m5.medium, it can recommend that you purchase a discounted m5 to cover the workload and reduce costs. This purchase could be on a region that currently doesn't have any m5 workloads. The purchase recommendation assumes you will move the workload to that other region.
- For AWS RIs:
 - For environments that use the *Instance Size Flexible* rules, Intersight Workload Optimizer can recommend that you buy multiple RIs of smaller instance types to cover the resource requirements of larger instance types. For example, rather than buying one t2.small RI, Intersight Workload Optimizer can recommend that you buy four t2.nano RIs to offer an equivalent discount.
 - For environments that consolidate billing into Billing Families, Intersight Workload Optimizer recommends purchases that are within the given billing family. For more information, see [AWS Billing Families \(on page 378\)](#).

Show All

Click **Show All** to see a table with details for each discount.

The table shows the properties, up-front cost, and break-even period for each discount. The break-even period is the time at which savings will exceed the up-front cost, rounded to the month. The Cost Impact column indicates the monthly savings you would realize when you buy a specific discount.

When you choose one or more check boxes, the total count, up-front cost, and savings appear at the top.

AWS		AZURE												
Buy Actions		20	Savings		\$799/mo							EXECUTE ACTIONS		↓
<input type="text" value="Type to search"/> ADD FILTER														
<input type="checkbox"/>	Account	Instance Type	Count	Platform	Term	Payment	Region	Up-Front Cost	Break Even Period	Action Category	Cost Impact	Action		
<input type="checkbox"/>	Advanced	r5a.large	8	Linux	1 Year	All Upfront	aws-US West (N. C.)	\$5,192	8 months	SAVINGS	↓ \$210/mo	DETAILS		
<input type="checkbox"/>	Advanced	c5a.large	6	Linux	1 Year	All Upfront	aws-US West (N. C.)	\$2,934	7 months	SAVINGS	↓ \$171/mo	DETAILS		
<input type="checkbox"/>	Advanced	r5a.large	5	Linux	1 Year	All Upfront	aws-US East (Ohio)	\$2,910	8 months	SAVINGS	↓ \$133/mo	DETAILS		

AWS		AZURE												
Buy Actions		27	Savings		\$928/mo							EXECUTE ACTIONS		↓
<input type="text" value="Type to search"/> ADD FILTER														
<input type="checkbox"/>	Subscription	Product Name	Quan...	Term	Region	Up-Front Cost	Break Even Period	Action Category	Cost Impact	Action				
<input type="checkbox"/>	Dev	Standard_D2s_v3	6	1 Year	azure-North Central	\$3,042	7 months	SAVINGS	↓ \$173/mo	DETAILS				
<input type="checkbox"/>	Dev	Standard_B1ls	49	1 Year	azure-East US	\$1,323	7 months	SAVINGS	↓ \$73/mo	DETAILS				
<input type="checkbox"/>	Dev	Standard_DS1_v2	2	1 Year	azure-Brazil South	\$798	6 months	SAVINGS	↓ \$57/mo	DETAILS				


Chart Type

You can set the display to:

- Text
- Ring Chart
- Horizontal Bar

Discount Coverage Chart

This chart shows the percentage of VMs covered by discounts. If you have a high percentage of on-demand VMs, you should be able to reduce your monthly costs by increasing coverage. To increase coverage, you scale VMs to instance types that have existing capacity.

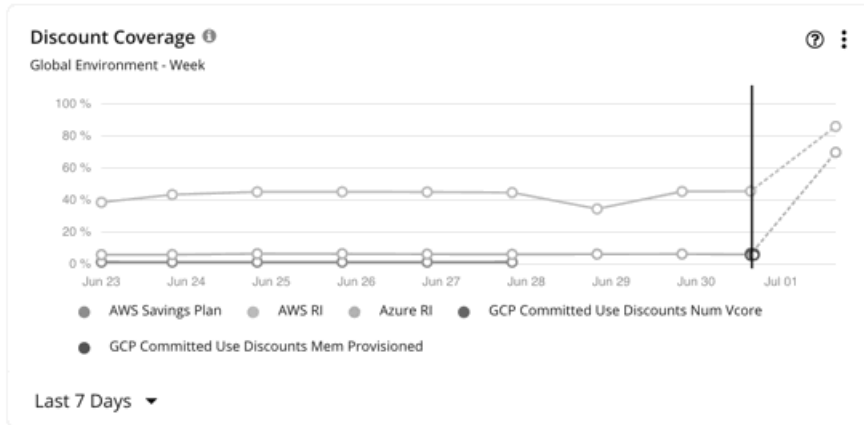

To identify VMs that are good candidates for discounted pricing, Intersight Workload Optimizer analysis considers the history of a VM (by default, the last 21 days), and it looks for:

- **Activity**
If the VM's VCPU utilization percentile is 20% or higher, then Intersight Workload Optimizer considers it an active VM.
- **Stability**
If there have been no start, stop, or resize actions for the VM for 16 of the last 21 days, then Intersight Workload Optimizer considers it stable.

If the current discount inventory cannot support the VM, or if supporting it would exceed your desired coverage, then Intersight Workload Optimizer can recommend purchasing additional discounts.

AWS RIs

If you set the scope to a specific AWS account, the chart shows the RI coverage for the workloads for the account, plus any RIs for the billing family.

The data point on the solid vertical line shows the latest data that was polled from your environment. Data points to the left of the vertical line represent historical data, while data points to the right are projections into the future.

Hover on a data point in the chart to see the following information:

- The date and time for the data point
- The percentage of coverage, based on normalization factors

[Normalization factor](#) is a measure of RI capacity that you can use to compare or combine the capacity for different instance families.

Intersight Workload Optimizer measures RI coverage in terms of normalization factors. It compares the number of RIs calculated as normalization factors that cover workload capacity with the total number of normalization factors for a given Intersight Workload Optimizer scope. Each workload is assigned normalized units depending on its instance type.

AWS Savings Plans

To view data for AWS Savings Plans, you must:

- Set the scope to your global environment.
- Choose a timeframe that shows daily or monthly data points (Last 7 Days, Last 30 Days, or Last Year)

AWS measures your Savings Plans commitment in \$/hour, but shows daily and monthly costs in Cost Explorer. Intersight Workload Optimizer polls Cost Explorer periodically to obtain the latest cost data, and then uses that data to calculate Savings Plans utilization or coverage *per day*. For this reason, you will not see Savings Plans data if you choose a timeframe that shows hourly data points (Last 2 Hours or Last 24 Hours).

NOTE:

AWS timestamps data in UTC, but the chart presents data in your local time. This difference could result in the appearance of a missing day in the chart, but has no effect on data completeness (the chart always reflects the complete data set).

The chart shows historical data, represented by data points to the left of the solid vertical line. Data for the current day is not available since the latest data that AWS provides is always a few days old. In addition, Intersight Workload Optimizer does not project coverage into the future.

Hover on a data point in the chart to see the following information:

- The date and time for the data point
- The percentage of coverage

Azure Reservations

If you set the scope to a specific Azure subscription, this chart shows the reservation coverage for the workloads for the subscription, plus any shared reservations and single-scope reservations owned by this subscription.

The data point on the solid vertical line shows the latest data that was polled from your environment. Data points to the left of the vertical line represent historical data, while data points to the right are projections into the future.

Hover on a data point in the chart to see the following information:

- The date and time for the data point
- The percentage of coverage, based on ratios.

[Ratio](#) refers to the number of Azure reservation units that cover workload capacity compared to the total number of reservation units for a given Intersight Workload Optimizer scope. Each workload is assigned reservation units based on its instance type.

GCP Committed Use Discounts

The chart displays the latest data that was polled from your environment, but does *not* show historical data or project coverage into the future.

Hover on a data point in the chart to see the following information:


- The date and time for the data point
- The percentage of coverage

Discount Inventory Chart

This chart lists the cloud provider discounts discovered in your environment.

- AWS Reserved Instances (RIs) and Savings Plans
- Azure reservations
- GCP committed use discounts

Chart Type

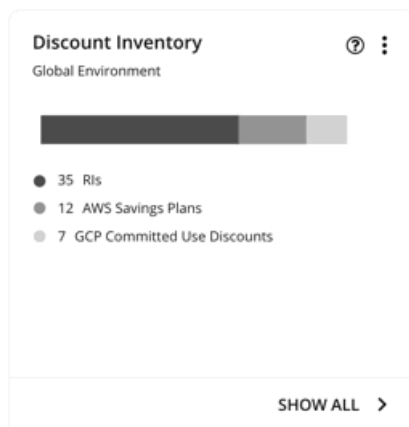

You can set the display to:

- Text
- Ring Chart
- Horizontal Bar

Show All

Click **Show All** at the bottom of the chart to see detailed information for the discounts in scope. If your scope includes multiple cloud providers, each provider will have its own tab.

Discount Inventory														
AWS RESERVED INSTANCES			AWS SAVINGS PLANS			AZURE RESERVED INSTANCES			GCP COMMITTED USE DISCOUNTS					
Total 8 Count 12 Cost \$1,790.83/mo Savings \$1,434.16/mo ↓														
Reservation ID	Account	Instance Type	Count	Location	Platform	Tenancy	Class	Payment	Current Utilization	Est. Savings	Term	Exp. Date	Effective Cost	Li... VMs
<input type="checkbox"/>	Quality Engin	t3.nano	1	aws-ap-northe	Linux	Default	Convertible	All Upfront	0%	\$0.00/mo	1 Year	Nov 02, 2022	\$3.67/mo	0 VM
<input type="checkbox"/>	Quality Engin	t3.nano	1	aws-ap-northe	Linux	Default	Convertible	All Upfront	0%	\$0.00/mo	1 Year	Nov 02, 2022	\$3.67/mo	0 VM
<input type="checkbox"/>	Development	t3.micro	1	aws-US East (Linux	Default	Convertible	No Upfront	100%	\$2.12/mo	1 Year	Feb 28, 2023	\$5.48/mo	1 VM

Each row in the table corresponds to a discount. Note that there can be several discounts for an Azure subscription or AWS/GCP account, and each discount displays as its own row. Table columns show basic information obtained from the cloud provider, such as the name/ID of the discount, the subscription/account that uses that discount, instance type and location, term, and expiration dates. Click a subscription/account to narrow the scope.

The table supports the following general functionality:

- **Totals:** At the top of the page, you will see the total number of discovered discounts. For AWS RIs and Azure reservations, you will also see total costs and savings. As you select one or more checkboxes, the information changes to reflect the totals for your selections.
- **Column Sorting:** Click any column heading to sort the list.
- **Download:** Click the Download icon at the upper right section of the page to download the table as a CSV file.

Azure Reservations and AWS RIs

When you add an Azure EA account or an AWS master account as your primary cloud target, Intersight Workload Optimizer gains full insight into the discounts for your billing families. Even as you selectively add Azure subscriptions or AWS member accounts as secondary targets, Intersight Workload Optimizer remains aware of all discounts and how they are utilized across the board, and can thus recommend more accurate discount optimization and purchase actions.

Points to consider:

- For AWS, if you added some member accounts as targets, but not a master account, Intersight Workload Optimizer will not reflect discounts for member accounts that you have not added as targets.
- For Azure:
 - It could take Intersight Workload Optimizer up to a day to discover newly purchased Azure reservations.
 - There can be delays in billing information updates that Azure makes available to Intersight Workload Optimizer. If this happens, analysis might use partial billing data in its calculations and show incomplete costs for discounts from non-added Azure subscriptions.

Set the scope to your global environment to view the full inventory. When you click **Show All** at the bottom of the chart, pay attention to the following information shown in the table:

- For discounts in *added* accounts (Azure subscriptions or AWS member accounts):

Reservation ID	Subscription	Name	Product Name	Quantity	Location	Scope	Current Utilization	Est. Savings	Term	Exp. Date	Effective Cost	Linked VMs
	EA - Dev	Standard_DS2_v2_renewed	Standard_DS...	1	azure-East US 2	Shared	100%	\$29.14/mo	1 Year	Aug 24, 2022	\$54.08/mo	1 VM *
	EA - Dev	Standard_DS2_v2_renewed	Standard_DS...	1	azure-East US 2	Shared	100%	\$29.14/mo	1 Year	Sep 03, 2022	\$54.08/mo	1 VM *
	EA - Dev	Standard_D2as_v4_renewed	Standard_D2a...	1	azure-East US 2	Shared	100%	\$28.33/mo	1 Year	Sep 03, 2022	\$41.75/mo	1 VM
	EA - Dev	Standard_F1s_renamed_renewed	Standard_F1s	1	azure-East US 2	Shared	100%	\$9.20/mo	1 Year	Sep 03, 2022	\$27.08/mo	1 VM *

– **Subscription** column (for Azure) or **Account** column (for AWS)

This column shows the account name for the discount. Click the name to set the scope to that account. Note that there can be several discounts for an account, and each discount displays as its own row.

NOTE:

If there is a failure to re-validate the account for some reason, Intersight Workload Optimizer shows it as a *non-added* account in the Discount Inventory page.

– **Current Utilization** column

This column shows the percentage of discount capacity currently used by VMs in all accounts. Intersight Workload Optimizer estimates the percentage if there are VMs in non-added accounts that use the discount (since the exact number of VMs is unknown).

– **Linked VMs** column

This column shows how many VMs in the account use the discount. Click the number to view the VMs.

A star symbol (*) after the number indicates that there are VMs from *non-added* accounts that also use the discount. Since you have not added those accounts, the exact number of VMs is unknown.

■ For discounts in *non-added* accounts:

Reservation ID	Subscription	Name	Product Name	Quantity	Location	Scope	Current Utilization	Est. Savings	Term	Exp. Date	Effective Cost	Linked VMs
	9224a	Standard_F1_f...	Standard_F1	1	azure-East US 2	Shared	0%	\$0.00/mo	1 Year	Aug 24, 2022	\$27.08/mo	0 VM
	9224a	Standard_F1s...	Standard_F1s	1	azure-East US 2	Shared	0%	\$0.00/mo	1 Year	Aug 24, 2022	\$27.08/mo	0 VM
	acbc8	Standard_D2a...	Standard_D2a_v4	2	azure-East US 2	acbc86dd-2dk	38%	\$21.25/mo	1 Year	Aug 24, 2022	\$83.50/mo	-

– **Account** column (for AWS) or **Subscription** column (for Azure)

This column shows a grayed-out, non-clickable name to indicate that you have not added the account as a target. Intersight Workload Optimizer is aware of this account and if the given discount is shared with other accounts because you have added a master or EA account.

– **Current Utilization** column

This column shows the percentage of discount capacity currently used by VMs in all accounts. Intersight Workload Optimizer estimates the percentage if there are VMs in non-added accounts that use the discount (since the exact number of VMs is unknown).

– **Linked VMs**

If the number under this column is 1 or more, the number indicates VMs from *added* accounts that use the discount. Click the number to view the VMs.

If the number is 0 (zero), then the discount is currently not used anywhere.

A hyphen symbol (-) indicates that there are VMs from other *non-added* accounts that also use the discount. Since you have not added those accounts, the exact number of VMs is unknown.

AWS Savings Plans

If you added targets that are AWS accounts with read-only access to the AWS Savings Plans API, Intersight Workload Optimizer uses this chart to present the Savings Plans that it discovered in your cloud environment and the instance types they use.

Savings Plan ID	Account	Type	Payment	Instance Family	Location	Commitment	Term	Start Date	Exp. Date
55555 ...	Prod	Compute	All Upfront	All	All	\$0.001/hr	1 Year	Dec 28, 2020	Dec 28, 2021
45555 ...	Prod	EC2	No Upfront	t3	aws-...	\$0.001/hr	3 Years	Dec 29, 2020	Dec 29, 2023

GCP Committed Use Discounts


Intersight Workload Optimizer discovers committed use discounts for your workloads when you add the following as targets:

- A service account with the "Billing Account Viewer" role to the related billing accounts
- Billing accounts

<input type="checkbox"/>	Name	Account	Status	Region	Type	Payment	Instance Family	Cores	Memory	Term	Start Date	End Date
<input type="checkbox"/>	commitment-1		Active	us-west4	Family Scoped	All upfront	N2	1	4 GB	3 Years	Oct 15, 2021	Oct 15, 2024
<input type="checkbox"/>	commitment-1		Active	eu-north1	Family Scoped	All upfront	N2	1	2 GB	1 Year	Oct 21, 2021	Oct 21, 2022
<input type="checkbox"/>	commitment-1		Active	northamerica-northe	Family Scoped	All upfront	N2D	N/A	2 GB	1 Year	Jan 27, 2022	Jan 27, 2023
<input type="checkbox"/>	commitment-2		Active	us-central1	Family Scoped	All upfront	E2	N/A	4 GB	1 Year	Oct 21, 2021	Oct 21, 2022

Discount Utilization Chart

This chart shows how well you have utilized your current discount [inventory \(on page 349\)](#). The desired goal is to maximize the utilization of your inventory and thus take full advantage of the discounted pricing offered by your cloud provider.

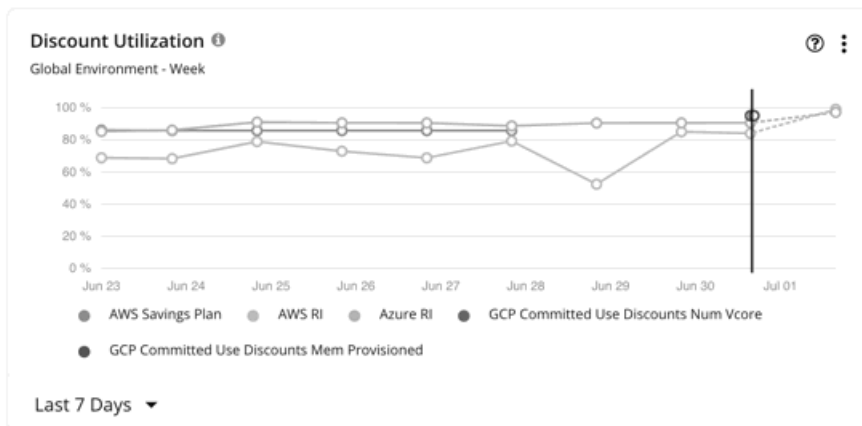

AWS RIs

You can set the scope to your global cloud environment or to individual accounts, billing families, or regions. Scoping to an account shows the RI utilization for the workloads for the entire billing family.

NOTE:

Under very rare circumstances, you can have RIs on payment plans that do not resolve to 1-year or 3-year terms. In this case, AWS does not return pricing data for those RIs. Intersight Workload Optimizer does not include such RIs in its calculations of RI utilization or RI cost.

The data point on the solid vertical line shows the latest data that was polled from your environment. Data points to the left of the vertical line represent historical data, while data points to the right are projections into the future.

Hover on a data point in the chart to see the following information:

- The date and time for the data point
- The percentage of utilization, based on normalization factors

[Normalization factor](#) is a measure of RI capacity that you can use to compare or combine the capacity for different instance families.

Intersight Workload Optimizer measures RI coverage in terms of normalization factors. It compares the number of RIs calculated as normalization factors that cover workload capacity with the total number of normalization factors for a given Intersight Workload Optimizer scope. Each workload is assigned normalized units depending on its instance type.

AWS Savings Plans

To view data for AWS Savings Plans, you must:

- Set the scope to your global environment.
- Choose a timeframe that shows daily or monthly data points (Last 7 Days, Last 30 Days, or Last Year)

AWS measures your Savings Plans commitment in \$/hour, but shows daily and monthly costs in Cost Explorer. Intersight Workload Optimizer polls Cost Explorer periodically to obtain the latest cost data, and then uses that data to calculate Savings Plans utilization or coverage *per day*. For this reason, you will not see Savings Plans data if you choose a timeframe that shows hourly data points (Last 2 Hours or Last 24 Hours).

NOTE:

AWS timestamps data in UTC, but the chart presents data in your local time. This difference could result in the appearance of a missing day in the chart, but has no effect on data completeness (the chart always reflects the complete data set).

The chart shows historical data, represented by data points to the left of the solid vertical line. Data for the current day is not available since the latest data that AWS provides is always a few days old. In addition, Intersight Workload Optimizer does not project coverage into the future.

Hover on a data point in the chart to see the following information:

- The date and time for the data point
- The percentage of utilization, based on the total utilized and committed costs per day

Azure Reservations

You can set the scope to your global cloud environment or to individual subscriptions, billing families, or regions. Scoping to a subscription shows the reservations utilization for workloads for the entire billing family or for single and shared subscriptions.

The data point on the solid vertical line shows the latest data that was polled from your environment. Data points to the left of the vertical line represent historical data, while data points to the right are projections into the future.

Hover on a data point in the chart to see the following information:

- The date and time for the data point
- The percentage of utilization, based on ratios.

[Ratio](#) refers to the number of Azure reservation units that cover workload capacity compared to the total number of reservation units for a given Intersight Workload Optimizer scope. Each workload is assigned reservation units based on its instance type.

GCP Committed Use Discounts

The chart displays the latest data that was polled from your environment, but does *not* show historical data or project utilization into the future.

Hover on a data point in the chart to see the following information:

- The date and time for the data point
- The percentage of utilization

Cloud Estimated Cost Charts

Cloud Estimated Cost charts show estimated monthly costs and investments for the cloud. Monthly cost amounts are summarized as amounts with and without actions.

Display

The chart shows the information as a Text chart.

Volume Summary Charts

To help you manage your costs on the public cloud, these charts show the distribution and costs of volumes for the given scope. In this way, you can see how volume utilization affects your costs. For these charts, Intersight Workload Optimizer calculates the costs based on the cost information from the cloud targets.

These charts show the following data:

- Tiers

The chart breaks down volumes by tier (disk type) and shows the volume count and monthly cost for each tier.

- Volume State

The chart breaks down volumes by attachment state (attached or unattached) and shows the volume count and monthly cost for each state. For unattached volumes, you can reduce your cloud cost by the given amount if you delete these volumes. Click **Show All** and then click the **Details** button for an unattached volume to execute a delete action.

NOTE:

For an Optimize Cloud plan, the Volume Tier Summary chart shows 'Current' and 'Optimized' results. The 'Current' result includes currently unattached volumes that you can delete to reduce costs, while the 'Optimized' result assumes that unattached volumes have been deleted. To see a list of unattached volumes, click **Show Changes** at the bottom of the chart. For details about Optimize Cloud plans, see [Optimize Cloud Plan Results \(on page 267\)](#).

For a detailed breakdown, click **Show All** at the bottom of the chart. If you have multiple cloud providers, each provider will have its own tab. Click any column heading to sort the list. When you choose one or more check boxes, the total appears at the top.

NOTE:

For Azure environments with VMs in Scale Sets, for any VMs that are powered off, the associated volume shows a utilization of zero GB. This is an accurate presentation of the data that the Azure environment returns for such a powered-off VM. However, it is likely that some of the volume capacity is currently utilized.

Chart Unit

If you are scoped to a particular cloud provider, you can sort tiers and volumes by clicking the Edit option at the top-right corner of the chart, and then choosing one of the following units:

- **Count** – Sort by volume count, from largest to smallest.
- **Cost** – Sort by monthly cost, from highest to lowest.

Monthly Savings or Investments Totals Charts

Monthly Savings or Investments Totals charts help you examine the monthly savings or investments for executed cloud actions. For example, if an executed action causes an increase in the price, this is an investment. These charts also show the missed monthly savings or missed performance investments that you could have achieved for recommended cloud actions, if you executed them.

For this chart's scope, you can choose an account or subscription, a group of accounts or subscriptions, or use the default, Global Environment. If you use the default Global Environment, the chart will automatically use all cloud accounts for its scope. Other examples of scope settings are: An AWS billing family, an Azure subscription, the All AWS Accounts predefined group, or the All Azure Accounts predefined group.

For all actions except Suspend, savings and investments are estimated based on the hourly cost of workload price differences and 730 hours per month of workload usage. Savings from Suspend actions are estimated based on the hourly cost of workload price differences and actual suspend times as defined in the suspension policy.

Missed savings and investments are estimated based on the hourly cost of workload price differences and the number of hours that recommended actions exist in the system.

Chart Type


You can set the display to:

- Stacked Bar Chart
- Tabular

Examples:

■ Stacked Bar

This chart shows the monthly totals of savings or investments for each of the last seven days. It also shows the missed monthly savings or performance investments that you could achieve by executing recommended cloud actions.

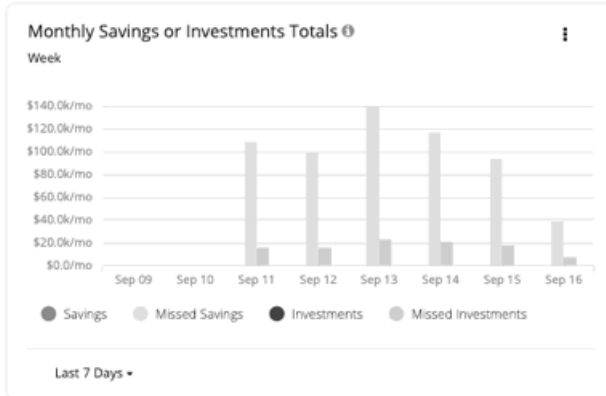

In the chart legend, you can also choose an item to change the display of the chart. Click the item again to reset the chart. For example, if you want to examine investment information, click **Investments** in the legend.

■ Tabular

This chart shows the monthly totals of savings or investments for each of the last seven days. It also shows the missed monthly savings or performance investments that you could achieve by executing recommended cloud actions.

Date	Savings	Missed Savings	Investments	Missed Investments
Sep 09	\$0/mo	\$0/mo	\$0/mo	\$0/mo
Sep 10	\$0/mo	\$0/mo	\$0/mo	\$0/mo
Sep 11	\$154.76/mo	\$107,763.11/mo	\$0/mo	\$15,778.08/mo
Sep 12	\$0/mo	\$98,511.93/mo	\$0/mo	\$15,766.58/mo

The table provides a detailed view of the data shown in the stacked bar chart. A legend at the top left of the table area allows switching between the four data series. A dropdown menu at the bottom left is set to 'Last 7 Days'.

On-Prem Chart Types

These chart widgets provide information on the status of your on-prem environment.

Density Charts

Density charts show the number of resource consumers (virtual machines or containers) per provider (host or storage). If available, choose the **Show Density** checkbox to see the ratio of consumers to providers.

These charts also show the desired count of virtual machines, assuming you want to fill the headroom completely. Note that the Desired Workloads values are the results of running plans. These plans can calculate workload moves within a cluster to gain more efficiency, but they always respect the cluster boundaries – the plans never move VMs to hosts on different clusters.

To display relevant data, you must set the scope to your global environment or a cluster group. Other scopes are not supported.

To display relevant data, you must set the scope to your global environment or a cluster group. Other scopes are not supported.

Chart Type

You can set the display to:

- Stacked Bar Chart
- Line Chart

Ports Charts

Ports charts show the most utilized northbound or southbound ports in your on-prem environment over a given time period. These charts are useful in Fabric environments where you license port channels.

Display

The chart shows the information as Tabular.

Headroom Charts

Headroom charts show how much extra capacity your clusters have to host workloads.

To calculate cluster capacity and headroom, Intersight Workload Optimizer runs nightly plans that take into account the conditions in your current environment. The plans use the Economic Scheduling Engine to identify the optimal workload distribution for your clusters. This can include moving your current VMs to other hosts within the given cluster, if such moves would result in a more desirable workload distribution. The result of the plan is a calculation of how many more VMs the cluster can support.

To calculate VM headroom, the plan simulates adding VMs to your cluster. The plan assumes a certain capacity for these VMs, based on a specific VM template. For this reason, the count of VMs given for the headroom is an approximation based on that VM template.

You can specify the following types of Headroom charts:

- CPU Headroom
- Memory Headroom
- Storage Headroom

Commodity


You can choose:

- CPU Headroom
- Memory Headroom
- Storage Headroom

Display

The chart shows the information as an Area chart.

Example:

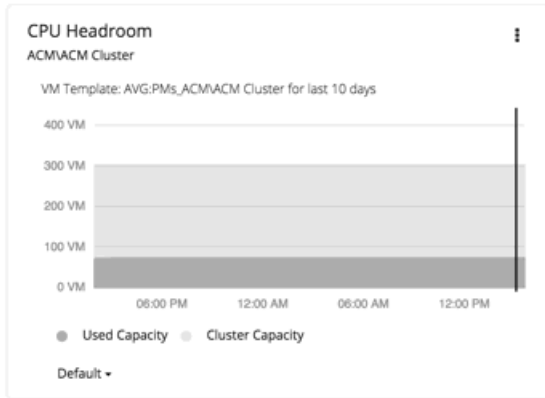

Exhaustion Time Chart

This chart shows the current growth of workloads and projects when workloads will exceed the capacity of your current infrastructure. This is useful for future planning (for example, if you might need to buy more hardware).

You can track CPU, memory, and storage as well as the average monthly Virtual Machine growth and the average VM template. The amount of time is presented as days. For example, storage will be used up in 41 days.

Display

The chart shows the information as a Text chart.



Creating Groups

Groups assemble collections of resources for Intersight Workload Optimizer to monitor and manage. When setting scope for your Intersight Workload Optimizer session, you can select groups to focus on those specific resources. For example, if you have a number of VMs devoted to a single customer, you can create a group of just those VMs. When running a planning scenario you can set the scope to work with just that group.

Intersight Workload Optimizer discovers groups that exist in your environment. These groups include PM clusters, and entities grouped by different logical boundaries. For example, Intersight Workload Optimizer discovers Storage by Disk Array, Physical Machines by Datacenter, and VMs by Network. In addition, Intersight Workload Optimizer discovers pools such as virtual datacenters, or folders that implement specific HA policies.

You can also create custom groups. Intersight Workload Optimizer supports two custom-grouping methods:

- **Dynamic** – You define these groups by specific criteria. You can group services according to naming conventions (all VM names that start with **ny**), resource characteristics (all physical machines with four CPUs), or other criteria such as time zone or number of CPUs.

These groups are dynamic because Intersight Workload Optimizer updates the group as conditions change.

- **Static** – You create these groups by selecting the specific group members.

NOTE:

You should never use the Intersight Workload Optimizer user interface to delete discovered groups. If you do, later analysis cycles will discover them again, and add them to your environment. But until it recreates those groups, any analysis that relies on those groups can give unexpected results.

You *can* delete any custom group you have created. Before you do, you should verify that you do not have any charts, plans, or policies that use the group you want to delete to set their scopes. After you delete the group, such charts, plans, or policies will lose their scope. For example, a policy with no scope has no effect.


To create a group:

1. Navigate to the Settings Page.

Click **More**, then display the Settings Page. From there, you can perform a variety of Intersight Workload Optimizer configuration tasks.

2. Choose **Groups**.

Click to navigate to the Group Management Page.

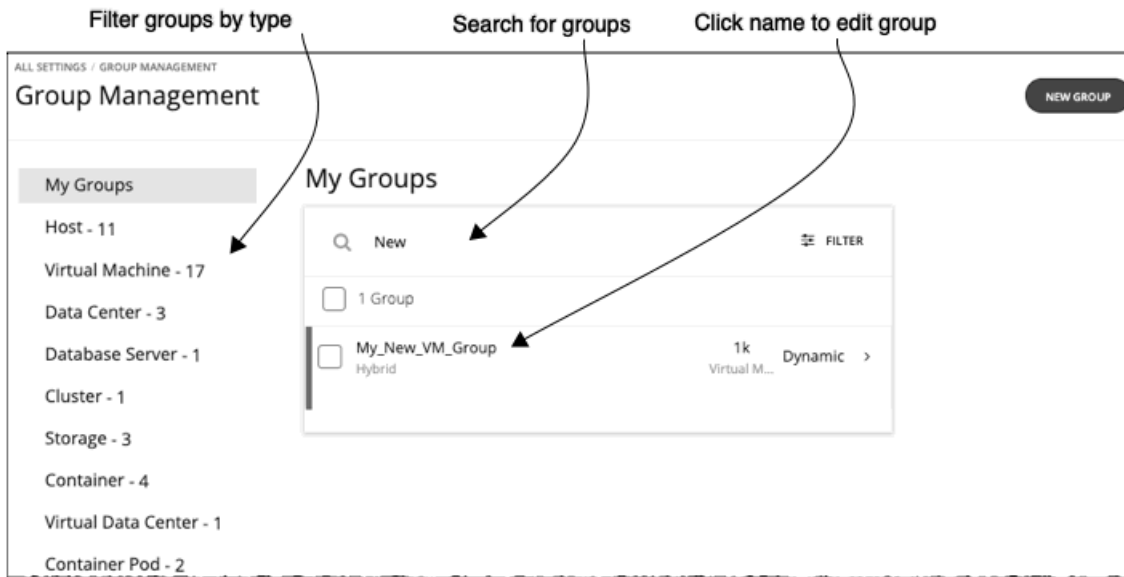

This page lists all the custom groups that you currently have configured for Intersight Workload Optimizer. You can:


- Expand an entry to see group details
- Select an entry to delete the group
- Click a group name to edit it

For a dynamic group, you can edit the set of criteria that select the group members. For a static group, you can add or subtract specific members.

- Create new groups

To work with a long list of groups, you can filter by group type. For example, only show groups of VMs, or groups of host machines. You can also type a string in the **Search** field to filter the list.


3. Expand an entry to see group details.

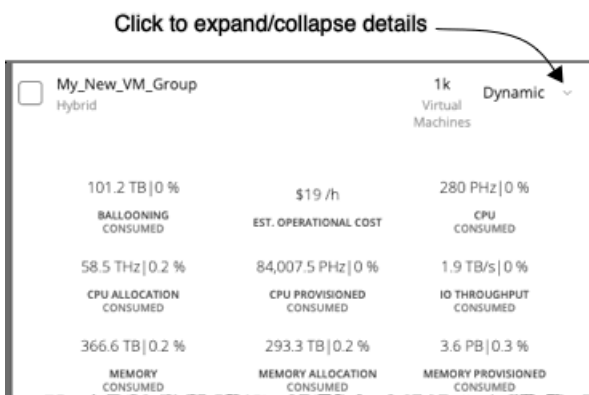

The details show you information about related entities such as how many hosts provide resources for a group of VMs. If there are any pending actions for the group, the details list those actions as well.

4. Create a new group.

Click **NEW GROUP**.

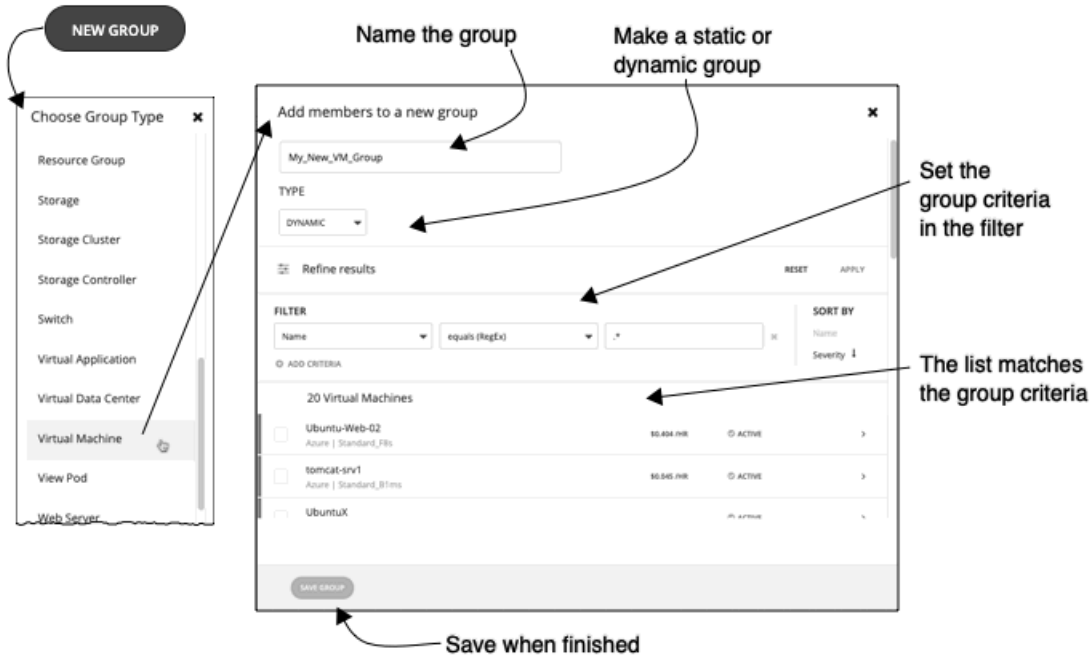

Next, choose a group type.

Then, specify the group settings:

- Give the group a unique name. To prevent issues, you should never use duplicate names for groups of the same entity type.
- Set whether the group will be static or dynamic.
 - To create a static group, select the member entities from the list. To filter the list, set group criteria.
 - To create a dynamic group, set group criteria. The list updates to show the resulting group members.
- Specify group criteria.

These criteria are entity attributes that determine group membership. You might create a group of all VMs that have 4 VCPUs. You can choose properties of the member entities, and you can choose properties of entities that are related to the members. For example, you can make a group of VMs that are hosted by PMs with the substring "Development" in their names.

As you set criteria, the list of entities updates to show the member entities. You also can sort the list by severity (per the most critical entity in group) or group name.

Note that you can use regular expression to express your match strings.
- When you are finished, save the group.

Save adds this group to the **My Groups** collection.




Working With Schedules

Intersight Workload Optimizer schedules specify a specific time range during which certain events can occur. Intersight Workload Optimizer currently uses schedules in scoped policies to set up windows of time when the policy can execute certain actions, or when the policy changes settings that affect analysis and action generation.

NOTE:

When you configure a schedule window for a VM resize action, to ensure Intersight Workload Optimizer will execute the action during the scheduled time, you must turn off the **Enforce Non Disruptive Mode** setting for that scheduled policy. Even if you turn the setting off for the global policy, you still must turn the setting off for your scheduled policy. Otherwise Intersight Workload Optimizer will not execute the resize action.

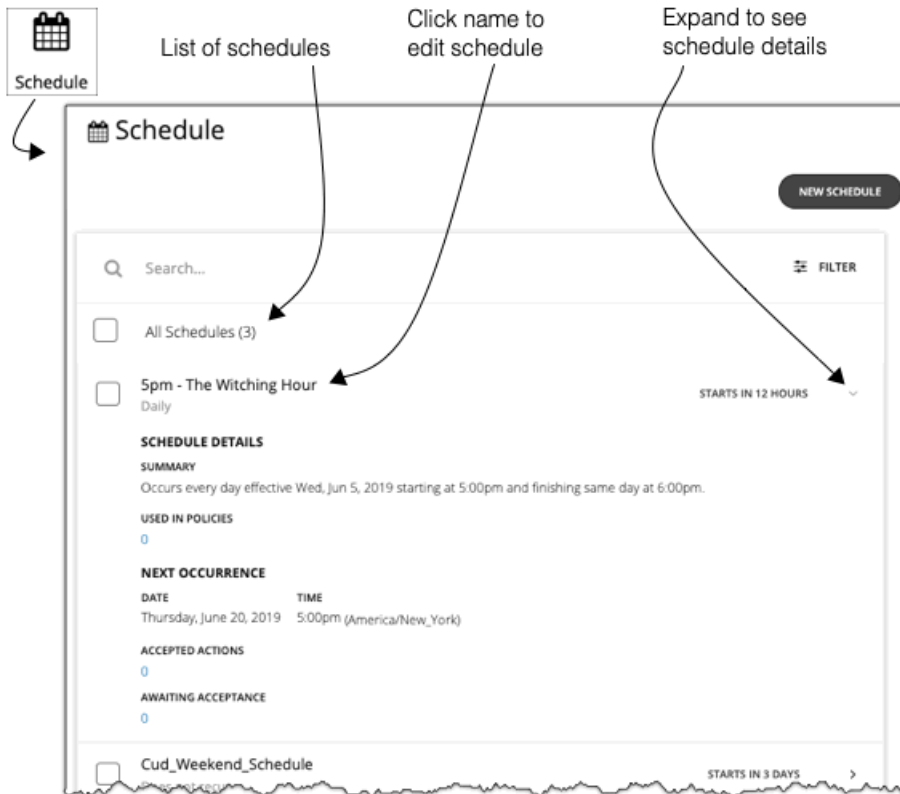

The Schedules page lists all the currently defined schedules. From this page you can:

- Select an entry to delete the schedule.
- Select an entry to defer the next occurrence.

Intersight Workload Optimizer calculates when the next scheduled window will open. If you want cancel the scheduled occurrence one time, you can select the schedule and defer the upcoming occurrence. This defers the schedule wherever it is applied. If the schedule is applied to more than one policy, this will defer all the policies that use this schedule. Before you defer a schedule, you should expand the details and review all the policies that use this schedule.

- Expand an entry to see schedule details

The details include a summary of the schedule definition, as well as:

- **Used in Policies**

The number of policies that use this schedule. Click the number to review the policies.

- **Next Occurrence**

When the schedule will next come into effect.

- **Accepted Actions**

How many scheduled actions have been accepted to be executed in the next schedule occurrence. Click the number for a list of these actions.

- **Awaiting Acceptance**

The number of Manual actions affected by this schedule that are in the Pending Actions list, and have not been accepted. Click the number for a list of these actions.

- Create new schedules

See [Creating Schedules \(on page 362\)](#).

Deleting Schedules

Before you delete a schedule, you should view its details to make sure no policies use it. If you delete a schedule that is in use by any policies, Intersight Workload Optimizer disables the affected policies until you edit them to either:

- Apply a different schedule to the policy and save the change, or...
- Save the policy with no schedule

Saving with no schedule confirms that you intend for this policy to apply at all times. Because scheduled policies are for special cases, this is usually not what you intend. For example, a scheduled maintenance window can have aggressive action modes that you do not want to enable during peak hours. If you save the policy with no schedule, then the aggressive settings will take effect at all times.

Intersight Workload Optimizer posts a confirmation dialog before deleting a schedule that is currently in use.

Creating Schedules

To create a new schedule:

1. Navigate to the Settings Page.

Click **More**, then display the Settings Page. From there, you can perform a variety of Intersight Workload Optimizer configuration tasks.

2. Choose Schedules.

Click to navigate to the Schedule Management Page.

This page lists all the schedules that you currently have configured for Intersight Workload Optimizer. You can edit the schedules in the list, or you can create new schedules.

3. Create a new schedule.

Click **New Schedule** to open the new schedule fly-out. Then name the schedule.

4. Set the recurrence for the schedule.

Choose whether the scheduled period occurs just once, or whether it repeats over time. The settings vary according to the recurrence you choose:

- Does Not Recur

This is a one-time schedule window. A non-recurring window has a start date, and no end date. The window starts on the day and time you specify, and remains open for the given duration.

- Daily

Repeat this schedule every given number of days. For example, repeating 30 days is similar to repeating monthly, except it repeats by the count of days, not by the calendar month.

The schedule begins on the **Start Date**, and continues repeating until the **End Date**. If **End Date** is "None", the schedule repeats perpetually.

■ Weekly

RECURRENCE
Weekly

REPEAT EVERY 1 weeks ON Mo Tu Wd Th Fr Sa Su

START DATE Wed Jun 19 2019 END DATE None

Repeat this schedule every given number of weeks, on the week days you specify. For example, to repeat every weekend, set it to repeat every one week on Saturday and Sunday.

The schedule begins on the **Start Date**, and continues repeating until the **End Date**. If **End Date** is "None", the schedule repeats perpetually.

■ Monthly

RECURRENCE
Monthly

REPEAT EVERY 1 months ON First Saturday

START DATE Wed Jun 19 2019 END DATE None

Repeat this schedule every given number of months, to begin on a given day in the month. For example, you can schedule a maintenance window to begin on the first Saturday of each month.

The schedule begins on the **Start Date**, and continues repeating until the **End Date**. If **End Date** is "None", the schedule repeats perpetually.

5. Set the Start Time and Duration.

These settings specify how long the scheduled window remains open. You set the duration in terms of hours and minutes. Using a duration instead of an end time removes ambiguities such as starting before midnight and ending after. However, you should make sure the duration is not longer than the recurrence.


6. Set the time zone.

This gives a reference for the schedule's start time. The Intersight Workload Optimizer server uses that reference when it opens and closes the schedule window. Users see the same time zone setting no matter where they are located - They should convert the schedule time to their local time if they want to track when the schedule opens in their working day.

7. When the settings are complete, save the schedule.



Templates: Resource Allocations for New Entities

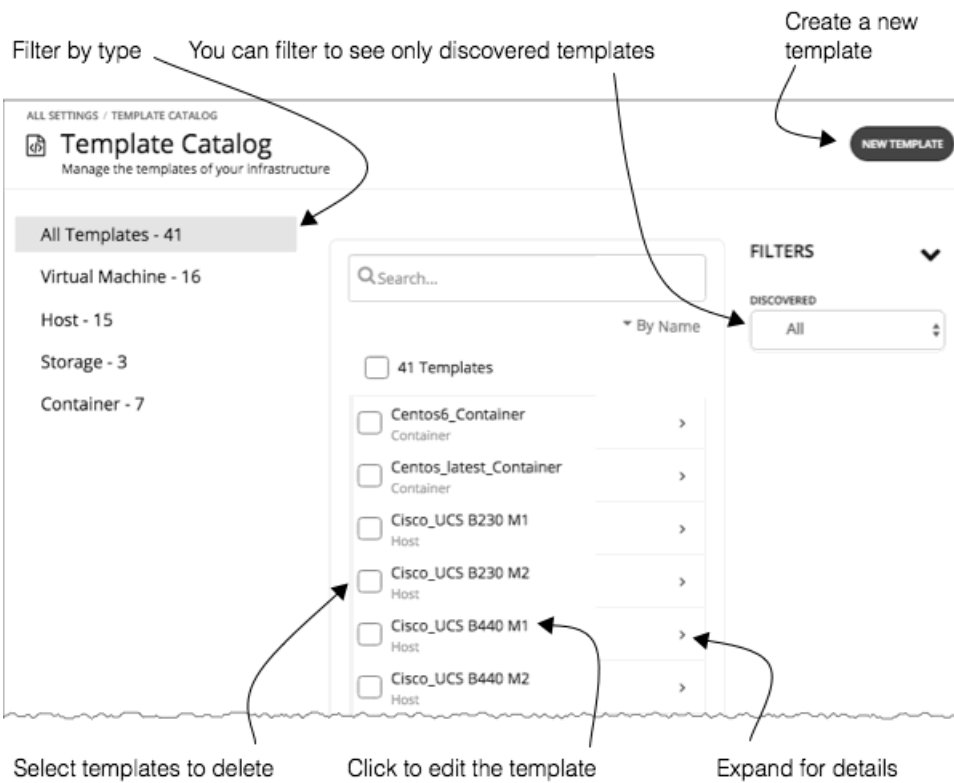

Intersight Workload Optimizer uses templates to describe new entities that it will deploy in your environment or in plans. The templates specify resource allocations for these entities. For example, you can run a plan that adds new VMs to a cluster. If you add ten copies of a template, then the plan places ten new VMs that match the resource allocation you have specified for the given template. For your cloud environment, you can see templates to match the instance types in your cloud accounts and subscriptions.

A VM template definition can include one or more images that Intersight Workload Optimizer uses to deploy the VM in your environment. The image identifies the actual deployment package, including a path to the physical files (for example an OVA).

The Template Catalog shows all of the templates that have been specified or discovered for your installation of Intersight Workload Optimizer. From this page, you can also create new templates and edit existing ones.

Creating Templates

Templates specify the resources for entities that Intersight Workload Optimizer can deploy in your environment, or in plans.

A VM template definition can include one or more images that Intersight Workload Optimizer uses to deploy the VM in your environment. The image identifies the actual deployment package, including a path to the physical files (for example an OVA).

The Template Catalog shows all of the templates that have been specified or discovered for your installation of Intersight Workload Optimizer. From this page, you can also create new templates and edit existing ones.


Creating and Editing Templates

To create a new template, navigate to the Template Catalog and click **NEW TEMPLATE**. To edit a template, click the template's name. When you create a new template, the first step is to choose the entity type.

1. Navigate to the Settings Page.
Click **More** and then display the Settings Page.
2. Choose Templates.



3. Create or edit a template
To create a new template, navigate to the Template Catalog and click **NEW TEMPLATE**. To edit a template, click the template's name.
4. If you're creating a new template, choose the entity type.

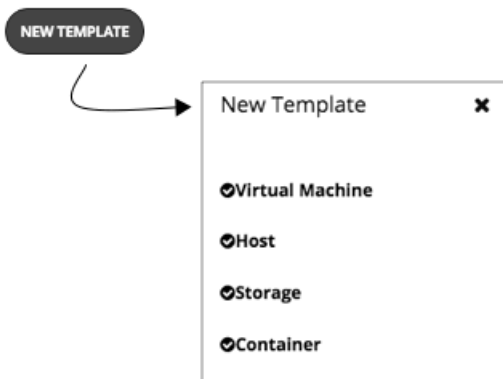

5. Make the settings for your template.
For each type of template, you set allocations for different resources. You can make templates of the following types:
 - Virtual Machine
 - Host
 - Storage
 - Container
6. Make the settings for your template, and then save your changes.
When the template window opens, it displays the most common resource settings. You can expand the settings to see the full collection for that template type.
7. Save your changes.
After you have made your settings and named the template, click **CREATE** or **SAVE**.

VM Template Settings

A VM template describes the resource allocation that you want to provide for a type of VMs. When Intersight Workload Optimizer deploys the associated VM to your environment or in a plan, it uses these values to determine the size of the VM. Intersight Workload Optimizer uses the Size settings to calculate the best placement for a VM of this type.

A VM template can optionally include an image description. When Intersight Workload Optimizer uses the template to deploy a VM to your environment, it uses the image to access the actual bits that install as the VM instance.

NOTE:

Intersight Workload Optimizer generates a special template called *headroomVM*, which it uses to calculate cluster headroom. The Template Catalog shows the template as editable, but you should not edit it because Intersight Workload Optimizer will overwrite your changes the next time it generates the template.

VM Size

■ CPU

The virtual CPUs assigned to the VM. Specify the number of **Cores** and the **VCPU** clock speed – Intersight Workload Optimizer multiplies these values to calculate the host CPU resources it will allocate when placing the VM.

The **Utilization** value sets the percentage of allocated CPU that the placed VM will consume. To ensure the host has left over resources for infrastructure tasks, you should assign less than 100%.

■ Memory

The amount of memory to allocate for the VM, in MB.

The **Utilization** value sets the percentage of allocated memory that the placed VM will consume. To ensure the host has left over resources for infrastructure tasks, you should assign less than 100%.

Note that you should never allocate less memory than is required for the VM's guest OS.

■ Storage

The storage resources to allocate for this VM.

- **disk/rdm** – If you choose **rdm**, then the VM can use VMware Raw Device Mapping for its storage.
- **IOPS** – The capacity for IO operations you give the VM for this datastore.
- **Size** – The amount of storage capacity, in GB.

The **Utilization** value sets the percentage of allocated memory that the placed VM will consume. To ensure the storage has left over resources for infrastructure tasks, you should assign less than 100%.

Note that you can allocate multiple datastores to the VM.

■ Network

The amount of the host's network throughput to assign to the VM, in Mb/s.

■ IO

The amount of throughput on the host's IO bus to assign to the VM, in Mb/s

Host Template Settings

Host templates describe models of physical hosts that you can deploy in the on-prem datacenter. As part of capacity planning, you might want to see how to replace your current hosts with different models. To do that, you create templates to represent the hosts you want, and then use those templates when running hardware replacement plans.

The host template is a collection of these settings:

■ CPU

The processor for this host model. Note that CPU size and speed are not the only factors to determine processing power. To address this, you can specify the host CPU in the following ways:

- Select from Catalog



When you enable **Select from Catalog**, you can open up a catalog of CPU models that Intersight Workload Optimizer uses to map the model to an effective capacity for the CPU.

- Cores and CPU Speed



When you disable **Select from Catalog**, you can specify the number of **Cores** and the **CPU** clock speed – Intersight Workload Optimizer multiplies these values to calculate the host CPU resources.

- **Memory**
The amount of memory to allocate for the VM, in MB.
- **Network**
The host’s network throughput, in MB/s.
- **IO**
The host’s IO bus throughput, in MB/s
- **Price**
If you know the price of the host model that you're specifying for the template, you can enter it here. When running a plan, Intersight Workload Optimizer can use the price to calculate costs or savings when adding or removing host machines in an on-prem datacenter.

Selecting CPUs from the Catalog


CPU processor speed is not necessarily an effective indicator of CPU capacity. For example, processor architecture can make a slower CPU have a greater effective capacity. Newer models of machines can often have fewer cores or less clock speed, but still have a higher effective capacity. This can affect planning in two ways:

- When planning hardware replacement, the plan knows the template's effective capacity. This means the plan knows how to best place workloads on the new hardware.
- For already deployed hosts, Intersight Workload Optimizer discovers the effective capacity and uses that information when calculating workload placement.

To build the catalog of CPU capacity, Intersight Workload Optimizer uses benchmark data from spec.org. When you set up the CPU for a host template, you can search this catalog for the processor you want, and set it to the template.

NOTE:

Intersight Workload Optimizer also uses the effective processor capacity when calculating workload placement in real-time. For more information, see [Effective CPU Capacity \(on page 45\)](#).

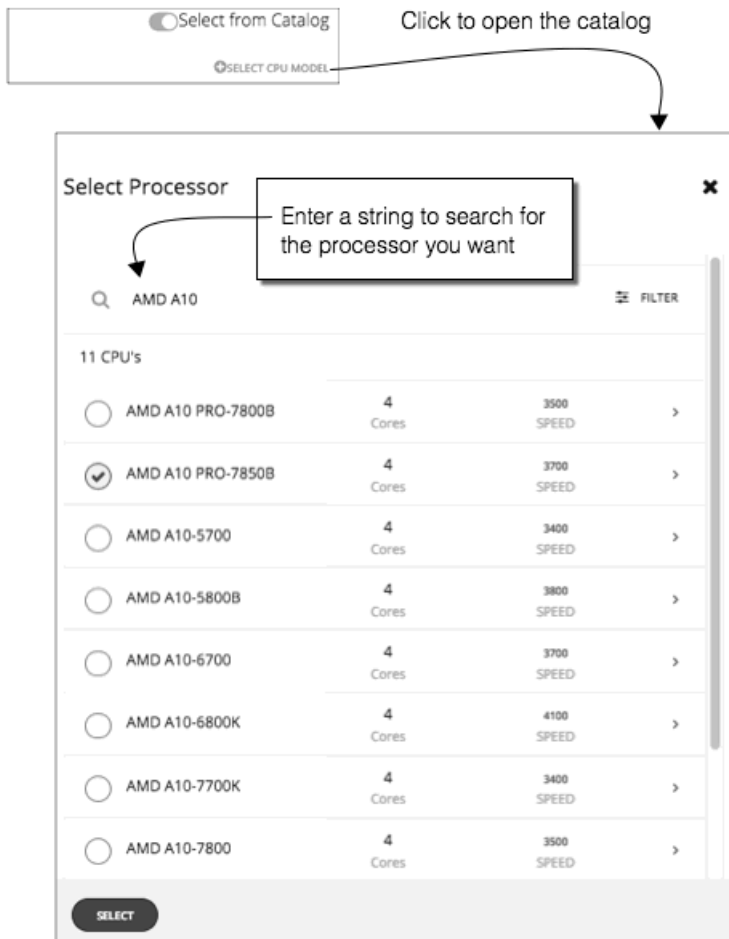

HCI Host Template Settings

HCI host templates describe models of physical hosts that support participation in a vSAN. Along with the host compute specifications, you also include specifications for storage capacity and redundancy (RAID level and failover). You can use these templates to plan for changes to your vSAN capacity.

NOTE:

For Hyper-V environments, if you run a Hardware Replace plan that replaces hosts with HCI Host templates, the results can be inconsistent or the plan can fail to place all the VMs in the plan scope. This typically occurs when Intersight Workload Optimizer detects a configuration issue with VMM or Hyper-V. As a result, Intersight Workload Optimizer treats the VMs as not controllable and will not attempt to place them.

The HCI Host template is a collection of these settings:

- CPU

The processor for this host model. Note that CPU size and speed are not the only factors to determine processing power. To address this, you can specify the host CPU in the following ways:

- Select from Catalog



When you enable **Select from Catalog**, you can open up a catalog of CPU models that Intersight Workload Optimizer uses to map the model to an effective capacity for the CPU.

- Cores and CPU Speed



When you disable **Select from Catalog**, you can specify the number of **Cores** and the **CPU** clock speed – Intersight Workload Optimizer multiplies these values to calculate the host CPU resources.

- Memory

The amount of memory to allocate for the VM, in MB.

- Network

The host’s network throughput, in MB/s.

- IO

The host’s IO bus throughput, in MB/s

- Storage

The capacity for this storage.

- **IOPS** – The effective IOPS capacity.
- **Size** – Raw storage capacity, in GB. A plan that uses this template will compute the effective storage capacity.

- Redundancy

The redundancy method for this storage on the virtualized SAN. This combines the RAID level and the number of host failures to tolerate.

- Price

If you know the price of the host model that you're specifying for the template, you can enter it here. When running a plan, Intersight Workload Optimizer can use the price to calculate costs or savings when adding or removing host machines in an on-prem datacenter.

Selecting CPUs from the Catalog


CPU processor speed is not necessarily an effective indicator of CPU capacity. For example, processor architecture can make a slower CPU have a greater effective capacity. Newer models of machines can often have fewer cores or less clock speed, but still have a higher effective capacity. This can affect planning in two ways:

- When planning hardware replacement, the plan knows the template’s effective capacity. This means the plan knows how to best place workloads on the new hardware.
- For already deployed hosts, Intersight Workload Optimizer discovers the effective capacity and uses that information when calculating workload placement.

To build the catalog of CPU capacity, Intersight Workload Optimizer uses benchmark data from spec.org. When you set up the CPU for a host template, you can search this catalog for the processor you want, and set it to the template.

NOTE:

Intersight Workload Optimizer also uses the effective processor capacity when calculating workload placement in real-time. For more information, see [Effective CPU Capacity \(on page 45\)](#).

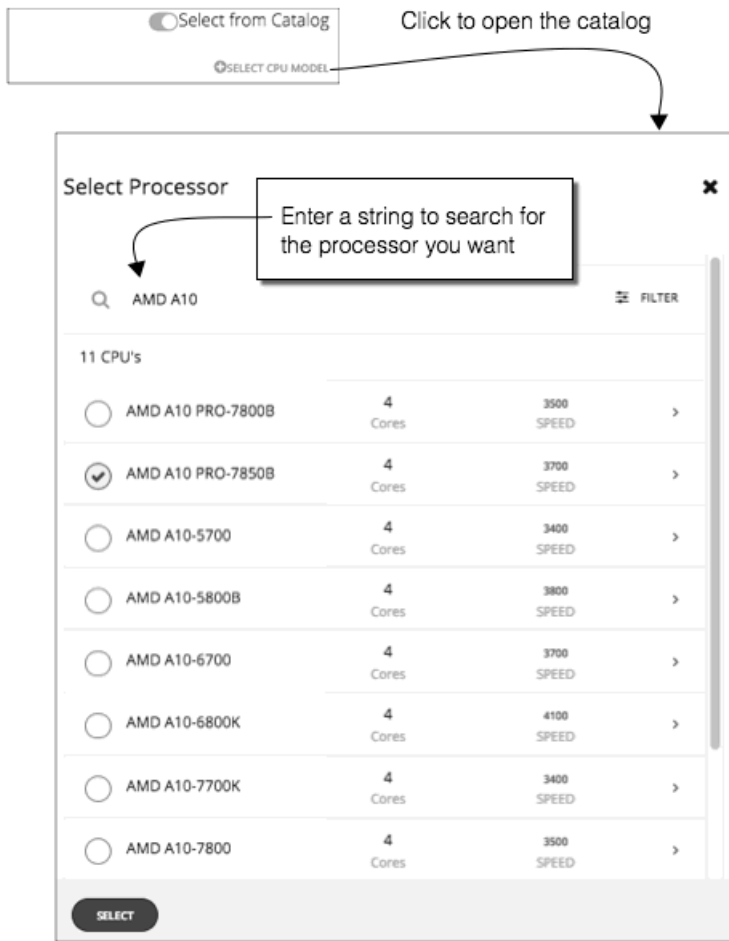

Storage Template Settings

Storage templates describe models of storage that you can deploy in the on-prem datacenter. As part of capacity planning, you might want to see how to replace your current storage with different models. To do that, you create templates to represent the storage you want, and then use those templates when running hardware replacement plans.

The storage template is a collection of these settings:

- Storage

The capacity for this storage.

- **IOPS** – The capacity for IO operations on this storage.
- **Size** – The amount of storage capacity, in GB.

- Price

If you know the price of the storage model that you're specifying for the template, you can enter it here. When running a plan, Intersight Workload Optimizer can use the price to calculate costs or savings when adding or removing storage in an on-prem datacenter.



Billing and Costs

As you work with Intersight Workload Optimizer, you can set up costs that Intersight Workload Optimizer uses in its calculations. This setup includes:

- Reserved Instance Settings

To recommend placing workloads on instance types that take advantage of discounted pricing, Intersight Workload Optimizer uses the real pricing plans that are available to the targets public cloud accounts. Setting up a purchase profile adds even more detail to the pricing structure that Intersight Workload Optimizer uses in its calculations.

- Price Adjustment

Cloud service providers can offer their own price lists, including special costs for services or discounts for workloads. However, Intersight Workload Optimizer does not discover these adjustments. For example, to reflect any discounted prices in the Intersight Workload Optimizer display and in Intersight Workload Optimizer analysis, you must manually configure those discounts. In Intersight Workload Optimizer, you configure such discounts via **Price Adjustments** for specific billing groups in your cloud environment.

- Currency

By default, Intersight Workload Optimizer uses the dollar symbol (\$) when displaying the costs and savings that it discovers or calculates for your cloud workloads. You can set a different symbol to match your preferred currency. For example, if your cloud provider bills you in euros, change the currency symbol to €.

Reserved Instance Settings

AWS PROFILE

OFFERING CLASS

Standard Convertible

TERM

1 Year 3 Year

PAYMENT

All Upfront Partial Upfront No Upfront

AZURE PROFILE

TERM

1 Year 3 Year

To recommend placing workloads on instance types that take advantage of discounted pricing, Intersight Workload Optimizer uses the real pricing plans that are available to the targets public cloud accounts. Setting up a purchase profile adds even more detail to the pricing structure that Intersight Workload Optimizer uses in its calculations.

A purchase profile determines the costs that Intersight Workload Optimizer will use for all discount purchase decisions in your environment. As it sees opportunities to move workloads to another term, Intersight Workload Optimizer determines the costs based on the profile, and includes cost information in action descriptions. Intersight Workload Optimizer also uses this information to calculate projected changes in costs.

Note that the settings you configure apply to your global public cloud environment.

To set up a profile, navigate to **Settings > Billing and Costs**, and display the **RESERVED INSTANCE SETTINGS** tab. Then make the settings for your purchase profile:

- **Offering Class**
For AWS environments, choose the offering class that corresponds to the RI types that you typically use in your environment.
- **Term**
For AWS and Azure environments, choose the payment terms you contract for your discounts. TERM can be one of **1 Year** or **3 Year**. Typically, longer term payment plans cost less per year.
- **Payment**
The payment option that you prefer for your AWS RIs:
 - All Upfront – You make full payment at the start of the RI term.
 - Partial Upfront – You make a portion of the payment at the start of the term, with the remain cost paid at an hourly rate.
 - No Upfront – You pay for the RIs at an hourly rate, for the duration of the term.

When you are satisfied with your RI Purchase Profile settings, click **APPLY SETTINGS**. Or to reset the form, click **RESET DEFAULTS**.

Price Adjustments

Cloud service providers can offer their own price lists, including special costs for services or discounts for workloads. However, Intersight Workload Optimizer does not discover these adjustments. For example, to reflect any discounted prices in the Intersight Workload Optimizer display and in Intersight Workload Optimizer analysis, you must manually configure those

discounts. In Intersight Workload Optimizer, you configure such discounts via **Price Adjustments** for specific billing groups in your cloud environment.

Intersight Workload Optimizer applies these price adjustments to:

- Costs for workload template families, including:
 - Compute
 - Discount Compute
- Costs for services, including:
 - Bandwidth
 - VM Licenses
 - AWS CloudWatch
 - AWS DynamoDB
 - And others

Note that in AWS environments, Intersight Workload Optimizer does not apply any discounts or other price adjustments to Spot Compute costs.

The general steps to configure a price adjustment are:

- Create the price adjustment:
 - Specify the adjustment scope
To do this, you choose which cloud service provider is giving you the adjustment, and then choose a billing group to set the scope of the adjustment.
 - Choose the Type
The price adjustment can be a Discount or an Increase. In most cases you will specify discounts for the price adjustment. While this sets the type for the overall adjustment, you can override the type for specific line items.
 - Specify a Price Adjustment setting
The Price Adjustment is the overall adjustment that your cloud service provider offers for the billing groups in your current scope. For example, AWS might offer you a 10% discount for a given account. For that billing group, you would specify a 10% Discount for the Price Adjustment setting.
- Specify Price Overrides (AWS only)
While your service provider might offer a general price adjustment for the billing group you chose, it might also offer further discounts for select services or template families. Or it might offer discounts for some template families, but price increases for some other services. You can configure these differences as Price Overrides.

NOTE:

Intersight Workload Optimizer uses the adjustments that you configure to display costs in the user interface. However, the values for hourly cost per entity, total hourly cost, total monthly cost, or total yearly cost can show inaccuracies on the order of a fraction of a percent. This is due to rounding when calculating the adjusted cost per entity.

Creating a Price Adjustment

A price adjustment configures adjusted workload pricing that you have negotiated with your Cloud Provider. After you configure an adjustment, Intersight Workload Optimizer applies it to pricing in the affected cloud scope.

To create a price adjustment in Intersight Workload Optimizer, you identify the adjustment's scope – the subscriptions or billing families the adjustment applies to – and then set the type and percentage for the price adjustment. This specifies an overall adjustment for the workloads that fall within the billing group. For AWS, you can later drill into the adjustment to specify overrides for specific template families or services.

Notes:

- To use a price adjustment with a given billing group, you must increase the memory allocated to the VM that hosts your Intersight Workload Optimizer instance. The *Intersight Workload Optimizer Installation Guide* recommends that you provide

a minimum of 16 GB when you install the product. To use price adjustments, Cisco recommends that you increase the allocated memory as follows:

- For the first price adjustment assigned to one or more billing groups, increase by 4 GB.
- For each subsequent price adjustment assigned to one or more billing groups, increase by an additional 1 GB.
- Whenever you add, edit, or remove a Price Adjustment that is in use, you must allow sufficient time for Intersight Workload Optimizer to fully discover all of the affected environment, and to propagate the changes throughout that environment. In an average environment, this can take up to 30 minutes. As an alternative, you can manually execute rediscovery for the affected cloud subscription or account.

To create a price adjustment:

1. Navigate to the Settings Page.

Click **More**, then display the Settings Page. From there, you can perform a variety of configuration tasks.

2. Choose Billing and Costs.

Click to navigate to the Billing and Costs page.

3. Display the PRICE ADJUSTMENT tab.

Click the **PRICE ADJUSTMENT** tab to see all of the adjustments that have been configured for your environment. In this list you can:

- Click an entry to see details and edit the adjustment
- Select an entry to delete the adjustment
- Create new price adjustments

4. Create the price adjustment.

First click **NEW PRICE ADJUSTMENT**, then specify the following settings to configure a price adjustment:

- Give the adjustment a name.
- To set the scope for this adjustment, choose its Billing Groups.

Click in the **BILLING GROUPS** field to display the Billing Groups fly-out.

In the Billing Groups fly-out, choose the cloud service provider you want to work with and then choose the billing group for the scope of this adjustment.

A Billing Group is a set of cloud service provider accounts that are consolidated into a single billing schedule. Billing group details depend on your service provider:

- AWS: To consolidate billing, AWS supports billing families of AWS accounts, where there is a *master* account and other *member* accounts. Intersight Workload Optimizer lists each billing family as a billing group. You can choose a billing family to set the scope of this adjustment.

After you have chosen your billing group, click **SAVE** to return to the Add New Price Adjustment fly-out.

- Set the Type for this price adjustment – Choose either **Discount** or **Increase**.
- Specify a percentage of adjustment as the Price Adjustment.

Enter the percentage in the **PRICE ADJUSTMENT** field. The acceptable value depends on the type of adjustment:

- For a discount: 0 - 99.99%
- For an increase: 0 - 999.99%

This is the general percentage of adjustment (increase or discount) for the current scope. For any costs within the adjustment scope, Intersight Workload Optimizer will apply this percentage as it calculates the optimal workload capacity and placement.

NOTE:

If you set an overall adjustment of 0%, then Intersight Workload Optimizer enforces a Type setting of Discount. The end result is the same, because an increase or a discount of 0% is the same.

5. (AWS only) Specify any price overrides for this price adjustment.

The PRICE ADJUSTMENT percentage you just specified applies as a default in the adjustment scope. However, you might have negotiated different prices for specific services or template families in your cloud environment. To configure these special prices, click **PRICE OVERRIDES** to open the Cloud Cost Adjustment fly-out.

For details, see [AWS Price Override \(on page 376\)](#).

6. Save your work.

After you have configured the price adjustment, click **SAVE**.

AWS Price Override

Cloud Cost Adjustment [AWS] - My AWS Discount							
SERVICES	TYPE	PRICE ADJUSTMENT %	OVERRIDE %	ORIGINAL RATE (LINUX)	EFFECTIVE ADJUSTMENT %	ADJUSTED RATE (LINUX)	
AWS CloudTrail	Discount	10 %	%	—	10 %	—	
AWS CloudWatch	Discount	10 %	%	—	10 %	—	
AWS Developer Sup...	Discount	10 %	%	—	10 %	—	
AWS DynamoDB	Discount	10 %	%	—	10 %	—	
^ AWS EC2 Compute *	Discount	10 %	%	—	10 %	—	
^ c5d *				—		—	
v c5d.9xlarge...*	Discount	10 %	15 %	—	15 %	—	
v c5d.18xlarge...	Discount	10 %	%	—	10 %	—	

To override the PRICE ADJUSTMENT setting for AWS billing groups, Intersight Workload Optimizer analysis can use settings for different services that AWS provides to your accounts.

In AWS, you can set up a billing family that includes a *master* account and a given set of *member* accounts. Intersight Workload Optimizer treats the AWS billing family as a Billing Group. For more information about billing families and accounts, see [AWS Billing Families \(on page 378\)](#).

Assume you have configured a price adjustment with a discount of 10% for a billing family, to match the overall discount that AWS offers you for that scope. But then assume the account includes extra discounts for some of the services your billing families provide. Then you can create overrides to add the extra discounts to those services.

Intersight Workload Optimizer uses the adjusted costs in its analysis as it calculates actions. For example, assume a price adjustment of 10% for a billing group, and a discount of 20% for the M4.Large family of templates. As Intersight Workload Optimizer places a workload, it will consider both the template capacity and the template cost. Even if an M4 template is larger than the workload actually needs, the M4 template could be less expensive because of the added discount. In that case, Intersight Workload Optimizer will place the workload on the less expensive template.

NOTE:

The Cloud Cost Adjustment table lists the services that are available to you for the AWS billing family that you have set up as the discount scope. The services this table displays depend on whether the billing family uses the given service, and whether there is any recorded cost at the time that you display the table. For this reason, under some circumstances you might see different services listed in the table.

Under all circumstances, the table lists the services, AWS EC2 Compute, AWS EC2 Reserved Instance, and AWS RDS.

Also, for the Cloud Cost Adjustment table to display CSP Cost and Effective Cost, you must have created a Cost and Usage report in AWS, and you must store it in an S3 bucket.

In the Cloud Cost Adjustment table, you can perform the following:

- Override the price adjustment for a service or template family.

To add an override, choose the line item for a service, or expand the row for a template family and:

- Set the Type. Double-click and then choose **Discount** or **Increase**. Press **Enter** to confirm your setting.
- Specify the percentage for this override, and then press **Enter** to confirm your override. The value you enter here is an absolute value for the discount or increase Intersight Workload Optimizer will apply for this line item.

When you're done setting these overrides, click **Save**.

- To remove all overrides and revert back to the PRICE ADJUSTMENT Discount, click **CLEAR ALL OVERRIDES**.

- To download a report of the discounts for each service, click **DOWNLOAD** and choose CSV or PDF.

The table lists the following information about your discounts:

- **SERVICES**

The different cloud services to which you can set an override discount. To see individual workload templates:

- For Azure, expand **Virtual Machines**
- For AWS, expand **AWS EC2 Compute** or **EC2 Reserved Instance**

- **TYPE**

Whether this price adjustment will be an increase or a discount. By default, this field shows the setting that you have made for the Price Adjustment. However, you can change it as an override for an individual entry.

- **PRICE ADJUSTMENT %**

The percentage that you have specified for the Price Adjustment setting. This is the general adjustment that Intersight Workload Optimizer applies by default to the given service.

- **OVERRIDE %**

If you have entered a value, this is the price adjustment Intersight Workload Optimizer applies to the given service.

- **ORIGINAL RATE (LINUX)**

The Cloud Service Provider's cost for VM templates, per hour. To see these costs, expand the workload services to show specific templates. The cost assumes no charge for the OS license, as though the VM runs Linux.

- **EFFECTIVE ADJUSTMENT %**

The actual adjustment for the given service.

- **ADJUSTED RATE (LINUX)**

The discounted cost for VM templates, per hour. To see these costs, expand **Virtual Machines** to show specific templates. The cost assumes no charge for the OS license, as though the VM runs Linux.

AWS Billing Families



As you configure AWS targets, Intersight Workload Optimizer discovers AWS accounts that are consolidated into *billing families*. A billing family has one *master* account, and zero or more *member* accounts. By recognizing billing families, Intersight Workload Optimizer more accurately calculates cloud investments and savings, and makes more accurate recommendations for RI coverage.

In the Targets user interface, master accounts appear in bold, with a star next to them. You can expand the account entry to see the related member accounts. If you expand the entry for a member account, then the related accounts includes the family master, indicated by a star.

For RI purchases, different accounts in a billing family can share the same RI resources. At the same time, accounts in other billing families cannot use those RIs. This adds flexibility to your RI coverage, while maintaining order over the billing.

In Intersight Workload Optimizer, if you enable Billing Family Recognition, then you can see the billing family master and member accounts in the Targets user interface, and Intersight Workload Optimizer can recommend proper RI purchases within the correct billing families.

To enable Billing Family Recognition, ensure the following as you configure your AWS targets:

- Use the proper role for each AWS target
 - To properly discover billing family information for a target, you must give Intersight Workload Optimizer credentials for an AWS role that includes the permission, `organizations:DescribeOrganization`. With that permission, Intersight Workload Optimizer can:
 - Discover master accounts and member accounts in different billing families
 - Display the account names in the user interface
 - Discover billing information for each family and account
 - Recommend RI actions that respect billing family boundaries
- Configure targets for the complete billing family
 - One billing family can consolidate a number of AWS accounts. For Intersight Workload Optimizer to include these accounts in its analysis, you must configure each one as a separate target. If you do not configure all the accounts in a billing family,

then Intersight Workload Optimizer cannot discover complete billing information for that family, and its analysis will be based on incomplete information.

Intersight Workload Optimizer displays member accounts that have been configured as targets in regular text. For members that Intersight Workload Optimizer discovers but have not been configured as targets, Intersight Workload Optimizer displays their names in grayed text.

If you have enabled Billing Family Recognition, you should keep the following points in mind:

- Billing families can grow

Intersight Workload Optimizer regularly checks the membership of your billing families. If it discovers a new member account, it adds that account to the list of members. If you have already configured the account as a target, then Intersight Workload Optimizer includes the new member in its analysis of billing families. If the new member is not already a target, then Intersight Workload Optimizer lists the new member in grayed text.

- You can configure discounts per billing family

Intersight Workload Optimizer includes a feature to set a discount for a billing group, and to override that discount for specific template families within that scope. For more information, see [Cloud Discounts \(on page 373\)](#) and [Discount Override: AWS \(on page 376\)](#).

- You might see master accounts that have no member accounts

AWS treats every account you create as a part of a billing family. Assume you created an account, but you had no reason to consolidate its billing with any other accounts. In that case, the account appears in the Intersight Workload Optimizer user interface as a master account, but it has no member accounts.

Azure Enterprise Agreements

The screenshot displays the Intersight Workload Optimizer interface for an Azure Enterprise Agreement (EA). It shows a list of 13 targets, with 'Azure-EA' selected. Below this, the EA enrollment number (11111111) and related subscriptions are listed. The subscriptions include 'EA - Prod', 'EA - Test', and a standalone 'EA Test' subscription. The interface also shows the 'core.windows.net' Azure Service Principal target, which is linked to the EA. The EA is validated on Jan 28, 2021.

1) Enterprise Agreement (EA) target

2) EA - Prod is one of the subscriptions in this EA.

3) The Service Principal target (core.windows.net in this example) discovers the underlying subscriptions.

4) Some subscriptions (such as EA - Prod) participate in the EA.

5) Other subscriptions (such as EA Test) are standalone or pay-as-you-go.

You can configure Intersight Workload Optimizer to manage Azure subscriptions within the context of an Enterprise Agreement (EA). An EA defines specific pricing, including the pricing for reservations. When you configure an EA target, and set the EA key to your Azure targets, Intersight Workload Optimizer uses that richer pricing information to calculate workload placement and reservations coverage for your Azure environment.

To enable Intersight Workload Optimizer management of Azure EA environments, you must configure:

- One Microsoft Enterprise Agreement target
- At least one Service Principal target that can discover the underlying Azure subscriptions

For information about Azure targets, see "Microsoft Azure" in the *Target Configuration Guide*.

In the Targets View, you can identify the targets related to Azure EA as follows:

- EA Targets

The target that discovers the EA to track pricing and reservations. You can have one EA target per Intersight Workload Optimizer deployment.

- Azure Subscription Targets

The targets that manage the workloads in your Azure environment. These are discovered by Service Principal targets. Note that not all subscription targets *necessarily* participate in the EA. Expand these entries to see the related Service Principal target. For members of the EA, you can see the related EA target as well.

Subscriptions that do not participate in the EA appear as Standalone targets.

NOTE:

In rare circumstances, you can have a subscription that is not in use – The subscription has no workloads associated with it. In this case, Intersight Workload Optimizer identifies the subscription as Standalone. This is because the target cannot discover any cost or usage information that would relate the subscription to its EA.

Empty Azure EA subscriptions that are not incurring any charges will not stitch with the Azure Billing target or the Azure EA target, and a discrepancy will occur in the offer ID of the subscription. Once the subscription incurs a charge, the stitching occurs and the subscription should correctly associate with the Azure Billing target with the correct offer ID.

- Service Principal Targets

The Azure target that you configure to discover Azure subscription targets. Expand the entry to see the discovered targets. If you have configured an EA target, the entry lists that as well, along with the EA enrollment number.

Reservations and Azure EA

For Azure environments, Intersight Workload Optimizer can only discover and use reservations if you have configured a Microsoft Enterprise Account target, and if one or more subscriptions participate in that EA.

To discover and manage reservations in Azure environments, Intersight Workload Optimizer uses both the EA target and the associated subscription targets. On its own, a subscription target exposes costs for pay-as-you-go pricing. The EA target discovers pricing for the available reservations. Intersight Workload Optimizer combines this information to track:

- Utilization of reservations
- VMs covered by reservations
- VM costs (accounting for reservations)
- Purchase recommendations

NOTE:

This release of Intersight Workload Optimizer does not support discovery and management of reservations for Classic VMs, Classic Cloud Services, and Suppressed Core VMs.

Cost Calculations for Azure Environments

To understand the reported costs in your Azure environment, consider these points:

- For targets that participate in the EA, Intersight Workload Optimizer uses the terms of the given EA, and bases costs on the Offer ID that is effective for the given subscription.
- For VMs in Azure, reservations pricing does not include the cost of the OS license. However pricing for on-demand VMs does include the license cost.

NOTE:

For Microsoft Azure EA environments, the projected cost for actions to purchase reservations might not match associated costs you find in the Microsoft Pricing Calculator.

Intersight Workload Optimizer actions can recommend purchases. For these recommendations, the action assumes a free Linux OS, so the cost estimate does not include the OS cost. However, The Microsoft Pricing Calculator does include costs for OS licenses. As a result, when you compare the Intersight Workload Optimizer cost estimates to the values in the Pricing Calculator, it's likely that the two estimates will not match. This difference also affects the Break Even Point that appears in the Recommended RI Purchases chart. Because the recommended purchases do not include Azure costs for OS licenses, the listed Break Even Point can be optimistic.

- For on-prem workloads you migrated to Azure, Intersight Workload Optimizer recognizes Azure Hybrid Benefit (AHUB) savings for reservations and on-demand workloads. The costs you see in Intersight Workload Optimizer charts include this benefit. However, remember that recommended actions do not include any license cost, so the actions will not reflect any proposed AHUB savings (see above).

Currency Settings

By default, Intersight Workload Optimizer uses the dollar symbol (\$) when displaying the costs and savings that it discovers or calculates for your cloud workloads. You can set a different symbol to match your preferred currency. For example, if your cloud provider bills you in euros, change the currency symbol to €.

To change the currency symbol, go to **Settings > Billing and Costs** and then click the **Currency** tab.

Intersight Workload Optimizer saves your preference in the local storage of the browser that you used to access the user interface. It reverts to the default symbol if you use another browser or view the user interface in incognito/private mode.

Currency symbols are for display purposes only. Intersight Workload Optimizer does not convert monetary amounts when you switch symbols.