


رمأ يأل لم تحملا ريثأتلل كمهف نم دكأتف، ليغشتلا دي قكتك بش

ةي ل حم ةي قرت

ب ول طملا رادصلإا ةي قرت ةمزح فلم لي زنتب مق 1. ةوطخل

[ةي ل حم ةي قرت ةروص بلجل](#) لقتنا 1.1. ةوطخل

صيخرتلا مقر وأ ةي داملا ةزهجالل نرتقملا يلسلسلتلا (ماقرألا) مقرلا لخدأ 1.2. ةوطخل
ةيره اظلا ةزهجالاب صاخال زارطلاو (VLN) يره اظلا

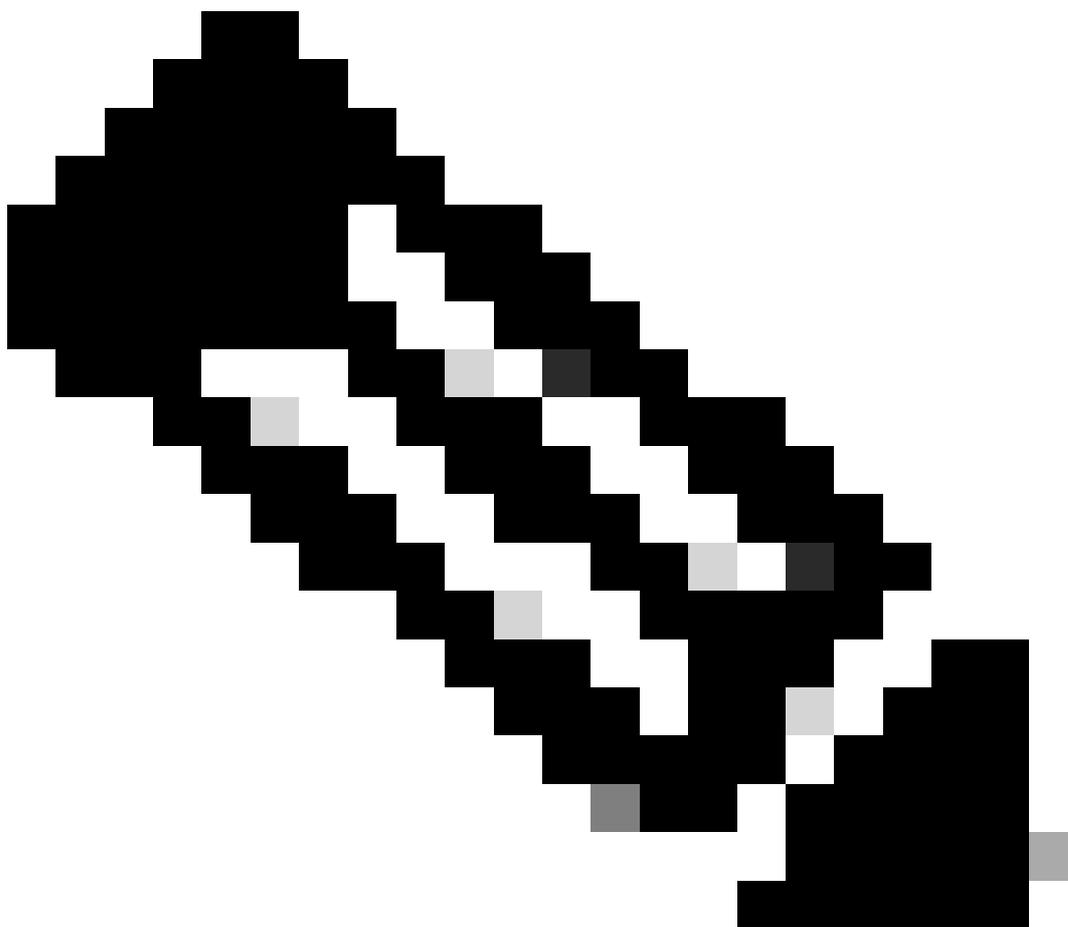

دحاو نم رثكأ كانه ناك اذا لصاوفب ةي لسلسلتلا ماقرألا لصف كنكمي: ةظحالم

قيسنتلا اذهب زاهجال ل قح نم ي ل ا ح ل رادصلإا لخدأ، ةي ساسألا رادصلإا ةمالع ي ف 1.3. ةوطخل

ل SWA: coeus-x-x-x-xxx (لاثم: coeus-15.0.0-355) ةبسنلاب

ةي ب وروألا ءاضفلا ةلاك وىلإ ةبسنلاب (لاثم: Phoebe-15-0-0-104)

الاسم: SMA: zeus-x-x-x-xxx (الاسم: zeus-15-0-0-334)

This page will allow you to fetch a local upgrade image.

The device serial, release tag and model can be determined by logging into the CLI and typing "version".


Serial number(s) (separated by commas, only required for hardware appliances):

Virtual license number (only required for virtual appliances):

Model (only required for virtual appliances):

Base release tag (required):

يُرجى الرجوع إلى صفحة الإعدادات لبدء - إكمال

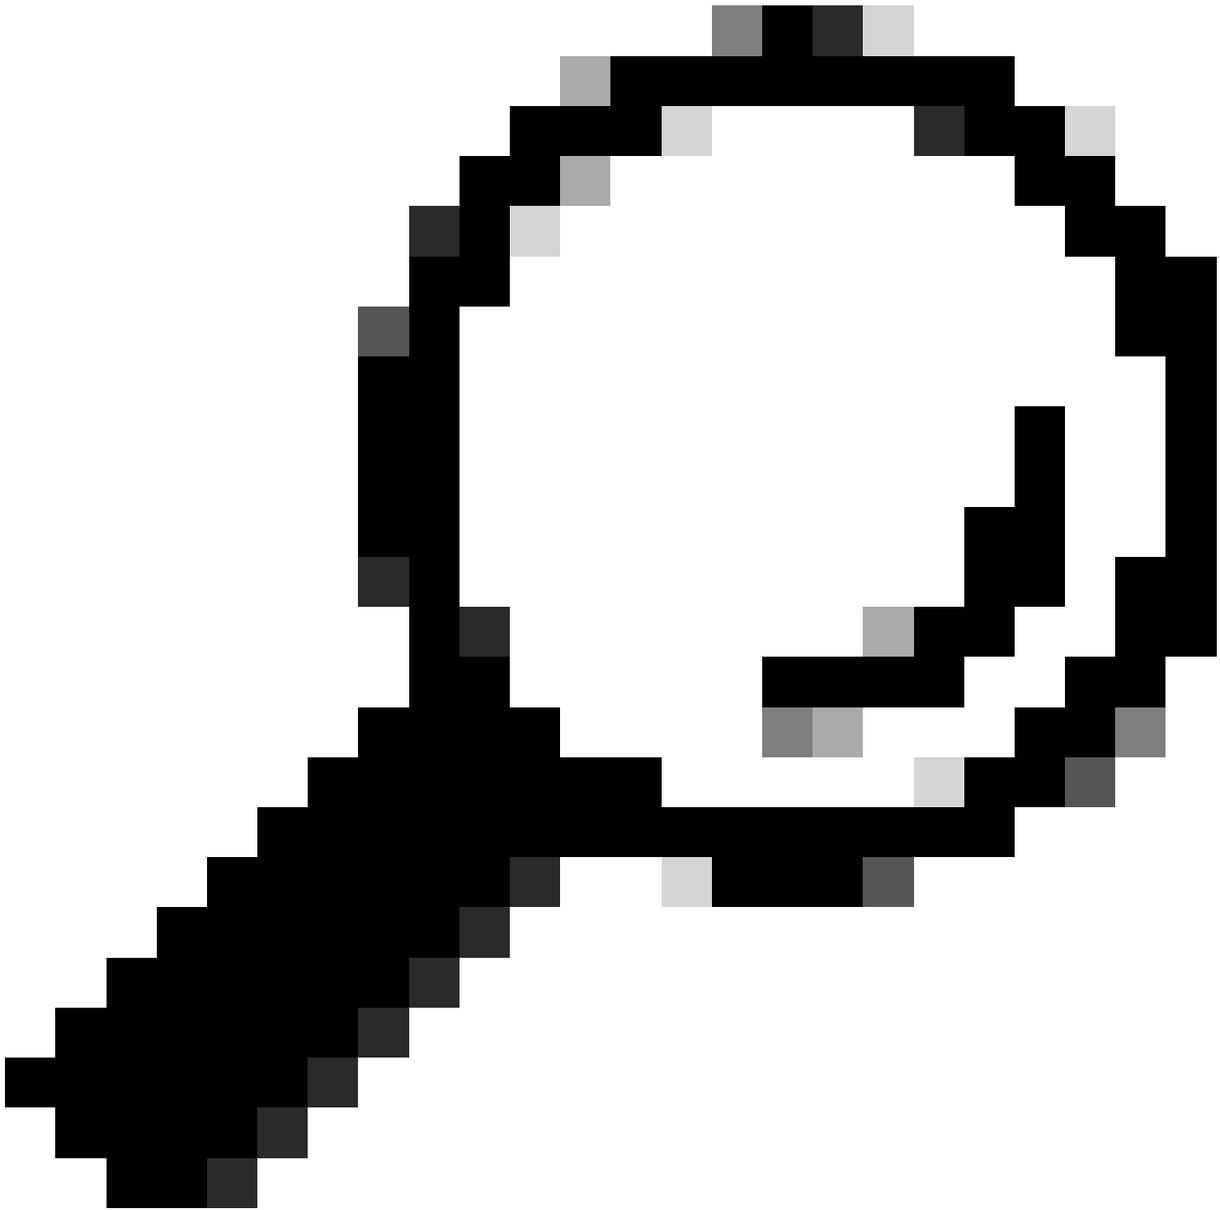

رمأل مادختسإ كنكمي ،ةيره اظلا ةزهأل اب ةصاخلا VLAN ةكبش ىلع روثعلل :خيملت
رمأل (CLI) رطس ةهجاو نم "showLicense".

ةرفوتملا تايقرتلا ةمئاق ضرعل نايبلا راضحإ قوف رقنا 1.4 ةوطخلا

ةبغرلا رادصإ ليزنتب مق 1.5 ةوطخلا

ببوي مداخل ىلإ خسناو هليزنت مت يذلا فلملا جرختسا 2 ةوطخلا


كيدل SWA زاغ نم Coios-X-X-x-xxx.xml ليلدل او فلملا ةينب ىلإ لوصول ةينكلم نم ققحت 3 ةوطخلا

```
asyncos/coeus-x-x-x-xxx.xml/app/default/1
asyncos/coeus-x-x-x-xxx.xml/distroot/default/1
asyncos/coeus-x-x-x-xxx.xml/hints/default/1
asyncos/coeus-x-x-x-xxx.xml/scannerroot/default/1
asyncos/coeus-x-x-x-xxx.xml/upgrade.sh/default/1
```

ثي دحتال تادادع| ريحت رتخاو ثي دحتال او ةي قرتال تادادع| > ماظنلال ةرادا| لى لقتنا 4. ةوطخال


نايبل فل مل لم الكال URL ناو نع لخدأو، ةي لحمال ثي دحتال مداوخ ددح 5. ةوطخال

<http://YourWebserverAddress/asyncos/coeus-14-5-1-008.xml>

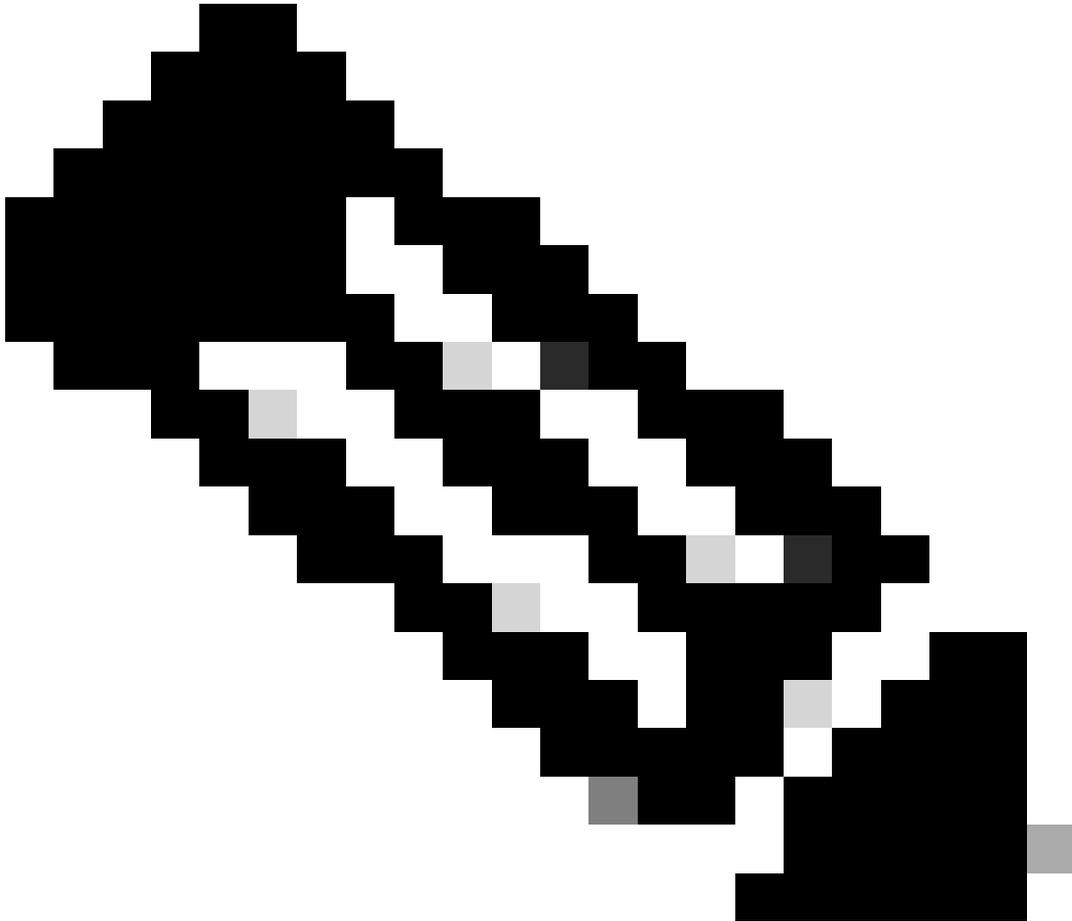

asynco دلحمال ي ف دوچوم xml. فلم وه نايبل فلم: ةطخال م

ريي غتب مق. ةي لحمال ثي دحتال مداوخ رتخأ، (روصلال) ثي دحتال مداوخ نيوكت ي ف 6. ةوطخال
مقرو ي لحمال ةي قرتال مداخال لى (IronPort AsyncOS تاي قرت) ي ساسأل URL ناو نع تادادع|
بس انملا ذفنملا

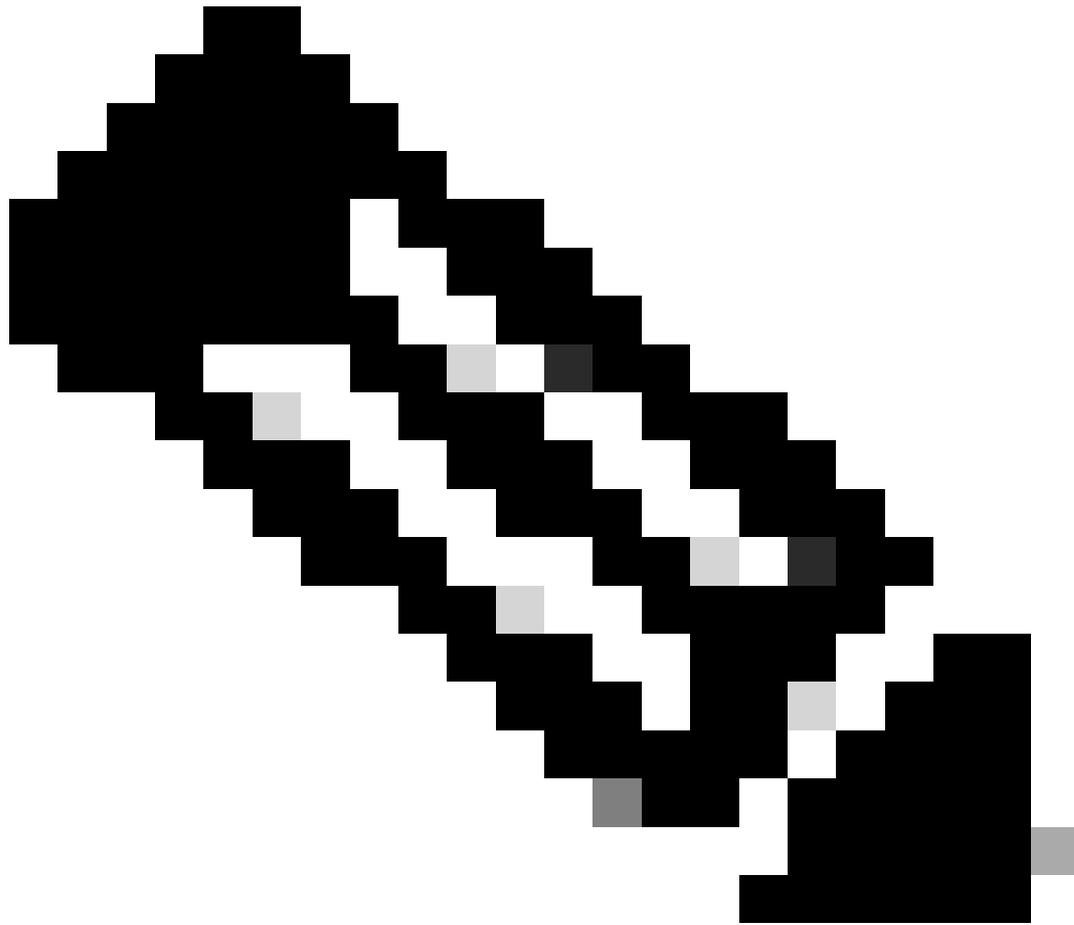

ي ف دامتعالا تانايب نييغت كنكمي ف ،ةقداصلل بيولا مداخ نيوكت مت اذا :ةظحالم
ةقداصلل مسق .

Routing Table:	Management
Update Servers (list):	<p>The URL will be used to obtain the list of available updates for the following services:</p> <ul style="list-style-type: none"> - Cisco AsyncOS upgrades - HTTPS Proxy Certificate Lists - How-Tos updates - Time zone rules - Web Reputation Filters
1	<input type="radio"/> Cisco Update Servers <input checked="" type="radio"/> Local Update Servers (location of list of available updates file)
	<p>Full Url: <input type="text" value="http://172.16.200.101/asyncos/coeus-14-5-1-008.xr"/> Port: <input type="text" value="80"/></p> <p><i>http://updates.example.com/my_updates.xml</i></p> <p>Authentication (optional):</p> <p>Username: <input type="text"/></p> <p>Passphrase: <input type="text"/></p> <p>Retype Passphrase: <input type="text"/></p>
Update Servers (images):	<p>The update servers will be used to obtain update images for the following services:</p> <ul style="list-style-type: none"> - Cisco AsyncOS upgrades - HTTPS Proxy Certificate Lists - How-Tos updates - Time zone rules - Web Reputation Filters
2	<input type="radio"/> Cisco Update Servers <input checked="" type="radio"/> Local Update Servers (location of update image files) (?)
	<p>Base Url: <input type="text" value="http://172.16.200.101"/> Port: <input type="text" value="80"/></p> <p><i>http://downloads.example.com</i></p> <p>Authentication (optional):</p> <p>Username: <input type="text"/></p> <p>Passphrase: <input type="text"/></p> <p>Retype Passphrase: <input type="text"/></p>

اهذيفنتو تاريغيغتلا لاسرا 7. ةوطخل

ةرفوتملا تارادصلإا ةمئاق ضرعل ةيقورتل تاراخي قوف رقنا 8. ةوطخل

System Upgrade

Upgrade System	
Click Upgrade Options to view and select the applicable options available for your appliance.	
Current AsyncOS Version:	11.8.1-023
Current Upgrade Settings:	Update Server (list): http://172.16.200.101/asyncos/coeus-14-5-1-008.xml
	Routing Table: Management
	HTTP Proxy Server: None
	HTTPS Proxy Server: None
<input type="button" value="Upgrade Options..."/> 1	

"ةعباتم قوف رقناو بولطملا رادصلإا رتخأ 9. ةوطخل

Upgrade Options

Upgrade options

Choose any one upgrade option:

- Download and install
(Select from the list of available upgrade image files from upgrade server to download from, and install.)
- Download only
(Select from the list of available upgrade image files from upgrade server to download. You may use this image file to Install later.)

Most system upgrades require a reboot of the system after the upgrade is applied. Changes made to your system's configuration between the time the upgrade download is completed and the system is rebooted will not be saved.

Since version 11.8, the Next Generation portal of your appliance by default uses AsyncOS API HTTP/HTTPS ports (6080/6443) and trailblazer HTTPS port (4431). You can configure the HTTPS (4431) port using the trailblazerconfig command in the CLI. Make sure that the configured HTTPS port is opened on the firewall and ensure that your DNS server can resolve the hostname that you specified for accessing the appliance.

List of available upgrade images files at upgrade server:

AsyncOS 14.5.1 build 008 upgrade For Web, 2023-01-12, is a release available for Maintenance Deployment

Upgrade Preparation:

- Save the current configuration to the configuration directory before upgrading.

Email file to:

Separate multiple addresses with commas.

- Plain passwords in the configuration file.
- Mask passwords in the configuration file.

Note: Files with masked passwords cannot be loaded using Load Configuration.

مماظنلا ةيقرت ةحفص يف ةدوجوملا تاداشرالا نم ققحت 10 ةوطخلا

Cisco S100V
Web Security Virtual Appliance

Web Security Appliance is getting...

System Upgrade

Overall Progress: 12%

Upgrade is running, please wait.

Current Task

Downloading application...

Copyright © 2003-2020 Cisco Systems, Inc. All rights reserved. | Privacy Statement

اهحالص او ءاطخال فاشك ت سا

ةيقرتلا تالجسب طبترملا مقرلا راي تخ | CLI > GREP > نم ةيقرتلا تالجس ضرع كنكمي
ةحجانلا ةيقرتلا تالجس نم ةني ع يلي امي ف

Wed Feb 18 04:08:12 2024 Info: Begin Logfile
 Wed Feb 18 04:08:12 2024 Info: Version: 11.8.1-023 SN: 420D8120350A5CB03F1E-EEE6300DA0C4
 Wed Feb 18 04:08:12 2024 Info: Time offset from UTC: 3600 seconds
 Wed Feb 18 05:18:10 2024 Info: The SHA of the file hints is 5a9987847797c9193f8d0ba1c7ad6270587bcf82f1
 Wed Feb 18 05:18:10 2024 Info: Download and installation of AsyncOS 14.5.1 build 008 upgrade For Web, I
 Wed Feb 18 05:18:10 2024 Info: The SHA of the file upgrade.sh is 41da10da137bb9a7633a5ced9636de239907


نايبال لي زنت رذعت

System Upgrade

Error — Could not download manifest.

Upgrade System		
<i>Click Upgrade Options to view and select the applicable options available for your appliance.</i>		
Current AsyncOS Version:	11.8.1-023	
Current Upgrade Settings:	Update Server (list):	http://172.16.200.101/asynco/ceus-14-5-1-008.xml
	Routing Table:	Management
	HTTP Proxy Server:	None
	HTTPS Proxy Server:	None
Upgrade Options...		

ة، لوصوملا صحفي نأ ،لدان بيوي في دربملا تذفن عيطتسي SWA ناضي نأ جاتحت تنأ ،
نم رماً curl تلمعتسا عيطتسي تنأ CLI.

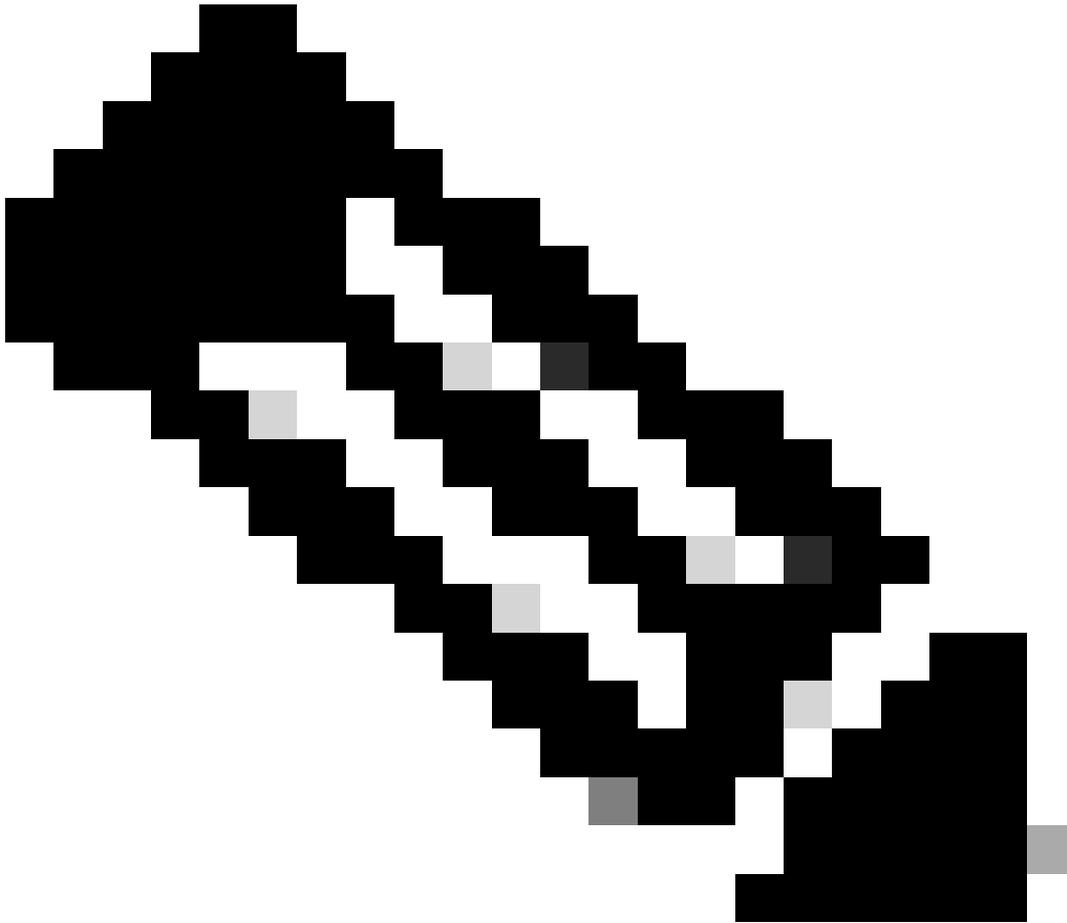

مَدْخَسِي لَو لِي غَشْتَل مَاطَن نَم لَاصَتَا ل SWA رِبْتَخْت ، Direct رَايْتِخْ | دَن ع : عَظْحَا ل م لِي كَوَلَا .

SWA_CLI> curl

Choose the operation you want to perform:

- DIRECT - URL access going direct
 - APPLIANCE - URL access through the Appliance
- []> direct


Do you wish to choose particular interface of appliance?

[N]>

Enter URL to make request to

[]> http://172.16.200.101/asyncos/coeus-14-5-1-008.xml


ةي قرتلا ةمئاق لي زنت لشف

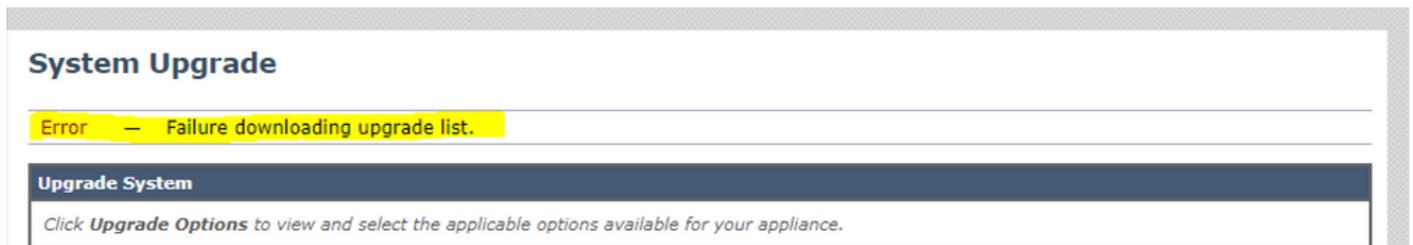

وه امك curl رم ألامادختس إك نكمي يذلا ةي قرتلا مداخل و SWA ني ل لاصتالا نم ققحت ،الأو روكذم .

امهنأ نم دكأتلل نايبلا فلمل يلسلسلتلا مقرلا أو VLAN نم ققحتف ، اديج ل لاصتالا ناك اذا <keys> ةمالع نع ثحبل او xml . فلم حتف ك نكمي . زاهجال سفن

حاجن نود ةي قرتلا ءاهنإ مت ، لي زنتلا ي ف أطخ

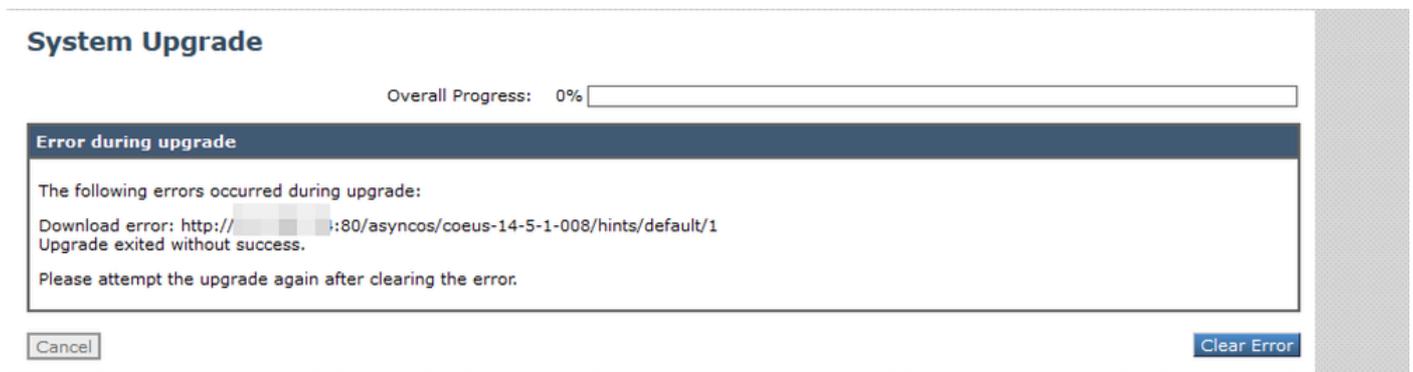

ححص لكشب بيوم داخل ي ف نذال نيوكت نم دكأت

ةلص تاذا تامولعم

[عارجا عانثأ أطخ ثدح](#). "ةيقرتلا ليزنت لشف" ةمئاق ىلع لصحأ اذامل، ةيقرتلا ةلواحم دنع Cisco - "جارجال/لاخجالا يف أطخ: ةيقرتلا

[Cisco نم نملآا بيولا زاهج ةيقرت ةيلمع](#)

وأ (GUI) ةيموسرلا مدختس ملأ ةهجاو مدختساب (ESA) ينورتكلال ديربلا نامأ زاهج ةيقرت
[Cisco - رماوألارطس ةهجاو](#)

ةمچرتل هذه ل و ح

ةلأل تاي نقتل ن م ة و مچ م ادخت ساب دن تسم ل ا ذه Cisco ت مچرت
م ل ا ل اء ان ا ع مچ ي ف ن م دخت س م ل ل م عد و ت ح م م د ق ت ل ة ي ر ش ب ل و
امك ة ق ي ق د ن و ك ت ن ل ة ل ا ة مچرت ل ض ف ا ن ا ة ظ ح ال م ي ج ر ي . ة ص ا خ ل م ه ت غ ل ب
Cisco ي ل خ ت . ف ر ت ح م مچرت م ا ه م د ق ي ي ت ل ا ة ي ف ا ر ت ح ال ا ة مچرت ل ا ع م ل ا ح ل ا و ه
ل ا ا م اء ا د ع و ج ر ل ا ب ي ص و ت و ت ا مچرت ل ا هذه ة ق د ن ع ا ه ت ي ل و ئ س م Cisco
Systems (ر ف و ت م ط ب ا ر ل ا) ي ل ص ا ل ا ي ز ي ل ج ن ا ل ا دن ت س م ل ا