

# 使用mtrace V2排除组播故障

## 目录

---

[简介](#)

[先决条件](#)

[要求](#)

[使用的组件](#)

[比较mtrace v1和mtrace v2](#)

[mtrace v2详细信息](#)

[ios-XR上的MTRACE v2](#)

[命令的语法](#)

[Examples](#)

[备注](#)

---

## 简介

本文档介绍Cisco IOS®XR中的mtrace版本2。

## 先决条件

### 要求

本文档没有任何特定的要求。

### 使用的组件

本文档特定于Cisco IOS®XR，但不限于特定的软件版本或硬件。

本文档中的信息都是基于特定实验室环境中的设备编写的。本文档中使用的所有设备最初均采用原始（默认）配置。如果您使用的是真实网络，请确保您已经了解所有命令的潜在影响。

## 比较mtrace v1和mtrace v2


- mtrace v2 Reply message等同于mTrace v1 Response message。
- mtrace v1仅支持IPv4组播。mTrace v2支持IPv4和IPv6组播。
- mtrace v1查询和响应消息是IGMP消息。所有mTrace v2数据包都是UDP。
- mtrace v1有一个路由协议字段，路由协议是用于流向上游路由器的RPF的组播路由协议。  
mTrace v2有两个字段：一个用于用于RPF的单播路由协议，一个用于运行到上游路由器的组播路由协议。
- mtrace v1和v2的目标相同，数据包语法也非常相似。
- mtrace v1和v2对路由协议和转发代码使用不同的代码集。
- mtrace v2支持地址系列IPv6和特定UDP端口号(33435)。

## mtrace v2详细信息

- 该工具允许跟踪从源到目的地的路径。它可验证采用的路径，也可能会指示任何问题，例如生存时间(TTL)或反向路径转发(RPF)。
  - mtrace v2和v1的目标相同。mtrace验证路径的方法是将数据包发送到目的地（最后一跳路由器或LHR），然后向后追踪通往源（源树）或Rendez-Vous Point (RP)路由器的路径。这意味着您必须指定目标（单播地址）、源（单播地址）和组播组。
  - mtrace功能的真正强大之处在于，可以从网络中的任何路由器（发起方）执行mtrace命令。它不需要是第一跳路由器(FHR)或RP。
- mtrace v2在RFC 8487中指定：mtrace版本2：用于IP组播的traceroute设施
  - mtrace v1on IOS-XR基于草案：draft-ietf-idmr-traceroute-ipm
  - mtrace v2不支持mVPN

有三种类型的数据包用于mtrace。这三个数据包一起使mtrace起作用。发起方向最后一跳路由器发送mtrace查询数据包。此LHR将查询转换为请求数据包。然后，此数据包将逐跳单播转发到上游路由器。LHR和每个上游路由器都会添加一个响应数据块，其中包含接口地址、路由协议、转发代码等有用信息。当请求到达FHR时，它会将请求转换为应答数据包并将其转发给发起方。如果没有完成跟踪，中间路由器可能还会将回复返回到发起方，例如发生了致命错误，如“no route”。

请查看此映像，了解该过程以及三种mtrace数据包类型的处理。

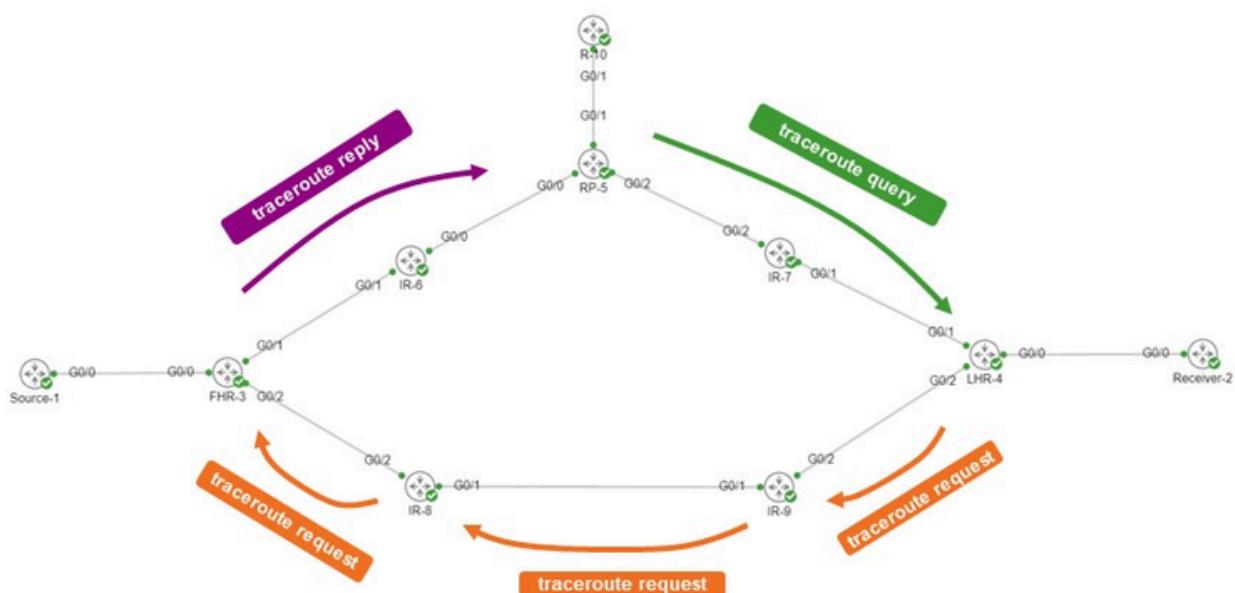

发起方是R-10。LHR是LHR-4。FHR是FHR-3。RP是RP-5。网络正在运行PIM稀疏模式或任何源组播(ASM)。

mtrace请求消息如下所示。

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1
Type	Length	# Hops	
Multicast Address			
Source Address			
Mtrace2 Client Address			
Query ID		Client Port #	

客户端地址是发起方的地址，即执行mTrace v2命令的路由器。

响应数据块保存感兴趣的信息。此信息将添加到请求消息中。每台路由器都会向请求消息添加一个响应数据块。以下是响应数据块。

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1 2 3 4 5 6 7 8 9 0	1
Type	Length	MBZ	
Query Arrival Time			
Incoming Interface Address			
Outgoing Interface Address			
Upstream Router Address			
Input packet count on Incoming Interface .			
Output packet count on Outgoing Interface .			
Total number of packets for this source-group pair .			
Rtg Protocol	Multicast Rtg Protocol		
Fwd TTL	MBZ	S	Src Mask  Forwarding Code

此响应块信息用于显示traceroute输出。每个响应块在mtrace输出中为一行。

路由协议和组播路由协议编号与IP组播MIB (RFC 5132)中的ipMcastRouteRtProtocol的值相同。它们与mtrace v1中使用的值不同。

IANA将其列出如下：

路由协议：

```
other      (1), -- not specified
local      (2), -- local interface
netmgmt    (3), -- static route
icmp       (4), -- result of ICMP Redirect

-- the following are all dynamic

-- routing protocols

egp        (5), -- Exterior Gateway Protocol
ggp        (6), -- Gateway-Gateway Protocol
hello     (7), -- FuzzBall HelloSpeak
rip        (8), -- Berkeley RIP or RIP-II
isis       (9), -- Dual IS-IS
esIs      (10), -- ISO 9542
ciscoIgrp (11), -- Cisco IGRP
bbnSpfIgp (12), -- BBN SPF IGP
ospf      (13), -- Open Shortest Path First
bgp       (14), -- Border Gateway Protocol
idpr     (15), -- InterDomain Policy Routing
ciscoEigrp (16), -- Cisco EIGRP
dvmpmrp   (17), -- DVMRP
rpl       (18), -- RPL [RFC-ietf-roll-rpl-19]
dhcp      (19), -- DHCP [RFC2132]
```

组播路由协议：

```
other(1),          -- none of the following
local(2),          -- e.g., manually configured
netmgmt(3),        -- set via net.mgmt protocol
dvmpmrp(4),
mospf(5),
pimSparseDense(6), -- PIMv1, both DM and SM
cbt(7),
pimSparseMode(8),  -- PIM-SM
pimDenseMode(9),   -- PIM-DM
igmpOnly(10),
bgmp(11),
msdp(12)
```

mtrace v2的转发代码如下所示。它们与mtrace v1中的不同。

Value	Name	Description
0x00	NO_ERROR	No error.
0x01	WRONG_IF	Mtrace2 Request arrived on an interface for which this router does not perform forwarding for the specified group to the source or RP.
0x02	PRUNE_SENT	This router has sent a prune upstream that applies to the source and group in the Mtrace2 Request.
0x03	PRUNE_RCVD	This router has stopped forwarding for this source and group in response to a Request from the downstream router.
0x04	SCOPED	The group is subject to administrative scoping at this router.
0x05	NO_ROUTE	This router has no route for the source or group and no way to determine a potential route.
0x06	WRONG_LAST_HOP	This router is not the proper LHR.
0x07	NOT_FORWARDING	This router is not forwarding this source and group out the Outgoing Interface for an unspecified reason.
0x08	REACHED_RP	Reached the Rendezvous Point.
0x09	RPF_IF	Mtrace2 Request arrived on the expected RPF interface for this source and group.
0x0A	NO_MULTICAST	Mtrace2 Request arrived on an interface that is not enabled for multicast.
0x0B	INFO_HIDDEN	One or more hops have been hidden from this trace.
0x0C	REACHED_GW	Mtrace2 Request arrived on a gateway (e.g., a NAT or firewall) that hides the information between this router and the Mtrace2 client.
0x0D	UNKNOWN_QUERY	A non-transitive Extended Query Type was received by a router that does not support the type.
0x80	FATAL_ERROR	A fatal error is one where the router may know the upstream router but cannot forward the message to it.
0x81	NO_SPACE	There was not enough room to insert another Standard Response Block in the packet.
0x83	ADMIN_PROHIB	Mtrace2 is administratively prohibited.

## ios-XR上的MTRACE v2

### 命令的语法

**使用率:** mtrace <src\_addr> [<dest\_addr>] [<group\_addr>] [<resp\_addr>] [<ttl>]

确保指定2以使用mtrace v2。

<#root>

RP/0/RP0/CPU0:R-10#

mtrace?

```
mtrace mtrace2  
RP/0/RP0/CPU0:R-10#  
mtrace2 ?  
  
 ipv4 IPv4 Address family  
 ipv6 ipv6 Address Family  
RP/0/RP0/CPU0:R-10#  
mtrace2 ipv4 ?
```

Hostname or A.B.C.D Source to trace route from  
<cr>

源地址是发起方的地址。

```
<#root>  
RP/0/RP0/CPU0:R-10#  
mtrace2 ipv4 10.1.3.3 ?  
  
Hostname or A.B.C.D Destination of route  
debug Mtrace client-side debugging(cisco-support)  
<cr>
```

目的地址是LHR的地址。

```
<#root>  
RP/0/RP0/CPU0:R-10#  
mtrace2 ipv4 10.1.3.3 10.2.4.4 ?  
  
Hostname or A.B.C.D Group to trace route via  
debug Mtrace client-side debugging(cisco-support)  
<cr>
```

组地址是正在跟踪的组播流的组地址。

```
<#root>  
RP/0/RP0/CPU0:R-10#  
mtrace2 ipv4 10.1.3.3 10.2.4.4 225.1.1.1 ?
```

```
Hostname or A.B.C.D response address to receive response
debug Mtrace client-side debugging(cisco-support)
<cr>
```

响应地址是traceroute回复所返回的地址。

<#root>

```
RP/0/RP0/CPU0:R-10#
mtrace2 ipv4 10.1.3.3 10.2.4.4 225.1.1.1 10.0.0.10
```

?

```
<1-255> Time-to-live for multicasted trace request
debug Mtrace client-side debugging(cisco-support)
<cr>
```

Examples

请注意，该命令可从网络中的任何路由器（不一定是启用PIM/组播的路由器）或正在调查的特定共享或源树启动。

<#root>

```
RP/0/RP0/CPU0:R-10#
mtrace2 ipv4 10.1.3.3 10.2.4.4 225.1.1.1 10.0.0.10
```

Type escape sequence to abort.

```
Mtrace from 10.1.3.3 to 10.2.4.4
via group 225.1.1.1
From source (?) to destination (?)
Querying full reverse path...
```

```
0 10.2.4.4
-1 10.4.7.4 PIM [10.1.3.0/24]
-2 10.5.7.7 PIM [10.1.3.0/24]
-3 0.0.0.0 PIM Reached RP/Core [10.1.3.0/24]
```

您可以看到已对共享树(\*, G)执行mtrace。mtrace从最后一跳路由器10.2.4.4开始，然后返回到RP (10.0.0.5)的共享树。原因是对于组225.1.1.1的源10.1.3.3，LHR-4路由器没有(S, G) MRIB条目。

[10.1.3.0/24]部分是用于RPF信息的单播路由。对于IPv4，IOS-XR中的RPF信息始终为/32条目。此信息来自单播路由。将显示此单播路由。

显示的是组播协议。这是PIM。

跳数显示反向，从最后一跳路由器的0开始，到到达第一跳路由器为止一直为负。

接下来是源树的情况。

<#root>

```
RP0/RP0/CPU0:LHR-4#
```

```
show mrib route 225.1.1.1
```

#### IP Multicast Routing Information Base

Entry flags: L - Domain-Local Source, E - External Source to the Domain,  
C - Directly-Connected Check, S - Signal, IA - Inherit Accept,  
IF - Inherit From, D - Drop, ME - MDT Encap, EID - Encap ID,  
MD - MDT Decap, MT - MDT Threshold Crossed, MH - MDT interface handle  
CD - Conditional Decap, MPLS - MPLS Decap, EX - Extranet  
MoFE - MoFRR Enabled, MoFS - MoFRR State, MoFP - MoFRR Primary  
MoFB - MoFRR Backup, RPFID - RPF ID Set, X - VXLAN  
Interface flags: F - Forward, A - Accept, IC - Internal Copy,  
NS - Negate Signal, DP - Don't Preserve, SP - Signal Present,  
II - Internal Interest, ID - Internal Disinterest, LI - Local Interest,  
LD - Local Disinterest, DI - Decapsulation Interface  
EI - Encapsulation Interface, MI - MDT Interface, LVIF - MPLS Encap,  
EX - Extranet, A2 - Secondary Accept, MT - MDT Threshold Crossed,  
MA - Data MDT Assigned, LMI - mLDP MDT Interface, TMI - P2MP-TE MDT Interface  
IRMI - IR MDT Interface, TRMI - TREE SID MDT Interface, MH - Multihome Interface

(\*,225.1.1.1) RPF nbr: 10.4.7.7 Flags: C RPF

Up: 1d21h

Incoming Interface List

GigabitEthernet0/0/0/1 Flags: A NS, Up: 1d21h

Outgoing Interface List

GigabitEthernet0/0/0/0 Flags: F NS LI, Up: 1d21h

(10.1.3.1,225.1.1.1)

RPF nbr: 10.4.9.9 Flags: RPF

Up: 1d18h

Incoming Interface List

GigabitEthernet0/0/0/2 Flags: A, Up: 1d18h

Outgoing Interface List

GigabitEthernet0/0/0/0 Flags: F NS, Up: 1d18h

存在源10.1.3.1的MRIB条目。完成该源时，mtrace命令将显示不同的输出。

<#root>

```
RP0/RP0/CPU0:R-10#
```

```
mtrace2 ipv4 10.1.3.1 10.2.4.4 225.1.1.1 10.0.0.10
```

```
Type escape sequence to abort.
```

```
Mtrace from 10.1.3.1 to 10.2.4.4  
via group 225.1.1.1  
From source (?) to destination (?)  
Querying full reverse path...
```

```
0 10.2.4.4  
-1 10.4.9.4 PIM [10.1.3.0/24]  
-2 10.8.9.9 PIM [10.1.3.0/24]  
-3 10.3.8.8 PIM [10.1.3.0/24]  
-4 10.1.3.3 PIM [10.1.3.0/24]
```

请注意，反向路径现在为LHR4 - IR-9 - IR-8 - FHR-3。这是从FHR-3到LHR-4的源树。这与(S , G)的MRIB条目匹配。

```
<#root>
```

```
RP/0/RP0/CPU0:FHR-3#
```

```
show mrib route 225.1.1.1
```

IP Multicast Routing Information Base

Entry flags: L - Domain-Local Source, E - External Source to the Domain,  
C - Directly-Connected Check, S - Signal, IA - Inherit Accept,  
IF - Inherit From, D - Drop, ME - MDT Encap, EID - Encap ID,  
MD - MDT Decap, MT - MDT Threshold Crossed, MH - MDT interface handle  
CD - Conditional Decap, MPLS - MPLS Decap, EX - Extranet  
MoFE - MoFRR Enabled, MoFS - MoFRR State, MoFP - MoFRR Primary  
MoFB - MoFRR Backup, RPFID - RPF ID Set, X - VXLAN  
Interface flags: F - Forward, A - Accept, IC - Internal Copy,  
NS - Negate Signal, DP - Don't Preserve, SP - Signal Present,  
II - Internal Interest, ID - Internal Disinterest, LI - Local Interest,  
LD - Local Disinterest, DI - Decapsulation Interface  
EI - Encapsulation Interface, MI - MDT Interface, LVIF - MPLS Encap,  
EX - Extranet, A2 - Secondary Accept, MT - MDT Threshold Crossed,  
MA - Data MDT Assigned, LMI - mLDP MDT Interface, TMI - P2MP-TE MDT Interface  
IRMI - IR MDT Interface, TRMI - TREE SID MDT Interface, MH - Multihome Interface

```
(10.1.3.1,225.1.1.1) RPF nbr: 10.1.3.1 Flags: RPF
```

```
Up: 1d21h
```

```
Incoming Interface List
```

```
GigabitEthernet0/0/0/0 Flags: A, Up: 1d21h
```

```
Outgoing Interface List
```

```
GigabitEthernet0/0/0/2 Flags: F NS, Up: 1d18h
```

您可以将debug IGMP与mtrace v1一起使用，以便在跟踪路径上的任何路由器上显示mTrace数据包。mtrace v2使用UDP数据包，因此IGMP调试不能用于mtrace v2。

但是，您可以重点关注IOS-XR上的mtrace v2数据包所使用的UDP端口33433。

示例：

在中间路由器上调试UDP mtracev2数据包。

IR-9 :

<#root>

RP/0/RP0/CPU0:IR-9#

show access-lists

ipv4 access-list mtracev2

10 permit udp any eq 33433 any eq 33433

RP/0/RP0/CPU0:IR-9#

debug udp packet v4-access-list mtracev2 location 0/RP0/CPU0

RP/0/RP0/CPU0:IR-9#

show debug

#### debug flags set from tty 'con0\_RP0\_CPU0' ####

udp packet flag is ON with value '0x1:0x0:0x4:mtracev2:0x0:::'

RP/0/RP0/CPU0:IR-9#RP/0/RP0/CPU0:IR-9#

RP/0/RP0/CPU0:IR-9#

RP/0/RP0/CPU0:Jun 19 07:20:13.123 UTC: syslog\_dev[115]: udp[214] PID-22001:

R

42469 ms LEN 60 10.4.9.4:33433 <-> 10.4.9.9:33433

RP/0/RP0/CPU0:Jun 19 07:20:13.123 UTC: syslog\_dev[115]: udp[214] PID-22001:

RP/0/RP0/CPU0:Jun 19 07:20:13.139 UTC: syslog\_dev[115]: udp[214] PID-22062:

S

15 ms LEN 100 10.8.9.9:33433 <-> 10.8.9.8:33433

RP/0/RP0/CPU0:Jun 19 07:20:13.139 UTC: syslog\_dev[115]: udp[214] PID-22062:

中间路由器接收并发送mtrace v2消息。

备注

确保您知道哪些路由器是FHR和LHR。其他路由器无法完成mtrace。

如果路由器已同步时钟，由于存在时间戳，您可以测量传播mtrace消息所需的时间。此时间仅用于指示，因为这些消息在每一跳都被视为控制消息。

## 关于此翻译

思科采用人工翻译与机器翻译相结合的方式将此文档翻译成不同语言，希望全球的用户都能通过各自的语言得到支持性的内容。

请注意：即使是最好的机器翻译，其准确度也不及专业翻译人员的水平。

Cisco Systems, Inc. 对于翻译的准确性不承担任何责任，并建议您总是参考英文原始文档（已提供链接）。