

在WAP351和WAP371接入点上配置区域设置

目标

区域设置是连接到强制网络门户实例的身份验证网页。有关如何在设备上设置强制网络门户的信息，请参阅[在WAP351和WAP371接入点上配置强制网络门户](#)。

在WAP上设置强制网络门户后，可以使用Web门户自定义页面为网络上的不同区域创建唯一页面，并自定义页面上的文本和图像。

本文档的本目的是说明如何上传和删除二进制图像文件以在WAP351和WAP371接入点上进行Web定制，以及使用文本和图形元素自定义身份验证页面。

适用设备

·WAP351

·WAP371


软件版本

·WAP351 v1.0.0.39

·WAP371 v1.1.2.3

Web自定义

步骤1.登录Web配置实用程序，然后选择强制网络门户(Captive Portal)> Web Portal Customization。“Web门户自定义”页面打开：

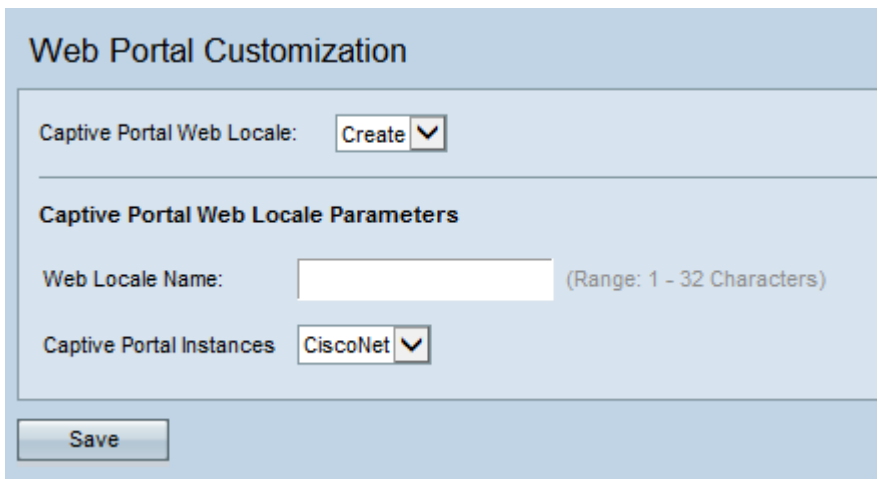

Web Portal Customization

Captive Portal Web Locale: Create ▾

Captive Portal Web Locale Parameters

Web Locale Name: (Range: 1 - 32 Characters)

Captive Portal Instances CiscoNet ▾

Save

步骤2.从强制网络门户Web区域下拉列表中选择创建，为强制网络门户创建区域设置。如果要编辑以前的Web区域设置，请从强制网络门户Web区域设置下拉列表中选择创建的Web区域设置，然后跳[至步骤6](#)。

Web Portal Customization

Captive Portal Web Locale: Create ▾

Captive Portal Web Locale Parameters

Web Locale Name: (Range: 1 - 32 Characters)

Captive Portal Instances CiscoNet ▾

Save

步骤3.在Web区域设置名称字段中输入区域设置的名称。名称必须为1-32个字符，且不包含空格。

Web Portal Customization

Captive Portal Web Locale: Create ▾

Captive Portal Web Locale Parameters

Web Locale Name: CiscoLocale (Range: 1 - 32 Characters)

Captive Portal Instances CiscoNet ▾

Save

步骤4.从强制网络门户实例下拉列表中，选择您要将区域设置与其关联的强制网络门户实例。有关设置强制网络门户实例的信息，请参阅[在WAP351和WAP371接入点上配置强制网络门户](#)

。

Web Portal Customization

Captive Portal Web Locale: Create ▾

Captive Portal Web Locale Parameters

Web Locale Name: CiscoLocale (Range: 1 - 32 Characters)

Captive Portal Instances CiscoNet ▾

Save

步骤5.单击“保存”以保存所做的配置。

Web Portal Customization

Captive Portal Web Locale: Create

Captive Portal Web Locale Parameters

Web Locale Name: CiscoLocale (Range: 1 - 32 Characters)

Captive Portal Instances: CiscoNet

Save

[系统将显示强制网络门户Web区域设置参数区域，其中包含其他信息：](#)

Web Portal Customization

Captive Portal Web Locale: CiscoLocale

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg Upload/Delete Custom Image

Logo Image Name: cisco_logo.png Upload/Delete Custom Image

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

注意：在强制网络门户Web区域设置参数区域中，以下字段将自动生成，无法从此页面编辑：

- 区域设置ID — 显示区域设置的序列号
- 实例名称 — 显示所选实例的名称

步骤6.从Background Image Name下拉列表中选择强制网络门户背景的图像。

Web Portal Customization

Captive Portal Web Locale: CiscoLocale ▼

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg ▼ Upload/Delete Custom Image

Logo Image Name: cisco_logo.png ▼ Upload/Delete Custom Image

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

注意：如果要上传或从列表中删除图像，请单击“上传/删除自定义图像”按钮。有关上传和删除自定义映像的信息，请参阅[上传/删除自定义映像](#)。

Web Portal Customization

Captive Portal Web Locale: CiscoLocale ▼

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg ▼ Upload/Delete Custom Image

Logo Image Name: cisco_logo.png ▼ Upload/Delete Custom Image

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

步骤7.从Logo Image Name下拉列表中为徽标选择图像。

Web Portal Customization

Captive Portal Web Locale: CiscoLocale ▼

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg ▼ Upload/Delete Custom Image

Logo Image Name: cisco_logo.png ▼ Upload/Delete Custom Image

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

注意：如果要上传或从列表中删除图像，请单击“上传/删除自定义图像”按钮。有关上传和删除自定义映像的信息，请[参阅上传/删除自定义映像](#)。

Web Portal Customization

Captive Portal Web Locale: CiscoLocale ▼

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg ▼ Upload/Delete Custom Image

Logo Image Name: cisco_logo.png ▼ Upload/Delete Custom Image

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

步骤8.在“前景颜色”字段中输入前景颜色的HTML代码。代码采用6位十六进制格式。

Web Portal Customization

Captive Portal Web Locale: CiscoLocale

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg

Logo Image Name: cisco_logo.png

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

注意：有关Web颜色格式的详细信息，请参[阅此](#)页。

注意：为了帮助使用基于调色板的GUI生成十六进制HTML颜色代码，您可以参[阅此](#)页。

步骤9.在“背景颜色”字段中输入背景颜色的HTML代码。代码采用6位十六进制格式。

Web Portal Customization

Captive Portal Web Locale: CiscoLocale

Captive Portal Web Locale Parameters

Locale ID: 1

Instance Name: CiscoNet

Background Image Name: cisco_bkg.jpg

Logo Image Name: cisco_logo.png

Foreground Color: #999999 (Range: 1 - 32 Characters, Default: #999999)

Background Color: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

Separator: #BFBFBF (Range: 1 - 32 Characters, Default: #BFBFBF)

步骤10.在“分隔符”字段中输入分隔符颜色的HTML代码(将标题与正文页分开的行)。代码采用6位十六进制格式。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

步骤11.在区域设置标签字段中输入描述区域设置的标签。默认为英语。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

步骤12.在区域设置字段中输入区域设置的缩写。默认值为en。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

步骤13.从“帐户映像”下拉列表中，选择要在登录字段上方描述经过身份验证的登录的映像。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

注意：如果要上传或从列表中删除图像，请单击“上传/删除自定义图像”按钮。有关上传和删除自定义映像的信息，请参阅[上传/删除自定义映像](#)。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

步骤14. 输入文本，该文本向用户提供在“帐户标签”字段中输入用户名的说明。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username:"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password:"/>	(Range: 1 - 64 Characters)

步骤15.在“用户标签”字段中输入文本以标记用户名。

Foreground Color:	<input type="text" value="#999999"/>	(Range: 1 - 32 Characters, Default: #999999)
Background Color:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Separator:	<input type="text" value="#BFBFBF"/>	(Range: 1 - 32 Characters, Default: #BFBFBF)
Locale Label:	<input type="text" value="English"/>	(Range: 1 - 32 Characters, Default: English)
Locale:	<input type="text" value="en"/>	(Range: 1 - 32 Characters, Default: en)
Account Image:	<input type="text" value="login_key.jpg"/> <input type="button" value="Upload/Delete Custom Image"/>	
Account Label:	<input type="text" value="Enter your Username"/>	(Range: 1 - 32 Characters)
User Label:	<input type="text" value="Username"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password"/>	(Range: 1 - 64 Characters)

步骤16.在“密码标签”字段中输入文本以标记用户密码文本。

User Label:	<input type="text" value="Username"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password"/>	(Range: 1 - 64 Characters)
Button Label:	<input type="text" value="Connect"/>	(Range: 2 - 32 Characters, Default: Connect)
Fonts:	<input type="text" value="'MS UI Gothic', arial, sans-serif"/>	(Range: 1 - 512 Characters, Default: 'MS UI Gothic', arial, sans-serif)
Browser Title:	<input type="text" value="Captive Portal"/>	(Range: 1 - 128 Characters, Default: Captive Portal)
Browser Content:	<input type="text" value="Welcome to the Wireless Network"/>	(Range: 1 - 128 Characters, Default: Welcome to the Wireless Network)

步骤17.在“按钮标签”字段中输入文本以标记用于提交用户名和密码信息的按钮。

User Label:	<input type="text" value="Username"/>	(Range: 1 - 32 Characters)
Password Label:	<input type="text" value="Password"/>	(Range: 1 - 64 Characters)
Button Label:	<input type="text" value="Connect"/>	(Range: 2 - 32 Characters, Default: Connect)
Fonts:	<input type="text" value="'MS UI Gothic', arial, sans-serif"/>	(Range: 1 - 512 Characters, Default: 'MS UI Gothic', arial, sans-serif)
Browser Title:	<input type="text" value="Captive Portal"/>	(Range: 1 - 128 Characters, Default: Captive Portal)
Browser Content:	<input type="text" value="Welcome to the Wireless Network"/>	(Range: 1 - 128 Characters, Default: Welcome to the Wireless Network)

步骤18.在“字体”(Fonts)字段中，在强制网络门户页面上输入要用于所有文本的字体名称。可以输入多个字体名称，每个字体名称用逗号分隔。如果客户端系统上没有第一种字体，则使用下一种字体，依此类推。对于带空格的字体名称，整个名称必须用单引号括起来。

The screenshot shows a configuration interface with several fields. The 'Fonts' field is highlighted with a red box and contains the text: 'MS UI Gothic', arial, sans-serif. The field has a range of 1 - 512 characters and a default value of 'MS UI Gothic', arial, sans-serif. Other fields include 'User Label' (Username), 'Password Label' (Password), 'Button Label' (Connect), 'Browser Title' (Captive Portal), and 'Browser Content' (Welcome to the Wireless Network).

步骤19.在“浏览器标题”字段中输入要在浏览器窗口标题栏中显示的文本。

The screenshot shows the same configuration interface. The 'Browser Title' field is highlighted with a red box and contains the text: 'Captive Portal'. The field has a range of 1 - 128 characters and a default value of 'Captive Portal'. Other fields are the same as in the previous screenshot.

步骤20.在“浏览器内容”字段中输入徽标图像右侧显示的欢迎文本。

The screenshot shows the configuration interface with the 'Browser Content' field highlighted by a red box. It contains the text: 'Welcome to the Wireless Network'. The field has a range of 1 - 128 characters and a default value of 'Welcome to the Wireless Network'. Below it, the 'Content' field contains the text: 'To start using this service, enter your credentials and click the connect button.' and the 'Acceptance Use Policy' field contains the text: 'Acceptance Use Policy.'

步骤21.在“内容”字段的用户名和密码文本框中输入说明性文本，供用户显示。

Browser Content:	Welcome to the Wireless Network	(Range: 1 - 128 Characters, Default: Welcome to the Wireless Network)
Content:	To start using this service, enter your credentials and click the connect button.	(Range: 1 - 256 Characters, Default: To start using this service, enter your credentials)
Acceptance Use Policy:	Acceptance Use Policy.	(Range: 1 - 4096 Characters, Default: Acceptance Use Policy.)

步骤22.在“接受使用策略”字段中输入用户必须接受的登录条件。

Acceptance Use Policy:	Acceptance Use Policy.	(Range: 1 - 4096 Characters, Default: Acceptance Use Policy.)
Accept Label:	Check here to indicate that you have read and accepted the Acceptance Use Policy.	(Range: 1 - 128 Characters, Default: Check here to indicate that you)
No Accept Text:	Error: You must acknowledge the Acceptance Use Policy before connecting!	(Range: 1 - 128 Characters, Default: Error: You must acknowledge)

步骤23.输入文本，提示用户选中复选框以接受“接受使用策略”(Accept Use Policy)和“接受标签”(Accept Label)字段。

Acceptance Use Policy:	Acceptance Use Policy.	(Range: 1 - 4096 Characters, Default: Acceptance Use Policy.)
Accept Label:	Check here to indicate that you have read and accepted the Acceptance Use Policy.	(Range: 1 - 128 Characters, Default: Check here to indicate that you)
No Accept Text:	Error: You must acknowledge the Acceptance Use Policy before connecting!	(Range: 1 - 128 Characters, Default: Error: You must acknowledge)

步骤24.在“不接受文本”字段中，输入用户不接受“接受使用策略”并尝试登录时显示的文本。

No Accept Text: Error: You must acknowledge the Acceptance Use Policy before connecting! (Range: 1 - 128 Characters, Default: Error: You must acknowledge the Acceptance Use Policy before connecting!)

Work In Progress Text: Connecting, please be patient... (Range: 1 - 128 Characters, Default: Connecting, please be patient...)

Denied Text: Error: Invalid Credentials, please try again! (Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)

步骤25.在“正在进行的文本”字段中，输入用户等待身份验证时显示的文本。

No Accept Text: Error: You must acknowledge the Acceptance Use Policy before connecting! (Range: 1 - 128 Characters, Default: Error: You must acknowledge the Acceptance Use Policy before connecting!)

Work In Progress Text: Connecting, please be patient... (Range: 1 - 128 Characters, Default: Connecting, please be patient...)

Denied Text: Error: Invalid Credentials, please try again! (Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)

步骤26.在“拒绝文本”字段中，输入当用户身份验证失败时显示的文本。

Denied Text: Error: Invalid Credentials, please try again! (Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)

Welcome Title: Congratulations! (Range: 1 - 128 Characters, Default: Congratulations!)

Welcome Content: You are now authorized and connected to the network. (Range: 1 - 256 Characters, Default: You are now authorized and connected to the network.)

Delete Locale:

Save Preview...

步骤27.在“欢迎标题”字段中，输入用户成功通过身份验证后显示的文本。

Denied Text: Error: Invalid Credentials, please try again!
(Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)

Welcome Title: Congratulations!
(Range: 1 - 128 Characters, Default: Congratulations!)

Welcome Content: You are now authorized and connected to the network.
(Range: 1 - 256 Characters, Default: You are now authorized and connected to the network.)

Delete Locale:

Save Preview...

步骤28.在“欢迎内容”字段中，输入指示用户何时连接到网络的文本。

Denied Text: Error: Invalid Credentials, please try again!
(Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)

Welcome Title: Congratulations!
(Range: 1 - 128 Characters, Default: Congratulations!)

Welcome Content: You are now authorized and connected to the network.
(Range: 1 - 256 Characters, Default: You are now authorized and connected to the network.)

Delete Locale:

Save Preview...

步骤29. (可选) 如果要删除当前本地配置，请选中删除区域复选框。

Denied Text: Error: Invalid Credentials, please try again!
(Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)

Welcome Title: Congratulations!
(Range: 1 - 128 Characters, Default: Congratulations!)

Welcome Content: You are now authorized and connected to the network.
(Range: 1 - 256 Characters, Default: You are now authorized and connected to the network.)

Delete Locale:

Save Preview...

步骤30.单击Save保存所有配置。

Denied Text: (Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)

Welcome Title: (Range: 1 - 128 Characters, Default: Congratulations!)

Welcome Content: (Range: 1 - 256 Characters, Default: You are now authorized and connected to the network.)

Delete Locale:

Save Preview...

步骤31. (可选) 如果要预览进行的本地配置，请单击**预览**。

Denied Text: (Range: 1 - 128 Characters, Default: Error: Invalid Credentials, please try again!)

Welcome Title: (Range: 1 - 128 Characters, Default: Congratulations!)

Welcome Content: (Range: 1 - 256 Characters, Default: You are now authorized and connected to the network.)


Delete Locale:

Save **Preview...**

系统将打开“强制网络门户Web区域设置Web区域设置参数预览”页：

Captive Portal Web Locale Parameters Preview

CISCO Welcome to the Wireless Network

 Enter your Username

Username:

To start using this service, enter your credentials and click the connect button.

Acceptance Use Policy.

Check here to indicate that you have accepted the Acceptance Use Policy.


注意：预览显示已保存到启动配置的文本和图像。如果进行更改，请单击“保存”，然后单击“预

览”查看更改。


上传/删除自定义映像

您可以使用自己的徽标和图像自定义强制网络门户页面。最多可将18个自定义映像上传到设备（假设6个已配置区域，每个区域有3个映像）。

步骤1.单击强制网络门户Web区域设置参数页面中的上传/删除自定义映像按钮。“Web门户自定义映像”页打开：

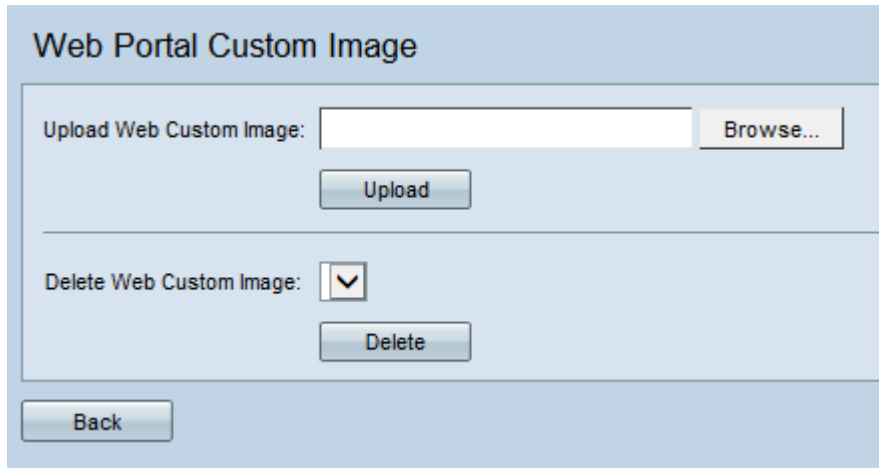

步骤2.如果要从计算机上传要使用的映像，请在“上传Web自定义映像”字段中单击“浏览”。如果要删除图像，请跳至[步骤4](#)。

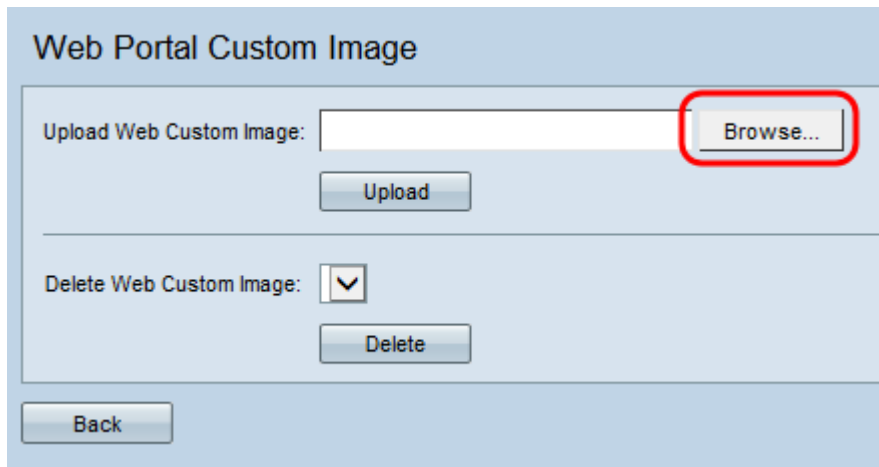

注意：图像必须为5千字节或更小，并且必须是GIF或JPEG格式文件。调整图像大小以适合指定的尺寸。为了获得最佳外观，您的徽标和帐户图像应与下面列出的默认图像尺寸成类似比例：

- 背景 — 10 x 800像素
- 徽标 — 168 x 78像素
- 账户 — 295 x 55像素

步骤3.单击**Upload**将映像上传到WAP设备。

Web Portal Custom Image

Upload Web Custom Image: C:\image_001.gif

Delete Web Custom Image:

[步骤4](#).如果要删除映像，请从删除Web自定义映像下拉列表中选择要删除的文件。否则，请跳至[步骤6](#)。

Web Portal Custom Image

Upload Web Custom Image:

Delete Web Custom Image:
image_001.gif

步骤5.单击**Delete**从WAP设备删除所选文件。

Web Portal Custom Image

Upload Web Custom Image:

Delete Web Custom Image: image_001.gif

注意：删除当前使用的映像会将Web自定义页面的部分重置为默认值。

[步骤6](#).单击“上一步”返回到Web门户自定义页。

Web Portal Custom Image

Upload Web Custom Image:

Delete Web Custom Image:

步骤7.要继续编辑区域设置，您需要再次从强制网络门户Web区域设置下拉列表中选择该区域设置。

Web Portal Customization

Captive Portal Web Locale:

Captive Portal Web Locale Parameters

Web Locale Name: (Range: 1 - 32 Characters)

Captive Portal Instances

可以单击[此](#)处返回区域设置参数部分。