



Cisco Nexus 6000 Series Switches Interfaces Command Reference

First Published: 2016-04-20

Last Modified: 2018-04-03

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

© 2017-2018 Cisco Systems, Inc. All rights reserved.



B Commands

- [bandwidth \(interface\)](#), page 2
- [beacon \(interface\)](#), page 4
- [bfd authentication](#), page 5
- [bfd fabricpath](#), page 7
- [bfd fabricpath encap-ce](#), page 8
- [bfd interval](#), page 9
- [bfd slow-timer](#), page 11

bandwidth (interface)

To set the inherited and received bandwidth values for an interface, use the **bandwidth** command. To restore the default values, use the **no** form of this command.

```
bandwidth {kbps| inherit [ kbps ]}
no bandwidth {kbps| inherit [ kbps ]}
```

Syntax Description	[<i>kbps</i>]	Informational bandwidth in kilobits per second. Valid values are from 1 to 10000000.
	inherit	(Optional) Specifies that the bandwidth be inherited from the parent interface.

Command Default 1000000 kbps

Command Modes Interface configuration mode
Subinterface configuration mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines The **bandwidth** command sets an informational parameter to communicate only the current bandwidth to the higher-level protocols; you cannot adjust the actual bandwidth of an interface using this command.

The **bandwidth inherit** command controls how a subinterface inherits the bandwidth of its main interface.

The **no bandwidth inherit** command enables all subinterfaces to inherit the default bandwidth of the main interface, regardless of the configured bandwidth. If a bandwidth is not configured on a subinterface, and you use the **bandwidth inherit** command, all subinterfaces will inherit the current bandwidth of the main interface. If you configure a new bandwidth on the main interface, all subinterfaces will use this new value.

If you do not configure a bandwidth on the subinterface and you configure the bandwidth inherit command on the main interface, the subinterfaces will inherit the specified bandwidth.

In all cases, if an interface has an explicit bandwidth setting configured, then that interface will use that setting, regardless of whether the bandwidth inheritance setting is in effect.

Examples

This example shows how to configure the bandwidth for a Layer 2 interface:

```
switch(config)# interface ethernet 1/5
switch(config-if)# bandwidth 1000
switch(config-if)#{
```

This example shows how to configure subinterfaces to inherit the bandwidth from the parent routed interface:

```
switch(config)# interface ethernet 1/5
switch(config-if)# no switchport
switch(config-if)# bandwidth inherit 30000
switch(config-if)# interface ethernet 1/1.1
switch(config-subif)#{
```

Related Commands

Command	Description
show interface	Displays the interface configuration information.

beacon (interface)

To turn on the beacon LED for a port of an interface, use the **beacon** command. To turn off the beacon LED for the interface, use the **no** form of this command.

beacon

no beacon

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes Interface configuration mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines Use the **beacon** command to toggle the port LED of an interface to easily identify each time a beacon is sent to check for pending packets on the interface.

Examples This example shows how to turn on the locator beacon LED for a specific interface:

```
switch(config)# interface ethernet 2/1
switch(config-if)# beacon
```

This example shows how to turn off the locator beacon LED for a specific interface:

```
switch(config)# interface ethernet 2/1
switch(config-if)# no beacon
```

Related Commands

Command	Description
show interface	Displays configuration information for an interface.

bfd authentication

To configure SHA-1 authentication for all Bidirectional Forwarding Detection (BFD) sessions on the interface, use the **bfd authentication** command. To disable SHA-1 authentication on the interface, use the **no** form of the command.

```
bfd [fabricpath] authentication keyed-SHA1 key-id id {hex-key hex-key| key ascii-key}
no bfd [fabricpath] authentication
```

Syntax Description

[fabricpath]	(Optional) Enables BFD authentication for the fabricpath session.
key-id	Specifies the key ID to use in BFD frames.
id	Key ID value. The range is from 1 to 255.
hex-key	Specifies the HEX binary SHA1 secret.
hex-key	HEX binary SHA1 secret. A hex-key can be any case-sensitive, alphanumeric string up to 40 characters.
key	Specifies the ASCII SHA1 secret.
ascii-key	SHA1 secret value. An ASCII key can be any case-sensitive, alphanumeric string up to 20 characters.

Command Default

None

Command Modes

Interface configuration mode

Command History

Release	Modification
7.0(0)N1(1)	The fabricpath keyword was added.
6.0(2)N2(1)	This command was introduced.

Usage Guidelines

Configures SHA-1 authentication for all BFD sessions on the interface. The `ascii_key` string is a secret key shared among BFD peers. The `id` value, a number between 0 and 255, is assigned to this particular `ascii_key`. BFD packets specify the key by ID, allowing the use of multiple active keys.

bfd authentication

Use the optional fabricpath keyword to configure SHA-1 authentication for fabricpath BFD sessions.

Examples

This example shows how to configure SHA-1 authentication for all BFD sessions on the interface:

```
switch# configure terminal  
switch(config)# interface ethernet 3/1  
switch(config-if)# bfd authentication keyed-SHA1 key-id 23 key cisco123  
switch(config-if)#
```

Related Commands

Command	Description
feature bfd	Enables the BFD feature.

bfd fabricpath

To enable a Bidirectional Forwarding Detection (BFD) fabricpath session on a specific interface, use the **bfd fabricpath** command. To disable the setting, use the **no** form of the command.

bfd fabricpath

no bfd fabricpath

Syntax Description This command has no arguments or keywords.

Command Modes Enabled for fabricpath core ports.

Disabled for non-fabricpath core ports.

Command History

Release	Modification
7.0(0)N1(1)	This command was introduced.

Usage Guidelines

If the command is disabled, all sessions matching the address family on the interface will be put into admit down state. The session will be maintained and client requests for the session on the interface will be accepted.

Examples

This example shows how to enable a BFD fabricpath for an interface:

```
switch# configure terminal
switch(config)# interface ethernet 3/1
switch(config-if)# fabricpath isis bfd
```

Related Commands

Command	Description
feature bfd	Enables the BFD feature.

bfd fabricpath encap-ce

bfd fabricpath encap-ce

To select the encapsulation mode for L2BFD frames on a per-session basis, use the **bfd fabricpath encap-ce** command. To disable the setting, use the **no** form of the command.

bfd fabricpath encap-ce

[no] **bfd fabricpath encap-ce**

Syntax Description

encap-ce	To select the encapsulation mode for L2BFD frames on a per-session basis. On enabling, a L2BFD frame is sent out with Ethernet encapsulation and by default it is sent with fabricpath encapsulation. The encapsulation mode cannot be changed once the session has been initiated.
-----------------	---

Command Default

Default mode

Command Modes

Interface configuration mode

Command History

Release	Modification
7.2(0)N1(1)	This command was introduced.

Usage Guidelines

This command is mandatory for interoperability with Cisco Nexus 7000 Series switch and is optional for interoperability with other Cisco Nexus 5000 Series and Cisco Nexus 6000 Series switches.

Examples

This example shows how to enable a BFD fabricpath encapsulation for an interface:

```
switch# configure terminal
switch(config)# interface int-if
switch(config-if)# bfd fabricpath encap-ce
switch(config-if)# fabricpath isis bfd
```

Related Commands

Command	Description
bfd fabricpath	To enable a Bidirectional Forwarding Detection (BFD) fabricpath session on a specific interface.

bfd interval

To configure Bidirectional Forwarding Detection (BFD) session parameters, use the **bfd interval** command. To return to the default setting, use the **no** form of the command.

bfd [fabricpath] interval *mintx min_rx msec multiplier value*
no bfd [fabricpath] interval

Syntax Description

[fabricpath]	(Optional) Configures BFD session parameters for the fabricpath session.
<i>mintx</i>	Rate at which BFD control packets are sent to BFD neighbors. The configurable range is from 50 to 999.
<i>min_rx msec</i>	Specifies the rate at which BFD control packets are expected to be received from BFD neighbors. The range is from 50 to 999.
<i>multiplier value</i>	Specifies the number of consecutive BFD control packets that must be missed from a BFD neighbor before BFD declares that the neighbor is unavailable and the BFD neighbor is informed of the failure. The range is from 3 to 50.

Command Default BFD interval: 50 milliseconds
 min_rx: 50 milliseconds
 multiplier: 3

Command Modes Global configuration mode
 Interface configuration mode

Command History

Release	Modification
7.0(0)N1(1)	The fabricpath keyword was added. The minimum configurable range for BFD interval was changed to 50 from 250 milliseconds.
6.0(2)N2(1)	This command was introduced.

bfd interval**Usage Guidelines**

BFD session parameters configured at the interface level take precedence over the globally configured BFD session parameters.

Use the optional fabricpath keyword to configure the global parameters for fabricpath BFD sessions.

**Note**

The **bfd fabricpath interval** command cannot be enabled on a non-fabricpath port.

Examples

This example shows how to set the BFD session parameters for an interface:

```
switch# configure terminal
switch(config)# interface ethernet 3/1
switch(config-if)# bfd fabricpath interval 50 min_rx 20 multiplier 3
```

Related Commands

Command	Description
feature bfd	Enables the BFD feature.

bfd slow-timer

To configure the Bidirectional Forwarding Detection (BFD) slow timer value, use the **bfd slow-timer** command. To return to the default setting, use the **no** form of this command.

bfd [fabricpath] slow-timer milliseconds

no bfd [fabricpath] slow-timer

Syntax Description

[fabricpath]	(Optional) Configures the slow timer in milliseconds, used in the echo function for the fabricpath session.
milliseconds	BFD slow timer value, in milliseconds. The range is from 1000 to 30000.

Command Default 2000 milliseconds

Command Modes Interface configuration mode

Command History

Release	Modification
7.0(0)N1(1)	The fabricpath keyword was added.
6.0(2)N2(1)	This command was introduced.

Usage Guidelines

Configures the slow timer used in the echo function.

This value determines how fast BFD starts up a new session and at what speed the asynchronous sessions use for BFD control packets when the echo function is enabled. The slow-timer value is used as the new control packet interval, while the echo packets use the configured BFD intervals. The echo packets are used for link failure detection, while the control packets at the slower rate maintain the BFD session.

Examples

This example shows how to configure the BFD slow timer value to 14,000 milliseconds for fabricpath sessions on an interface:

```
switch# configure terminal
switch(config)# interface ethernet 2/1
switch(config-if)# bfd fabricpath slow-timer 14000
switch(config-if)#
```

bfd slow-timer**Related Commands**

Command	Description
feature bfd	Enables the BFD feature.



C Commands

- [carrier-delay](#), page 14
- [cdp](#), page 16
- [cdp enable](#), page 18
- [channel-group \(Ethernet\)](#), page 20
- [clear lacp counters](#), page 24
- [clear mac access-list counters](#), page 25

carrier-delay

To set the carrier delay on a serial interface, use the **carrier-delay** command. To return to the default carrier delay value, use the **no** form of this command.

carrier-delay {delay-seconds| msec milliseconds}
no carrier-delay

Syntax Description

<i>delay-seconds</i>	Time, in seconds, to wait for the system to change states. Enter an integer in the range 0 to 60.
msec	Specifies the delay time in milliseconds.
<i>milliseconds</i>	Time, in milliseconds, to wait for the system to change states. Enter an integer in the range 0 to 1000.

Command Default The default carrier-delay value is 100 milliseconds.

Command Modes Interface VLAN configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

You can use this command on a VLAN interface.

If a link goes down and comes back up before the carrier delay timer expires, the down state is effectively filtered, and the rest of the software on the switch is not aware that a link-down event occurred. Therefore, a large carrier delay timer results in fewer link-up/link-down events being detected. Setting the carrier delay time to 0 means that every link-up/link-down event is detected.

This command does not require a license.

Examples

This example shows how to change the carrier delay to 10 seconds:

```
switch# configure terminal
switch(config)# interface vlan 5
switch(config-if)# carrier-delay 10
switch(config-if)#
```

This example shows how to revert to the default carrier delay value:

```
switch# configure terminal
switch(config)# interface vlan 5
```

```
switch(config-if)# no carrier-delay  
switch(config-if)#[/pre]
```

Related Commands

Command	Description
show running-config interface	Displays the running configuration information for an interface.

cdp

cdp

To enable the Cisco Discovery Protocol (CDP) and configure CDP attributes, use the **cdp** command. To disable CDP or reset CDP attributes, use the **no** form of this command.

```
cdp { advertise { v1 | v2 } | enable | format device-id { mac-address | serial-number | system-name } | holdtime seconds | timer seconds }
no cdp { advertise | enable | format device-id { mac-address | serial-number | system-name } | holdtime seconds | timer seconds }
```

Syntax Description

advertise { v1 v2 }	Configures the version to use to send CDP advertisements. Version-2 is the default state.
enable	Enables CDP for all Ethernet interfaces.
format device-id	Configures the format of the CDP device ID.
mac-address	Uses the MAC address as the CDP device ID.
serial-number	Uses the serial number as the CDP device ID.
system-name	Uses the system name, which can be expressed as a fully qualified domain name, as the CDP device ID. This is the default.
holdtime seconds	Specifies the amount of time a receiver should hold CDP information before discarding it. The range is from 10 to 255 seconds; the default is 180 seconds.
timer seconds	Sets the transmission frequency of CDP updates in seconds. The range is from 5 to 254; the default is 60 seconds.

Command Default None

Command Modes Global configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to enable CDP on all Ethernet interfaces:

```
switch# configure terminal  
switch(config)# cdp enable
```

This example shows how to configure the MAC address as the CDP device ID:

```
switch# configure terminal  
switch(config)# cdp format device-id mac-address
```

This example shows how to disable CDP on all Ethernet interfaces:

```
switch# configure terminal  
switch(config)# no cdp enable
```

Related Commands

Command	Description
show cdp	Displays Cisco Discovery Protocol (CDP) information.

cdp enable

cdp enable

To enable the Cisco Discovery Protocol (CDP) on an interface, use the **cdp enable** command. To disable CDP on the interface, use the **no** form of this command.

cdp enable

no cdp enable

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes Interface configuration mode

Virtual Ethernet interface configuration mode

Command History

	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines

You can use this command on the following interfaces:

- Ethernet interface
- Management interface
- Virtual Ethernet interface

Examples

This example shows how to enable CDP on an Ethernet interface:

```
switch# configure terminal
switch(config)# interface ethernet 1/1
switch(config-if)# cdp enable
```

This example shows how to enable CDP on a specific virtual Ethernet interface:

```
switch# configure terminal
switch(config)# interface vethernet 1
switch(config-if)# cdp enable
```

This example shows how to disable CDP on a specific virtual Ethernet interface:

```
switch# configure terminal
switch(config)# interface vethernet 1
switch(config-if)# no cdp enable
```

Related Commands

Command	Description
show cdp	Displays Cisco Discovery Protocol (CDP) information.
show interface	Displays the interface configuration information.

channel-group (Ethernet)

To assign and configure a physical interface to an EtherChannel, use the **channel-group** command. To remove the channel group configuration from the interface, use the **no** form of this command.

```
channel-group number [force] [mode {active|on|passive}]
no channel-group [ number ]
```

Syntax Description

[<i>number</i>]	Number of channel group. The <i>number</i> range is from 1 to 4096. Cisco NX-OS creates the EtherChannel associated with this channel group if the EtherChannel does not already exist.
force	(Optional) Specifies that the LAN port be forcefully added to the channel group.
mode	(Optional) Specifies the EtherChannel mode of the interface.
active	Specifies that when you enable the Link Aggregation Control Protocol (LACP), this command enables LACP on the specified interface. The interface is in an active negotiating state, in which the port initiates negotiations with other ports by sending LACP packets.
on	This is the default channel mode. Specifies that all EtherChannels that are not running LACP remain in this mode. If you attempt to change the channel mode to active or passive before enabling LACP, the switch returns an error message. After you enable LACP globally, by using the feature lacp command, you enable LACP on each channel by configuring the channel mode as either active or passive. An interface in this mode does not initiate or respond to LACP packets. When an LACP attempts to negotiate with an interface in the on state, it does not receive any LACP packets and becomes an individual link with that interface; it does not join the channel group. The default mode is on .

passive	Specifies that when you enable LACP, this command enables LACP only if an LACP device is detected. The interface is in a passive negotiation state, in which the port responds to LACP packets that it receives but does not initiate LACP negotiation.
----------------	---

Command Default None

Command Modes Interface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

Use this command to create a channel group that includes the interface that you are working on and to add or remove specific interfaces from the channel group. Use this command to move a port from one channel group to another. You enter the channel group that you want the port to move to; the switch automatically removes the specified port from its present channel group and adds it to the specified channel group.

Use the **force** keyword to force the addition of the interface into the specified channel group.

After you enable LACP globally, by using the **feature lacp** command, you enable LACP on each channel by configuring the channel mode as either **active** or **passive**. An EtherChannel in the **on** channel mode is a pure EtherChannel and can aggregate a maximum of eight ports. The EtherChannel does not run LACP.

You cannot change the mode for an existing EtherChannel or any of its interfaces if that EtherChannel is not running LACP; the channel mode remains as **on**. The system returns an error message if you attempt to change the mode.

Use the **no** form of this command to remove the physical interface from the EtherChannel. When you delete the last physical interface from an EtherChannel, the EtherChannel remains. To delete the EtherChannel completely, use the **no** form of the **interface port-channel** command.

The compatibility check includes the following operational attributes:

- Port mode
- Access VLAN
- Trunk native VLAN
- Tagged or untagged
- Allowed VLAN list
- Switched Port Analyzer (SPAN) (cannot be SPAN source or destination port)
- Storm control

channel-group (Ethernet)

Use the **show port-channel compatibility-parameters** command to see the full list of compatibility checks that Cisco NX-OS uses.

You can only add interfaces configured with the channel mode set to **on** for static EtherChannels, that is, without a configured aggregation protocol. You can only add interfaces configured with the channel mode as **active** or **passive** to EtherChannels that are running LACP.

You can configure these attributes on an individual member port. If you configure a member port with an incompatible attribute, Cisco NX-OS suspends that port in the EtherChannel.

When the interface joins an EtherChannel, some of its individual parameters are overridden with the values on the EtherChannel, as follows:

- MAC address
- Spanning Tree Protocol (STP)
- Service policy
- Quality of service (QoS)
- Access control lists (ACLs)

Interface parameters, such as the following, remain unaffected when the interface joins or leaves a EtherChannel:

- Description
- Cisco Discovery Protocol (CDP)
- LACP port priority
- Debounce
- Rate mode
- Shutdown
- SNMP trap

If interfaces are configured for the EtherChannel interface and a member port is removed from the EtherChannel, the configuration of the EtherChannel interface is not propagated to the member ports.

Any configuration changes that you make in any of the compatibility parameters to the EtherChannel interface are propagated to all interfaces within the same channel group as the EtherChannel (for example, configuration changes are also propagated to the physical interfaces that are not part of the EtherChannel but are part of the channel group).

Examples

This example shows how to add an interface to LACP channel group 5 in active mode:

```
switch(config)# interface ethernet 1/1
switch(config-if)# channel-group 5 mode active
switch(config-if)#

```

This example shows how to forcefully add an interface to the channel group 5:

```
switch(config)# interface ethernet 1/1
switch(config-if)# channel-group 5 force
switch(config-if)#

```

Related Commands

Command	Description
show interface port-channel	Displays information about the traffic on the specified EtherChannel interface.
show lacp	Displays LACP information.
show port-channel summary	Displays information on the EtherChannels.

clear lacp counters

clear lacp counters

To clear the Link Aggregation Control Protocol (LACP) counters, use the **clear lacp counters** command.

clear lacp counters [interface port-channel *channel-num*]

Syntax Description

interface	(Optional) Clears the LACP counters of a specific interface.
port-channel <i>channel-num</i>	(Optional) Specifies a port channel interface. The range is from 1 to 4096.

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

This command does not require a license.

Examples

This example shows how to clear all LACP counters:

```
switch# clear lacp counters
```

This example shows how to clear the LACP on a port channel:

```
switch# clear lacp counters interface port-channel 100
```

Related Commands

Command	Description
show lacp	Displays LACP information.

clear mac access-list counters

To clear statistical information from the access list, use the **clear mac access-list counters** command.

clear mac access-list counters [*name*]

Syntax Description	[<i>name</i>]	(Optional) Name of a specific counter to clear . The name can be a maximum of 64 characters.
---------------------------	-----------------	--

Command Default None

Command Modes EXEC mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Examples This example shows how to clear statistical information from the access list:

```
switch# clear mac access-list counters
```

Related Commands

Command	Description
show mac access-lists	Displays the information about the MAC address table.

```
clear mac access-list counters
```



D Commands

- [delay \(interface\)](#), page 28
- [description \(interface\)](#), page 29
- [duplex](#), page 31

delay (interface)

delay (interface)

To set a delay value for an interface, use the **delay** command. To restore the default delay value, use the **no** form of this command.

delay *tens-of-microseconds*

no delay

Syntax Description

<i>tens-of-microseconds</i>	Throughput delay in tens of microseconds. The range is from 1 to 16,777,215.
-----------------------------	--

Command Default

10 microseconds

Command Modes

Interface configuration mode
Subinterface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to set a delay of 30,000 microseconds on an interface:

```
switch(config)# interface ethernet 1/1
switch(config-if)# delay 30000
switch(config-if)#
```

This example shows how to set a delay of 1000 microseconds on a subinterface:

```
switch(config)# interface ethernet 1/1.1
switch(config-subif)# delay 1000
switch(config-subif)#
```

Related Commands

Command	Description
interface ethernet (Layer 3)	Configures an Ethernet routed interface.
show interface	Displays the interface configuration information.

description (interface)

To add a description to an interface configuration, use the **description** command. To remove the description, use the **no** form of this command.

description *description*

no description

Syntax Description

description	String description of the interface configuration. This string is limited to 80 characters.
--------------------	---

Command Default

No description is added.

Command Modes

Interface configuration mode
Subinterface configuration mode
Virtual Ethernet interface configuration

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

The **description** command is meant to provide a reminder in the configuration to describe what certain interfaces are used for. The description appears in the output of the following commands such as **show interface** and **show running-config**.

You can use this command on the following interfaces:

- Ethernet interface
- Management interface
- Subinterfaces
- Virtual Ethernet interface

Examples

This example shows how to add a description for an interface:

```
switch# configure terminal
switch(config)# interface ethernet 1/1
switch(config-if)# description "10G Server Link"
switch(config-if)#

```

description (interface)

This example shows how to add a description for a virtual Ethernet interface:

```
switch# configure terminal
switch(config)# interface vethernet 1
switch(config-if)# description "Virtual interface"
switch(config-if)#

```

Related Commands

Command	Description
show interface ethernet	Displays the interface configuration information.
show interface vethernet	Displays the virtual Ethernet interface configuration information.
show running-config	Displays the contents of the currently running configuration file.

duplex

To specify the duplex mode as full, half, or autonegotiate, use the **duplex** command. To return the system to default mode, use the **no** form of this command.

```
duplex {full| half| auto}
no duplex {full| half| auto}
```

Syntax Description

full	Specifies the duplex mode as full.
half	Specifies the duplex mode as half. Note This keyword is not supported on a management interface.
auto	Specifies the duplex mode as autonegotiate.

Command Default None

Command Modes Interface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

The interface speed that you specify can affect the duplex mode used for an interface, so you should set the speed before setting the duplex mode. If you set the speed for autonegotiation, the duplex mode is automatically set to be autonegotiated. If you specify 10- or 100-Mbps speed, the port is automatically configured to use half-duplex mode, but you can specify full-duplex mode instead. Gigabit Ethernet is full duplex only. You cannot change the duplex mode on Gigabit Ethernet ports or on a 10/100/1000-Mbps port that is set for Gigabit Ethernet.

See the *Cisco Nexus 5000 Series NX-OS Layer 2 Switching Configuration Guide* for more information on interface speed and duplex settings.

This command does not require a license.

Examples

This example shows how to specify the duplex mode for full duplex:

```
switch# configure terminal
switch(config)# interface ethernet 1/5
switch(config-if)# duplex full
switch(config-if)#
```

duplex**Related Commands**

Command	Description
show interface	Displays information about the interface, which includes the duplex parameter.



E Commands

- [errdisable detect cause](#), page 34
- [errdisable recovery cause](#), page 35
- [errdisable recovery interval](#), page 37

errdisable detect cause

errdisable detect cause

To enable error-disable (err-disabled) detection in an application, use the **errdisable detect cause** command. To disable error disable detection, use the **no** form of this command.

errdisable detect cause {all| link-flap| loopback}

no errdisable detect cause {all| link-flap| loopback}

Syntax Description

all	Enables error detection on all cases.
link-flap	Enables error disable detection on linkstate-flapping.
loopback	Enables error disable detection on loopback.

Command Default

Enabled

Command Modes

Global configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

When error disable detection is enabled and a cause is detected on an interface, the interface is placed in an err-disabled state, which is an operational state that is similar to the link-down state.

Examples

This example shows how to enable the err-disabled detection on linkstate-flapping:

```
switch(config)# errdisable detect cause link-flap
switch(config)#
```

Related Commands

Command	Description
errdisable recovery	Configures recovery from the err-disabled state.
show interface status err-disabled	Displays the interface error disabled state.

errdisable recovery cause

To configure the application to bring the interface out of the error-disabled (err-disabled) state and retry coming up, use the **errdisable recovery cause** command. To revert to the defaults, use the **no** form of this command.

```
errdisable recovery cause {all| bpduguard| failed-port-state| link-flap-recovery| pause-rate-limit| udld}
no errdisable recovery cause {all| bpduguard| failed-port-state| link-flap-recovery| pause-rate-limit|
udld}
```

Syntax Description

all	Enables a timer to recover from all causes.
bpduguard	Enables a timer to recover from bridge protocol data unit (BPDU) Guard error disable state.
failed-port-state	Enables a timer to recover from a Spanning Tree Protocol (STP) set port state failure.
link-flap	Enables a timer to recover from linkstate flapping.
pause-rate-limit	Enables a timer to recover from the pause rate limit error disabled state.
udld	Enables a timer to recover from the Unidirectional Link Detection (UDLD) error disabled state.

Command Default

None

Command Modes

Global configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

When error disable recovery is enabled, the interface automatically recovers from the err-disabled state, and the device retries bringing the interface up.

Examples

This example shows how to enable error disable recovery from linkstate-flapping:

```
switch(config)# errdisable recovery cause link-flap
switch(config)#
```

errdisable recovery cause**Related Commands**

Command	Description
errdisable detect cause	Enables the error disabled (err-disabled) detection.
show interface status err-disabled	Displays the interface error disabled state.

errdisable recovery interval

To configure the recovery time interval to bring the interface out of the error-disabled (err-disabled) state, use the **errdisable recovery interval** command. To revert to the defaults, use the **no** form of this command.

errdisable recovery interval *time*

no errdisable recovery interval

Syntax Description

<i>time</i>	Error disable recovery time interval. The range is from 30 to 65535 seconds.
-------------	--

Command Default

Disabled

Command Modes

Global configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

When error disable recovery is enabled, the interface automatically recovers from the err-disabled state, and the device retries bringing the interface up.

The device waits 300 seconds to retry.

Examples

This example shows how to enable error disable recovery time interval to 100 seconds:

```
switch(config)# errdisable recovery interval 100
switch(config)#
```

Related Commands

Command	Description
errdisable recovery cause	Enables an error disabled recovery on an interface.
show interface status err-disabled	Displays the interface error disabled state.

errdisable recovery interval



F Commands

- [fabric-mode](#), page 40
- [feature adapter-fex](#), page 41
- [feature bfd](#), page 43
- [feature lacp](#), page 44
- [feature lldp](#), page 45
- [feature poe](#), page 47
- [feature port-security](#), page 48
- [feature udld](#), page 50

fabric-mode

fabric-mode

To select the fabric mode, use the **fabric-mode** command.

fabric-mode {10g| 40g}

Syntax Description

10g-optimized	Sets the fabric mode to 10G.
40g-optimized	Sets the fabric mode to 40G.

Command Default 40G

Command Modes Global configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines None

Examples

This example shows how to set the fabric mode to 10G:

```
switch# configure terminal
switch(config)# fabric-mode 10g
```

This example shows how to set the fabric mode to 40G:

```
switch# configure terminal
switch(config)# fabric-mode 40g
```

feature adapter-fex

To enable the Adapter Fabric Extender (Adapter-FEX), use the **feature adapter-fex** command. To disable Adapter-FEX, use the **no** form of this command.

feature adapter-fex

no feature adapter-fex

Syntax Description	This command has no arguments or keywords.
---------------------------	--

Command Default	Disabled
------------------------	----------

Command Modes	Global configuration mode
----------------------	---------------------------

Command History	Release	Modification
	5.1(3)N1(1)	This command was introduced.

Usage Guidelines	Before you disable this feature on the switch, do the following:
-------------------------	--

- Remove all virtual Ethernet interface configurations on the switch.
- Remove all port profiles of type vethernet.
- Change the port mode to access by using the **switchport mode access** command.

If you attempt to disable the Adapter-FEX feature with virtual Ethernet interface or port profile configurations enabled, the switch returns an error message.

Before you use a virtual Ethernet interface, you must enable Cisco Virtual Machine Fabric Extender (VM-FEX) on the switch by using the **feature vmfex** command.

Examples	This example shows how to enable Adapter-FEX on the switch:
-----------------	---

```
switch# configure terminal
switch(config)# feature adapter-fex
Virtualization Plugin license checked out successfully
Virtualization Plugin extracted successfully
All Virtualization processes enabled successfully
switch(config)#

```

This example shows how to disable Adapter-FEX on the switch:

```
switch# configure terminal
switch(config)# no feature adapter-fex
Disabled feature adapter-fex successfully.
You should save the configuration and Reload.
switch(config)#

```

feature adapter-fex

This example shows the error message that appears when you attempt to disable Adapter-FEX on a switch with virtual Ethernet interface configurations enabled:

```
switch# configure terminal
switch(config)# no feature adapter-fex
Disabling of NIV failed.veth and vntag configs found
Shutdown all veths and Remove them.
Change ports with 'switchport mode vntag' to 'switchport mode access'.
switch(config)#

```

Related Commands

Command	Description
interface vethernet	Configures a virtual Ethernet interface.
port-profile	Configures a port profile.
show feature	Displays whether or not Adapter-FEX is enabled on the switch.
switchport mode	Configures the interface as a nontrunking nontagged single-VLAN Ethernet interface.

feature bfd

To enable Bidirectional Forwarding Detection (BFD), use the **feature bfd** command. To disable BFD, use the **no** form of this command.

feature bfd

no feature bfd

Syntax Description This command has no arguments or keywords.

Command Default Disabled

Command Modes Global configuration mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines None.

Examples This example shows how to enable BFD on the switch:

```
switch# configure terminal  
switch(config)# feature bfd  
switch(config)#
```

feature lacp

feature lacp

To enable the Link Aggregation Control Protocol (LACP), which bundles a number of physical ports together to form a single logical channel, use the **feature lacp** command. To disable LACP on the switch, use the **no** form of this command.

```
feature lacp
no feature lacp
```

Syntax Description This command has no arguments or keywords.

Command Default LACP is disabled.

Command Modes Global configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

You must remove all the LACP configuration parameters from all EtherChannels on the switch before you can disable LACP.

Even after you enable LACP globally, you do not have to run LACP on all EtherChannels on the switch. You enable LACP on each channel mode using the **channel-group mode** command.

Examples

This example shows how to enable LACP EtherChannels on the switch:

```
switch(config)# feature lacp
```

Related Commands

Command	Description
showlacp	Displays information on LACP.
show feature	Displays whether or not LACP is enabled on the switch.

feature lldp

To enable the Link Layer Discovery Protocol (LLDP) on a device, use the **feature lldp** command in global configuration mode. To disable the LLDP feature, use the **no** form of the command. Feature LLDP is enabled on the switch by default.

feature lldp

no feature lldp

Syntax Description	This command has no arguments or keywords.
---------------------------	--

Command Default	Enabled
------------------------	---------

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines	You cannot enable or disable LLDP on a Cisco Nexus device. LLDP is enabled on the switch by default. However, the feature lldp command shows as part of the running configuration on the switch, as shown below:
-------------------------	---

```
switch#feature lldp
switch# show running-config
!Command: show running-config
!Time: Wed Jan 29 12:36:03 2013

version 6.0(2)N1(1)
feature telnet
feature lldp

username admin password 5 $1$d81kfqC8$4VfRuOoZTKvCtTq8VAKbq/    role network-admin
no password strength-check
ip domain-lookup
hostname switch
class-map type qos class-fcoe
class-map type qos match-all cl
    match cos 1
<--Output truncated-->
switch#
```

The Cisco Discovery Protocol (CDP) is a device discovery protocol that runs over Layer 2 (the data link layer) on all Cisco-manufactured devices (routers, bridges, access servers, and switches). CDP allows network management applications to automatically discover and learn about other Cisco devices connected to the network.

To support non-Cisco devices and to allow for interoperability between other devices, the switch supports the Link Layer Discovery Protocol (LLDP). LLDP is a neighbor discovery protocol that is used for network devices to advertise information about themselves to other devices on the network. This protocol runs over the data-link layer, which allows two systems running different network layer protocols to learn about each other.

feature lldp

Examples

This example shows how to enable LLDP on the switch:

```
switch(config)# feature lldp
switch(config)#+
```

This example shows how to disable LLDP on the switch:

```
switch(config)# no feature lldp
switch(config)#+
```

Related Commands

Command	Description
lldp	Configures the global LLDP options on the switch.
lldp (Interface)	Configures the LLDP feature on an interface.
show feature	Displays that LLDP is enabled on the switch.

feature poe

To enable Power over Ethernet (PoE), use the **feature poe** command. To disable PoE, use the **no** form of this command.

feature poe

no feature poe

Syntax Description This command has no keywords or arguments.

Command Default Disabled

Command Modes Global configuration mode

Command History	Release	Modification
	5.0(3)N2(1)	This command was introduced.

Examples This example shows how to enable PoE on the switch:

```
switch(config)# feature poe
```

Related Commands

Command	Description
power inline	Configures the power usage for interfaces.
show feature	Displays the status of features enabled or disabled on the switch.

feature port-security

To enable port security on Layer 2 interfaces, use the **feature port-security** command. To disable port security, use the **no** form of this command.

feature port-security no **feature port-security**

Syntax Description This command has no keywords or arguments.

Command Default Default

Command Modes Global configuration mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines Use the port security feature to secure a port by limiting and identifying the MAC addresses of the switches that are allowed to access the port.

You can enable port security on a virtual port channel (vPC) port only if the following occurs:

- Port security is enabled on both the vPC peers.
- Port security is enabled on the vPC port on both the vPC peers.

This command does not require a license.

Examples This example shows how to enable port security on the switch:

```
switch# configure terminal
switch(config)# feature port-security
switch(config)#

```

This example shows how to disable port security on the switch:

```
switch# configure terminal
switch(config)# no feature port-security
switch(config)#

```

Related Commands

Command	Description
show feature	Displays the status of features enabled or disabled on the switch.

Command	Description
show port-security	Displays the port security configuration information.
switchport port-security	Configures the switchport parameters to establish port security.

feature udld

feature udld

To enable the Cisco-proprietary Unidirectional Link Detection (UDLD) protocol, which allows ports that are connected through fiber optics or copper Ethernet cables to monitor the physical configuration of the cables and detect when a unidirectional link exists, use the **feature udld** command. To disable UDLD on the switch, use the **no** form of this command.

feature udld
no feature udld

Syntax Description This command has no arguments or keywords.

Command Default UDLD is disabled.

Command Modes Global configuration mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Examples This example shows how to enable UDLD on the switch:

```
switch(config)# feature udld
```

Related Commands

Command	Description
show udld	Displays the administrative and operational UDLD status.
show feature	Displays whether or not UDLD is enabled on the switch.



H Commands

- [hardware multicast hw-hash, page 52](#)
- [high-performance host-netio \(virtual Ethernet interface\), page 54](#)

hardware multicast hw-hash

hardware multicast hw-hash

To use hardware hashing for multicast traffic on an EtherChannel interface, use the **hardware multicast hw-hash** command. To restore the defaults, use the **no** form of this command.

hardware multicast hw-hash

no hardware multicast hw-hash

Syntax Description This command has no arguments or keywords.

Command Default The software selection method is used for multicast traffic.

Command Modes Interface configuration mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines By default, ingress multicast traffic on any port in the switch selects a particular EtherChannel member to egress the traffic. To reduce potential issues with the bandwidth and to provide effective load balancing of the ingress multicast traffic, hardware hashing is used for multicast traffic.



Note Hardware hashing is not available on a Cisco Nexus 2000 Series Fabric Extender HIF port (downlink port).

Examples This example shows how to set the hardware hashing for multicast traffic on an EtherChannel interface:

```
switch(config)# interface port-channel 21
switch(config-if)# hardware multicast hw-hash
switch(config-if)#
```

This example shows how to restore the default software selection method for multicast traffic on an EtherChannel interface:

```
switch(config)# interface port-channel 21
switch(config-if)# hardware multicast hw-hash
switch(config-if)# no hardware multicast hw-hash
switch(config-if)#
```

Related Commands

Command	Description
show interface port-channel	Displays the status of the EtherChannel interface configuration.

high-performance host-netio (virtual Ethernet interface)

To turn on high performance on the host, use the **high-performance host-netio** command. To disable high performance, use the **no** form of this command.

high-performance host-netio

no high-performance host-netio

Syntax Description This command has no arguments or keywords.

Command Default Disabled

Command Modes Virtual Ethernet interface configuration mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines This command does not require a license.

Examples This example shows how to enable high performance on the host:

```
switch# configure terminal
switch(config)# interface vethernet 1
switch(config-if)# high-performance host-netio
switch(config-if)#
```

Related Commands

Command	Description
show interface vethernet	Displays virtual Ethernet interface configuration information.
show running-config interface	Displays the running configuration information for an interface.



I Commands

- [interface breakout](#), page 56
- [interface ethernet](#), page 57
- [interface ethernet \(Layer 3\)](#), page 59
- [interface loopback](#), page 62
- [interface mgmt](#), page 64
- [interface port-channel](#), page 66

interface breakout

To configure the Linecard Expansion Module (LEM) in 10G mode, use the **interface breakout** command. To configure the Linecard Expansion Module (LEM) in 40G mode, use the **no** form of this command.

```
interface breakout slot slot-number port port-range map 10g-4x
nointerface breakout slot slot-number port port-range map 10g-4x
```

Syntax Description

<i>slot-number</i>	The range is from 1 to 8.
<i>port-range</i>	The range is from 1 to 12.

Command Default 40G mode

Command Modes Global configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines You can use this command to configure a LEM in 10G mode and 40G mode.

Examples

This example shows how to configure a LEM in 40G mode:

```
switch# configure terminal
switch(config)# interface breakout slot 1 port 1-12 map 10g-4x
```

This example shows how to configure a LEM in 10G mode:

```
switch# configure terminal
switch(config)# no interface breakout slot 1 port 1-12 map 10g-4x
```

Related Commands

Command	Description
show interface capabilities	Displays detailed information about the capabilities of an interface.

interface ethernet

To enter interface configuration mode for an Ethernet IEEE 802.3 interface, use the **interface ethernet** command.

interface ethernet [chassis_ID [/] slot [/QSFP-module [/] port]

Syntax Description

<i>chassis_ID</i>	(Optional) Fabric Extender chassis ID. The chassis ID is from 100 to 199. Note This argument is not optional when addressing the host interfaces of a Cisco Nexus 2000 Series Fabric Extender.
<i>slot</i>	Slots from 1 to 8. The following list defines the slots available: <ul style="list-style-type: none"> • Slots 1 to 4 are fixed Linecard Expansion Modules (LEMs). • Slots 5 to 8 are hot-swappable LEMs.
<i>QSFP-module</i>	(Optional) The Linecard Expansion Module that has been set to 10G mode. The <i>QSFP-module</i> number is from 1 to 12.
<i>port</i>	Port number within a particular slot. The <i>port</i> number is from 1 to 128.

Command Default None

Command Modes Global configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to enter configuration mode for Ethernet interface 1/4:

```
switch(config)#interface ethernet 1/4
switch(config-if) #
```

This example shows how to enter configuration mode for a host interface on a Fabric Extender:

```
switch(config)#interface ethernet 101/1/1
switch(config-if) #
```

interface ethernet

This example shows how to enter configuration mode for LEM 1/2/1:

```
switch(config)#interface ethernet 1/2/1
switch(config-if) #
```

Related Commands

Command	Description
interface vethernet	Configures a virtual Ethernet interface.
show fex	Displays all configured Fabric Extender chassis connected to the switch.
show interface ethernet	Displays various parameters of an Ethernet IEEE 802.3 interface.
speed	Sets the speed on the interface.
vtp (interface)	Enables VLAN Trunking Protocol (VTP) on an interface.

interface ethernet (Layer 3)

To configure a Layer 3 Ethernet IEEE 802.3 routed interface, use the **interface ethernet** command.

interface ethernet [chassis_ID [/] {slot /[QSFP-module [/] port [. subintf-port-no]]}

Syntax Description

<i>chassis_ID</i>	(Optional) Fabric Extender chassis ID. The chassis ID is from 100 to 199. Note This argument is not optional when addressing the host interfaces of a Cisco Nexus 2000 Series Fabric Extender.
<i>slot</i>	Slots from 1 to 8. The following list defines the slots available: <ul style="list-style-type: none"> • Slots 1 to 4 are fixed Linecard Expansion Modules (LEMs). • Slots 5 to 8 are hot-swappable LEMs.
<i>QSFP-module</i>	(Optional) Linecard Expansion Module (LEM) that has been set to 10G mode.
<i>port</i>	Port number within a particular slot. The port number is from 1 to 128.
.	(Optional) Subinterface separator.
<i>subintf-port-no</i>	(Optional) Port number for the subinterface. The range is from 1 to 48.

Command Default None

Command Modes Global configuration mode
Interface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

interface ethernet (Layer 3)**Usage Guidelines**

You must use the **no switchport** command in the interface configuration mode to configure the interface as a Layer 3 routed interface. When you configure the interface as a Layer 3 interface, all Layer 2-specific configurations on this interface are deleted.

Use the **switchport** command to convert a Layer 3 interface into a Layer 2 interface. When you configure the interface as a Layer 2 interface, all Layer 3-specific configurations on this interface are deleted.

Examples

This example shows how to enter configuration mode for Layer 3 Ethernet interface 1/5:

```
switch(config)#interface ethernet 1/5
switch(config-if)#no switchport
switch(config-if)#ip address 10.1.1.1/24
switch(config-if)#+
```

This example shows how to configure a Layer 3 subinterface for Ethernet interface 1/5 in the global configuration mode:

```
switch(config)#interface ethernet 1/5.2
switch(config-if)#no switchport
switch(config-subif)#ip address 10.1.1.1/24
switch(config-subif)#+
```

This example shows how to configure a Layer 3 subinterface in interface configuration mode:

```
switch(config)#interface ethernet 1/5
switch(config-if)#no switchport
switch(config-if)#interface ethernet 1/5.1
switch(config-subif)#ip address 10.1.1.1/24
switch(config-subif)#+
```

This example shows how to convert a Layer 3 interface to a Layer 2 interface:

```
switch(config)#interface ethernet 1/5
switch(config-if)#no switchport
switch(config-if)#ip address 10.1.1.1/24
switch(config-if)#switchport
switch(config-if)#+
```

Related Commands

Command	Description
bandwidth	Sets the bandwidth parameters for an interface.
delay	Configures the interface throughput delay value.
encapsulation	Sets the encapsulation type for an interface.
ip address	Sets a primary or secondary IP address for an interface.
inherit	Assigns a port profile to an interface.
interface vethernet	Configures a virtual Ethernet interface.
no switchport	Configures an interface as a Layer 3 interface.
service-policy	Configures a service policy for an interface.

Command	Description
show fex	Displays all configured Fabric Extender chassis connected to the switch.
show interface ethernet	Displays various parameters of an Ethernet IEEE 802.3 interface.

interface loopback

To create a loopback interface and enter interface configuration mode, use the **interface loopback** command. To remove a loopback interface, use the **no** form of this command.

interface loopback *number*

no interface loopback *number*

Syntax Description

<i>number</i>	Interface number. The range is from 0 to 1023.
---------------	--

Command Default

None

Command Modes

Global configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

Use the **interface loopback** command to create or modify loopback interfaces.

From the loopback interface configuration mode, the following parameters are available:

- **description**—Provides a description of the purpose of the interface.
- **ip**—Configures IP features, such as the IP address for the interface, Address Resolution Protocol (ARP) attributes, load balancing, Unicast Reverse Path Forwarding (RPF) or IP Source Guard.
- **logging**—Configures logging of events.
- **shutdown**—Shuts down traffic on the interface.

Examples

This example shows how to create a loopback interface:

```
switch(config)# interface loopback 50
switch(config-if)# ip address 10.1.1.1/24
switch(config-if) #
```

Related Commands

Command	Description
show interface loopback	Displays information about the traffic on the specified loopback interface.

interface mgmt

To enter the management interface configuration mode, use the **interface mgmt** command.

interface mgmt *mgmt-intf-num*

Syntax Description

<i>mgmt-intf-num</i>	Management interface number. The interface number is 0.
----------------------	---

Command Default None

Command Modes Global configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to enter the management interface configuration mode:

```
switch# configure terminal
switch(config)# interface mgmt 0
switch(config-if)#
```

Related Commands

Command	Description
show interface mgmt	Displays information about the management interface.
cdp enable	Enables the Cisco Discovery Protocol (CDP) on an interface.
description (interface)	Adds a description to an interface configuration.
duplex	Configures the duplex mode for an interface.
lldp (interface)	Enables the reception or transmission of Link Layer Discovery Protocol (LLDP) packets on an interface.
rate-limit cpu direction	Configures the packet per second (PPS) rate limit for an interface.

Command	Description
snmp trap link-status	Enables Simple Network Management Protocol (SNMP) link trap generation on an interface.
speed	Configures the transmit and receive speed for an interface.
vrf member	Adds an interface to a virtual routing and forwarding (VRF) instance.

interface port-channel

interface port-channel

To create an EtherChannel interface and enter interface configuration mode, use the **interface port-channel** command. To remove an EtherChannel interface, use the **no** form of this command.

interface port-channel *channel-number* [.*subintf-channel-no*]

no interface port-channel *channel-number* [.*subintf-channel-no*]

Syntax Description

<i>channel-number</i>	Channel number that is assigned to this EtherChannel logical interface. The range is from 1 to 4096.
.	(Optional) Subinterface separator. Note Applies to Layer 3 interfaces.
<i>subintf-channel-no</i>	(Optional) Port number of the EtherChannel subinterface. The range is from 1 to 4093. Note Applies to Layer 3 interfaces.

Command Default None

Command Modes Global configuration mode
Interface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines A port can belong to only one channel group.

When you use the **interface port-channel** command for Layer 2 interfaces, follow these guidelines:

- If you are using CDP, you must configure it only on the physical interface and not on the EtherChannel interface.
- If you do not assign a static MAC address on the EtherChannel interface, a MAC address is automatically assigned. If you assign a static MAC address and then later remove it, the MAC address is automatically assigned.
- The MAC address of the EtherChannel is the address of the first operational port added to the channel group. If this first-added port is removed from the channel, the MAC address comes from the next operational port added, if there is one.

You must use the **no switchport** command in the interface configuration mode to configure the EtherChannel interface as a Layer 3 interface. When you configure the interface as a Layer 3 interface, all Layer 2-specific configurations on this interface are deleted.

Use the **switchport** command to convert a Layer 3 EtherChannel interface into a Layer 2 interface. When you configure the interface as a Layer 2 interface, all Layer 3-specific configurations on this interface are deleted.

You can configure one or more subinterfaces on a port channel made from routed interfaces.

Examples

This example shows how to create an EtherChannel group interface with channel-group number 50:

```
switch(config)# interface port-channel 50
switch(config-if) #
```

This example shows how to create a Layer 3 EtherChannel group interface with channel-group number 10:

```
switch(config)# interface port-channel 10
switch(config-if)# no switchport
switch(config-if)# ip address 192.0.2.1/24
switch(config-if) #
```

This example shows how to configure a Layer 3 EtherChannel subinterface with channel-group number 1 in interface configuration mode:

```
switch(config)# interface port-channel 10
switch(config-if)# no switchport
switch(config-if)# interface port-channel 10.1
switch(config-subif)# ip address 192.0.2.2/24
switch(config-subif) #
```

This example shows how to configure a Layer 3 EtherChannel subinterface with channel-group number 20.1 in global configuration mode:

```
switch(config)# interface port-channel 20.1
switch(config-subif)# ip address 192.0.2.3/24
switch(config-subif) #
```

Related Commands

Command	Description
encapsulation	(Layer 3 interfaces) Sets the encapsulation type for an interface.
ip address	(Layer 3 interfaces) Sets a primary or secondary IP address for an interface.
no switchport	(Layer 3 interfaces) Configures an interface as a Layer 3 interface.
show interface	Displays configuration information about interfaces.
show lacp	Displays LACP information.
show port-channel summary	Displays information about the EtherChannels.
vtp (interface)	Enables VLAN Trunking Protocol (VTP) on an interface.

interface port-channel



L Commands

- [lacp graceful-convergence](#), page 70
- [lacp port-priority](#), page 72
- [lacp rate fast](#), page 73
- [lacp suspend-individual](#), page 75
- [lacp system-priority](#), page 77
- [link debounce](#), page 78
- [load-interval](#), page 80

lacp graceful-convergence

To configure port channel Link Aggregation Control Protocol (LACP) graceful convergence, use the **lacp graceful-convergence** command. To disable graceful convergence on a port channel interface, use the **no** form of this command.

lacp graceful-convergence
no lacp graceful-convergence

Syntax Description This command has no arguments or keywords.

Command Default Enabled

Command Modes Interface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

You can use this command only on a port channel interface that is in an administratively down state. You cannot configure (or disable) LACP graceful convergence on a port channel that is in an administratively up state. If you do so, you will see the following error message:

ERROR: Cannot set/reset lacp graceful-convergence for port-channel10 that is admin up



Note

To avoid port suspension, we recommend that you disable graceful convergence on LACP ports on a peer switch that is not running Cisco NX-OS.

This command does not require a license.

Examples

This example shows how to enable LACP graceful convergence on a port channel:

```
switch# configure terminal
switch(config)# interface port-channel 100
switch(config-if)# shutdown
switch(config-if)# lacp graceful-convergence
switch(config-if)#

```

This example shows how to disable LACP graceful convergence on a port channel:

```
switch# configure terminal
switch(config)# interface port-channel 100
switch(config-if)# no lacp graceful-convergence
switch(config-if)#

```

Related Commands

Command	Description
show lacp	Displays LACP information.
show running-config	Displays the running system configuration.

lacp port-priority

To set the priority for the physical interfaces for the Link Aggregation Control Protocol (LACP), use the **lacp port-priority** command. To return the port priority to the default value, use the **no** form of this command.

lacp port-priority *priority*

no lacp port-priority

Syntax Description

<i>priority</i>	Priority for the physical interfaces. The range of valid numbers is from 1 to 65535.
-----------------	--

Command Default

System priority value is 32768.

Command Modes

Interface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

Each port configured to use LACP has an LACP port priority. You can configure a value between 1 and 65535. LACP uses the port priority in combination with the port number to form the port identifier. The port priority is used with the port number to form the port identifier. The port priority is used to decide which ports should be put into standby mode when there is a hardware limitation that prevents all compatible ports from aggregating.



Note

When setting the priority, note that a *higher* number means a *lower* priority.

Examples

This example shows how to set the LACP port priority for the interface to 2000:

```
switch# configure terminal
switch(config)# interface ethernet 1/5
switch(config-if)# lacp port-priority 2000
switch(config-if)#
```

Related Commands

Command	Description
show lacp	Displays LACP information.

lacp rate fast

To configure the rate at which control packets are sent by the Link Aggregation Control Protocol (LACP), use the **lacp rate fast** command. To restore the rate to 30 seconds, use the **no** form of this command or the **lacp rate normal** command.

```
lacp rate fast
no lacp rate
no lacp rate fast
lacp rate normal
```

Syntax Description This command has no arguments or keywords.

Command Default 1 second

Command Modes Interface configuration mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines You must enable LACP before using this command.

You can configure the LACP rate fast feature on the LACP ports of a Cisco Nexus device or a Cisco Nexus Fabric Extender that is connected to a Cisco Nexus device.

The LACP rate fast feature is used to set the rate (once every second) at which the LACP control packets are sent to an LACP-supported interface. The normal rate at which LACP packets are sent is 30 seconds.

Examples This example shows how to configure the LACP fast rate feature on a specified Ethernet interface:

```
switch(config)# interface ethernet 1/1
switch(config-if)# lacp rate fast
```

This example shows how to remove the LACP fast rate configuration from a specified Ethernet interface:

```
switch(config)# interface ethernet 1/1
switch(config-if)# no lacp rate fast
```

Related Commands

Command	Description
feature lacp	Enables or disables LACP on the switch.
interface ethernet	Enters Ethernet interface configuration mode.

lacp rate fast

Command	Description
show lacp	Displays the LACP configuration information.

lacp suspend-individual

To enable Link Aggregation Control Protocol (LACP) port suspension on a port channel, use the **lacp suspend-individual** command. To disable port suspension on a port channel interface, use the **no** form of this command.

lacp suspend-individual
no lacp suspend-individual

Syntax Description This command has no arguments or keywords.

Command Default Disabled

Command Modes Interface configuration mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines LACP sets a port to the suspended state if it does not receive an LACP bridge protocol data unit (BPDU) from the peer ports in a port channel. This can cause some servers to fail to boot up as they require LACP to logically bring up the port.

This command does not require a license.

Examples This example shows how to enable LACP port suspension on a port channel:

```
switch# configure terminal
switch(config)# interface port-channel 100
switch(config-if)# shutdown
switch(config-if)# lacp suspend-individual
switch(config-if)#

```

This example shows how to disable LACP port suspension on a port channel:

```
switch# configure terminal
switch(config)# interface port-channel 100
switch(config-if)# shutdown
switch(config-if)# no lacp suspend-individual
switch(config-if)#

```

Related Commands

Command	Description
show lacp	Displays LACP information.

lacp suspend-individual

Command	Description
show running-config	Displays the running system configuration.

lacp system-priority

To set the system priority of the switch for the Link Aggregation Control Protocol (LACP), use the **lacp system-priority** command. To return the system priority to the default value, use the **no** form of this command.

lacp system-priority *priority*

no lacp system-priority

Syntax Description

<i>priority</i>	Priority for the physical interfaces. The range of valid numbers is from 1 to 65535 .
-----------------	---

Command Default

System priority value is 32768.

Command Modes

Global configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

Each device that runs LACP has an LACP system priority value. You can configure a value between 1 and 65535. LACP uses the system priority with the MAC address to form the system ID and also during negotiation with other systems.

When setting the priority, note that a *higher* number means a *lower* priority.

Examples

This example shows how to set the LACP system priority for the device to 2500:

```
switch(config)# lacp system-priority 2500
```

Related Commands

Command	Description
show lacp	Displays LACP information.

link debounce

link debounce

To enable the debounce timer on an interface, use the **link debounce** command. To disable the timer, use the **no** form of this command.

link debounce [time milliseconds]

no link debounce

Syntax Description

time milliseconds	(Optional) Specifies the extended debounce timer. The range is from 0 to 5000 milliseconds. A value of 0 milliseconds disables the debounce time.
--------------------------	---

Command Default None

Command Modes Interface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

The port debounce time is the amount of time that an interface waits to notify the supervisor of a link going down. During this time, the interface waits to see if the link comes back up. The wait period is a time when traffic is stopped.



Caution

When you enable the debounce timer, link up and link down detections are delayed, resulting in a loss of traffic during the debounce period. This situation might affect the convergence of some protocols.

Examples

This example shows how to enable the debounce timer and set the debounce time to 1000 milliseconds for an Ethernet interface:

```
switch# configure terminal
switch(config)# interface ethernet 1/1
switch(config-if)# link debounce time 1000
```

This example shows how to disable the debounce timer for an Ethernet interface:

```
switch(config-if)# no link debounce
```

Related Commands

Command	Description
show interface ethernet	Displays the interface configuration information.
show interface debounce	Displays the debounce time information for all interfaces.

load-interval

To change the sampling interval for statistics collections on interfaces, use the **load-interval** command. To return to the default sampling interval, use the **no** form of this command.

load-interval [counter {1| 2| 3}] seconds
no load-interval [counter {1| 2| 3}] [seconds]

Syntax Description

1 2 3	Specifies the number of counters configured on the interface.
[seconds]	Specifies the interval between sampling statistics on the interface. The range is from 60 to 300 seconds for VLAN network interfaces, and the range is from 30 to 300 seconds for Ethernet and port-channel interfaces.

Command Default 1—30 seconds; 60 seconds for VLAN network interface
 2—300 seconds
 3—not configured

Command Modes Interface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

Use the load-interval command to obtain bit-rate and packet-rate statistics for three different durations.

You can set the statistics collection intervals on the following types of interfaces:

- Ethernet interfaces
- Port-channel interfaces
- VLAN network interfaces

You cannot use this command on the management interface or subinterfaces.

This command sets the sampling interval for such statistics as packet rate and bit rate on the specified interface.

This command does not require a license.

Examples

This example shows how to set the three sample intervals for the Ethernet port 3/1:

```
switch# configure terminal
switch(config)# interface ethernet 3/1
switch(config-if)# load-interval counter 1 60
switch(config-if)# load-interval counter 2 135
switch(config-if)# load-interval counter 3 225
```

Related Commands

Command	Description
show interface	Displays information about the interface.

load-interval



M Commands

- [management, page 84](#)

management

To configure a switch virtual interface (SVI) that should be used for in-band management, use the **management** command. To remove the in-band management access to a VLAN interface IP address, use the **no** form of this command.

management

no management

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes Interface configuration mode
Switch profile configuration mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines You can use this command on a VLAN interface.

Examples This example shows how to configure a VLAN interface to allow in-band management access:

```
switch# configure terminal
switch(config)# interface vlan 5
switch(config-if)# management
switch(config-if)#

```

This example shows how to remove the in-band management access to a VLAN interface:

```
switch# configure terminal
switch(config)# interface vlan 5
switch(config-if)# no management
switch(config-if)#

```

Related Commands

Command	Description
show running-config interface	Displays the running configuration information for an interface.



N Commands

- [no switchport, page 86](#)

no switchport

no switchport

To configure the interface as a Layer 3 Ethernet interface, use the **no switchport** command.

no switchport

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes Interface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

You can configure any Ethernet port as a routed interface. When you configure an interface as a Layer 3 interface, any configuration specific to Layer 2 on this interface is deleted.

If you want to configure a Layer 3 interface for Layer 2, enter the **switchport** command. Then, if you change a Layer 2 interface to a routed interface, enter the **no switchport** command.

Examples

This example shows how to enable an interface as a Layer 3 routed interface:

```
switch(config)#interface ethernet 1/5
switch(config-if)#no switchport
switch(config-if) #
```

This example shows how to configure a Layer 3 interface as a Layer 2 interface:


```
switch(config)#interface ethernet 1/5
switch(config-if)#switchport
switch(config-if) #
```

Related Commands

Command	Description
copy running-config startup-config	Saves the running configuration to the startup configuration file.
interface ethernet(Layer 3)	Configures an Ethernet routed interface or subinterface.
interface loopback	Configures a loopback interface.
interface port-channel	Configures an EtherChannel interface or subinterface.

Command	Description
ipaddress	Sets a primary or secondary IP address for an interface.
showinterfaces	Displays interface information.

no switchport

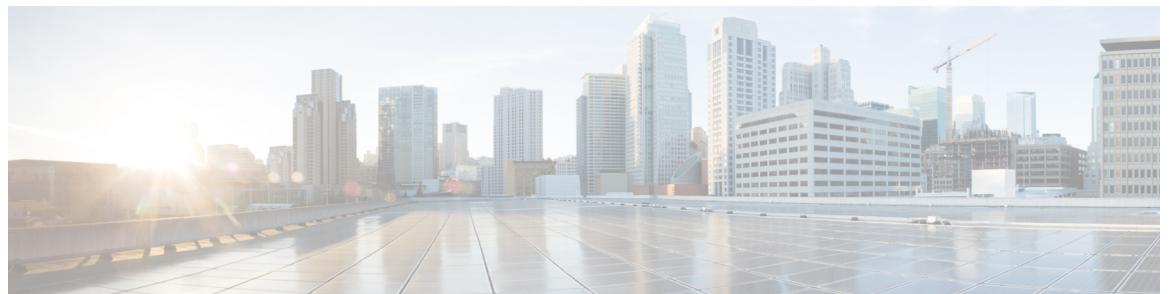

P Commands

- [peer-switch](#), page 90
- [port](#), page 91
- [port-channel load-balance ethernet](#), page 93

peer-switch

To enable the virtual port channel (vPC) switch pair to appear as a single Spanning Tree Protocol (STP) root in the Layer 2 topology, use the **peer-switch** command. To disable the peer switch vPC topology, use the **no** form of this command.

peer-switch

no peer-switch

Syntax Description This command has no arguments or keywords.

Command Default Peer switch Layer 2 topology is disabled.

Command Modes vPC domain configuration mode
network-admin

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines This command does not require a license.

Examples This example shows how to enable the vPC switch pair to appear as a single STP root in the Layer 2 topology:

```
switch(config)# vpc domain 5
switch(config-vpc-domain)# peer-switch
2013 Jan 30 14:44:44 switch %STP-2-VPC_PEER_SWITCH_CONFIG_ENABLED: vPC peer-switch
configuration is enabled. Please make sure to configure spanning tree "bridge" priority as
per recommended guidelines to make vPC peer-switch operational.
```

Related Commands

Command	Description
vpc domain	Creates a virtual port-channel (vPC) domain.

port

To configure a unified port on a Cisco Nexus 5548UP switch or Cisco Nexus 5596UP switch, use the **port** command. To remove the unified port, use the **no** form of this command.

port *port-number* **type** {**ethernet**|**fc**}
no **port** *port-number* **type** {**ethernet**|**fc**}

Syntax Description

<i>port-number</i>	Port number. The range is from 1 to 199.
type	Specifies the type of port to configure on a slot in a chassis.
ethernet	Specifies an Ethernet port.
fc	Specifies a Fibre Channel (FC) port.

Command Default

None

Command Modes

Slot configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

Unified ports allow you to configure ports as Ethernet, native Fibre Channel or Fibre Channel over Ethernet (FCoE) ports. By default, the ports are Ethernet ports but you can change the port mode to Fibre Channel on the following unified ports:

- Any port on the Cisco Nexus 5548UP switch or the Cisco Nexus 5596UP switch.
- The ports on the Cisco N55-M16UP expansion module that is installed in a Cisco Nexus 5548P switch.

You must configure Ethernet ports and FC ports in a specified order:

- FC ports must be configured from the last port of the module.
- Ethernet ports must be configured from the first port of the module.

If the order is not followed, the following errors are displayed:

```
ERROR: Ethernet range starts from first port of the module
ERROR: FC range should end on last port of the module
```

On a Cisco Nexus 5548UP switch, the 32 ports of the main slot (slot1) are unified ports. The Ethernet ports start from port 1/1 to port 1/32. The FC ports start from port 1/32 backwards to port 1/1.

Examples

This example shows how to configure a unified port on a Cisco Nexus 5548UP switch or Cisco Nexus 5596UP switch:

```
switch# configure terminal
switch(config)# slot 1
switch(config-slot)# port 32 type fc
switch(config-slot)# copy running-config startup-config
switch(config-slot)# reload
```

This example shows how to configure a unified port on a Cisco N55-M16UP expansion module:

```
switch# configure terminal
switch(config)# slot 2
switch(config-slot)# port 32 type fc
switch(config-slot)# copy running-config startup-config
switch(config-slot)# reload
```

This example shows how to configure 20 ports as Ethernet ports and 12 as FC ports:

```
switch# configure terminal
switch(config)# slot 1
switch(config-slot)# port 21-32 type fc
switch(config-slot)# copy running-config startup-config
switch(config-slot)# reload
```

Related Commands

Command	Description
slot	Enables preprovisioning of features or interfaces of a module on a slot in a chassis.
reload	Reloads the switch and all attached Fabric Extender chassis or a specific Fabric Extender.

port-channel load-balance ethernet

To configure the load-balancing method among the interfaces in the channel-group bundle, use the **port-channel load-balance ethernet** command. To return the system priority to the default value, use the **no** form of this command.

port-channel load-balance ethernet *method*

no port-channel load-balance ethernet [*method*]

Syntax Description

<i>method</i>	Load-balancing method. See the “Usage Guidelines” section for a list of valid values.
---------------	---

Command Default

Loads distribution on the source and destination IP address.

The default hash polynomial is CRC8a.

Command Modes

Global configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

The valid load-balancing *method* values are as follows:

- **destination-ip**—Loads distribution on the destination IP address.
- **destination-mac**—Loads distribution on the destination MAC address.
- **destination-port**—Loads distribution on the destination port.
- **source-destination-ip**—Loads distribution on the source and destination IP address.
- **source-destination-mac**—Loads distribution on the source and destination MAC address.
- **source-destination-port**—Loads distribution on the source and destination port.
- **source-ip**—Loads distribution on the source IP address.
- **source-mac**—Loads distribution on the source MAC address.
- **source-port**—Loads distribution on the source port.

Use the option that provides the balance criteria with the greatest variety in your configuration. For example, if the traffic on an EtherChannel is going only to a single MAC address and you use the destination MAC

port-channel load-balance ethernet

address as the basis of EtherChannel load balancing, the EtherChannel always chooses the same link in that EtherChannel; using source addresses or IP addresses might result in better load balancing.

Examples

This example shows how to set the load-balancing method to use the source IP:

```
switch(config)#port-channel load-balance ethernet source-ip
```

Related Commands

Command	Description
show port-channel load-balance	Displays information on EtherChannel load balancing.



R Commands

- [rate-limit cpu direction, page 96](#)

rate-limit cpu direction

To set the packet per second (PPS) rate limit for an interface, use the **rate-limit cpu direction** command. To revert to the default value, use the **no** form of this command.

```
rate-limit cpu direction {both| input| output} pps pps_value action log
no rate-limit cpu direction {both| input| output} pps pps_value action log
```

Syntax Description

both	Sets the maximum input and output packet rate.
input	Sets the maximum input packet rate.
output	Sets the maximum output packet rate.
pps pps_value	Specifies the packets per second. The range is from 0 to 100,000.
action	Specifies the action is logged.
log	Writes a syslog message if the PPS value matches or exceeds the specified rate limit.

Command Default

None

Command Modes

Interface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

This command does not require a license.

Examples

This example shows how to set the maximum input packet rate to 3 for an interface and enable the logging of syslog messages:

```
switch# configure terminal
switch(config)# interface ethernet 1/5
switch(config-if)# rate-limit cpu direction input pps 3 action log
switch(config-if)#
```

Related Commands

Command	Description
showrunning-config	Displays the running system configuration information.
remote ip address	Configures the IPv4 address for a remote machine.
remote port	Configures the TCP port for a remote machine.
remote vrf	Configures the virtual routing and forwarding (VRF) instance for a remote machine.
show svs connections	Displays SVS connection information.
svs connection	Enables an SVS connection.

rate-limit cpu direction



S Commands

- shutdown, page 100
- speed (interface), page 102
- system default switchport shutdown, page 104

shutdown

To shut down the local traffic on an interface, use the **shutdown** command. To return the interface to its default operational state, use the **no** form of this command.

shutdown

no shutdown

Syntax Description This command has no arguments or keywords.

Command Default Not shut down

Command Modes Interface configuration mode
Subinterface configuration mode
Virtual Ethernet interface configuration mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines You can use this command on the following interfaces:

- Layer 2 interface (Ethernet interface, EtherChannel interface, subinterface)
- Layer 3 interface



Note Use the **no switchport** command to configure an interface as a Layer 3 interface.

- Layer 3 subinterface
- Management interface
- Virtual Ethernet interface

Examples This example shows how to shut down, or disable, a Layer 2 interface:

```
switch(config)# interface ethernet 1/10
switch(config-if)# shutdown
switch(config-if)#

```

This example shows how to shut down a Layer 3 Ethernet subinterface:

```
switch(config)# interface ethernet 1/5.1
switch(config-subif)# shutdown
switch(config-subif)#{/pre>
```

This example shows how to shut down a virtual Ethernet interface:

```
switch(config)# interface vethernet 10
switch(config-if)# shutdown
switch(config-if)#{/pre>
```

Related Commands

Command	Description
no switchport	Converts an interface to a Layer 3 routed interface.
show interface ethernet	Displays the Ethernet interface configuration information.
show interface port-channel	Displays information on traffic about the specified EtherChannel interface.
show interface vethernet	Displays the virtual Ethernet interface configuration information.

speed (interface)

To configure the transmit and receive speed for an interface, use the **speed** command. To reset to the default speed, use the **no** form of this command.

speed {10|100|1000|10000|auto}

nospeed

Syntax Description

10	Sets the interface speed to 10 Mbps.
100	Sets the interface speed to 100 Mbps. This speed is not supported on a management interface or the CU-96 CEM card.
1000	Sets the interface speed to 1 Gbps.
10000	Sets the interface speed to 10 Gbps. This is the default speed. This speed is not supported on a management interface.
auto	Specifies that the speed of the interface is auto negotiated.

Command Default

The default speed is 10000 (10-Gigabit).

Command Modes

Interface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

The first 8 ports of a Cisco Nexus 5010 switch and the first 16 ports of a Cisco Nexus 5020 switch are switchable 1-Gigabit and 10-Gigabit ports. The default interface speed is 10-Gigabit. To configure these ports for 1-Gigabit Ethernet, insert a 1-Gigabit Ethernet SFP transceiver into the applicable port and then set its speed with the speed command.

The first 32 ports of a Cisco Nexus 5596T switch are switchable 1-Gigabit and 10-Gigabit ports. You can also configure them to auto-negotiate to either 1-Gigabit or 10-Gigabit. The last ports 33-48 are SFP+ ports and do not support auto negotiation.

**Note**

On the Cisco Nexus 5000 Series switches and 6000 Series switches with 1-Gigabit Ethernet SFP transceiver, you must configure the **no negotiation auto** command to disable auto negotiation

Examples

This example shows how to set the speed for a 1-Gigabit Ethernet port:

```
switch#configure terminal  
switch(config)#interface ethernet 2/1  
switch(config-if)#speed 1000
```

This example shows how to set the an interface port to automatically negotiate the speed:

```
switch#configure terminal  
switch(config)#interface ethernet 1/5  
switch(config-if)#speed auto  
switch(config-if)#+
```

Related Commands

Command	Description
show interface	Displays the contents of the currently running configuration file.

system default switchport shutdown

system default switchport shutdown

To configure all Layer 2 switchports to be Layer 3 routed ports, use the **system default switchport shutdown** command. To reset to the default of all Layer 2 switchports, use the **no** form of this command.

system default switchport shutdown

no system default switchport shutdown

Syntax Description This command has no arguments or keywords.

Command Default The default is all ports configured as Layer 2 switchports.

Command Modes Global configuration mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines When the **system default switchport shutdown** command is issued, any switchports (including FEX HIFs) that are not configured with **no shutdown** command are shut down. To avoid the shutdown, configure the switchports with **no shutdown** command.

Examples This example shows how to set all ports as Layer 3 routed ports:

```
switch# configure terminal
switch(config)# system default switchport shutdown
switch(config)#

```

This example shows how to reset all ports back to Layer 2 switchports:

```
switch# configure terminal
switch(config)# system default switchport shutdown
switch(config)#

```

Related Commands

Command	Description
show interface	Displays the interface configuration information.



Show Commands

- [show cdp all](#), page 107
- [show cdp entry](#), page 109
- [show cdp global](#), page 112
- [show cdp interface](#), page 113
- [show cdp neighbors](#), page 115
- [show cdp traffic](#), page 120
- [show interface brief](#), page 122
- [show interface capabilities](#), page 126
- [show interface debounce](#), page 128
- [show interface ethernet](#), page 130
- [show interface loopback](#), page 135
- [show interface mac-address](#), page 139
- [show interface mgmt](#), page 142
- [show interface port-channel](#), page 144
- [show interface status err-disabled](#), page 146
- [show interface switchport](#), page 148
- [show interface switchport backup](#), page 153
- [show interface transceiver](#), page 156
- [show lacp](#), page 159
- [show port-channel capacity](#), page 161
- [show port-channel compatibility-parameters](#), page 162
- [show port-channel database](#), page 164
- [show port-channel load-balance](#), page 166
- [show port-channel summary](#), page 170

- [show port-channel traffic](#), page 172
- [show port-channel usage](#), page 174
- [show port-security](#), page 175
- [show resource](#), page 177
- [show running-config](#), page 179
- [show running-config backup](#), page 180
- [show running-config interface](#), page 182
- [show running-config poe](#), page 185
- [show startup-config](#), page 186
- [show startup-config backup](#), page 187
- [show tech-support](#), page 189
- [show tech-support port-channel](#), page 193
- [show udld](#), page 195
- [show vpc brief](#), page 198

show cdp all

To display the interfaces in the Cisco Discovery Protocol (CDP) database, use the **show cdp all** command.

show cdp all

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes EXEC mode

Command History

	Release	Modification
6.0(2)N1(1)		This command was introduced.

Examples

This example shows how to display the interfaces in the CDP database:

```
switch# show cdp all
mgmt0 is up
    CDP enabled on interface
    Refresh time is 60 seconds
    Hold time is 180 seconds
Ethernet1/1 is down
    CDP enabled on interface
    Refresh time is 60 seconds
    Hold time is 180 seconds
Ethernet1/2 is down
    CDP enabled on interface
    Refresh time is 60 seconds
    Hold time is 180 seconds
Ethernet1/3 is down
    CDP enabled on interface
    Refresh time is 60 seconds
    Hold time is 180 seconds
Ethernet1/4 is down
    CDP enabled on interface
    Refresh time is 60 seconds
    Hold time is 180 seconds
Ethernet1/5 is down
    CDP enabled on interface
    Refresh time is 60 seconds
    Hold time is 180 seconds
Ethernet1/6 is down
    CDP enabled on interface
    Refresh time is 60 seconds
    Hold time is 180 seconds
<--Output truncated-->
switch#
```

show cdp all**Related Commands**

Command	Description
cdp	Enables CDP on the switch.

show cdp entry

To display the interfaces in the Cisco Discovery Protocol (CDP) database, use the **show cdp entry** command.

show cdp entry {all| name *device-name*}

Syntax Description

all	Displays all interfaces in the CDP database.
name <i>device-name</i>	Displays a specific CDP entry that matches a name. The device name can be a maximum of 256 alphanumeric characters.

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display all the entries in the CDP database:

```
switch# show cdp entry all
-----
Device ID:sw-sw70

Interface address(es):
    IPv4 Address: 10.193.88.70
Platform: WS-C3560E-48T, Capabilities: Switch IGMP Filtering
Interface: mgmt0, Port ID (outgoing port): GigabitEthernet0/30
Holdtime: 142 sec

Version:
Cisco IOS Software, C3560E Software (C3560E-UNIVERSALK9-M), Version 12.2(50)SE2,
 RELEASE SOFTWARE (fc2)
Copyright (c) 1986-2009 by Cisco Systems, Inc.
Compiled Fri 15-May-09 22:11 by nachen

Advertisement Version: 2

Native VLAN: 88
Duplex: full
Mgmt address(es):
    IPv4 Address: 10.193.88.70
-----
Device ID:switch(FOC16333ZER)
System Name: switch

Interface address(es):
    IPv4 Address: 10.193.88.192
```

show cdp entry

```

Platform: N6K-C6004-96Q, Capabilities: Switch IGMP Filtering Supports-STP-Disput
e

Interface: Ethernet1/4, Port ID (outgoing port): Ethernet1/12
Holdtime: 178 sec

Version:
Cisco Nexus Operating System (NX-OS) Software, Version 6.0(2u)N1(1u)

Advertisement Version: 2

Native VLAN: 1
Duplex: full

MTU: 1500
Physical Location: snmplocation
Mgmt address(es):
    IPv4 Address: 10.193.88.192
-----
Device ID:switch(FOC16333ZER)
System Name: switch

Interface address(es):
    IPv4 Address: 10.193.88.192
Platform: N6K-C6004-96Q, Capabilities: Switch IGMP Filtering Supports-STP-Disput
e
Interface: Ethernet1/6, Port ID (outgoing port): Ethernet1/10
Holdtime: 126 sec

Version:
Cisco Nexus Operating System (NX-OS) Software, Version 6.0(2u)N1(1u)

Advertisement Version: 2

Native VLAN: 1
Duplex: full

MTU: 1500
Physical Location: snmplocation
Mgmt address(es):
    IPv4 Address: 10.193.88.192
-----
Device ID:switch(FOC16333ZER)
System Name: switch

Interface address(es):
    IPv4 Address: 10.193.88.192
Platform: N6K-C6004-96Q, Capabilities: Switch IGMP Filtering Supports-STP-Disput
e
Interface: Ethernet1/10, Port ID (outgoing port): Ethernet1/6
Holdtime: 126 sec

Version:
Cisco Nexus Operating System (NX-OS) Software, Version 6.0(2u)N1(1u)

Advertisement Version: 2

Native VLAN: 1
Duplex: full

MTU: 1500
Physical Location: snmplocation
Mgmt address(es):
    IPv4 Address: 10.193.88.192
-----
Device ID:switch(FOC16333ZER)
System Name: switch

Interface address(es):
    IPv4 Address: 10.193.88.192
Platform: N6K-C6004-96Q, Capabilities: Switch IGMP Filtering Supports-STP-Disput
e
Interface: Ethernet1/12, Port ID (outgoing port): Ethernet1/4

```

```

Holdtime: 178 sec

Version:
Cisco Nexus Operating System (NX-OS) Software, Version 6.0(2u)N1(1u)

Advertisement Version: 2

Native VLAN: 1
Duplex: full

MTU: 1500
Physical Location: snmplocation
Mgmt address(es):
    IPv4 Address: 10.193.88.192
switch#

```

This example shows how to display a specific entry from the CDP database:

```

switch# show cdp entry name swor95(SSI13110AAS)
-----
Device ID:swor95(SSI13110AAS)
System Name:swor95
Interface address(es):
    IPv4 Address: 192.168.0.95
Platform: N5K-C5010I-BF, Capabilities: Switch IGMP Filtering Supports-STP-Dispute
Interface: Ethernet1/29, Port ID (outgoing port): Ethernet1/19
Holdtime: 173 sec

Version:
Cisco Nexus Operating System (NX-OS) Software, Version 6.0(2)N1(1)

Advertisement Version: 2
Native VLAN: 1
Duplex: full
Physical Location: snmplocation
Mgmt address(es):
    IPv4 Address: 192.168.0.95

switch#

```

Related Commands

Command	Description
cdp	Enables CDP on the switch.

show cdp global

show cdp global

To display the Cisco Discovery Protocol (CDP) global parameters, use the **show cdp global** command.

show cdp global

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes EXEC mode

Command History

	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the CDP global parameters:

```
switch# show cdp global
Global CDP information:
    CDP enabled globally
    Refresh time is 60 seconds
    Hold time is 180 seconds
    CDPv2 advertisements is enabled
    DeviceID TLV in System-Name(Default) Format
switch#
```

Related Commands

Command	Description
cdp	Enables CDP on the switch.

show cdp interface

To display the Cisco Discovery Protocol (CDP) parameters for an interface, use the **show cdp interface** command.

show cdp interface {ethernet slot [/QSFP-module /] port| mgmt mgmt-num}

Syntax Description

ethernet	Specifies an Ethernet interface.
<i>slot</i>	The slot number is from 1 to 255.
<i>QSFP-module</i>	(Optional) Quad Small Form-Factor Pluggable (QSFP) transceiver module. The range is from 1 to 199.
<i>port</i>	The port number is from 1 to 128.
mgmt <i>mgmt-num</i>	Specifies a management interface. The management interface number is 0.

Command Default None

Command Modes EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the CDP parameters for an Ethernet interface:

```
switch# show cdp interface ethernet 1/30
Ethernet1/30 is down
    CDP enabled on interface
    Refresh time is 60 seconds
    Hold time is 180 seconds
switch#
```

This example shows how to display the CDP parameters for a management interface:

```
switch# show cdp interface mgmt 0
mgmt0 is up
    CDP enabled on interface
    Refresh time is 60 seconds
    Hold time is 180 seconds
switch#
```

show cdp interface**Related Commands**

Command	Description
cdp	Enables CDP on the switch.

show cdp neighbors

To display the Cisco Discovery Protocol (CDP) neighbors, use the **show cdp neighbors** command.

show cdp neighbors [interface {ethernet slot /[QSFP-module /] port| mgmt mgmt-num}] [detail]

Syntax Description

interface	(Optional) Displays CDP neighbor information for an Ethernet or management interface.
ethernet	Displays CDP neighbor information for an Ethernet interface.
<i>slot</i>	The slot number is from 1 to 255.
<i>QSFP-module</i>	(Optional) Quad Small Form-Factor Pluggable (QSFP) transceiver module. The range is from 1 to 199.
<i>port</i>	The port number is from 1 to 128.
mgmt <i>mgmt-num</i>	Displays CDP neighbor information for a management interface. The management interface number is 0.
detail	(Optional) Displays the detailed information about CDP neighbors.

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display all CDP neighbors:

```
switch# show cdp neighbors
Capability Codes: R - Router, T - Trans-Bridge, B - Source-Route-Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater,
                  V - VoIP-Phone, D - Remotely-Managed-Device,
                  s - Supports-STP-Dispute
```

show cdp neighbors

Device-ID	Local Intrfce	Hldtme	Capability	Platform	Port ID
sw-sw70 switch(FOC16333ZER)	mgmt0	179	S I	WS-C3560E-48T	Gig0/30
	Eth1/4	155	S I s	N6K-C6004-96Q	Eth1/12
	Eth1/6	162	S I s	N6K-C6004-96Q	Eth1/10
	Eth1/10	162	S I s	N6K-C6004-96Q	Eth1/6
	Eth1/12	155	S I s	N6K-C6004-96Q	Eth1/4

This example shows how to display the CDP neighbors for a specific Ethernet interface:

```
switch# show cdp neighbors interface ethernet 1/29
Capability Codes: R - Router, T - Trans-Bridge, B - Source-Route-Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater,
                  V - VoIP-Phone, D - Remotely-Managed-Device,
                  s - Supports-STP-Dispute, M - Two-port Mac Relay
```

Device ID	Local Intrfce	Hldtme	Capability	Platform	Port ID
swor95(SSI13110AAS)	Eth1/29	146	S I s	N5K-C5010P-BF	Eth1/19

switch#

This example shows how to display the detailed information of the CDP neighbors for a specific Ethernet interface:

```
switch# show cdp neighbors interface ethernet 1/29 detail
-----
Device ID:swor95(SSI13110AAS)
System Name:swor95
Interface address(es):
  IPv4 Address: 192.168.0.95
Platform: N5K-C5010P-BF, Capabilities: Switch IGMP Filtering Supports-STP-Disput
e
Interface: Ethernet1/29, Port ID (outgoing port): Ethernet1/19
Holdtime: 141 sec

Version:
Cisco Nexus Operating System (NX-OS) Software, Version 6.0(2)N1(1)

Advertisement Version: 2
Native VLAN: 1
Duplex: full
Physical Location: snmplocation
Mgmt address(es):
  IPv4 Address: 192.168.0.95

switch#
```

This example shows how to display the CDP neighbors for the management interface:

```
switch# show cdp neighbors interface mgmt 0
Capability Codes: R - Router, T - Trans-Bridge, B - Source-Route-Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater,
                  V - VoIP-Phone, D - Remotely-Managed-Device,
                  s - Supports-STP-Dispute
```

Device-ID	Local Intrfce	Hldtme	Capability	Platform	Port ID
sw-sw70 switch#	mgmt0	159	S I	WS-C3560E-48T	Gig0/30

This example shows how to display the detailed information of the CDP neighbors for the management interface:

```
switch# show cdp neighbors interface mgmt 0 detail
-----
Device ID:sw-sw70
System Name:
Interface address(es):
  IPv4 Address: 10.193.88.70
```

```

Platform: cisco WS-C3560E-48TD, Capabilities: Switch IGMP Filtering
Interface: mgmt0, Port ID (outgoing port): GigabitEthernet0/30
Holdtime: 152 sec

Version:
Cisco IOS Software, C3560E Software (C3560E-UNIVERSALK9-M), Version 12.2(50)SE2,
 RELEASE SOFTWARE (fc2)
Copyright (c) 1986-2009 by Cisco Systems, Inc.
Compiled Fri 15-May-09 22:11 by nachen

Advertisement Version: 2
Native VLAN: 88
VTP Management Domain:
Duplex: full
Mgmt address(es):
    IPv4 Address: 10.193.88.70

switch#

```

This example shows how to display the detailed information of all CDP neighbors:

```

switch# show cdp neighbors detail
-----
Device ID:sw-sw70
VTP Management Domain Name:

Interface address(es):
    IPv4 Address: 10.193.88.70
Platform: WS-C3560E-48T, Capabilities: Switch IGMP Filtering
Interface: mgmt0, Port ID (outgoing port): GigabitEthernet0/30
Holdtime: 127 sec

Version:
Cisco IOS Software, C3560E Software (C3560E-UNIVERSALK9-M), Version 12.2(50)SE2,
 RELEASE SOFTWARE (fc2)
Copyright (c) 1986-2009 by Cisco Systems, Inc.
Compiled Fri 15-May-09 22:11 by nachen

Advertisement Version: 2
Native VLAN: 88
Duplex: full
Mgmt address(es):
    IPv4 Address: 10.193.88.70
-----
Device ID:switch(FOC16333ZER)
System Name: switch

Interface address(es):
    IPv4 Address: 10.193.88.192
Platform: N6K-C6004-96Q, Capabilities: Switch IGMP Filtering Supports-STP-Disput
e
Interface: Ethernet1/4, Port ID (outgoing port): Ethernet1/12
Holdtime: 163 sec

Version:
Cisco Nexus Operating System (NX-OS) Software, Version 6.0(2)N1(1)

Advertisement Version: 2
Native VLAN: 1
Duplex: full

MTU: 1500
Physical Location: snmplocation
Mgmt address(es):
    IPv4 Address: 10.193.88.192
-----
Device ID:switch(FOC16333ZER)
System Name: switch

Interface address(es):
    IPv4 Address: 10.193.88.192

```

show cdp neighbors

```

Platform: N6K-C6004-96Q, Capabilities: Switch IGMP Filtering Supports-STP-Disput
e
Interface: Ethernet1/6, Port ID (outgoing port): Ethernet1/10
Holdtime: 170 sec

Version:
Cisco Nexus Operating System (NX-OS) Software, Version 6.0(2)N1(1)

Advertisement Version: 2

Native VLAN: 1
Duplex: full

MTU: 1500
Physical Location: snmplocation
Mgmt address(es):
    IPv4 Address: 10.193.88.192
-----
Device ID:switch(FOC16333ZER)
System Name: switch

Interface address(es):
    IPv4 Address: 10.193.88.192
Platform: N6K-C6004-96Q, Capabilities: Switch IGMP Filtering Supports-STP-Disput
e
Interface: Ethernet1/10, Port ID (outgoing port): Ethernet1/6
Holdtime: 170 sec

Version:
Cisco Nexus Operating System (NX-OS) Software, Version 6.0(2)N1(1)

Advertisement Version: 2

Native VLAN: 1
Duplex: full

MTU: 1500
Physical Location: snmplocation
Mgmt address(es):
    IPv4 Address: 10.193.88.192
-----
Device ID:switch(FOC16333ZER)
System Name: switch

Interface address(es):
    IPv4 Address: 10.193.88.192
Platform: N6K-C6004-96Q, Capabilities: Switch IGMP Filtering Supports-STP-Disput
e
Interface: Ethernet1/12, Port ID (outgoing port): Ethernet1/4
Holdtime: 163 sec

Version:
Cisco Nexus Operating System (NX-OS) Software, Version 6.0(2)N1(1)

Advertisement Version: 2

Native VLAN: 1
Duplex: full

MTU: 1500

Physical Location: snmplocation
Mgmt address(es):
    IPv4 Address: 10.193.88.192
switch#

```

Related Commands

Command	Description
cdp	Enables CDP on the switch.

show cdp traffic

show cdp traffic

To display the Cisco Discovery Protocol (CDP) traffic statistics, use the **show cdp traffic** command.

show cdp traffic interface {ethernet slot /[QSFP-module /] port| mgmt mgmt-num}

Syntax Description

interface	Displays CDP traffic statistics for an Ethernet or management interface.
ethernet	Displays CDP traffic statistics for an Ethernet interface.
<i>slot</i>	The slot number is from 1 to 255.
<i>QSFP-module</i>	(Optional) Quad Small Form-Factor Pluggable (QSFP) transceiver module. The range is from 1 to 199.
<i>port</i>	The port number is from 1 to 128.
mgmt <i>mgmt-num</i>	Displays CDP traffic statistics for a management interface. The management interface number is 0.

Command Default None

Command Modes EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the CDP traffic statistics for an Ethernet interface:

```
switch# show cdp traffic interface ethernet 1/29
-----
Traffic statistics for Ethernet1/29
Input Statistics:
    Total Packets: 3203
    Valid CDP Packets: 3203
        CDP v1 Packets: 0
        CDP v2 Packets: 3203
    Invalid CDP Packets: 0
        Unsupported Version: 0
        Checksum Errors: 0
        Malformed Packets: 0
```

```
Output Statistics:  
    Total Packets: 3203  
        CDP v1 Packets: 0  
        CDP v2 Packets: 3203  
    Send Errors: 0  
  
switch#  
This example shows how to display CDP traffic statistics for a management interface:  
switch# show cdp traffic interface mgmt 0  
-----  
Traffic statistics for mgmt0  
Input Statistics:  
    Total Packets: 3201  
        Valid CDP Packets: 3201  
            CDP v1 Packets: 0  
            CDP v2 Packets: 3201  
        Invalid CDP Packets: 0  
        Unsupported Version: 0  
        Checksum Errors: 0  
        Malformed Packets: 0  
  
Output Statistics:  
    Total Packets: 3201  
        CDP v1 Packets: 0  
        CDP v2 Packets: 3201  
    Send Errors: 0  
  
switch#
```

Related Commands

Command	Description
cdp	Enables CDP on the switch.

show interface brief

show interface brief

To display a brief summary of the interface configuration information, use the **show interface brief** command.

show interface brief

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes EXEC mode

Command History

	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display a brief summary of the configuration information for specified interfaces:

```
switch# show interface brief
-----
Ethernet      VLAN     Type Mode   Status  Reason           Speed    Port
Interface
-----  

Eth1/1        1         eth  access  down    SFP not inserted  40G(D)  --
Eth1/2        1         eth  access  down    SFP not inserted  40G(D)  --
Eth1/3        1         eth  access  down    SFP not inserted  40G(D)  --
Eth1/4        1         eth  access  up     none              40G(D)  --
Eth1/5        1         eth  access  down    SFP not inserted  40G(D)  --
Eth1/6        1         eth  access  up     none              40G(D)  --
Eth1/7        1         eth  access  down    SFP not inserted  40G(D)  --
Eth1/8        1         eth  access  down    SFP not inserted  40G(D)  --
Eth1/9        1         eth  access  down    SFP not inserted  40G(D)  --
Eth1/10       1         eth  access  up     none              40G(D)  --
Eth1/11       1         eth  access  down    SFP not inserted  40G(D)  --
Eth1/12       1         eth  access  up     none              40G(D)  --
Eth5/1/1      1         eth  access  up     none              10G(D)  --
Eth5/1/2      1         eth  access  down    Link not connected 10G(D)  --
Eth5/1/3      1         eth  access  down    Link not connected 10G(D)  --
Eth5/1/4      1         eth  access  down    Link not connected 10G(D)  --
Eth5/2/1      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/2/2      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/2/3      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/2/4      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/3/1      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/3/2      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/3/3      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/3/4      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/4/1      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/4/2      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/4/3      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/4/4      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/5/1      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/5/2      1         eth  access  down    SFP not inserted  10G(D)  --
Eth5/5/3      1         eth  access  down    SFP not inserted  10G(D)  --
```

Eth5/5/4	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/6/1	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/6/2	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/6/3	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/6/4	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/7/1	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/7/2	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/7/3	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/7/4	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/8/1	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/8/2	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/8/3	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/8/4	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/9/1	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/9/2	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/9/3	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/9/4	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/10/1	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/10/2	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/10/3	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/10/4	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/11/1	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/11/2	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/11/3	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/11/4	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/12/1	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/12/2	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/12/3	1	eth	access	down	SFP not inserted	10G(D) --
Eth5/12/4	1	eth	access	down	SFP not inserted	10G(D) --
Eth6/1	1	eth	access	down	SFP not inserted	40G(D) --
Eth6/2	1	eth	access	down	SFP not inserted	40G(D) --
Eth6/3	1	eth	access	down	SFP not inserted	40G(D) --
Eth6/4	1	eth	access	down	SFP not inserted	40G(D) --
Eth6/5	1	eth	access	down	SFP not inserted	40G(D) --
Eth6/6	1	eth	access	down	SFP not inserted	40G(D) --
Eth6/7	1	eth	access	down	SFP not inserted	40G(D) --
Eth6/8	1	eth	access	down	SFP not inserted	40G(D) --
Eth6/9	1	eth	access	down	SFP not inserted	40G(D) --
Eth6/10	1	eth	access	down	SFP not inserted	40G(D) --
Eth6/11	1	eth	access	down	SFP not inserted	40G(D) --
Eth6/12	1	eth	access	down	SFP not inserted	40G(D) --
Eth8/1	1	eth	access	down	SFP not inserted	40G(D) --
Eth8/2	1	eth	access	down	SFP not inserted	40G(D) --
Eth8/3	1	eth	access	down	SFP not inserted	40G(D) --
Eth8/4	1	eth	access	down	Link not connected	40G(D) --
Eth8/5	1	eth	access	down	SFP not inserted	40G(D) --
Eth8/6	1	eth	access	down	SFP not inserted	40G(D) --
Eth8/7	1	eth	access	down	SFP not inserted	40G(D) --
Eth8/8	1	eth	access	down	SFP not inserted	40G(D) --
Eth8/9	1	eth	access	down	SFP not inserted	40G(D) --
Eth8/10	1	eth	access	down	SFP not inserted	40G(D) --
Eth8/11	1	eth	access	down	SFP not inserted	40G(D) --
Eth8/12	1	eth	access	down	SFP not inserted	40G(D) --

Port	VRF	Status	IP Address	Speed	MTU
mgmt0	--	up	10.193.88.192	1000	1500

switch#

switch#

This example shows how to display a brief summary of the configuration information for several interfaces, including routed interfaces:

switch# show interface brief

Ethernet Interface	VLAN	Type	Mode	Status	Reason	Speed	Port Ch #
Eth1/1	1	eth	access	down	Link not connected	10G(D)	--

show interface brief

Interface	Port	Type	Mode	Status	Reason	Speed	Protocol
Eth1/2	1	eth	trunk	up	none	10G(D)	--
Eth1/3	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/4	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/5	--	eth	routed	up	none	10G(D)	--
Eth1/5.2	--	eth	routed	down	Configuration Incomplete	10G(D)	--
Eth1/6	1	eth	access	up	none	10G(D)	--
Eth1/7	1	eth	access	up	none	10G(D)	--
Eth1/8	1	eth	trunk	up	none	10G(D)	100
Eth1/9	1	eth	access	up	none	10G(D)	--
Eth1/10	1	eth	access	down	Link not connected	10G(D)	--
Eth1/11	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/12	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/13	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/14	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/15	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/16	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/17	1	eth	access	up	none	10G(D)	--
Eth1/18	1	eth	access	up	none	10G(D)	--
Eth1/19	1	eth	fabric	up	none	10G(D)	--
Eth1/20	1	eth	access	down	Link not connected	10G(D)	--
Eth1/21	1	eth	access	up	none	10G(D)	--
Eth1/22	1	eth	access	down	Link not connected	10G(D)	--
Eth1/23	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/24	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/25	1	eth	access	down	Link not connected	10G(D)	--
Eth1/26	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/27	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/28	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/29	1	eth	access	down	Link not connected	10G(D)	--
Eth1/30	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/31	1	eth	access	down	SFP not inserted	10G(D)	--
Eth1/32	1	eth	access	up	none	10G(D)	--
<hr/>							
Port-channel	VLAN	Type	Mode	Status	Reason	Speed	Protocol
Interface							
Po100	1	eth	trunk	up	none	a-10G(D)	none
<hr/>							
Port	VRF		Status	IP Address		Speed	MTU
mgmt0	--		up	172.29.231.33		1000	1500
<hr/>							
Interface	Secondary	VLAN	(Type)		Status	Reason	
Vlan1	--				up	--	
Vlan100	--				up	--	
<hr/>							
Ethernet	VLAN	Type	Mode	Status	Reason	Speed	Port Ch #
Interface							
Eth100/1/1	1	eth	access	up	none	10G(D)	--
Eth100/1/2	1	eth	access	down	Link not connected	auto(D)	--
Eth100/1/3	1	eth	access	up	none	10G(D)	--
Eth100/1/4	1	eth	access	down	Link not connected	auto(D)	--
Eth100/1/5	1	eth	access	down	Link not connected	auto(D)	--
Eth100/1/6	1	eth	access	down	Link not connected	auto(D)	--
Eth100/1/7	1	eth	access	down	Link not connected	auto(D)	--
Eth100/1/8	1	eth	access	down	Link not connected	auto(D)	--
Eth100/1/9	1	eth	access	down	Link not connected	auto(D)	--
Eth100/1/10	1	eth	access	up	none	10G(D)	--
Eth100/1/11	1	eth	access	down	Link not connected	auto(D)	--
Eth100/1/12	1	eth	access	down	Link not connected	auto(D)	--
Eth100/1/13	1	eth	access	down	Link not connected	auto(D)	--
Eth100/1/14	1	eth	access	down	Link not connected	auto(D)	--
Eth100/1/15	1	eth	access	up	none	10G(D)	--
Eth100/1/16	1	eth	access	down	Link not connected	auto(D)	--
<hr/>							
Interface	Status	Description					
<hr/>							

```
Lo10          up      --
switch#
```

Note the following in the above display:

- Ethernet 1/5 is a Layer 3-ready interface. The following fields in the display help identify an interface as a configured Layer 3 interface:
 - Mode—routed
 - Status—up
 - Reason—none
- Ethernet 1/5.2 is a Layer 3 subinterface; however, the interface is not ready for Layer 3 configuration (Status—down).
- Interface Lo10 is a Layer 3 loopback interface.

This example shows how to display a brief summary of interfaces configured as FabricPath interfaces:

```
switch# show interface brief
-----
Ethernet      VLAN   Type  Mode    Status   Reason           Speed     Port
Interface                            Ch#
-----
```

Ethernet Interface	VLAN	Type	Mode	Status	Reason	Speed	Port Ch#
Eth1/1	1	eth	access	down	SFP not inserted	1000 (D)	--
Eth1/2	--	eth	routed	down	SFP not inserted	1000 (D)	--
Eth1/3	1	eth	access	down	SFP not inserted	10G (D)	--
Eth1/4	1	eth	access	down	SFP not inserted	10G (D)	--
Eth1/5	1	eth	f-path	down	SFP not inserted	10G (D)	--
Eth1/6	1	eth	access	down	Link not connected	10G (D)	--
Eth1/7	1	eth	fabric	down	Link not connected	10G (D)	--
Eth1/8	1	eth	access	down	SFP not inserted	10G (D)	--
Eth1/9	1	eth	access	down	SFP not inserted	10G (D)	--
Eth1/10	1	eth	access	down	SFP not inserted	10G (D)	--
Eth1/11	1	eth	access	down	SFP not inserted	10G (D)	--
Eth1/12	1	eth	access	down	SFP not inserted	10G (D)	--
Eth1/13	1	eth	access	down	SFP not inserted	10G (D)	--
Eth1/14	1	eth	access	down	SFP not inserted	10G (D)	--
Eth1/15	1	eth	pvlan	up	none	1000 (D)	--
Eth1/16	1	eth	access	down	SFP not inserted	10G (D)	--
Eth1/17	1	eth	access	down	SFP not inserted	10G (D)	--

```
switch#
```

In the above display, Ethernet 1/5 has the mode shown as “f-path” which indicates that it has been configured as a FabricPath port.

Related Commands

Command	Description
interface ethernet	Configures an Ethernet IEEE 802.3 interface.

show interface capabilities

show interface capabilities

To display detailed information about the capabilities of an interface, use the **show interface capabilities** command.

show interface ethernet slot [/QSFP-module /] port capabilities

Syntax Description

ethernet	Specifies an Ethernet interface slot number and port number.
<i>slot</i>	The slot number is from 1 to 255.
<i>QSFP-module</i>	(Optional) Quad Small Form-Factor Pluggable (QSFP) transceiver module. The range is from 1 to 199.
<i>port</i>	The port number is from 1 to 128.

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

You can use the **show interface capabilities** command only for physical interfaces.

If the interface and transceiver speed is mismatched, the SFP validation failed message appears when you enter the **show interface ethernet slot/[QSFP-module/]port** command. For example, if you insert a 1-Gigabit SFP transceiver into a port without configuring the **speed 1000** command, you see this error. By default, all ports are 10-Gigabit ports.

Examples

This example shows how to display the interface capabilities for a specific interface:

```
switch# show interface ethernet 1/1 capabilities
Ethernet1/1
  Model:          N6K-C6004-M12Q-FIX
  Type (SFP capable): unknown
  Speed:          40000
  Duplex:         full
  Trunk encap. type: 802.1Q
  Channel:        yes
  Broadcast suppression: no
```

```
Flowcontrol:          rx-(off/on),tx-(off/on)
Rate mode:            none
QOS scheduling:      rx-(6q1t),tx-(1p6q0t)
CoS rewrite:          no
ToS rewrite:          no
SPAN:                 yes
UDLD:                yes
MDIX:                no
Link Debounce:        yes
Link Debounce Time:   yes
Pvlan Trunk capable: yes
TDR capable:          no
FabricPath capable:  yes
Port mode:            Switched
FEX Fabric:           yes

switch#
```

Related Commands

Command	Description
interface ethernet	Configures an Ethernet IEEE 802.3 interface.

show interface debounce

show interface debounce

To display the debounce time information for all interfaces, use the **show interface debounce** command.

show interface debounce

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes EXEC mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the debounce status of all interfaces:

```
switch# show interface debounce
```

Port	Debounce time	Value (ms)
Eth1/1	enable	100
Eth1/2	enable	100
Eth1/3	enable	100
Eth1/4	enable	100
Eth1/5	enable	100
Eth1/6	enable	100
Eth1/7	enable	100
Eth1/8	enable	100
Eth1/9	enable	100
Eth1/10	enable	100
Eth1/11	enable	100
Eth1/12	enable	100
Eth5/1/1	enable	100
Eth5/1/2	enable	100
Eth5/1/3	enable	100
Eth5/1/4	enable	100
Eth5/2/1	enable	100
Eth5/2/2	enable	100
Eth5/2/3	enable	100
Eth5/2/4	enable	100
Eth5/3/1	enable	100
Eth5/3/2	enable	100
Eth5/3/3	enable	100
Eth5/3/4	enable	100
Eth5/4/1	enable	100
Eth5/4/2	enable	100
Eth5/4/3	enable	100
Eth5/4/4	enable	100
Eth5/5/1	enable	100
Eth5/5/2	enable	100
Eth5/5/3	enable	100
Eth5/5/4	enable	100

```

Eth5/6/1      enable      100
Eth5/6/2      enable      100
Eth5/6/3      enable      100
Eth5/6/4      enable      100
Eth5/7/1      enable      100
Eth5/7/2      enable      100
Eth5/7/3      enable      100
Eth5/7/4      enable      100
Eth5/8/1      enable      100
Eth5/8/2      enable      100
Eth5/8/3      enable      100
Eth5/8/4      enable      100
Eth5/9/1      enable      100
Eth5/9/2      enable      100
Eth5/9/3      enable      100
Eth5/9/4      enable      100
Eth5/10/1     enable     100
Eth5/10/2     enable     100
Eth5/10/3     enable     100
Eth5/10/4     enable     100
Eth5/11/1     enable     100
Eth5/11/2     enable     100
Eth5/11/3     enable     100
Eth5/11/4     enable     100
Eth5/12/1     enable     100
Eth5/12/2     enable     100
Eth5/12/3     enable     100
Eth5/12/4     enable     100
Eth6/1        enable     100
Eth6/2        enable     100
Eth6/3        enable     100
Eth6/4        enable     100
Eth6/5        enable     100
Eth6/6        enable     100
Eth6/7        enable     100
Eth6/8        enable     100
Eth6/9        enable     100
Eth6/10       enable    100
Eth6/11       enable    100
Eth6/12       enable    100
Eth8/1        enable     100
Eth8/2        enable     100
Eth8/3        enable     100
Eth8/4        enable     100
Eth8/5        enable     100
Eth8/6        enable     100
Eth8/7        enable     100
Eth8/8        enable     100
Eth8/9        enable     100
Eth8/10       enable    100
Eth8/11       enable    100
Eth8/12       enable    100
switch#

```

Related Commands

Command	Description
link debounce	Enables the debounce timer on an interface.

show interface ethernet

show interface ethernet

To display information about the interface configuration, use the **show interface ethernet** command.

show interface ethernet *slot* /[*QSFP-module* /] *port* [. *subintf-port-no*] [brief** | **counters** | **description** | **status**] [**switchport**]**

Syntax Description

<i>slot</i>	The slot number is from 1 to 255.
<i>QSFP-module</i>	(Optional) Quad Small Form-Factor Pluggable (QSFP) transceiver module. The range is from 1 to 199.
<i>port</i>	The port number is from 1 to 128.
.	(Optional) Specifies the subinterface separator. Note This keyword applies to Layer 3 interfaces.
<i>subintf-port-no</i>	(Optional) Port number for the subinterface. The range is from 1 to 48. Note This argument applies to Layer 3 interfaces.
brief	(Optional) Displays brief information about the interfaces.
counters	(Optional) Displays information about the counters configured on an interface.
description	(Optional) Displays the description of an interface configuration.
status	(Optional) Displays the operational state of the interface.
switchport	(Optional) Displays the switchport information of an interface.

Command Default Displays all information for the interface.

Command Modes EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

If the interface and transceiver speed is mismatched, the SFP validation failed message appears when you enter the **show interface ethernet slot/[QSFP-module/]port** command. For example, if you insert a 1-Gigabit SFP transceiver into a port without configuring the **speed 1000** command, you will get this error.

By default, all ports on a Cisco Nexus device are 40-Gigabit ports.

Examples

This example shows how to display the detailed configuration of the specified interface:

```
switch# show interface ethernet 1/1
Ethernet1/1 is up
  Dedicated Interface
    Hardware: 40000 Ethernet, address: c84c.753d.5b78 (bia c84c.753d.5b78)
    MTU 1500 bytes, BW 40000000 Kbit, DLY 10 usec
    reliability 255/255, txload 1/255, rxload 1/255
    Encapsulation ARPA
    Port mode is access
    auto-duplex, 40 Gb/s
    Beacon is turned off
    Input flow-control is off, output flow-control is off
    Switchport monitor is off
    EtherType is 0x8100
    Last link flapped never
    Last clearing of "show interface" counters never
    0 interface resets
    30 seconds input rate 0 bits/sec, 0 packets/sec
    30 seconds output rate 0 bits/sec, 0 packets/sec
    Load-Interval #2: 5 minute (300 seconds)
      input rate 0 bps, 0 pps; output rate 0 bps, 0 pps
  RX
    0 unicast packets 0 multicast packets 0 broadcast packets
    0 input packets 0 bytes
    0 jumbo packets 0 storm suppression bytes
    0 runts 0 giants 0 CRC 0 no buffer
    0 input error 0 short frame 0 overrun 0 underrun 0 ignored
    0 watchdog 0 bad etype drop 0 bad proto drop 0 if down drop
    0 input with dribble 0 input discard
    0 Rx pause
  TX
    0 unicast packets 0 multicast packets 0 broadcast packets
    0 output packets 0 bytes
    0 jumbo packets
    0 output errors 0 collision 0 deferred 0 late collision
    0 lost carrier 0 no carrier 0 babble 0 output discard
    0 Tx pause
```

```
switch#
```

This example shows how to display the counters configured on a specified interface:

```
switch# show interface ethernet 1/1 counters
```

Port	InOctets	InUcastPkts
Eth1/1	0	0
Port	InMcastPkts	InBcastPkts

show interface ethernet

Eth1/1	0	0
<hr/>		
Port	OutOctets	OutUcastPkts
<hr/>		
Eth1/1	0	0
<hr/>		
Port	OutMcastPkts	OutBcastPkts
<hr/>		
Eth1/1	0	0

This example shows how to display the information for an interface configured for Adapter-FEX:

```
switch# show interface ethernet 1/2
Ethernet1/2 is up
    Hardware: 1000/10000 Ethernet, address: 000d.ecb0.fc49 (bia 000d.ecb0.fc49)
    MTU 1500 bytes, BW 1000000 Kbit, DLY 10 usec,
        reliability 255/255, txload 1/255, rxload 1/255
    Encapsulation ARPA
    Port mode is vntag
    full-duplex, 1000 Mb/s, media type is 10G
    Beacon is turned off
    Input flow-control is off, output flow-control is on
    Rate mode is dedicated
    Switchport monitor is off
    EtherType is 0x8100
    Last link flapped 00:00:13
    Last clearing of "show interface" counters 1d05h
    30 seconds input rate 0 bits/sec, 0 bytes/sec, 0 packets/sec
    30 seconds output rate 1328 bits/sec, 166 bytes/sec, 0 packets/sec
    Load-Interval #2: 5 minute (300 seconds)
        input rate 0 bps, 0 pps; output rate 160 bps, 0 pps
RX
    32453811602 unicast packets 649076 multicast packets 0 broadcast packets
    32454460682 input packets 2206903326245 bytes
    0 jumbo packets 0 storm suppression packets
    3 runts 0 giants 1 CRC 0 no buffer
    4 input error 0 short frame 0 overrun 0 underrun 0 ignored
    0 watchdog 0 bad etype drop 0 bad proto drop 0 if down drop
    0 input with dribble 0 input discard
    0 Rx pause
TX
    33695526841 unicast packets 36871810887 multicast packets 72059438 broadcast
    70639397169 output packets 4803378946692 bytes
    0 jumbo packets
    3 output errors 0 collision 0 deferred 0 late collision
    0 lost carrier 0 no carrier 0 babble
    0 Tx pause
    2 interface resets

switch#
```

The above display shows the port mode configured as a virtual network tag (VNTag) port.

This example shows how to display the detailed configuration information of a specified subinterface:

```
switch# show interface ethernet 1/5.2
Ethernet1/5.2 is up
    Hardware: 1000/10000 Ethernet, address: 0005.73a6.1dbc (bia 0005.73a6.1d6c)
    Description: Eth 1/5.2 subinterfaces
    Internet Address is 192.0.0.3/24
    MTU 1500 bytes, BW 1500 Kbit, DLY 2000 usec,
        reliability 255/255, txload 1/255, rxload 1/255
    Encapsulation 802.1Q Virtual LAN, Vlan ID 100
    EtherType is 0x8100

switch#
```

This example shows how to display the brief configuration information of a specified subinterface:

```
switch# show interface ethernet 1/5.2 brief
```

Ethernet Interface	VLAN	Type	Mode	Status	Reason	Speed	Port Ch #
Eth1/5.2	100	eth	routed	up	none	10G(D)	--

This example shows how to display the purpose of a specified subinterface:

```
switch# show interface ethernet 1/5.2 description
```

Port	Type	Speed	Description
Eth1/5.2	eth	10G	Eth 1/5.2 subinterfaces

This example shows how to display the switchport information for a specific interface:

```
switch# show interface ethernet 1/2 switchport
Name: Ethernet1/2
  Switchport: Enabled
  Switchport Monitor: Not enabled
  Operational Mode: trunk
  Access Mode VLAN: 1 (default)
  Trunking Native Mode VLAN: 1 (default)
  Trunking VLANs Enabled: 1,300-800
  Pruning VLANs Enabled: 2-1001
  Administrative private-vlan primary host-association: none
  Administrative private-vlan secondary host-association: none
  Administrative private-vlan primary mapping: none
  Administrative private-vlan secondary mapping: none
  Administrative private-vlan trunk native VLAN: none
  Administrative private-vlan trunk encapsulation: dot1q
  Administrative private-vlan trunk normal VLANs: none
  Administrative private-vlan trunk private VLANs: none
  Operational private-vlan: none
  Unknown unicast blocked: disabled
  Unknown multicast blocked: disabled
  Monitor destination rate-limit: 1G
```

```
switch#
```

This example shows how to display the information about a specific Ethernet interface that is bound to a virtual Ethernet interface:

```
switch(config)# interface vethernet 10
switch(config-if)# bind interface ethernet 1/5 channel 10
switch(config-if)# inherit port-profile ppVEth
switch(config-if)# untagged cos 3
switch(config-if)# exit
switch(config)# exit
switch# show interface ethernet 1/5 brief
```

Ethernet Interface	VLAN	Type	Mode	Status	Reason	Speed	Port Ch #
Eth1/5	--	eth	routed	down	SFP not inserted	10G(D)	10

```
switch#
```

The following table describes the significant fields in the above display.

show interface ethernet

Table 1: show interface ethernet brief Field Description

Field	Description
Ethernet Interface	Ethernet interface information.
VLAN	VLANs associated with the Ethernet interface.
Type	Type of interface.
Mode	Mode configured for the interface: access, trunk, routed (applies to Layer 3 interfaces), and vlan.
Status	Indicates whether the interface hardware is currently active (up), is currently inactive (down), or has been taken down by an administrator (administratively down).
Reason	Indicates the reason the interface is inactive or administratively down.
Speed	Interface speed.
Port Ch #	EtherChannel associated with the interface.

This example shows how to display the MAC address of a specified subinterface:

```
switch# show interface ethernet 1/5.2
mac-address
-----
Interface          Mac-Address      Burn-in Mac-Address
-----
Ethernet1/5.2     0005.73a6.1dbc  0005.73a6.1d6c
switch#
```

Related Commands

Command	Description
interface ethernet	Configures an Ethernet IEEE 802.3 interface.
interface ethernet (Layer 3)	Configures a Layer 3 Ethernet IEEE 802.3 interface.
switchport mode vntag	Configures an Ethernet interface as a VNTag port.
switchport monitor rate-limit	Configures the rate limit for traffic on an interface.

show interface loopback

To display information about the loopback interface, use the **show interface loopback** command.

show interface loopback *lo-number* [brief] description]

Syntax Description

<i>lo-number</i>	Loopback interface number. The range is from 0 to 1023.
brief	(Optional) Displays a brief summary of the loopback interface information.
description	(Optional) Displays the description provided for the loopback interface.

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the configuration information for a specific loopback interface:

```
switch# show interface loopback 10
loopback10 is up
  Hardware: Loopback
  MTU 1500 bytes, BW 8000000 Kbit, DLY 5000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation LOOPBACK
    0 packets input 0 bytes
    0 multicast frames 0 compressed
    0 input errors 0 frame 0 overrun 0 fifo
    0 packets output 0 bytes 0 underruns
    0 output errors 0 collisions 0 fifo
```

switch#

The below table describes the significant fields shown in the display.

show interface loopback

Table 2: show interface loopback Field Description

Field	Description
Loopback is ...	Whether the interface hardware is currently active (whether carrier detect is present), is currently inactive (down), or has been taken down by an administrator (administratively down).
Hardware	Hardware is Loopback.
MTU	Maximum transmission unit (MTU) of the interface.
BW	Bandwidth (BW) of the interface in kilobits per second.
DLY	Delay (DLY) of the interface in microseconds.
reliability	Reliability of the interface as a fraction of 255 (255/255 is 100 percent reliability), calculated as an exponential average over 5 minutes.
txload	Load on the interface for transmitting packets as a fraction of 255 (255/255 is completely saturated), calculated as an exponential average over 5 minutes.
rxload	Load on the interface for receiving packets as a fraction of 255 (255/255 is completely saturated), calculated as an exponential average over 5 minutes.
Encapsulation	Encapsulation method assigned to the interface.
LOOPBACK	Indicates whether loopback is set.
packets input	Total number of error-free packets received by the system.
bytes	Total number of bytes, including data and MAC encapsulation, in the error-free packets received by the system.
multicast frames	Total number of multicast frames enabled on the interface.
compressed	Total number of multicast frames compressed on the interface.

Field	Description
input errors	Sum of all errors that prevented the receipt of datagrams on the interface being examined. This might not equal the sum of the enumerated output errors, because some datagrams might have more than one error and others might have errors that do not fall into any of the specifically tabulated categories.
frame	Number of packets received incorrectly having a CRC error and a noninteger number of octets. On a serial line, this number is usually the result of noise or other transmission problems.
overrun	Number of times that the serial receiver hardware was unable to hand received data to a hardware buffer because the input rate exceeded the receiver's ability to handle the data.
fifo	Number of First In, First Out (FIFO) errors in the receive direction.
packets output	Total number of messages transmitted by the system.
bytes	Total number of bytes, including data and MAC encapsulation, transmitted by the system.
underruns	Number of times that the far-end transmitter has been running faster than the near-end router's receiver can handle. This situation might never happen (be reported) on some interfaces.
output errors	Sum of all errors that prevented the final transmission of datagrams out of the interface being examined. This might equal the sum of the enumerated output errors, as some datagrams might have more than one error, and others might have errors that do not fall into any of the specifically tabulated categories.
collisions	Loopback interface does not have collisions.
fifo	Number of First In, First Out (FIFO) errors in the transmit direction.

This example shows how to display brief information about a specific loopback interface:

```
switch# show interface loopback 10 brief
```

Interface	Status	Description
-----------	--------	-------------

```
show interface loopback
```

```
loopback10      up      --
switch#
```

Related Commands

Command	Description
interface loopback	Configures a loopback interface.

show interface mac-address

To display the information about the MAC address, use the **show interface mac-address** command.

show interface [type slot /[QSFP-module /] port| portchannel-no] mac-address

Syntax Description

<i>type</i>	(Optional) Interface for which MAC addresses should be displayed. The <i>type</i> can be either Ethernet or EtherChannel or vethernet.
<i>slot</i>	The slot number is from 1 to 255.
<i>QSFP-module</i>	(Optional) Quad Small Form-Factor Pluggable (QSFP) transceiver module. The range is from 1 to 199.
<i>port</i>	The port number is from 1 to 128.
<i>portchannel-no</i>	EtherChannel number. The EtherChannel number is from 1 to 4096.

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

If you do not specify an interface, the system displays all the MAC addresses.

Examples

This example shows how to display the information about MAC addresses for the entire switch:

```
switch# show interface mac-address
```

Interface	Mac-Address	Burn-in Mac-Address
Ethernet1/1	c84c.753d.5b74	c84c.753d.5b78
Ethernet1/2	c84c.753d.5b74	c84c.753d.5b79
Ethernet1/3	c84c.753d.5b74	c84c.753d.5b7a
Ethernet1/4	c84c.753d.5b74	c84c.753d.5b7b
Ethernet1/5	c84c.753d.5b74	c84c.753d.5b7c
Ethernet1/6	c84c.753d.5b74	c84c.753d.5b7d

show interface mac-address

Ethernet1/7	c84c.753d.5b74	c84c.753d.5b7e
Ethernet1/8	c84c.753d.5b74	c84c.753d.5b7f
Ethernet1/9	c84c.753d.5b74	c84c.753d.5b80
Ethernet1/10	c84c.753d.5b74	c84c.753d.5b81
Ethernet1/11	c84c.753d.5b74	c84c.753d.5b82
Ethernet1/12	c84c.753d.5b74	c84c.753d.5b83
Ethernets5/1/1	c84c.753d.5b74	a44c.11e7.ea20
Ethernets5/1/2	c84c.753d.5b74	a44c.11e7.ea21
Ethernets5/1/3	c84c.753d.5b74	a44c.11e7.ea22
Ethernets5/1/4	c84c.753d.5b74	a44c.11e7.ea23
Ethernets5/2/1	c84c.753d.5b74	a44c.11e7.ea24
Ethernets5/2/2	c84c.753d.5b74	a44c.11e7.ea25
Ethernets5/2/3	c84c.753d.5b74	a44c.11e7.ea26
Ethernets5/2/4	c84c.753d.5b74	a44c.11e7.ea27
Ethernets5/3/1	c84c.753d.5b74	a44c.11e7.ea28
Ethernets5/3/2	c84c.753d.5b74	a44c.11e7.ea29
Ethernets5/3/3	c84c.753d.5b74	a44c.11e7.ea2a
Ethernets5/3/4	c84c.753d.5b74	a44c.11e7.ea2b
Ethernets5/4/1	c84c.753d.5b74	a44c.11e7.ea2c
Ethernets5/4/2	c84c.753d.5b74	a44c.11e7.ea2d
Ethernets5/4/3	c84c.753d.5b74	a44c.11e7.ea2e
Ethernets5/4/4	c84c.753d.5b74	a44c.11e7.ea2f
Ethernets5/5/1	c84c.753d.5b74	a44c.11e7.ea30
Ethernets5/5/2	c84c.753d.5b74	a44c.11e7.ea31
Ethernets5/5/3	c84c.753d.5b74	a44c.11e7.ea32
Ethernets5/5/4	c84c.753d.5b74	a44c.11e7.ea33
Ethernets5/6/1	c84c.753d.5b74	a44c.11e7.ea34
Ethernets5/6/2	c84c.753d.5b74	a44c.11e7.ea35
Ethernets5/6/3	c84c.753d.5b74	a44c.11e7.ea36
Ethernets5/6/4	c84c.753d.5b74	a44c.11e7.ea37
Ethernets5/7/1	c84c.753d.5b74	a44c.11e7.ea38
Ethernets5/7/2	c84c.753d.5b74	a44c.11e7.ea39
Ethernets5/7/3	c84c.753d.5b74	a44c.11e7.ea3a
Ethernets5/7/4	c84c.753d.5b74	a44c.11e7.ea3b
Ethernets5/8/1	c84c.753d.5b74	a44c.11e7.ea3c
Ethernets5/8/2	c84c.753d.5b74	a44c.11e7.ea3d
Ethernets5/8/3	c84c.753d.5b74	a44c.11e7.ea3e
Ethernets5/8/4	c84c.753d.5b74	a44c.11e7.ea3f
Ethernets5/9/1	c84c.753d.5b74	a44c.11e7.ea40
Ethernets5/9/2	c84c.753d.5b74	a44c.11e7.ea41
Ethernets5/9/3	c84c.753d.5b74	a44c.11e7.ea42
Ethernets5/9/4	c84c.753d.5b74	a44c.11e7.ea43
Ethernets5/10/1	c84c.753d.5b74	a44c.11e7.ea44
Ethernets5/10/2	c84c.753d.5b74	a44c.11e7.ea45
Ethernets5/10/3	c84c.753d.5b74	a44c.11e7.ea46
Ethernets5/10/4	c84c.753d.5b74	a44c.11e7.ea47
Ethernets5/11/1	c84c.753d.5b74	a44c.11e7.ea48
Ethernets5/11/2	c84c.753d.5b74	a44c.11e7.ea49
Ethernets5/11/3	c84c.753d.5b74	a44c.11e7.ea4a
Ethernets5/11/4	c84c.753d.5b74	a44c.11e7.ea4b
Ethernets5/12/1	c84c.753d.5b74	a44c.11e7.ea4c
Ethernets5/12/2	c84c.753d.5b74	a44c.11e7.ea4d
Ethernets5/12/3	c84c.753d.5b74	a44c.11e7.ea4e
Ethernets5/12/4	c84c.753d.5b74	a44c.11e7.ea4f
Ethernet6/1	c84c.753d.5b74	a44c.11e7.e9f0
Ethernet6/2	c84c.753d.5b74	a44c.11e7.e9f1
Ethernet6/3	c84c.753d.5b74	a44c.11e7.e9f2
Ethernet6/4	c84c.753d.5b74	a44c.11e7.e9f3
Ethernet6/5	c84c.753d.5b74	a44c.11e7.e9f4
Ethernet6/6	c84c.753d.5b74	a44c.11e7.e9f5
Ethernet6/7	c84c.753d.5b74	a44c.11e7.e9f6
Ethernet6/8	c84c.753d.5b74	a44c.11e7.e9f7
Ethernet6/9	c84c.753d.5b74	a44c.11e7.e9f8
Ethernet6/10	c84c.753d.5b74	a44c.11e7.e9f9
Ethernet6/11	c84c.753d.5b74	a44c.11e7.e9fa
Ethernet6/12	c84c.753d.5b74	a44c.11e7.e9fb
Ethernet8/1	c84c.753d.5b74	c84c.753d.5c38
Ethernet8/2	c84c.753d.5b74	c84c.753d.5c39
Ethernet8/3	c84c.753d.5b74	c84c.753d.5c3a
Ethernet8/4	c84c.753d.5b74	c84c.753d.5c3b
Ethernet8/5	c84c.753d.5b74	c84c.753d.5c3c
Ethernet8/6	c84c.753d.5b74	c84c.753d.5c3d
Ethernet8/7	c84c.753d.5b74	c84c.753d.5c3e

```

Ethernet8/8          c84c.753d.5b74  c84c.753d.5c3f
Ethernet8/9          c84c.753d.5b74  c84c.753d.5c40
Ethernet8/10         c84c.753d.5b74  c84c.753d.5c41
Ethernet8/11         c84c.753d.5b74  c84c.753d.5c42
Ethernet8/12         c84c.753d.5b74  c84c.753d.5c43
mgmt0               c84c.753d.5b39   c84c.753d.5b39
switch#

```

This example shows how to display the MAC address information for a specific port channel:

```
switch# show interface port-channel 5 mac-address
```

Interface	Mac-Address	Burn-in Mac-Address
port-channel5	0005.9b78.6e7c	0005.9b78.6e7c

Related Commands

Command	Description
mac address-table static	Adds static entries to the MAC address table or configures a static MAC address with IGMP snooping disabled for that address.
show mac address-table	Displays information about the MAC address table.

show interface mgmt

show interface mgmt

To display the configuration information for a management interface, use the **show interface mgmt** command.

show interface mgmt *intf-num* [brief] capabilities| counters [detailed [all]]| errors [snmp]]| description| status]

Syntax Description

<i>intf-num</i>	Management interface number. The value is 0.
brief	(Optional) Displays a summary of the configuration information for the management interface.
capabilities	(Optional) Displays the interface capabilities information.
counters	(Optional) Displays information about the management interface counters.
detailed	(Optional) Displays detailed information of only the nonzero interface counters.
all	(Optional) Displays all nonzero interface counters.
errors	(Optional) Displays the interface error counters, such as receive or transmit error counters.
snmp	(Optional) Displays the Simple Network Management Protocol (SNMP) MIB values for the nonzero interface counters.
description	(Optional) Displays the interface description.
status	(Optional) Displays the interface line status.

Command Default None

Command Modes EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the configuration information of the management interface:

```
switch# show interface mgmt0
mgmt0 is up
    Hardware: GigabitEthernet, address: 0005.9b74.a6c1 (bia 0005.9b74.a6c1)
    Internet Address is 10.193.51.174/21
    MTU 1500 bytes, BW 1000000 Kbit, DLY 10 usec
    reliability 255/255, txload 1/255, rxload 1/255
    Encapsulation ARPA
    full-duplex, 1000 Mb/s
    EtherType is 0x0000
    1 minute input rate 11336 bits/sec, 9 packets/sec
    1 minute output rate 2248 bits/sec, 3 packets/sec
Rx
    22722587 input packets 7487592 unicast packets 7082728 multicast packets
    8152267 broadcast packets 3375124199 bytes
Tx
    7618171 output packets 7283211 unicast packets 334751 multicast packets
    209 broadcast packets 1056259251 bytes
```

```
switch#
```

This example shows how to display the summary configuration information of the management interface:

```
switch# show interface mgmt 0 brief
```

Port	VRF	Status	IP Address	Speed	MTU
mgmt0	--	up	10.193.88.192	1000	1500

Related Commands

Command	Description
interface mgmt	Configures a management interface.

show interface port-channel

show interface port-channel

To display the information about an EtherChannel interface configuration, use the **show interface port-channel** command.

show interface port-channel *number* [. *subinterface-number*] [brief**] [**counters**] [**description**] [**status**]**

Syntax Description

<i>number</i>	EtherChannel number. The range is from 1 to 4096.
. <i>subinterface-number</i>	(Optional) Port-channel subinterface configuration. Use the EtherChannel number followed by a dot (.) indicator and the subinterface number. The format is: <i>portchannel-number.subinterface-number</i>
brief	(Optional) Displays a summary of the configuration information for the management interface.
counters	(Optional) Displays information about the counters configured on the EtherChannel interface.
description	(Optional) Displays the description of the EtherChannel interface configuration.
status	(Optional) Displays the operational state of the EtherChannel interface.

Command Default None

Command Modes EXEC mode

Command History

	Release	Modification
6.0(2)N1(1)		This command was introduced.

Examples

This example shows how to display the configuration information of a specified EtherChannel interface:

```
switch# show interface port-channel 21
port-channel21 is up
    Hardware: Port-Channel, address: 000d.ece7.df72 (bia 000d.ece7.df72)
    MTU 1500 bytes, BW 10000000 Kbit, DLY 10 usec,
        reliability 255/255, txload 1/255, rxload 1/255
    Encapsulation ARPA
    Port mode is trunk
```

```

full-duplex, 10 Gb/s
Beacon is turned off
Input flow-control is on, output flow-control is on
Switchport monitor is off
Members in this channel: Eth2/3
Last clearing of "show interface" counters never
30 seconds input rate 0 bits/sec, 0 packets/sec
30 seconds output rate 352 bits/sec, 0 packets/sec
Load-Interval #2: 5 minute (300 seconds)
    input rate 0 bps, 0 pps; output rate 368 bps, 0 pps
RX
    0 unicast packets  0 multicast packets  0 broadcast packets
    0 input packets  0 bytes
    0 jumbo packets  0 storm suppression packets
    0 runts  0 giants  0 CRC  0 no buffer
    0 input error  0 short frame  0 overrun  0 underrun  0 ignored
    0 watchdog  0 bad etype drop  0 bad proto drop  0 if down drop
    0 input with dribble  0 input discard
    0 Rx pause
TX
    0 unicast packets  15813 multicast packets  9 broadcast packets
    15822 output packets  1615917 bytes
    0 jumbo packets
    0 output errors  0 collision  0 deferred  0 late collision
    0 lost carrier  0 no carrier  0 babble
    0 Tx pause
    1 interface resets
switch#

```

Related Commands

Command	Description
interface port-channel	Configures an EtherChannel interface.

show interface status err-disabled

show interface status err-disabled

To display the error-disabled state of interfaces, use the **show interface status err-disabled** command.

show interface status err-disabled

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes EXEC mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Examples This example shows how to display the error-disabled state of interfaces:

```
switch# show interface status err-disabled
```

Port	Name	Status	Reason
Eth114/1/27	--	down	BPDUGuard errDisable
Eth114/1/28	--	down	BPDUGuard errDisable
Eth114/1/29	--	down	BPDUGuard errDisable
Eth114/1/30	--	down	BPDUGuard errDisable
Eth114/1/31	--	down	BPDUGuard errDisable
Eth114/1/32	--	down	BPDUGuard errDisable
Eth114/1/33	--	down	BPDUGuard errDisable
Eth114/1/34	--	down	BPDUGuard errDisable
Eth114/1/35	--	down	BPDUGuard errDisable
Eth114/1/36	--	down	BPDUGuard errDisable
Eth114/1/39	--	down	BPDUGuard errDisable
Eth114/1/40	--	down	BPDUGuard errDisable
Eth114/1/41	--	down	BPDUGuard errDisable
Eth114/1/42	--	down	BPDUGuard errDisable
Eth114/1/43	--	down	BPDUGuard errDisable
Eth114/1/44	--	down	BPDUGuard errDisable
Eth114/1/45	--	down	BPDUGuard errDisable
Eth114/1/46	--	down	BPDUGuard errDisable
Eth114/1/47	--	down	BPDUGuard errDisable
--More--			

switch#

Related Commands

Command	Description
errdisable detect cause	Enables the error-disabled (err-disabled) detection.
errdisable recovery cause	Enables error-disabled recovery on an interface.

show interface switchport

show interface switchport

To display information about all the switch port interfaces, use the **show interface switchport** command.

show interface switchport

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

You can configure the rate limit on the following Cisco Nexus 5000 Series switches using the **switchport monitor rate-limit 1G** command:

- Cisco Nexus 5010 Series
- Cisco Nexus 5020 Series

Examples

This example shows how to display information for all Ethernet and virtual Ethernet interfaces:

```
switch# show interface switchport

Name: Ethernet1/1
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: fex-fabric
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Trunking VLANs Enabled: 1-3967,4048-4093
Administrative private-vlan primary host-association: none
Administrative private-vlan secondary host-association: none
Administrative private-vlan primary mapping: none
Administrative private-vlan secondary mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs:
Operational private-vlan: none
Unknown unicast blocked: disabled
Unknown multicast blocked: disabled

Name: Ethernet1/2
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: fex-fabric
Access Mode VLAN: 1 (default)
```

```

Trunking Native Mode VLAN: 1 (default)
Trunking VLANs Enabled: 1-3967,4048-4093
Administrative private-vlan primary host-association: none
--More--
switch#

```

This example shows how to display information for all Ethernet and virtual Ethernet interfaces:

```

switch# show interface switchport
Name: Ethernet1/1
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: fex-fabric
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Trunking VLANs Enabled: 1,300-795,900,1002-1005
Pruning VLANs Enabled: 2-1001
Administrative private-vlan primary host-association: none
Administrative private-vlan secondary host-association: none
Administrative private-vlan primary mapping: none
Administrative private-vlan secondary mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Unknown unicast blocked: disabled
Unknown multicast blocked: disabled

Name: Ethernet1/2
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: vntag
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Trunking VLANs Enabled: 1,300-795
Pruning VLANs Enabled: 2-1001
Administrative private-vlan primary host-association: none
Administrative private-vlan secondary host-association: none
Administrative private-vlan primary mapping: none
Administrative private-vlan secondary mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Unknown unicast blocked: disabled
Unknown multicast blocked: disabled

Name: Ethernet1/3
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: trunk
Access Mode VLAN: 700 (VLAN0700)
Trunking Native Mode VLAN: 1 (default)
Trunking VLANs Enabled: 1,300-795
<--snip-->
:
:
Name: port-channel4000
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: access
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Trunking VLANs Enabled: 1,300-795,900,1002-1005
Pruning VLANs Enabled: 2-1001
Administrative private-vlan primary host-association: none
Administrative private-vlan secondary host-association: none
Administrative private-vlan primary mapping: none
Administrative private-vlan secondary mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q

```

```
show interface switchport
```

```

Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Unknown unicast blocked: disabled
Unknown multicast blocked: disabled

Name: Vethernet2
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: access
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Trunking VLANs Enabled: 1,300-795,900,1002-1005
Pruning VLANs Enabled: 2-1001
Administrative private-vlan primary host-association: none
Administrative private-vlan secondary host-association: none
Administrative private-vlan primary mapping: none
Administrative private-vlan secondary mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Unknown unicast blocked: disabled
Unknown multicast blocked: disabled

Name: Vethernet10
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: access
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Trunking VLANs Enabled: 1,300-795,900,1002-1005
Pruning VLANs Enabled: 2-1001
Administrative private-vlan primary host-association: none
Administrative private-vlan secondary host-association: none
Administrative private-vlan primary mapping: none
Administrative private-vlan secondary mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Unknown unicast blocked: disabled
Unknown multicast blocked: disabled

Name: Ethernet101/1/1
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: access
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Trunking VLANs Enabled: 1,300-795,900,1002-1005
Pruning VLANs Enabled: 2-1001
Administrative private-vlan primary host-association: none
<--Output truncated-->
switch#

```

This example shows how to display the rate limit status for Ethernet interface 1/2:

```

switch# show interface switchport
BEND-2(config-if)# show interface switchport
Name: Ethernet1/1
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: fex-fabric
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Trunking VLANs Enabled: 1,300-800,900
Pruning VLANs Enabled: 2-1001
Administrative private-vlan primary host-association: none
Administrative private-vlan secondary host-association: none
Administrative private-vlan primary mapping: none

```

```

Administrative private-vlan secondary mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Unknown unicast blocked: disabled
Unknown multicast blocked: disabled

Name: Ethernet1/2
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: trunk
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Trunking VLANs Enabled: 1,300-800
Pruning VLANs Enabled: 2-1001
Administrative private-vlan primary host-association: none
Administrative private-vlan secondary host-association: none
Administrative private-vlan primary mapping: none
Administrative private-vlan secondary mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Unknown unicast blocked: disabled
Unknown multicast blocked: disabled
Monitor destination rate-limit: 1G


```

```

Name: Ethernet1/3
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: trunk
Access Mode VLAN: 700 (VLAN0700)
Trunking Native Mode VLAN: 1 (default)
<--Output truncated-->
switch #

```

In the above display, the significant field for Ethernet interface 1/2 is highlighted.

This example shows how to display the voice VLAN information for an Ethernet interface:

```

switch# show interface ethernet 1/28 switchport
Name: Ethernet1/28
Switchport: Enabled
Switchport Monitor: Not enabled
Operational Mode: access
Access Mode VLAN: 3000 (VLAN3000)
Trunking Native Mode VLAN: 1 (default)
Trunking VLANs Enabled: 1,200,300-302,500,2001-2248,3000-3001,4049,4090
Pruning VLANs Enabled: 2-1001
Voice VLAN: 3
Extended Trust State : not trusted [COS = 0]
Administrative private-vlan primary host-association: none
Administrative private-vlan secondary host-association: none
Administrative private-vlan primary mapping: none
Administrative private-vlan secondary mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Unknown unicast blocked: disabled
Unknown multicast blocked: disabled

switch#

```

show interface switchport**Related Commands**

Command	Description
switchport access vlan	Sets the access VLAN when the interface is in access mode.
switchport monitor rate-limit	Configures the rate limit for traffic on an interface.

show interface switchport backup

To display information about all the switch port Flex Links interfaces, use the **show interface switchport backup** command.

show interface switchport backup [detail]

Syntax Description

detail	(Optional) Displays detailed information for backup interfaces.
---------------	---

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display information for all Flex Links:

```
switch# show interface switchport backup
```

Switch Backup Interface Pairs:

Active Interface	Backup Interface	State
Ethernet1/2	Ethernet1/1	Active Down/Backup Down
Ethernet1/20	Ethernet1/21	Active Down/Backup Down
port-channel1300	port-channel1301	Active Up/Backup Down
port-channel1500	port-channel1501	Active Down/Backup Down
port-channel1502	port-channel1503	Active Down/Backup Down
port-channel1504	Ethernet2/1	Active Down/Backup Down

This example shows how to display the detailed information for all Flex Links:

```
switch# show interface switchport backup detail
```

Switch Backup Interface Pairs:

Active Interface	Backup Interface	State
Ethernet1/2	Ethernet1/1	Active Down/Backup Down
Preemption Mode : off		
Multicast Fast Convergence : Off		
Bandwidth : 1000000 Kbit (Ethernet1/2), 10000000 Kbit (Ethernet1/1)		
Ethernet1/20	Ethernet1/21	Active Down/Backup Down
Preemption Mode : off		

show interface switchport backup

```

        Multicast Fast Convergence : Off
        Bandwidth : 10000000 Kbit (Ethernet1/20), 10000000 Kbit (Ethernet1/21)

port-channel1300      port-channel1301      Active Up/Backup Down
    Preemption Mode : forced
    Preemption Delay : 35 seconds (default)
    Multicast Fast Convergence : On
    Bandwidth : 20000000 Kbit (port-channel1300), 10000000 Kbit (port-channel
301)

port-channel1500      port-channel1501      Active Down/Backup Down
    Preemption Mode : off
    Multicast Fast Convergence : On
    Bandwidth : 100000 Kbit (port-channel1500), 100000 Kbit (port-channel1501)

port-channel1502      port-channel1503      Active Down/Backup Down
    Preemption Mode : off
    Multicast Fast Convergence : Off
    Bandwidth : 100000 Kbit (port-channel1502), 100000 Kbit (port-channel1503)

port-channel1504      Ethernet2/1          Active Down/Backup Down
    Preemption Mode : off
    Multicast Fast Convergence : Off
    Bandwidth : 100000 Kbit (port-channel1504), 0 Kbit (Ethernet2/1)
switch#

```

[Table 3: show interface switchport backup Field Descriptions](#), on page 154 describes the significant fields displayed in the output.

Table 3: show interface switchport backup Field Descriptions

Field	Description
Active Interface	Layer 2 interface being configured.
Backup Interface	Layer 2 interface to act as a backup link to the interface being configured.
State	Flex Links status.
Preemption Mode	Preemption scheme for a backup interface pair.
Preemption Delay	Preemption delay configured for a backup interface pair.
Multicast Fast Convergence	Fast convergence configured on the backup interface.
Bandwidth	Bandwidth configured on the backup interface.

Related Commands

Command	Description
switchport backup interface	Configures Flex Links.
show running-config backup	Displays the running configuration information for backup interfaces.

Command	Description
show running-config flexlink	Displays the running configuration information for Flex Links.

show interface transceiver

show interface transceiver

To display the information about the transceivers connected to a specific interface, use the **show interface transceiver** command.

show interface ethernet slot /[*QSFP-module* /] port transceiver [details][calibrations|sprom]

Syntax Description

ethernet	Displays information about an Ethernet interface slot number and port number.
<i>slot</i>	The slot number is from 1 to 255.
<i>QSFP-module</i>	(Optional) Quad Small Form-Factor Pluggable (QSFP) transceiver module. The range is from 1 to 199.
details	(Optional) Displays detailed information about the transceivers on an interface
calibrations	(Optional) Displays calibration information about the transceivers on an interface.
<i>port</i>	The port number is from 1 to 128.
sprom	This command was introduced.

Command Default None

Command Modes EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines You can use the **show interface transceiver** command only for physical interfaces.

Examples This example shows how to display the transceivers connected to a specified Ethernet interface:

```
switch# show interface ethernet 1/1 transceiver
Ethernet1/1
```

```

transceiver is present
type is SFP-H10GB-CU1M
name is CISCO-MOLEX
part number is 74752-9044
revision is 07
serial number is MOC14081360
nominal bitrate is 10300 Mbit/sec
Link length supported for copper is 1 m
cisco id is --
cisco extended id number is 4
switch#

```

The following example shows how to display calibration information of transceivers connected to a specified ethernet interface:

```

switch# show interface ethernet 1/45 transceiver calibrations
Ethernet1/45
    transceiver is present
    type is 10Gbase-SR
    name is CISCO-JDSU
    part number is PLRXPL-SC-S43-CS
    revision is 1
    serial number is JUR191101WD
    nominal bitrate is 10300 MBit/sec
    Link length supported for 50/125um OM2 fiber is 82 m
    Link length supported for 62.5/125um fiber is 26 m
    Link length supported for 50/125um OM3 fiber is 300 m
    cisco id is --
    cisco extended id number is 4
        SFP          Internal      Calibrations      Information
        -----        -----        -----
        Slope        Offset        Rx4/Rx3/Rx2/Rx1/Rx0
        -----
Temperature   256          0
Voltage      256          0
Current       256          0
Tx Power     256          0
Rx Power      0.0000/0.0000/0.0000/1.0000/0.0000
-----
```

The following example shows how to display detailed information of transceivers connected to a specified ethernet interface:

```

switch# show interface ethernet 1/45 transceiver details
Ethernet1/45
    transceiver is present
    type is 10Gbase-SR
    name is CISCO-JDSU
    part number is PLRXPL-SC-S43-CS
    revision is 1
    serial number is JUR191101WD
    nominal bitrate is 10300 MBit/sec
    Link length supported for 50/125um OM2 fiber is 82 m
    Link length supported for 62.5/125um fiber is 26 m
    Link length supported for 50/125um OM3 fiber is 300 m
    cisco id is --
    cisco extended id number is 4
        SFP Detail Diagnostics Information (internal calibration)
        -----
        Current          Alarms          Warnings
        Measurement      High           Low           High           Low
        -----
Temperature   43.09 C    75.00 C    -5.00 C    70.00 C    0.00 C
Voltage      3.32 V     3.63 V     2.97 V     3.46 V     3.13 V
Current       7.63 mA    10.00 mA    2.59 mA    8.50 mA    3.00 mA
Tx Power     -2.29 dBm   1.69 dBm   -11.30 dBm   -1.30 dBm   -7.30 dBm
Rx Power     -3.01 dBm   1.99 dBm   -13.97 dBm   -1.00 dBm   -9.91 dBm
        -----
Note: ++ high-alarm; + high-warning; -- low-alarm; - low-warning

```

The **show interface transceiver details** command output:

show interface transceiver

- When the small form-factor pluggable (SFP) port is shut down and the laser is turned off, the value of the Current field in the output will be close to zero and the Tx power value will be at a minimum (close to -40 dBm).
- When the SFP port is shutdown and the laser is not turned off, the Current and Tx power values will stay at operational levels. The Rx power value will depend on the behavior of the remote side of the link and the interface status—it can either stay at an operational level, or at a minimum (close to -40dBm), or N/A.



Note

The output for the **show interface transceiver** command will vary based on the transceiver type, name, part number, revision, and link length of the device.

Related Commands

Command	Description
interface ethernet	Configures an Ethernet IEEE 802.3 interface.
show interface capabilities	Displays detailed information about the capabilities of an interface.

show lacp

To display Link Aggregation Control Protocol (LACP) information, use the **show lacp** command.

```
show lacp {counters| interface ethernet slot /[QSFP-module /] port| neighbor [interface port-channel number]| port-channel [interface port-channel number]| system-identifier}
```

Syntax Description

counters	Displays information about the LACP traffic statistics.
interface ethernet	Displays LACP information for a specific Ethernet interface.
<i>slot</i>	The slot number is from 1 to 255.
<i>QSFP-module</i>	(Optional) Quad Small Form-Factor Pluggable (QSFP) transceiver module. The range is from 1 to 199.
<i>port</i>	The port number is from 1 to 128.
neighbor	Displays information about the LACP neighbor.
interface port-channel<i>number</i>	(Optional) Displays information about a specific EtherChannel. The EtherChannel number is from 1 to 4096.
port-channel	Displays information about all EtherChannels.
system-identifier	Displays the LACP system identification. It is a combination of the port priority and the MAC address of the device.

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

Use the **show lacp** command to troubleshoot problems related to LACP in a network.

show lacp

Examples

This example shows how to display the LACP system identification:

```
switch# show lacp system-identifier
32768,0-5-9b-78-6e-7c
switch#
```

This example shows how to display the LACP information for a specific interface:

```
switch# show lacp interface ethernet 1/1
Interface Ethernet1/1 is up
  Channel group is 1 port channel is Po1
    PDUs sent: 1684
    PDUs rcvd: 1651
    Markers sent: 0
    Markers rcvd: 0
    Marker response sent: 0
    Marker response rcvd: 0
    Unknown packets rcvd: 0
    Illegal packets rcvd: 0
  Lag Id: [ [(8000, 0-5-9b-78-6e-7c, 0, 8000, 101), (8000, 0-d-ec-c9-c8-3c, 0, 800
0, 101)] ]
  Operational as aggregated link since Wed Apr 21 00:37:27 2010

  Local Port: Eth1/1  MAC Address= 0-5-9b-78-6e-7c
    System Identifier=0x8000,0-5-9b-78-6e-7c
    Port Identifier=0x8000,0x101
    Operational key=0
    LACP_Activity=active
    LACP_Timeout=Long Timeout (30s)
    Synchronization=IN_SYNC
    Collecting=true
    Distributing=true
    Partner information refresh timeout=Long Timeout (90s)
    Actor Admin State=(Ac-1:To-1:Ag-1:Sy-0:Co-0:Di-0:De-0:Ex-0)
    Actor Oper State=(Ac-1:To-0:Ag-1:Sy-1:Co-1:Di-1:De-0:Ex-0)
    Neighbor: 1/1
      MAC Address= 0-d-ec-c9-c8-3c
      System Identifier=0x8000,0-d-ec-c9-c8-3c
      Port Identifier=0x8000,0x101
      Operational key=0
      LACP_Activity=active
      LACP_Timeout=Long Timeout (30s)
      Synchronization=IN_SYNC
      Collecting=true
      Distributing=true
    Partner Admin State=(Ac-0:To-1:Ag-0:Sy-0:Co-0:Di-0:De-0:Ex-0)
    Partner Oper State=(Ac-1:To-0:Ag-1:Sy-1:Co-1:Di-1:De-0:Ex-0)
switch#
```

Related Commands

Command	Description
clear lacp counters	Clears LACP counters.
lacp port-priority	Sets the priority for the physical interfaces for the LACP.
lacp system-priority	Sets the system priority of the switch for the LACP.

show port-channel capacity

To display the total number of EtherChannel interfaces and the number of free or used EtherChannel interfaces, use the **show port-channel capacity** command.

show port-channel capacity

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes EXEC mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Examples This example shows how to display the EtherChannel capacity:

```
switch# show port-channel capacity
Port-channel resources
    768 total      29 used     739 free      3% used
switch#
```

Related Commands

Command	Description
port-channel load-balance ethernet	Configures the load-balancing algorithm for EtherChannels.
show tech-support port-channel	Displays Cisco Technical Support information about EtherChannels.

show port-channel compatibility-parameters

show port-channel compatibility-parameters

To display the parameters that must be the same among the member ports in order to join an EtherChannel interface, use the **show port-channel compatibility-parameters** command.

show port-channel compatibility-parameters

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes EXEC mode

Command History

Release

Modification

6.0(2)N1(1)	This command was introduced.
-------------	------------------------------

Examples

This example shows how to display the EtherChannel interface parameters:

```
switch# show port-channel compatibility-parameters
* port mode
Members must have the same port mode configured.
* port mode
Members must have the same port mode configured, either E,F or AUTO. If they are configured in AUTO port mode, they have to negotiate E or F mode when they come up. If a member negotiates a different mode, it will be suspended.
* speed
Members must have the same speed configured. If they are configured in AUTO speed, they have to negotiate the same speed when they come up. If a member negotiates a different speed, it will be suspended.
* MTU
Members have to have the same MTU configured. This only applies to ethernet port-channel.
* shut lan
Members have to have the same shut lan configured. This only applies to ethernet port-channel.
* MEDIUM
Members have to have the same medium type configured. This only applies to ethernet port-channel.
* Span mode
```

```
Members must have the same span mode.  
* load interval  
Member must have same load interval configured.  
--More--  
<---output truncated--->  
switch#
```

Related Commands

Command	Description
port-channel load-balance ethernet	Configures the load-balancing algorithm for EtherChannels.
show tech-support port-channel	Displays Cisco Technical Support information about EtherChannels.

show port-channel database

show port-channel database

To display the aggregation state for one or more EtherChannel interfaces, use the **show port-channel database** command.

show port-channel database [interface port-channel number [. subinterface-number]]

Syntax Description

interface	(Optional) Displays information for an EtherChannel interface.
port-channel number	Displays aggregation information for a specific EtherChannel interface. The <i>number</i> range is from 1 to 4096.
subinterface-number	(Optional) Subinterface number. Use the EtherChannel number followed by a dot (.) indicator and the subinterface number. The format is <i>portchannel-number.subinterface-number</i> .

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the aggregation state of all EtherChannel interfaces:

```
switch# show port-channel database
port-channel19
    Last membership update is successful
    4 ports in total, 4 ports up
    First operational port is Ethernet199/1/24
    Age of the port-channel is 0d:09h:11m:30s
    Time since last bundle is 0d:09h:12m:20s
    Last bundled member is
    Ports:   Ethernet199/1/24  [active ] [up] *
              Ethernet199/1/28  [active ] [up]
              Ethernet199/1/30  [active ] [up]
              Ethernet199/1/31  [active ] [up]

port-channel21
    Last membership update is successful
    1 ports in total, 1 ports up
    First operational port is Ethernet2/3
    Age of the port-channel is 0d:09h:11m:30s
```

```

Time since last bundle is 0d:09h:12m:20s
Last bundled member is
Ports:   Ethernet2/3      [on]  [up]  *

port-channel50
    Last membership update is successful
--More--
<---output truncated--->

switch#

```

This example shows how to display the aggregation state for a specific EtherChannel interface:

```

switch# show port-channel database interface port-channel 21
port-channel21
    Last membership update is successful
    1 ports in total, 1 ports up
    First operational port is Ethernet2/3
    Age of the port-channel is 0d:09h:13m:14s
    Time since last bundle is 0d:09h:14m:04s
    Last bundled member is
    Ports:   Ethernet2/3      [on]  [up]  *

switch#

```

Related Commands

Command	Description
port-channel load-balance ethernet	Configures the load-balancing algorithm for EtherChannels.
show tech-support port-channel	Displays Cisco Technical Support information about EtherChannels.

show port-channel load-balance

show port-channel load-balance

To display information about EtherChannel load balancing, use the **show port-channel load-balance** command.

```
show port-channel load-balance [forwarding-path interface port-channel number {.| vlan vlan_ID} [dst-ip ipv4-addr] [dst-ipv6 ipv6-addr] [dst-mac dst-mac-addr] [l4-dst-port dst-port] [l4-src-port src-port] [src-ip ipv4-addr] [src-ipv6 ipv6-addr] [src-mac src-mac-addr]]
```

Syntax Description

forwarding-path interface port-channel	(Optional) Identifies the port in the EtherChannel interface that forwards the packet.
<i>number</i>	EtherChannel number for the load-balancing forwarding path that you want to display. The range is from 1 to 4096.
.	(Optional) Subinterface number separator. Use the EtherChannel number followed by a dot (.) indicator and the subinterface number. The format is <i>portchannel-number .subinterface-number</i> .
vlan	(Optional) Identifies the VLAN for hardware hashing.
<i>vlan_ID</i>	VLAN ID. The range is from 1 to 3967 and 4048 to 4093.
dst-ip	(Optional) Displays the load distribution on the destination IP address.
<i>ipv4-addr</i>	IPv4 address to specify a source or destination IP address. The format is <i>A .B .C .D</i> .
dst-ipv6	(Optional) Displays the load distribution on the destination IPv6 address.
<i>ipv6-addr</i>	IPv6 address to specify a source or destination IP address. The format is <i>A :B ::C :D</i> .
dst-mac	(Optional) Displays the load distribution on the destination MAC address.
<i>dst-mac-addr</i>	Destination MAC address. The format is <i>AAAA :BBBB :CCCC</i> .
l4-dst-port	(Optional) Displays the load distribution on the destination port.
<i>dst-port</i>	Destination port number. The range is from 0 to 65535.

l4-src-port	(Optional) Displays the load distribution on the source port.
<i>src-port</i>	Source port number. The range is from 0 to 65535.
src-ip	(Optional) Displays the load distribution on the source IP address.
src-ipv6	(Optional) Displays the load distribution on the source IPv6 address.
src-mac	(Optional) Displays the load distribution on the source MAC address.
<i>src-mac-addr</i>	Source MAC address. The format is <i>AA :BB :CC :DD :EE :FF</i> .

Command Default None

Command Modes EXEC mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines You must use the **vlan** keyword to determine the use of hardware hashing.

When you do not use hardware hashing, the output displays all parameters used to determine the outgoing port ID. Missing parameters are shown as zero values in the output.

If you do not use hardware hashing, the outgoing port ID is determined by using control-plane selection. Hardware hashing is not used in the following scenarios:

- The specified VLAN contains an unknown unicast destination MAC address.
- The specified VLAN contains a known or an unknown multicast destination MAC or destination IP address.
- The specified VLAN contains a broadcast MAC address.
- The EtherChannel has only one active member.
- The destination MAC address is unknown when the load distribution is configured on the source IP address (**src-ip**), source port (**l4-src-port**), or source MAC address (**src-mac**).
- If multichassis EtherChannel trunk (MCT) is enabled and the traffic flows from a virtual port channel (vPC) peer link, the output displays “Outgoing port id (vPC peer-link traffic).”

show port-channel load-balance

To get accurate results, you must do the following:

- (For unicast frames) Provide the destination MAC address (dst-mac) and the VLAN for hardware hashing (vlan). When the destination MAC address is not provided, hardware hashing is assumed.
- (For multicast frames) For IP multicast, provide either the destination IP address (dst-ip) or destination MAC address (dst-mac) with the VLAN for hardware hashing (vlan). For non-IP multicast, provide the destination MAC address with the VLAN for hardware hashing.
- (For broadcast frames) Provide the destination MAC address (dst-mac) and the VLAN for hardware hashing (vlan).

Examples

This example shows how to display the port channel load-balancing information:

```
switch# show port-channel load-balance
Port Channel Load-Balancing Configuration:
System: source-dest-ip

Port Channel Load-Balancing Addresses Used Per-Protocol:
Non-IP: source-dest-mac
IP: source-dest-ip source-dest-mac

switch#
```

The table below describes the fields shown in the display.

Table 4: show port-channel load-balance Field Descriptions

Field	Description
System	Load-balancing method configured on the switch.
Non-IP	Field that will be used to calculate the hash value for non-IP traffic.
IP	Fields used for IPv4 and IPv6 traffic.

This example shows how to display the port channel load-balancing information when hardware hashing is not used:

```
switch# show port-channel load-balance forwarding-path interface port-channel 5 vlan 3
dst-ip 192.0.2.37
Missing params will be substituted by 0's.
Load-balance Algorithm on FEX: source-dest-ip
crc8_hash: Not Used      Outgoing port id: Ethernet133/1/3
Param(s) used to calculate load-balance (Unknown unicast, multicast and broadcast packets):
          dst-mac: 0000.0000.0000
          vlan id: 3
switch#
```

This example shows how to display the port channel load-balancing information when hardware hashing is not used to determine the outgoing port ID:

```
switch# show port-channel load-balance forwarding-path interface port-channel 10 vlan 1
dst-ip 192.0.2.25 src-ip 192.0.2.10 dst-mac ffff.ffff.ffff src-mac aa:bb:cc:dd:ee:ff
14-src-port 0 14-dst-port 1
Missing params will be substituted by 0's.
Load-balance Algorithm on switch: source-dest-port
crc8_hash: Not Used      Outgoing port id: Ethernet1/1
```

```
Param(s) used to calculate load-balance (Unknown unicast, multicast and broadcast packets):
```

```
dst-mac: fffff.fffff.fffff
vlan id: 1
```

```
switch#
```

This example shows how to display the port channel load-balancing information when MCT is enabled and traffic flows from a vPC peer link:

```
switch# show port-channel load-balance forwarding-path interface port-channel 10
vlan 1 dst-ip 192.0.2.25 src-ip 192.0.2.10 dst-mac fffff.fffff src-mac aa:bb:cc:dd:ee:ff
```

```
14-src-port 0 14-dst-port 1
```

Missing params will be substituted by 0's.

Load-balance Algorithm on switch: source-dest-port

crc8_hash: Not Used Outgoing port id (non vPC peer-link traffic): ethernet1/2

crc8_hash: Not Used Outgoing port id (vPC peer-link traffic): Ethernet1/1

Param(s) used to calculate load-balance (Unknown unicast, multicast and broadcast packets):

```
dst-mac: fffff.fffff.fffff
vlan id: 1
```

```
switch#
```

This example shows how to display the port channel load-balancing information when hardware hashing is used to determine the outgoing port ID:

```
switch# show port-channel load-balance forwarding-path interface port-channel 10 vlan 1
dst-ip 192.0.2.25 src-ip 192.0.2.10 src-mac aa:bb:cc:dd:ee:ff 14-src-port 0 14-dst-port 1
```

Missing params will be substituted by 0's.

Load-balance Algorithm on switch: source-dest-port

crc8_hash: 204 Outgoing port id: Ethernet1/1

Param(s) used to calculate load-balance:

```
dst-port: 1
src-port: 0
dst-ip: 192.0.2.25
src-ip: 192.0.2.10
dst-mac: 0000.0000.0000
src-mac: aabb.ccdd.eeff
```

```
switch#
```

Related Commands

Command	Description
port-channel load-balance ethernet	Configures the load-balancing method among the interfaces in the channel-group bundle.

show port-channel summary

show port-channel summary

To display summary information about EtherChannels, use the **show port-channel summary** command.

show port-channel summary

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes Global configuration mode
EXEC mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Usage Guidelines Before you use this command, you must configure an EtherChannel group using the **interface port-channel** command.

Examples This example shows how to display summary information about EtherChannels:

```
switch# show port-channel summary
Flags: D - Down      P - Up in port-channel (members)
       I - Individual  H - Hot-standby (LACP only)
       s - Suspended   r - Module-removed
       S - Switched    R - Routed
       U - Up (port-channel)
-----
Group Port-      Type     Protocol Member Ports
      Channel
-----
1    Po1 (SU)    Eth      LACP     Eth1/1 (P)  Eth1/2 (P)  Eth1/3 (P)
                                         Eth1/4 (P)  Eth1/21 (P) Eth1/22 (P)
                                         Eth1/23 (P) Eth1/24 (P) Eth1/25 (P)
                                         Eth1/26 (P) Eth1/27 (P) Eth1/28 (P)
                                         Eth1/29 (P) Eth1/30 (P) Eth1/31 (P)
                                         Eth1/32 (P)
3    Po3 (SU)    Eth      NONE    Eth1/9 (P)  Eth1/10 (P) Eth1/13 (P)
                                         Eth1/14 (P) Eth1/40 (P)
5    Po5 (SU)    Eth      NONE    Eth3/5 (P)  Eth3/6 (P)
6    Po6 (SU)    Eth      NONE    Eth1/5 (P)  Eth1/6 (P)  Eth1/7 (P)
                                         Eth1/8 (P)
12   Po12 (SU)   Eth      NONE    Eth3/3 (P)  Eth3/4 (P)
15   Po15 (SD)   Eth      NONE    --
20   Po20 (SU)   Eth      NONE    Eth1/17 (P) Eth1/18 (P) Eth1/19 (D)
                                         Eth1/20 (P)
24   Po24 (SU)   Eth      LACP    Eth105/1/27 (P) Eth105/1/28 (P) Eth105/1/29
                                         (P)
                                         Eth105/1/30 (P) Eth105/1/31 (P) Eth105/1/32
                                         (P)
```

```

25    Po25 (SU)      Eth     LACP      Eth105/1/23 (P)  Eth105/1/24 (P)  Eth105/1/25
      (P)                                         Eth105/1/26 (P)
33    Po33 (SD)      Eth     NONE     --
41    Po41 (SD)      Eth     NONE     --
44    Po44 (SD)      Eth     NONE     --
48    Po48 (SD)      Eth     NONE     --
100   Po100 (SD)     Eth     NONE     --
101   Po101 (SD)     Eth     NONE     --
102   Po102 (SU)     Eth     LACP     Eth102/1/2 (P)
103   Po103 (SU)     Eth     LACP     Eth102/1/3 (P)
104   Po104 (SU)     Eth     LACP     Eth102/1/4 (P)
105   Po105 (SU)     Eth     LACP     Eth102/1/5 (P)
106   Po106 (SU)     Eth     LACP     Eth102/1/6 (P)
107   Po107 (SU)     Eth     LACP     Eth102/1/7 (P)
108   Po108 (SU)     Eth     LACP     Eth102/1/8 (P)
109   Po109 (SU)     Eth     LACP     Eth102/1/9 (P)
110   Po110 (SU)     Eth     LACP     Eth102/1/10 (P)
111   Po111 (SU)     Eth     LACP     Eth102/1/11 (P)

<---output truncated--->
switch#

```

Related Commands

Command	Description
channel-group (Ethernet)	Assigns and configures a physical interface to an EtherChannel.
interface port-channel	Creates an EtherChannel interface and enters interface configuration mode.

show port-channel traffic

show port-channel traffic

To display the traffic statistics for EtherChannels, use the **show port-channel traffic** command.

show port-channel traffic [interface port-channel number [. subinterface-number]]

Syntax Description

interface port-channel<i>number</i>	(Optional) Displays traffic statistics for a specified interface. The range is from 1 to 4096.
. subinterface-number	(Optional) Subinterface number. Use the EtherChannel number followed by a dot (.) indicator and the subinterface number. The format is <i>portchannel-number.subinterface-number</i> .

Command Default None

Command Modes EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the traffic statistics for all EtherChannels:

```
switch# show port-channel traffic
ChanId      Port Rx-Ucst Tx-Ucst Rx-Mcst Tx-Mcst Rx-Bcst Tx-Bcst
----- -----
 10    Eth1/7    0.0%  0.0%   0.0%   0.0%   0.0%   0.0%   0.0%
 10    Eth1/8    0.0%  0.0%   0.0%   0.0%   0.0%   0.0%   0.0%
 10    Eth1/9    0.0%  0.0%   0.0%   0.0%   0.0%   0.0%   0.0%
 10    Eth1/10   0.0%  0.0%   0.0%   0.0%   0.0%   0.0%   0.0%
----- -----
 4000   Eth1/1    0.0%  0.0%  99.64%  99.81%   0.0%   0.0%
 4000   Eth1/2    0.0%  0.0%   0.06%   0.06%   0.0%   0.0%
 4000   Eth1/3    0.0%  0.0%   0.23%   0.06%   0.0%   0.0%
 4000   Eth1/4    0.0%  0.0%   0.06%   0.06%   0.0%   0.0%
switch#
```

This example shows how to display the traffic statistics for a specific EtherChannel:

```
switch# show port-channel traffic interface port-channel 10
ChanId      Port Rx-Ucst Tx-Ucst Rx-Mcst Tx-Mcst Rx-Bcst Tx-Bcst
----- -----
 10    Eth1/7    0.0%  0.0%   0.0%   0.0%   0.0%   0.0%   0.0%
 10    Eth1/8    0.0%  0.0%   0.0%   0.0%   0.0%   0.0%   0.0%
 10    Eth1/9    0.0%  0.0%   0.0%   0.0%   0.0%   0.0%   0.0%
 10    Eth1/10   0.0%  0.0%   0.0%   0.0%   0.0%   0.0%   0.0%
switch#
```

Related Commands

Command	Description
port-channel load-balance ethernet	Configures the load-balancing algorithm for EtherChannels.
show tech-support port-channel	Displays Cisco Technical Support information about EtherChannels.

show port-channel usage

show port-channel usage

To display the range of used and unused EtherChannel numbers, use the **show port-channel usage** command.

show port-channel usage

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes EXEC mode

Command History

	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the EtherChannel usage information:

```
switch# show port-channel usage
Total 29 port-channel numbers used
=====
Used : 19 , 21 , 50 , 100 , 150 , 170 - 171 , 198 - 199 , 256
      301 , 400 - 401 , 1032 - 1033 , 1111 , 1504 , 1511 , 1514 , 1516 - 1520
      1532 , 1548 , 1723 , 1905 , 1912
Unused: 1 - 18 , 20 , 22 - 49 , 51 - 99 , 101 - 149 , 151 - 169
        172 - 197 , 200 - 255 , 257 - 300 , 302 - 399 , 402 - 1031
        1034 - 1110 , 1112 - 1503 , 1505 - 1510 , 1512 - 1513 , 1515 , 1521 - 1531
        1533 - 1547 , 1549 - 1722 , 1724 - 1904 , 1906 - 1911 , 1913 - 4096
(some numbers may be in use by SAN port channels)

switch#
```

Related Commands

Command	Description
port-channel load-balance ethernet	Configures the load-balancing algorithm for EtherChannels.
show tech-support port-channel	Displays Cisco Technical Support information about EtherChannels.

show port-security

To display the port security configuration on an interface, use the **show port-security** command.

```
show port-security [address [interface {ethernet slot /[QSFP-module /] port| port-channel channel-num}]]  
interface {ethernet slot /[QSFP-module /] port| port-channel channel-num}| state]
```

Syntax Description

address	(Optional) Displays the secure MAC address of a port.
interface	(Optional) Displays the secure address for an interface.
ethernet	(Optional) Displays the secure address for an Ethernet interface.
<i>slot</i>	The slot number is from 1 to 255.
<i>QSFP-module</i>	(Optional) Quad Small Form-Factor Pluggable (QSFP) transceiver module. The range is from 1 to 199.
<i>port</i>	The port number is from 1 to 128.
port-channel<i>channel-num</i>	(Optional) Displays the secure address for an EtherChannel interface. The <i>channel-num</i> is from 1 to 4096.
state	(Optional) Displays whether a port is secure.

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

This command does not require a license.

show port-security

Examples

This example shows how to display the port security configuration on an interface:

```
switch# show port-security

Total Secured Mac Addresses in System (excluding one mac per port)      : 0
Max Addresses limit in System (excluding one mac per port) : 8192

-----
Secure Port  MaxSecureAddr CurrentAddr SecurityViolation  Security Action
          (Count)       (Count)        (Count)
-----
Ethernet1/5      10           0            0           Shutdown
=====
switch#
```

Related Commands

Command	Description
clear port-security dynamic	Clears the dynamically secured addresses on a port.
show running-config port-security	Displays the port security configuration information.
switchport port-security	Configures the switchport parameters to establish port security.

show resource

To display the number of resources currently available in the system, use the **show resource** command.

show resource [resource]

Syntax Description

<i>resource</i>	(Optional) Resource name, which can be one of the following: <ul style="list-style-type: none"> • port-channel--Displays the number of EtherChannels available in the system. • vlan -Displays the number of VLANs available in the system. • vrf -Displays the number of virtual routing and forwarding (VRF) instances available in the system.
-----------------	---

Command Default None

Command Modes EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the resources available in the system:

```
switch# show resource
      Resource        Min        Max        Used        Unused        Avail
      -----        ----        ----        ----        -----        -----
      vlan          16       4094       509         0          3
      monitor-session    0           2         0         0          2
      vrf            2       1000         2         0        998
      port-channel     0        768         2         0        766
      u4route-mem     32          32         1        31         31
      u6route-mem     16          16         1        15         15
      m4route-mem     58          58         0        58         58
      m6route-mem      8           8         0         8          8
      bundle-map       0          16         2         0        14

switch#
```

show resource**Related Commands**

Command	Description
show interface port-channel	Displays information about EtherChannels.

show running-config

To display the contents of the currently running configuration file, use the **show running-config** command.

show running-config [all]

Syntax Description

all	(Optional) Displays the full operating information including default settings.
------------	--

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display information about the running configuration:

```
switch# show running-config
```

This example shows how to display detailed information about the running configuration:

```
switch# show running-config all
```

Related Commands

Command	Description
show startup-config	Displays the contents of the startup configuration file.

show running-config backup

show running-config backup

To display the running configuration for backup interfaces, use the **show running-config backup** command.

show running-config backup [all]

Syntax Description

all	(Optional) Displays backup interface information including default settings.
------------	--

Command Default None

Command Modes EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the running configuration for backup interfaces:

```
switch# show running-config backup
!Command: show running-config backup
!Time: Sun Jan  4 06:27:36 2009
version 5.0(3)N2(1)
feature flexlink

logging level Flexlink 5

interface port-channel1300
  switchport backup interface port-channel1301 preemption mode forced
  switchport backup interface port-channel1301 multicast fast-convergence

interface port-channel1500
  switchport backup interface port-channel1501 preemption delay 36
  switchport backup interface port-channel1501 multicast fast-convergence

interface port-channel1502
  switchport backup interface port-channel1502

interface port-channel1504
  switchport backup interface Ethernet2/1

interface Ethernet1/2
  switchport backup interface Ethernet1/1

interface Ethernet1/20
  switchport backup interface Ethernet1/21

interface Ethernet2/2
  switchport backup interface port-channel1507 preemption mode forced
```

```

switch#
This example shows how to display the detailed running configuration for backup interfaces:
switch# show running-config backup all
!Command: show running-config backup all
!Time: Sun Jan  4 06:28:04 2009
version 5.0(3)N2(1)
feature flexlink

logging level Flexlink 5

interface port-channel300
  switchport backup interface port-channel1301 preemption mode forced
  switchport backup interface port-channel1301 preemption delay 35
  switchport backup interface port-channel1301 multicast fast-convergence

interface port-channel500
  switchport backup interface port-channel1501 preemption mode off
  switchport backup interface port-channel1501 preemption delay 36
  switchport backup interface port-channel1501 multicast fast-convergence

interface port-channel502
  switchport backup interface port-channel1503 preemption mode off
  switchport backup interface port-channel1503 preemption delay 35

interface port-channel504
  switchport backup interface Ethernet2/1 preemption mode off
  switchport backup interface Ethernet2/1 preemption delay 35

interface Ethernet1/2
  switchport backup interface Ethernet1/1 preemption mode off
  switchport backup interface Ethernet1/1 preemption delay 35

interface Ethernet1/20
  switchport backup interface Ethernet1/21 preemption mode off
  switchport backup interface Ethernet1/21 preemption delay 35

interface Ethernet2/2
  switchport backup interface port-channel1507 preemption mode forced
  switchport backup interface port-channel1507 preemption delay 35

switch#

```

Related Commands

Command	Description
show running-config flexlink	Displays the Flex Links running configuration.
show startup-config backup	Displays the startup configuration for backup interfaces.
show startup-config flexlink	Displays the startup configuration for Flex Links.
show tech-support backup	Displays troubleshooting information for backup interfaces.
show tech-support flexlink	Displays troubleshooting information for Flex Links.

show running-config interface

show running-config interface

To display the running configuration for a specific port channel, use the **show running-config interface** command.

```
show running-config interface [ethernet slot /[QSFP-module /] port| fc slot /port| loopback number| mgmt 0| port-channel channel-number [membership]| vethernet veth-id| vlan vlan-id] [all| expand-port-profile]
```

Syntax Description

ethernet	(Optional) Displays the Ethernet interface slot number and port number.
<i>slot</i>	The slot number is from 1 to 255.
<i>QSFP-module</i>	(Optional) Quad Small Form-Factor Pluggable (QSFP) transceiver module. The range is from 1 to 199.
<i>port</i>	The port number is from 1 to 128.
fc slot /port	(Optional) Displays the configuration information of the Fibre Channel interface. The slot number is from 1 to 2 and the port number is from 1 to 48.
loopback number	(Optional) Displays the number of the loopback interface. The range of values is from 1 to 4096.
mgmt 0	(Optional) Displays the configuration information of the management interface.
port-channel channel-number	(Optional) Displays the number of the port-channel group. The range of values is from 0 to 1023.
membership	Displays the membership of the specified port channel.
tunnel number	Displays the number of the tunnel interface. The range of values is from 0 to 65535.
vethernet veth-id	(Optional) Displays the configuration information of the virtual Ethernet interface. The range is from 1 to 1048575.
vlan vlan-id	(Optional) Displays the configuration information of the VLAN. The range of values is from 1 to 4096.
all	(Optional) Displays configured and default information .

expand-port-profile	(Optional) Displays the configuration information of port profiles.
----------------------------	---

Command Default None

Command Modes Any command mode

Command History	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Examples This example shows how to display the running configuration for port channel 10:

```
switch(config)#show running-config interface port-channel 10
version 4.0(1)
interface port-channel10
  switchport
    switchport mode trunk

switch(config) #
```

This example shows how to display the running configuration for a virtual Ethernet interface:

```
switch# show running-config interface vethernet 10
!Command: show running-config interface Vethernet10
!Time: Fri Jan  2 01:40:37 2009

version 5.1(3)N1(1)

interface Vethernet10
  inherit port-profile ppVEth
  untagged cos 3
  switchport access vlan 101
  bind interface Ethernet1/5 channel 10

switch#
```

This example shows how to display the running configuration for VLAN 5 that has been configured as an SVI to be used for in-band management:

```
switch# show running-config interface vlan 5
!Command: show running-config interface Vlan5
!Time: Mon Apr  4 07:46:35 2005

version 5.1(3)N1(1)

interface Vlan5
  management

switch#
```

show running-config interface**Related Commands**

Command	Description
show startup-config	Displays the running configuration on the device.

show running-config poe

To display the running configuration for Power over Ethernet (PoE) ports, use the **show running-config poe** command.

show running-config poe [all]

Syntax Description

all	(Optional) Displays detailed information about PoE ports, including default settings.
------------	---

Command Default None

Command Modes EXEC mode

Command History

Release	Modification
5.0(3)N2(1)	This command was introduced.

Examples

This example shows how to display the running configuration for PoE ports:

```
switch# show running-config poe
```

Related Commands

Command	Description
show startup-config poe	Displays the startup configuration information about PoE ports.
show tech-support poe	Displays troubleshooting information about PoE ports.

show startup-config

show startup-config

To display the contents of the currently running configuration file, use the **show startup-config** command.

show startup-config

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes EXEC mode

Command History

	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display information from the startup configuration file:

```
switch# show startup-config
```

Related Commands

Command	Description
show running-config	Displays the contents of the currently running configuration file.

show startup-config backup

To display the startup configuration for backup interfaces, use the **show startup-config backup** command.

show startup-config backup [all]

Syntax Description

all	(Optional) Displays backup interface information including default settings.
------------	--

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the startup configuration for backup interfaces:

```
switch# show startup-config backup
!Command: show startup-config backup
!Time: Sun Jan 4 06:28:43 2009
!Startup config saved at: Thu Jan 1 03:40:28 2009

version 5.0(3)N2(1)
feature flexlink

logging level Flexlink 5

interface port-channel300
    switchport backup interface port-channel301 preemption mode forced

interface port-channel1500
    switchport backup interface port-channel1501 preemption delay 36
    switchport backup interface port-channel1501 multicast fast-convergence

interface port-channel1502
    switchport backup interface port-channel1503

interface port-channel1504
    switchport backup interface Ethernet2/1

interface Ethernet1/2
    switchport backup interface Ethernet1/1

interface Ethernet1/20
    switchport backup interface Ethernet1/21

interface Ethernet2/2
    switchport backup interface port-channel1507 preemption mode forced
```

show startup-config backup

```
switch#
This example shows how to display the detailed startup configuration for backup interfaces:
switch# show startup-config backup all
!Command: show startup-config backup all
!Time: Sun Jan  4 06:29:17 2009
!Startup config saved at: Thu Jan  1 03:40:28 2009
version 5.0(3)N2(1)
feature flexlink

logging level Flexlink 5

interface port-channel1300
  switchport backup interface port-channel1301 preemption mode forced
  switchport backup interface port-channel1301 preemption delay 35

interface port-channel1500
  switchport backup interface port-channel1501 preemption mode off
  switchport backup interface port-channel1501 preemption delay 36
  switchport backup interface port-channel1501 multicast fast-convergence

interface port-channel1502
  switchport backup interface port-channel1503 preemption mode off
  switchport backup interface port-channel1503 preemption delay 35

interface port-channel1504
  switchport backup interface Ethernet2/1 preemption mode off
  switchport backup interface Ethernet2/1 preemption delay 35

interface Ethernet1/2
  switchport backup interface Ethernet1/1 preemption mode off
  switchport backup interface Ethernet1/1 preemption delay 35

interface Ethernet1/20
  switchport backup interface Ethernet1/21 preemption mode off
  switchport backup interface Ethernet1/21 preemption delay 35

interface Ethernet2/2
  switchport backup interface port-channel1507 preemption mode forced
  switchport backup interface port-channel1507 preemption delay 35

switch#
```

Related Commands

Command	Description
copy running-config startup-config	Copies the running configuration information to the startup configuration file.
show running-config backup	Displays the running configuration information for backup interfaces.
show running-config flexlink	Displays Flex Links running configuration information.
show tech-support backup	Displays troubleshooting information for backup interfaces.
show tech-support flexlink	Displays troubleshooting information for Flex Links.

show tech-support

To display troubleshooting information about backup interfaces or Flex Links, use the **show tech-support** command.

show tech-support {backup| flexlink}

Syntax Description

backup	Displays troubleshooting information about backup interfaces.
flexlink	Displays troubleshooting information about Flex Links.

Command Default None

Command Modes EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display the troubleshooting information about backup interfaces:

```
switch# show tech-support backup
`show interface switchport backup detail`  
  

Switch Backup Interface Pairs:  
  

Active Interface      Backup Interface      State
-----  

Ethernet1/2           Ethernet1/1          Active Down/Backup Down
                     Preemption Mode : off
                     Multicast Fast Convergence : Off
                     Bandwidth : 10000000 Kbit (Ethernet1/2), 10000000 Kbit (Ethernet1/1)  
  

Ethernet1/20          Ethernet1/21         Active Down/Backup Down
                     Preemption Mode : off
                     Multicast Fast Convergence : Off
                     Bandwidth : 10000000 Kbit (Ethernet1/20), 10000000 Kbit (Ethernet1/21)  
  

port-channel300       port-channel301       Active Up/Backup Down
                     Preemption Mode : forced
                     Preemption Delay : 35 seconds (default)
                     Multicast Fast Convergence : On
                     Bandwidth : 20000000 Kbit (port-channel300), 10000000 Kbit (port-channel
301)  
  

port-channel1500      port-channel1501      Active Down/Backup Down
                     Preemption Mode : off
```

show tech-support

```

        Multicast Fast Convergence : On
        Bandwidth : 100000 Kbit (port-channel1500), 100000 Kbit (port-channel1501)

port-channel1502           port-channel1503           Active Down/Backup Down
    Preemption Mode : off
    Multicast Fast Convergence : Off
    Bandwidth : 100000 Kbit (port-channel1502), 100000 Kbit (port-channel1503)

port-channel1504           Ethernet2/1           Active Down/Backup Down
    Preemption Mode : off
    Multicast Fast Convergence : Off
    Bandwidth : 100000 Kbit (port-channel1504), 0 Kbit (Ethernet2/1)
`show platform backup internal trace`
FLEXLINK Trace Dump in FIFO order
=====
Trace Buffer Size: 5 MB; Num of times buffer wrapped 0; Max Rec-Size 156; Rec_id
for next Msg 6219
=====
::0:::[Thu Jan 1 00:01:21 2009 594649 usecs] flexlink_db_initialize: timer library initialization successful

::1:::[Thu Jan 1 00:01:21 2009 594702 usecs] flexlink_db_initialize: starting VD C 1

::2:::[Thu Jan 1 00:01:21 2009 594752 usecs] flexlink_initialize: flexlink_db_initialize done

::3:::[Thu Jan 1 00:01:21 2009 594946 usecs] flexlink_mts_queue_initialize: mts bind for flexlink_q_mts(7) successful

::4:::[Thu Jan 1 00:01:21 2009 595015 usecs] flexlink_mts_queue_initialize: registered MTS_OP_CSDWRAP_DEBUG_DUMP(1530) with flexlink_q_mts

::5:::[Thu Jan 1 00:01:21 2009 595064 usecs] flexlink_mts_queue_initialize: registered MTS_OP_SYSLOG_FACILITY_OPR(185) with flexlink_q_mts

::6:::[Thu Jan 1 00:01:21 2009 595113 usecs] flexlink_mts_queue_initialize: registered MTS_OP_SYSMGR_CFG_ACTION(1360) with flexlink_q_mts

::7:::[Thu Jan 1 00:01:21 2009 595161 usecs] flexlink_mts_queue_initialize: registered MTS_OP_SYSMGR_CFG_SAVED(1361) with flexlink_q_mts

::8:::[Thu Jan 1 00:01:21 2009 595209 usecs] flexlink_mts_queue_initialize: registered MTS_OP_VSH_CMD_TLV(7679) with flexlink_q_mts

::9:::[Thu Jan 1 00:01:21 2009 595257 usecs] flexlink_mts_queue_initialize: registered MTS_OP_VSH_CMD_TLV_SYNC(7682) with flexlink_q_mts

::10:::[Thu Jan 1 00:01:21 2009 595304 usecs] flexlink_mts_queue_initialize: registered MTS_OP_FM_SRV_ENABLE_FEATURE(8925) with flexlink_q_mts

::11:::[Thu Jan 1 00:01:21 2009 595351 usecs] flexlink_mts_queue_initialize: registered MTS_OP_FM_SRV_DISABLE_FEATURE(8926) with flexlink_q_mts

::12:::[Thu Jan 1 00:01:21 2009 595400 usecs] flexlink_mts_queue_initialize: registered MTS_OP_IM_IF_CREATED(62467) with flexlink_q_mts

::13:::[Thu Jan 1 00:01:21 2009 595448 usecs] flexlink_mts_queue_initialize: registered MTS_OP_IM_IF_REMOVED(62468) with flexlink_q_mts

::14:::[Thu Jan 1 00:01:21 2009 595495 usecs] flexlink_mts_queue_initialize: reg
<--Output truncated-->
switch#

```

This example shows how to display the troubleshooting information for Flex Links:

```

switch# show tech-support flexlink
`show interface switchport backup detail`
```

Switch Backup Interface Pairs:

Active Interface	Backup Interface	State
Ethernet1/2	Ethernet1/1	Active Down/Backup Down
		Preemption Mode : off
		Multicast Fast Convergence : Off
		Bandwidth : 1000000 Kbit (Ethernet1/2), 10000000 Kbit (Ethernet1/1)
Ethernet1/20	Ethernet1/21	Active Down/Backup Down
		Preemption Mode : off
		Multicast Fast Convergence : Off
		Bandwidth : 10000000 Kbit (Ethernet1/20), 10000000 Kbit (Ethernet1/21)
port-channel1300	port-channel1301	Active Up/Backup Down
		Preemption Mode : forced
		Preemption Delay : 35 seconds (default)
		Multicast Fast Convergence : On
		Bandwidth : 20000000 Kbit (port-channel1300), 10000000 Kbit (port-channel1301)
port-channel1500	port-channel1501	Active Down/Backup Down
		Preemption Mode : off
		Multicast Fast Convergence : On
		Bandwidth : 100000 Kbit (port-channel1500), 100000 Kbit (port-channel1501)
port-channel1502	port-channel1503	Active Down/Backup Down
		Preemption Mode : off
		Multicast Fast Convergence : Off
		Bandwidth : 100000 Kbit (port-channel1502), 100000 Kbit (port-channel1503)
port-channel1504	Ethernet2/1	Active Down/Backup Down
		Preemption Mode : off
		Multicast Fast Convergence : Off
		Bandwidth : 100000 Kbit (port-channel1504), 0 Kbit (Ethernet2/1)
'show platform backup internal trace'		
FLEXLINK Trace Dump in FIFO order		
=====		
Trace Buffer Size: 5 MB; Num of times buffer wrapped 0; Max Rec-Size 156; Rec_id for next Msg 6225		
=====		
::0:::[Thu Jan 1 00:01:21 2009 594649 usecs] flexlink_db_initialize: timer library initialization successful		
::1:::[Thu Jan 1 00:01:21 2009 594702 usecs] flexlink_db_initialize: starting VD C 1		
::2:::[Thu Jan 1 00:01:21 2009 594752 usecs] flexlink_initialize: flexlink_db_initialize done		
::3:::[Thu Jan 1 00:01:21 2009 594946 usecs] flexlink_mts_queue_initialize: mts bind for flexlink_q_mts(7) successful		
::4:::[Thu Jan 1 00:01:21 2009 595015 usecs] flexlink_mts_queue_initialize: registered MTS_OPC_SDWRAP_DEBUG_DUMP(1530) with flexlink_q_mts		
::5:::[Thu Jan 1 00:01:21 2009 595064 usecs] flexlink_mts_queue_initialize: registered MTS_OPC_SYSLOG_FACILITY_OPR(185) with flexlink_q_mts		
::6:::[Thu Jan 1 00:01:21 2009 595113 usecs] flexlink_mts_queue_initialize: registered MTS_OPC_SYSMGR_CFG_ACTION(1360) with flexlink_q_mts		
::7:::[Thu Jan 1 00:01:21 2009 595161 usecs] flexlink_mts_queue_initialize: registered MTS_OPC_SYSMGR_CFG_SAVED(1361) with flexlink_q_mts		
::8:::[Thu Jan 1 00:01:21 2009 595209 usecs] flexlink_mts_queue_initialize: registered MTS_OPC_VSH_CMD_TLV(7679) with flexlink_q_mts		
::9:::[Thu Jan 1 00:01:21 2009 595257 usecs] flexlink_mts_queue_initialize: registered MTS_OPC_VSH_CMD_TLV_SYNC(7682) with flexlink_q_mts		
::10:::[Thu Jan 1 00:01:21 2009 595304 usecs] flexlink_mts_queue_initialize: registered MTS_OPC_FM_SRV_ENABLE_FEATURE(8925) with flexlink_q_mts		

show tech-support

```
::11::[Thu Jan 1 00:01:21 2009 595351 usecs] flexlink_mts_queue_initialize: registered MTS_OPC_FM_SRV_DISABLE_FEATURE(8926) with flexlink_q_mts
::12::[Thu Jan 1 00:01:21 2009 595400 usecs] flexlink_mts_queue_initialize: registered MTS_OPC_IM_IF_CREATED(62467) with flexlink_q_mts
<--Output truncated-->
switch#
```

Related Commands

Command	Description
show running-config backup	Displays the running configuration information for backup interfaces.
show running-config flexlink	Displays Flex Links running configuration information.

show tech-support port-channel

To display troubleshooting information about EtherChannel interfaces, use the **show tech-support port-channel** command.

show tech-support port-channel

Syntax Description This command has no keywords or arguments.

Command Default None

Command Modes EXEC mode

Command History

	Release	Modification
	6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display Cisco technical support information for EtherChannel interfaces:

```
switch# show tech-support port-channel
`show port-channel internal event-history all`
Low Priority Pending queue: len(0), max len(2) [Wed Jan 30 04:05:04 2013]
High Priority Pending queue: len(0), max len(32) [Wed Jan 30 04:05:04 2013]
PCM Control Block info:
pcm_max_channels : 4096
pcm_max_channel_in_use : 1912
pc count : 29
hif-pc count : 20
Max PC Cnt : 768
=====
PORT CHANNELS:
port-channel19
channel          : 19
bundle           : 65535
ifindex          : 0x16000012
admin mode       : active
oper mode        : active
fop ifindex      : 0xfc605c0
nports           : 4
active           : 4
pre cfg          : 0
ltl:              : 0
lif:              : 0
iod:              : 43
global id        : 1
flag              : 0
--More--
<---output truncated--->
switch#
```

show tech-support port-channel**Related Commands**

Command	Description
port channelload-balanceethernet	Configures the load-balancing method among the interfaces in the channel-group bundle.
showport-channel load-balance	Displays information on EtherChannel load balancing.

show udld

To display the Unidirectional Link Detection (UDLD) information for a switch, use the **show udld** command.

show udld [ethernet slot /[QSFP-module /] port| global| neighbors]

Syntax Description

ethernet	(Optional) Displays UDLD information for an Ethernet IEEE 802.3z interface.
<i>slot</i>	The slot number is from 1 to 255.
<i>QSFP-module</i>	(Optional) Quad Small Form-Factor Pluggable (QSFP) transceiver module. The range is from 1 to 199.
<i>port</i>	The port number is from 1 to 128.
global	(Optional) Displays the UDLD global status and configuration information for all interfaces.
neighbors	(Optional) Displays information about UDLD neighbor interfaces.

Command Default

None

Command Modes

EXEC mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Examples

This example shows how to display UDLD information for all interfaces:

```
switch# show udld
Interface Ethernet1/1
-----
Port enable administrative configuration setting: device-default
Port enable operational state: enabled
Current bidirectional state: bidirectional
Current operational state: advertisement - Single neighbor detected
Message interval: 15
Timeout interval: 5

Entry 1
```

show udld

```
-----
Expiration time: 41
Cache Device index: 1
Current neighbor state: bidirectional
Device ID: FLC12280095
Port ID: Ethernet1/1
Neighbor echo 1 devices: SSI130205RT
Neighbor echo 1 port: Ethernet1/1
Message interval: 15
Timeout interval: 5
CDP Device name: N5Kswitch-2 (FLC12280095)

Interface Ethernet1/2
-----
Port enable administrative configuration setting: device-default
Port enable operational state: enabled
Current bidirectional state: bidirectional
Current operational state: advertisement - Single neighbor detected
Message interval: 15
Timeout interval: 5

Entry 1
-----
--More--
switch#
```

This example shows how to display the UDLD information for a specified interface:

```
switch# show udld ethernet 1/1

Interface Ethernet1/1
-----
Port enable administrative configuration setting: device-default
Port enable operational state: enabled
Current bidirectional state: bidirectional
Current operational state: advertisement - Single neighbor detected
Message interval: 15
Timeout interval: 5

Entry 1
-----
Expiration time: 41
Cache Device index: 1
Current neighbor state: bidirectional
Device ID: FLC12280095
Port ID: Ethernet1/1
Neighbor echo 1 devices: SSI130205RT
Neighbor echo 1 port: Ethernet1/1

Message interval: 15
Timeout interval: 5
CDP Device name: N5Kswitch-2 (FLC12280095)
switch#
```

This example shows how to display the UDLD global status and configuration for all interfaces:

```
switch# show udld global

UDLD global configuration mode: enabled
UDLD global message interval: 15
switch#
```

This example shows how to display the UDLD neighbor interfaces:

Port	Device Name	Device ID	Port ID	Neighbor State
Ethernet1/1	FLC12280095	1	Ethernet1/1	bidirectional
Ethernet1/2	FLC12280095	1	Ethernet1/2	bidirectional
Ethernet1/3	FLC12280095	1	Ethernet1/3	bidirectional
Ethernet1/4	FLC12280095	1	Ethernet1/4	bidirectional
Ethernet1/7	JAF1346000H	1	Ethernet1/7	bidirectional
Ethernet1/8	JAF1346000H	1	Ethernet1/8	bidirectional

```
Ethernet1/9      JAF1346000C    1          Ethernet1/9      bidirectional  
Ethernet1/10     JAF1346000C    1          Ethernet1/10     bidirectional  
  
switch#
```

Related Commands

Command	Description
udld (configuration mode)	Configures the UDLD protocol on the switch.
udld (Ethernet)	Configures the UDLD protocol on an Ethernet interface.

show vpc brief

show vpc brief

To display brief information about the virtual port channels (vPCs), use the **show vpc brief** command.

show vpc brief [vpc number]

Syntax Description

vpc number	(Optional) Displays brief information about the specified vPC. The range is from 1 to 4096.
-------------------	---

Command Default None

Command Modes Any command mode
network-admin

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

The **show vpc brief** command displays the vPC domain ID, the peer-link status, the keepalive message status, whether the configuration consistency is successful, and whether the peer link formed or failed to form.

This command is not available if you have not enabled the vPC feature. See the **feature vpc** command for information on enabling vPCs.

You can display the track object, if you have configured a tracked object for running vPCs on a single module under the vpc-domain configuration mode.

Examples

This example shows how to display brief information about the vPCs:

```
switch(config)# show vpc brief
Legend:
(*) - local vpc is down, forwarding via vPC peer-link

vPC domain id          : 10
Peer status             : peer adjacency formed ok
vPC keep-alive status   : peer is alive
Configuration consistency status: success
vPC role                : primary
Number of vPC configured : 1

vPC Peer-link status
-----
id  Port  Status Active vlans
--  ---   ----  -----
1   Po10  up     1-100

vPC status
```

```

-----
| id  Port  Status Consistency Reason          Active vlans
| ---  ---   ---   ---   ---   -
| 20  Po20  up    success     success        1-100
-----
```

This example also shows how to display brief information about the vPCs. In this example, the port channel failed the consistency check, and the device displays the reason for the failure:

```

switch(config)# show vpc brief
Legend:
  (*) - local vpc is down, forwarding via vPC peer-link
vPC domain id           : 10
Peer status              : peer adjacency formed ok
vPC keep-alive status   : peer is alive
Configuration consistency status: failed
Configuration consistency reason: vPC type-1 configuration incompatible - STP interface
port type inconsistent
vPC role                 : secondary
Number of vPC configured : 1

vPC Peer-link status
-----
| id  Port  Status Active vlans
| ---  ---   ---   -
| 1   Po10  up    1-100
-----
```

vPC status

```

-----
| id  Port  Status Consistency Reason          Active vlans
| ---  ---   ---   ---   ---   -
| 20  Po20  up    failed      vPC type-1 configuration  -
|                                incompatible - STP
|                                interface port type
|                                inconsistent
-----
```

This example shows how to display information about the tracked objects in the vPCs:

```


switch(config)# show vpc brief
Legend:
  (*) - local vpc is down, forwarding via vPC peer-link
vPC domain id           : 1
Peer status              : peer adjacency formed ok
vPC keep-alive status   : peer is alive
Configuration consistency status: success
vPC role                 : secondary
Number of vPC configured : 3
Track object             : 12

vPC Peer-link status
-----
| id  Port  Status Active vlans
| ---  ---   ---   -
| 1   Po10  up    1-100
-----
```

Related Commands

Command	Description
feature vpc	Enables vPCs on the device.
show port channel summary	Displays information about port channels.

```
show vpc brief
```

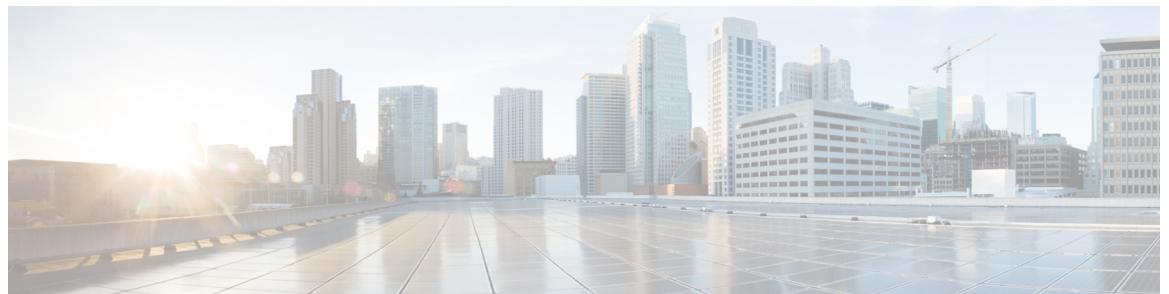

U Commands

- [udld \(Ethernet\)](#), page 202

udld (Ethernet)

To enable and configure the Unidirectional Link Detection (UDLD) protocol on an Ethernet interface, use the **udld** command. To disable UDLD, use the **no** form of this command.

```
udld {aggressive| disable| enable}
no udld {aggressive| disable| enable}
```

Syntax Description

aggressive	Enables UDLD in aggressive mode on the interface.
disable	Disables UDLD on the interface.
enable	Enables UDLD in normal mode on the interface.

Command Default

None

Command Modes

Interface configuration mode

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

You can configure normal or aggressive UDLD modes for an Ethernet interface. Before you can enable a UDLD mode for an interface, you must make sure that UDLD is enabled on the switch. UDLD must also be enabled on the other linked interface and its device.

To use the normal UDLD mode on a link, you must configure one of the ports for normal mode and configure the port on the other end for the normal or aggressive mode. To use the aggressive UDLD mode, you must configure both ends of the link for aggressive mode.

Examples

This example shows how to enable the normal UDLD mode for an Ethernet port:

```
switch# configure terminal
switch(config)# interface ethernet 1/1
switch(config-if)# udld enable
```

This example shows how to enable the aggressive UDLD mode for an Ethernet port:

```
switch(config-if)# udld aggressive
```

This example shows how to disable UDLD for an Ethernet port:

```
switch(config-if)# udld disable
```

Related Commands

Command	Description
show udld	Displays the administrative and operational UDLD status.



V Commands

- [vpc domain, page 206](#)
- [vpc orphan-port suspend, page 208](#)

vpc domain

To create a virtual port-channel (vPC) domain, use the **vpc domain** command. To remove a vPC domain, use the **no** form of this command.

vpc domain *domain-id*

no vpc domain *domain-id*

Syntax Description

<i>domain-id</i>	Domain ID for the vPC . The range of numbers is from 1 to 1000. You must use unique vPC IDs for each vPC within a single virtual device context (VDC).
------------------	--

Command Default None

Command Modes Any command mode
network-admin

Command History

Release	Modification
6.0(2)N1(1)	This command was introduced.

Usage Guidelines

You must enable the vPC feature before you can create a vPC domain.

You put all vPC interfaces, including the vPC peer link, on both of the vPC peer devices into the identical vPC domain. You must have unique vPC domain numbers within each VDC. Once you create a vPC domain, the system automatically creates a vPC system MAC address that is unique to that vPC.

You also use this command to enter the vpc-domain command mode in order to configure vPC parameters.
This command does not require a license.

Examples

This example shows how to create a vPC domain:

```
switch# configure terminal
switch(config)# vpc domain 5
switch(config-vpc-domain)#

```

This example shows how to enter the vpc-domain command mode to configure an existing vPC domain:

```
switch# configure terminal
switch(config)# vpc domain 5
switch(config-vpc-domain)#

```

Related Commands

Command	Description
show vpc brief	Displays information about vPCs. If the feature is not enabled, the system displays an error when you enter this command.

vpc orphan-port suspend

vpc orphan-port suspend

To suspend a vPC orphan port along with vPC ports, use the **vpc orphan-ports suspend** command in interface-configuration mode. Use the **no** form of this command to revert to default settings.

vpc orphan-port suspend

no vpc orphan-port suspend

Syntax Description This command has no arguments or keywords.

Command Default None

Command Modes Interface configuration mode.

Command History	Release	Modification
	5.0(3)N2(1)	This command was introduced.

Usage Guidelines The term “orphaned ports” refers to switch ports connected to single-attached hosts, or vPC ports whose members are all connected to a single vPC peer in a vPC VLAN. End-host can either be attached to a single vPC switch or connected to a vPC pair of switches in an active-standby mode with orphan ports. When a vPC peer-link goes down, while the peer-keepalive link is up, vPC secondary switch suspends all its vPC ports. All the interface VLANs for the vPC VLAN are also brought down during this process. However, orphan ports attached to the vPC secondary switch are not suspended. This may cause traffic disruption for the hosts connected to orphan ports as there is no Layer 3 connectivity for end host through the secondary switch. To suspend the vPC orphan ports along with the vPC ports, use the **vpc orphan-ports suspend** command in interface-configuration mode. The vpc orphan-ports suspend command can be configured on an orphan port that needs to be disconnected from the secondary-operational switch when the vPC peer-link fails.

Examples This example shows how to suspend an orphan port:

```
switch(config)# interface ethernet 1/20
switch(config-if)# vpc orphan-port suspend
switch(config-if) #
```

Related Commands

Command	Description
show vpc brief	Displays brief information about the vPCs.
show vpc orphan-ports	Displays information about orphan ports.

Command	Description
dual-active exclude interface-vlan	Ensures that specified VLAN interfaces do not go down on the vPC secondary device when the vPC peer link fails.

vpc orphan-port suspend