



## **Monitoring System Processes and Logs**

---

This chapter provides details on monitoring the health of the switch. It includes the following sections:

- [Displaying System Processes, page 68-1](#)
- [Displaying System Status, page 68-2](#)
- [Core and Log Files, page 68-3](#)
- [Online System Health Management, page 68-4](#)
- [Default Settings, page 68-6](#)

## **Displaying System Processes**

To obtain general information about all processes using Device Manager, follow these steps:

---

**Step 1** Choose **Admin > Running Processes**.

You see the Running Processes dialog box shown in [Figure 68-1](#).

**Displaying System Status**

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

**Figure 68-1 Running Processes Dialog Box**

ProcessId	Name	MemAllocated (B)	CPU Time (us)
1	init	16620	94376300
2	keventd	0	1150
3	ksoftirqd_CPU0	0	1943880227
4	kswapd	0	2
5	bdfflush	0	3
6	kupdated	0	8570879
1376	kjournald	0	1443394
1383	kjournald	0	583809
1578	portmap	17000	1081
1587	httpd	746040	91808014
1594	rpc.nfsd	22304	31492455
1596	rpc.mountd	23008	31660425
1598	sysmgr	4031464	721314311
1796	mping-thread	0	68
1797	mping-thread	0	35
1879	sdip-mts-thread	0	9106777
2617	xinetd	100340	26575
2618	tftpd	5820	7658
2619	syslogd	259488	888109476
2620	sdwrapd	170412	37699
2622	platform	1431168	713545891
2626	usd_mts_kthread	0	3
2633	kfu_fsm-app-137	0	18
2634	kfu_mts-app-137	0	6
2650	bel_mts_kthread	0	23
2654	redund_kthread	0	21
2655	redund_timer_kth	0	2
2659	ls-notify-mts-t	0	40517005

Refresh    Help    Close

142 row(s)

133998  
133998

Where:

- ProcessId = Process ID
- Name = Name of the process
- MemAllocated = Sum of all the dynamically allocated memory that this process has received from the system, including memory that may have been returned
- Runtime (ms) = CPU time the process has used, in microseconds

**Step 2** Click **Close** to close the dialog box.

## Displaying System Status


To display system status from Device Manager, follow these steps:

**Step 1** Choose **Physical > System**.

You see the System dialog box shown in [Figure 68-2](#).

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

**Figure 68-2 System Dialog Box**

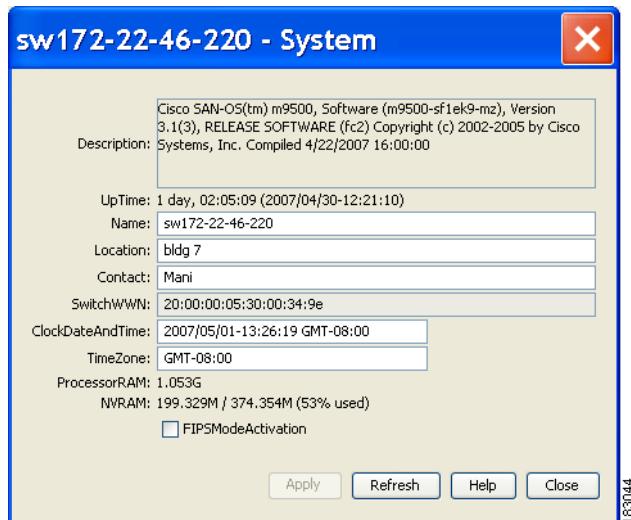

**Step 2** Click **Close** to close the dialog box.

---

## Core and Log Files

- [Displaying Core Status, page 68-3](#)
- [Clearing the Core Directory, page 68-4](#)

For information on copying core and log files, refer to the *Cisco MDS 9000 Family CLI Configuration Guide*.

## Displaying Core Status

To display cores on a switch using Device Manager, follow these steps:



**Note**

Be sure SSH2 is enabled on this switch.


---

**Step 1** Choose **Admin > Show Cores**.

You see the Show Cores dialog box shown in [Figure 68-3](#).

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

**Figure 68-3 Show Cores Dialog Box**

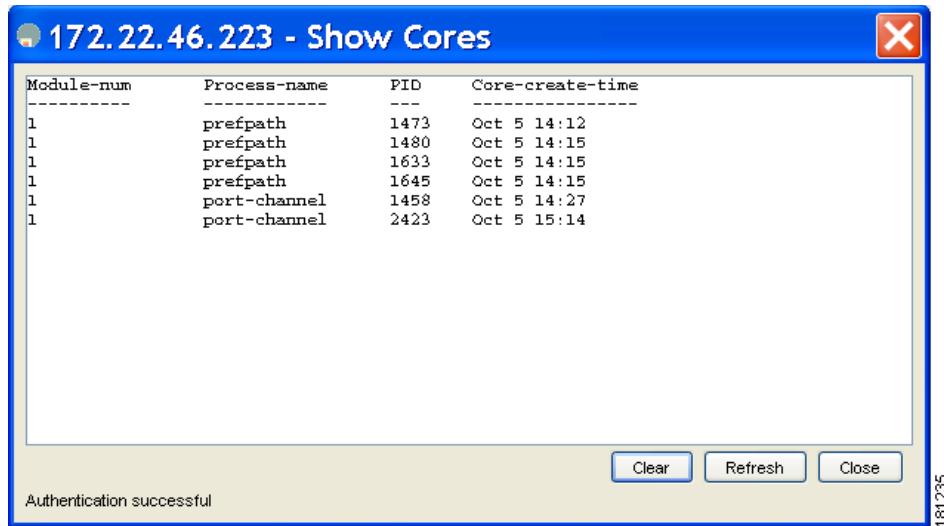

Where:

Module-num shows the slot number on which the core was generated. In this example, the `fspf` core was generated on the active supervisor module (slot 5), `fcc` was generated on the standby supervisor module (slot 6), and `acltcam` and `fib` were generated on the switching module (slot 8).

- Step 2** Click **Close** to close the dialog box.
- 

## Clearing the Core Directory

To clear the cores on a switch using Device Manager, follow these steps:



**Note**

Be sure SSH2 is enabled on this switch.

---

- Step 1** Click **Clear** to clear the cores.

The software keeps the last few cores per service and per slot and clears all other cores present on the active supervisor module.

- Step 2** Click **Close** to close the dialog box.
- 

## Online System Health Management

The Online Health Management System (system health) is a hardware fault detection and recovery feature. It ensures the general health of switching, services, and supervisor modules in any switch in the Cisco MDS 9000 Family.

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

**Note**

For information on most Online Health Management System procedures, refer to the *Cisco MDS 9000 Family CLI Configuration Guide*.

This section includes the following topics:

- [About Online System Health Management, page 68-5](#)
- [Performing Internal Loopback Tests, page 68-6](#)
- [Performing External Loopback Tests, page 68-6](#)

## About Online System Health Management

The Online Health Management System (OHMS) is a hardware fault detection and recovery feature. It runs on all Cisco MDS switching, services, and supervisor modules and ensures the general health of any switch in the Cisco MDS 9000 Family. The OHMS monitors system hardware in the following ways:

- The OHMS component running on the active supervisor maintains control over all other OHMS components running on the other modules in the switch.
- The system health application running in the standby supervisor module only monitors the standby supervisor module—if that module is available in the HA standby mode. See the “[HA Switchover Characteristics](#)” section on page 16-2.

The OHMS application launches a daemon process in all modules and runs multiple tests on each module to test individual module components. The tests run at preconfigured intervals, cover all major fault points, and isolate any failing component in the MDS switch. The OHMS running on the active supervisor maintains control over all other OHMS components running on all other modules in the switch.

On detecting a fault, the system health application attempts the following recovery actions:

- Performs additional testing to isolate the faulty component
- Attempts to reconfigure the component by retrieving its configuration information from persistent storage.
- If unable to recover, sends Call Home notifications, system messages and exception logs; and shuts down and discontinues testing the failed module or component (such as an interface)
- Sends Call Home and system messages and exception logs as soon as it detects a failure.
- Shuts down the failing module or component (such as an interface).
- Isolates failed ports from further testing.
- Reports the failure to the appropriate software component.
- Switches to the standby supervisor module, if an error is detected on the active supervisor module and a standby supervisor module exists in the Cisco MDS switch. After the switchover, the new active supervisor module restarts the active supervisor tests.
- Reloads the switch if a standby supervisor module does not exist in the switch.
- Provides CLI support to view, test, and obtain test run statistics or change the system health test configuration on the switch.
- Performs tests to focus on the problem area.

Each module is configured to run the test relevant to that module. You can change the default parameters of the test in each module as required.

**Default Settings**

**Send documentation comments to [mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)**

## Performing Internal Loopback Tests

You can run manual loopback tests to identify hardware errors in the data path in the switching or services modules, and the control path in the supervisor modules. Internal loopback tests send and receive FC2 frames to/from the same ports and provide the round trip time taken in microseconds. These tests are available for Fibre Channel, IPS, and iSCSI interfaces.

Choose **Interface > Diagnostics > Internal** to perform an internal loopback test from Device Manager.

## Performing External Loopback Tests

You can run manual loopback tests to identify hardware errors in the data path in the switching or services modules, and the control path in the supervisor modules. External loopback tests send and receive FC2 frames to/from the same port or between two ports.

You need to connect a cable (or a plug) to loop the Rx port to the Tx port before running the test. If you are testing to/from the same port, you need a special loop cable. If you are testing to/from different ports, you can use a regular cable. This test is only available for Fibre Channel interfaces.

Choose **Interface > Diagnostics > External** to perform an external loopback test from Device Manager.

## Default Settings

**Table 68-1** lists the default system health and log settings.

**Table 68-1 Default System Health and Log Settings**

Parameters	Default
Kernel core generation	One module.
System health	Enabled.
Loopback frequency	5 seconds.
Failure action	Enabled.