

# How to Remove a Product Instance (Cloud Connect)

## Contents

---

### [Introduction](#)

### [Prerequisites](#)

#### [Requirements](#)

#### [Components Used](#)

### [Removing a Product Instance \(Cloud Connect\)](#)

### [Verify](#)

### [Troubleshooting](#)

### [Related Information](#)

---

## Introduction

This article describes the process of removing a product instance via Cloud Connect. You need to remove a product instance when the device no longer consumes any licenses or when you are replacing hardware and removing it from the network.

## Prerequisites

### Requirements

Before you start, ensure that you:

- Have the following:
  - [Active Cisco.com account](#)
  - Smart account user, or Smart account administrator, or Virtual account user, or Virtual account administrator role (To request access to a Smart account or Virtual account, refer to [How to Request Access to an Existing Smart Account](#).)
  - Access to the device
- You registered a device with a Smart account (To register a device with a Smart account, refer to [How to Register a Device with a Smart Account \(Cloud Connect\)](#).)


### Components Used

The information in this document was created from Catalyst 9300 with IOS version 16.12.05b in a specific lab environment. If your network is live, ensure that you understand the potential impact of any command.

## Removing a Product Instance (Cloud Connect)


### Step 1:

Go to [Cisco Software Central](#) and log in with your Cisco.com account.

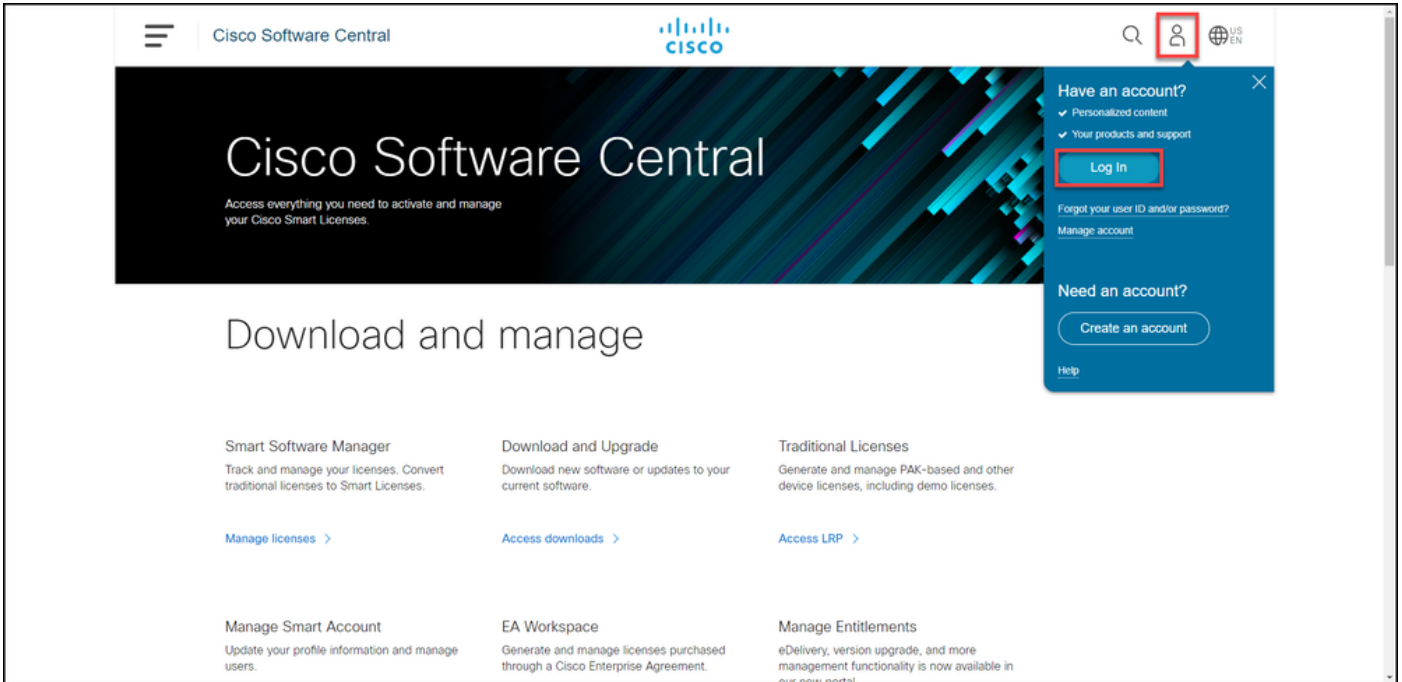

### Step 2:


In the **Smart Software Manager** section, click **Manage licenses**.

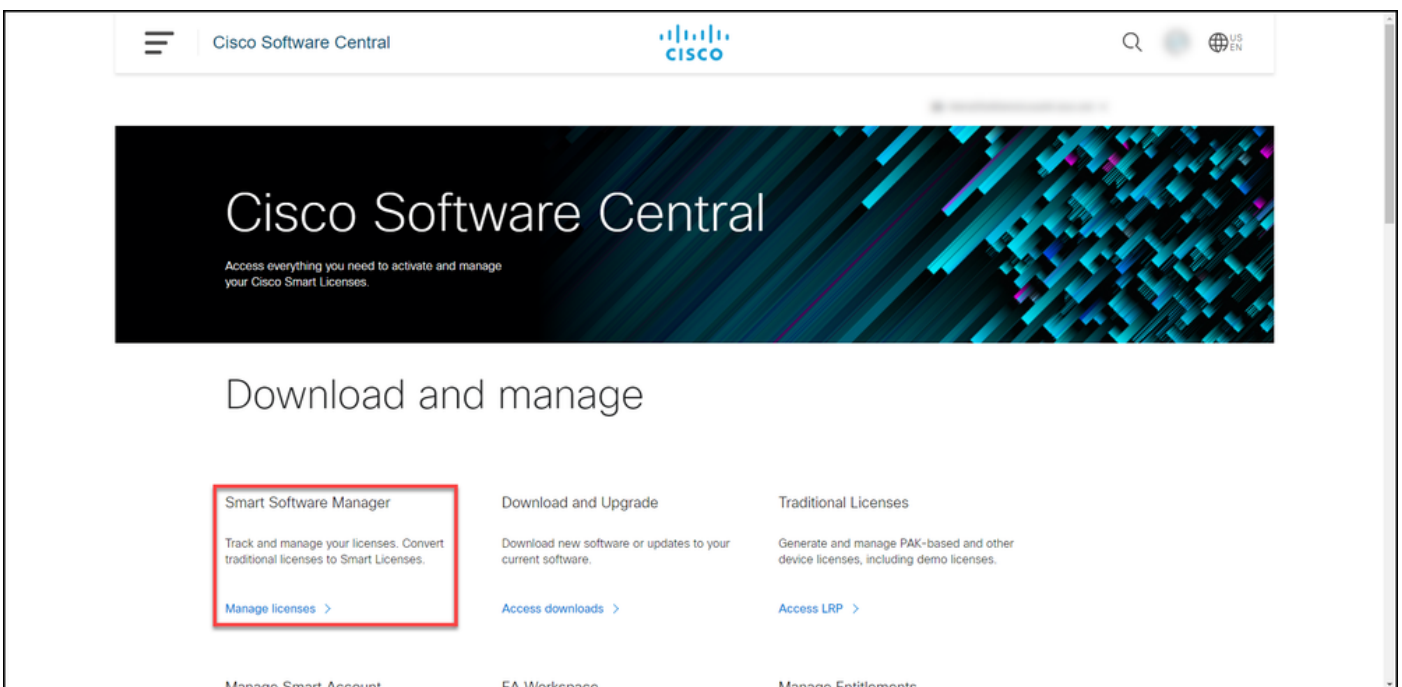

### Step 3:

On the **Inventory** tab, select your Virtual account, click **Product Instances**, search by device or product type, and then press **Enter** to find your device.


**Step result:** The system displays the product instance of your device.

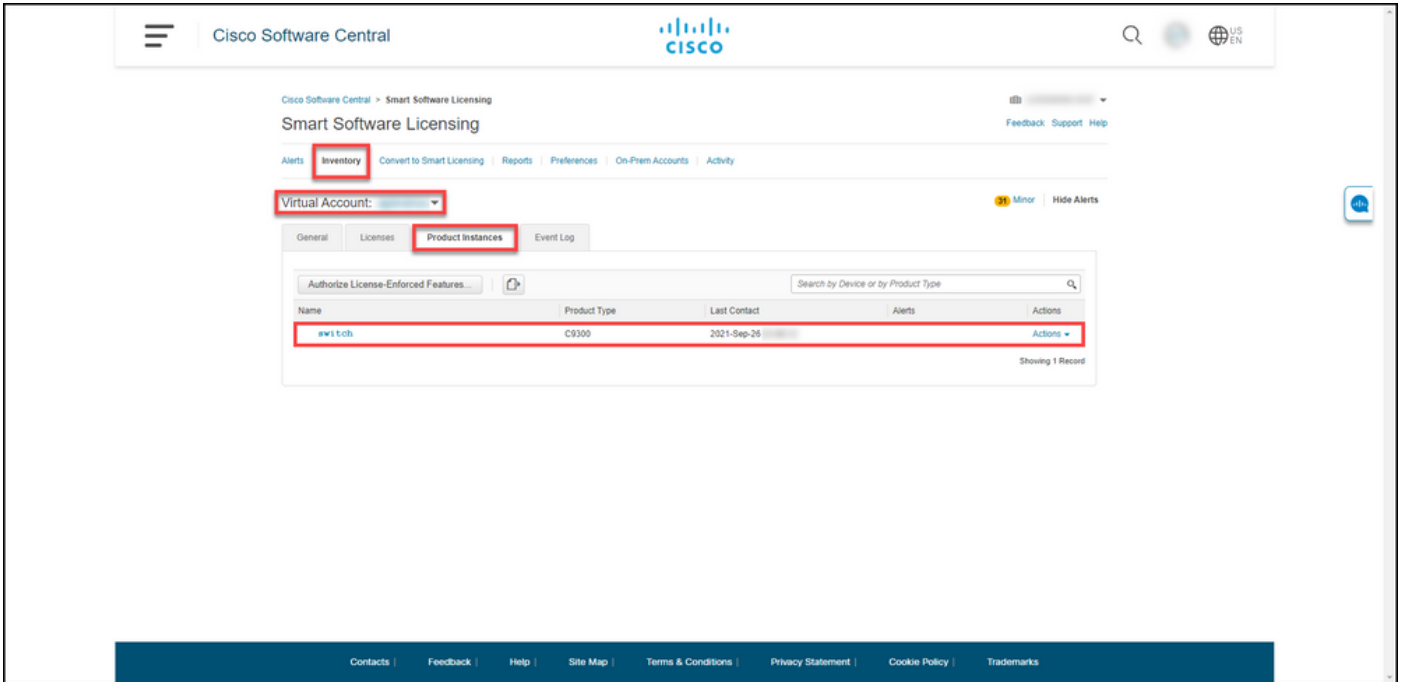

#### Step 4:

In the **Actions** column, click the **Actions** drop-down, and then select **Remove**.


**Step result:** The system displays the **Confirm Remove Product Instance** warning message.

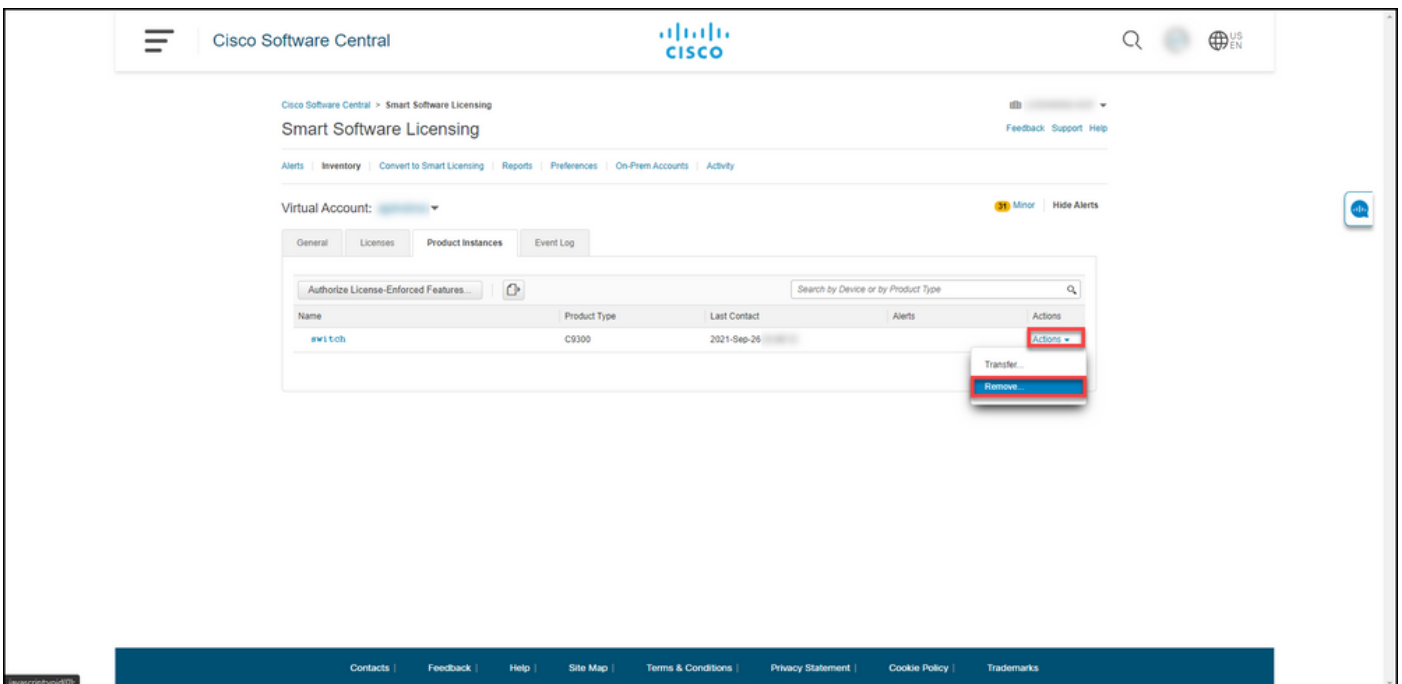

#### Step 5:

In the **Confirm Remove Product Instance** warning message, click the **Remove Product Instance** button.


**Step result:** The system removes the product instance from the **Product Instance** table in Cisco Smart Software Manager (CSSM) and the product instance no longer consumes any licenses. If you only remove the product instance from CSSM, then the product instance of your device gets re-populated in CSSM when the next synchronization occurs. To stop the synchronization, you need to also deregister the device on one of the clients or console. Refer to [Step 6](#).

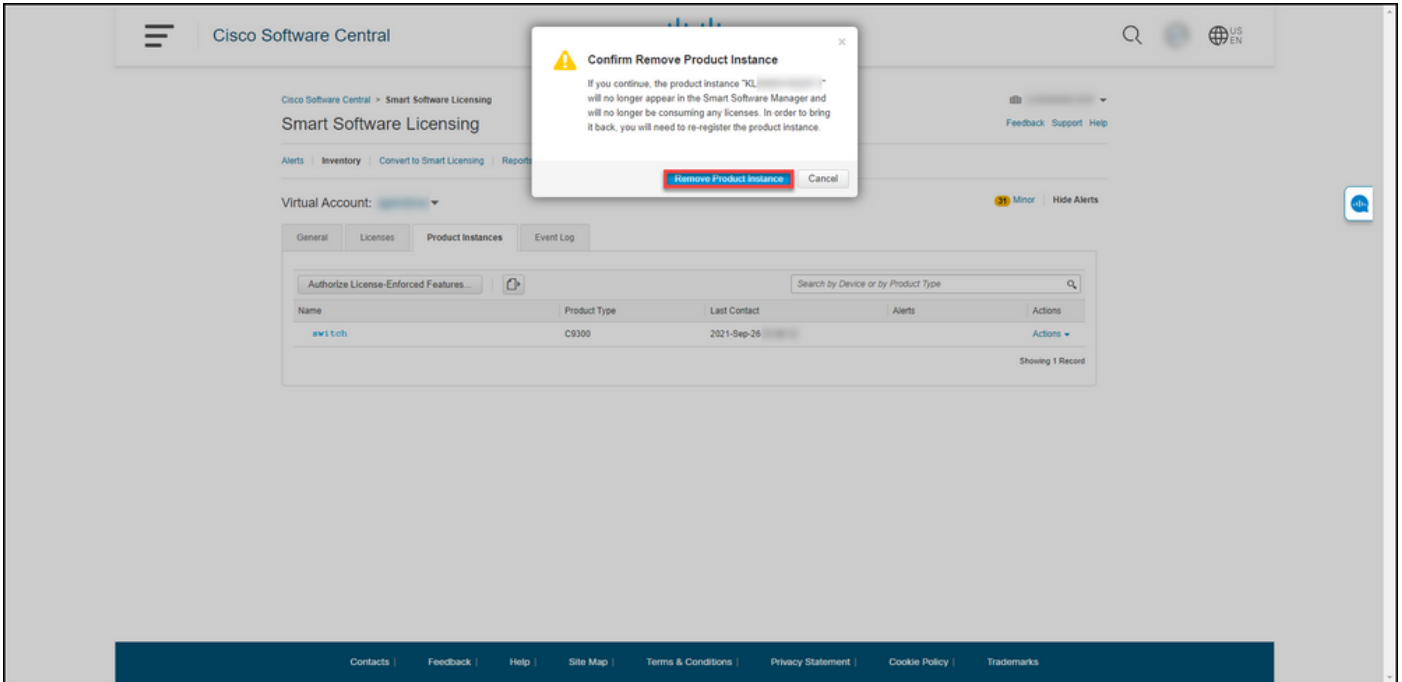

### Step 6:

Log in to the internetwork operating system (IOS) of the device with the login and password by using one of the clients or console.


**Step result:** You enter the user EXEC mode of the IOS.

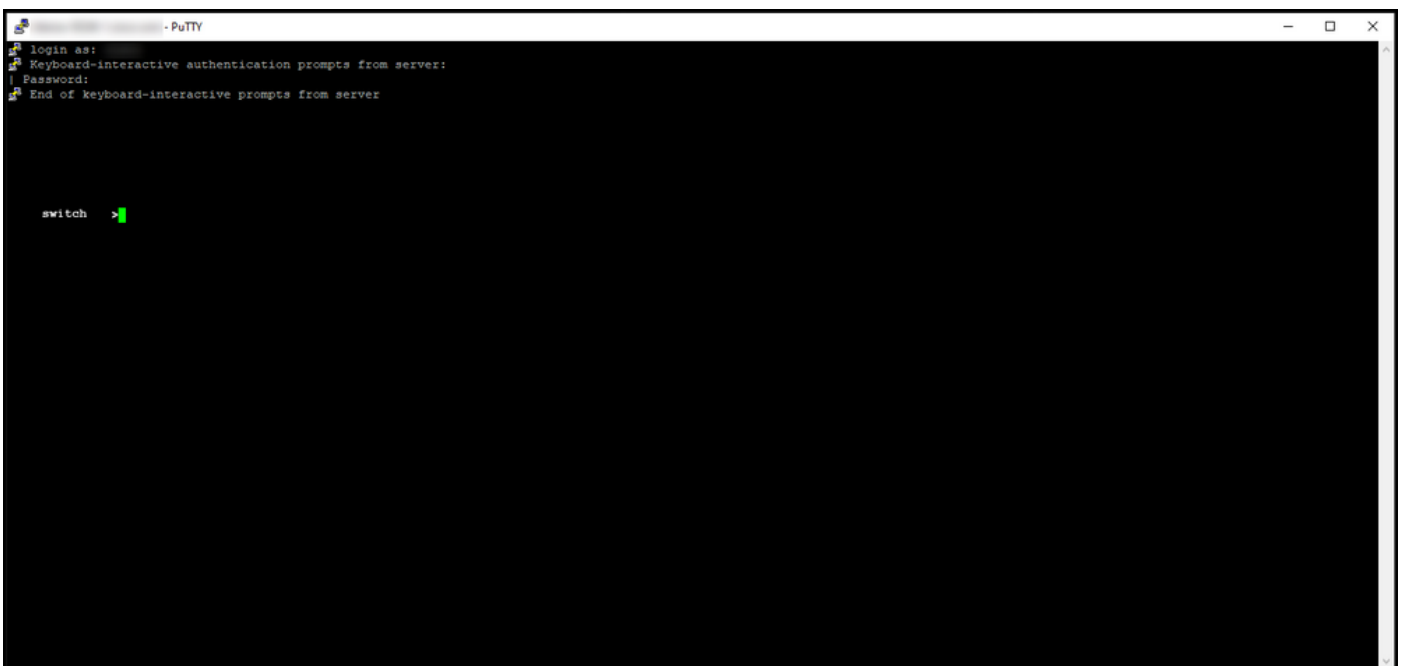

### Step 7:

In the user EXEC mode, enter the **enable** command, and then type the password to access the privileged EXEC mode.

**Step result:** You enter the privileged EXEC mode.

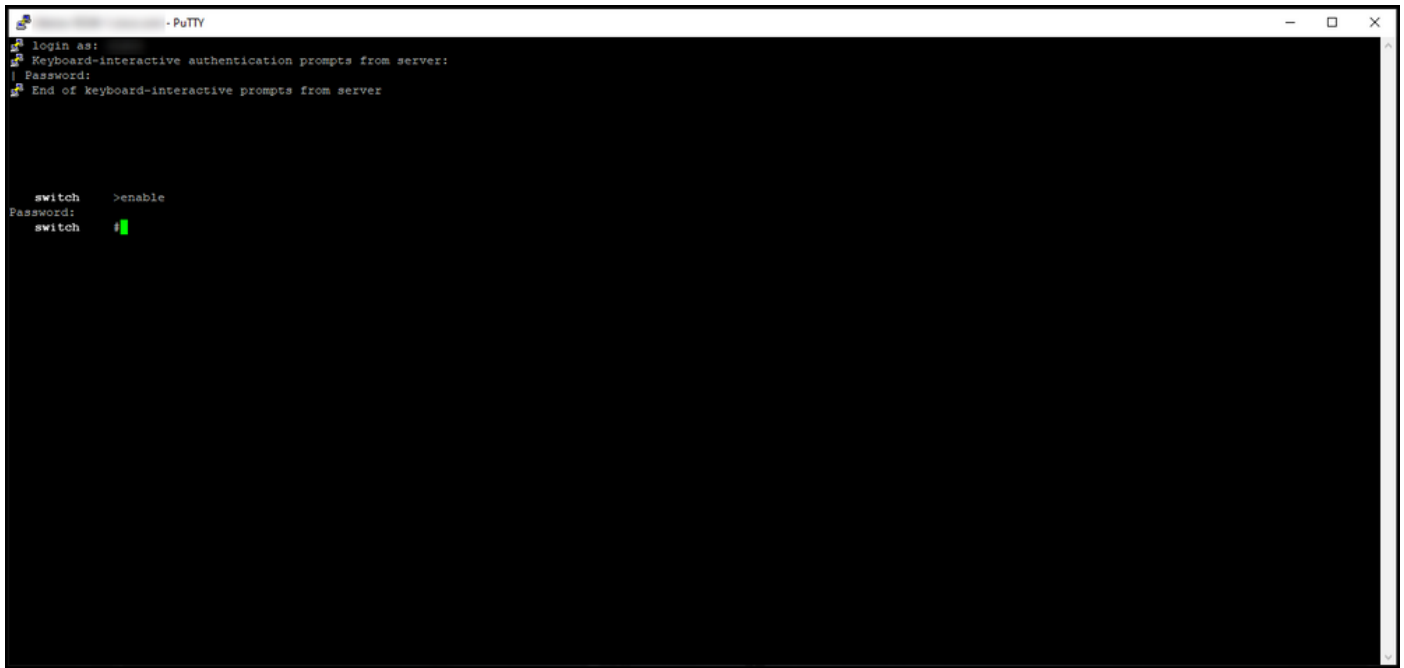


```
login as:
Keyboard-interactive authentication prompts from server:
Password:
End of keyboard-interactive prompts from server

switch >enable
Password:
switch #
```

### Step 8:

In the privileged EXEC mode, enter the **license smart deregister** command.

---

 **Note:** To verify that the system successfully executed the command, you can enter the **show license summary** command. If the deregistration was successful, the system displays the registration status as *unregistered*.

---

**Step result:** The system deregisters the device.

```
login as:
Keyboard-interactive authentication prompts from server:
| Password:
End of keyboard-interactive prompts from server

switch #license smart deregister
switch #show license summary
Smart Licensing is ENABLED

Registration:
Status: UNREGISTERED
Export-Controlled Functionality: NOT ALLOWED

License Authorization:
Status: EVAL EXPIRED

License Usage:
License                               Entitlement tag                Count Status
-----
                               (C9300-24 Network Advan...)    1 EVAL EXPIRED
                               (C9300-24 DNA Advantage)       1 EVAL EXPIRED


switch #
```

## Verify

Use this section to confirm that you successfully removed your product instance.

**Verification Step:** On the **Inventory** tab, select your Virtual account, click **Product Instances**, search by device or product type, and then press **Enter**.

**Step result:** The system no longer displays the product instance that you removed.

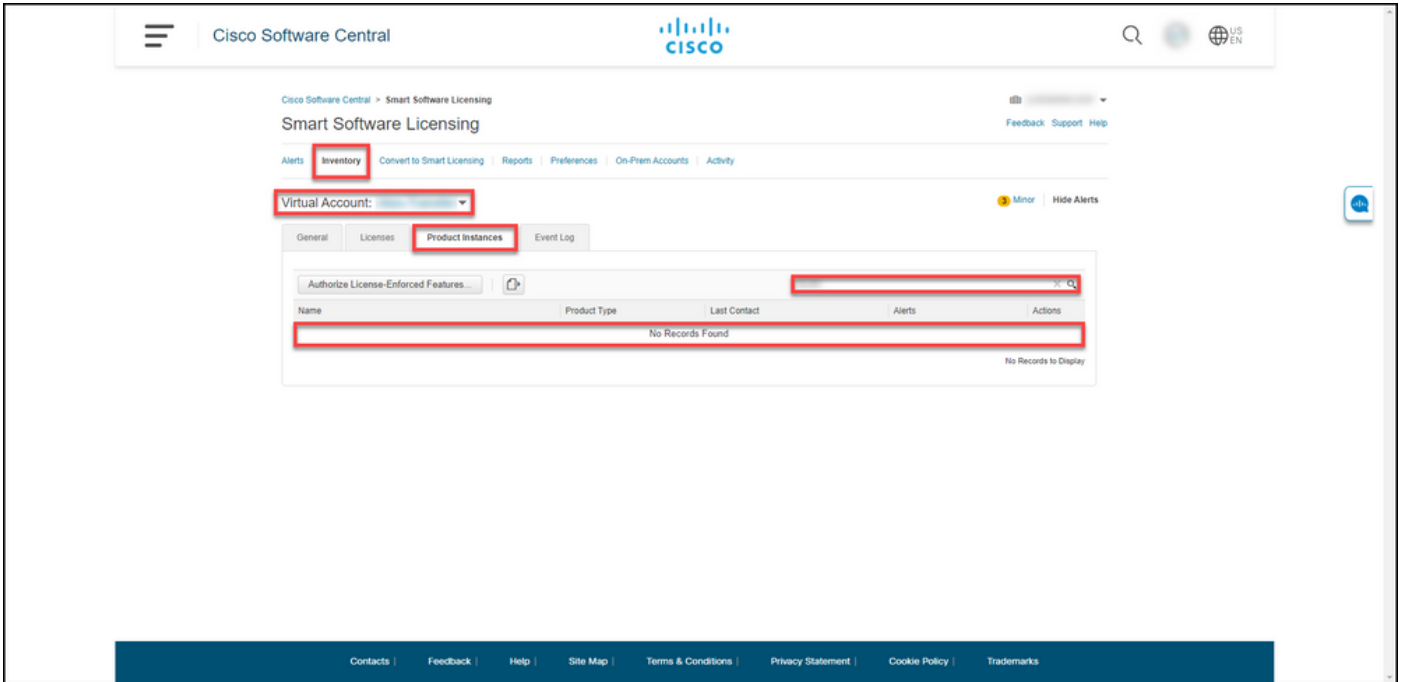

## Troubleshooting

If you experience an issue during the process of removing a product instance from a Smart account, open a case in [Support Case Manager \(SCM\)](#).

## Related Information

[How to Register a Device with a Smart Account \(Cloud Connect\)](#)