

Nutanix (CCHC + N) を使用 した Cisco コンピューティン グ ハイパーコンバージド X シ リーズ M7 の発注ガイド

はじめに

Nutanix ソリューションを使用した Cisco コンピューティング ハイパーコンバージド X シリーズ M7 サーバー

Nutanix を使用した Cisco コンピューティング ハイパーコンバージドは、Cisco クラス最高のコンピューティング (X シリーズ モーダル システム)、データセンター ネットワーキング、および SaaS インフラストラクチャ管理プラットフォーム (Cisco Intersight) と、市場をリードする Nutanix のハイパーコンバージドストレージソフトウェアである Nutanix Cloud Platform を統合したハイパーコンバージドインフラストラクチャソリューションです。Nutanix を使用した Cisco Compute Hyperconverged ファミリびアプライアンスは、さまざまな構成で Nutanix クラスタ経由でノードとして展開可能な事前構成された X シリーズ サーバーをお届けします。各サーバー アプライアンスには、X シリーズ サーバー ファームウェア、ハイパーバイザ (Nutanix AHV)、およびハイパーコンバージドストレージソフトウェア (Nutanix AOS) の 3 つのソフトウェアレイヤが含まれています。

Nutanix クラスタを使用した Cisco コンピューティング ハイパーコンバージド M7 サーバー

Cisco コンピューティング ハイパーコンバージド X シリーズ モジュラ システムは、データセンターを簡素化し、最新のアプリケーションの予測不可能なニーズに対応すると同時に、従来のスケールアウトやエンタープライズワークロードにも対応します。維持するサーバタイプの数が減り、運用の効率性と俊敏性が向上し、複雑さが軽減されます。Cisco UCS X シリーズには Cisco Intersight™ クラウド運用プラットフォームが搭載されているため、思考の矛先を管理からビジネス成果へと変えることができます。使用するハイブリッドクラウドインフラストラクチャは、クラウドからワークロードに合わせて組み合わせて成形し、継続的に最適化できます。

目的、対象者、範囲

目的

このマニュアルでは、CCW 見積書の作成から Nutanix を使用した Cisco Compute Hyperconverged の発注に関する情報を提供します。

対象範囲


この発注ガイドでは、以下に関する情報について説明します。

- Nutanix を使用した Cisco コンピューティング ハイパーコンバージド X シリーズ M7 サーバーの注文構造
- Cisco コンピューティング ハイパーコンバージド X シリーズ M7 サーバーの製品 ID のカタログ
- Cisco コンピューティング ハイパーコンバージド X シリーズ M7 サーバー ハードウェアの注文
- その他の技術情報へのリンク

対象読者

Cisco セールス チームとパートナー。

Nutanix を使用した Cisco コンピューティング ハイパーコンバージド X シリーズ M7 サーバーの注文構造

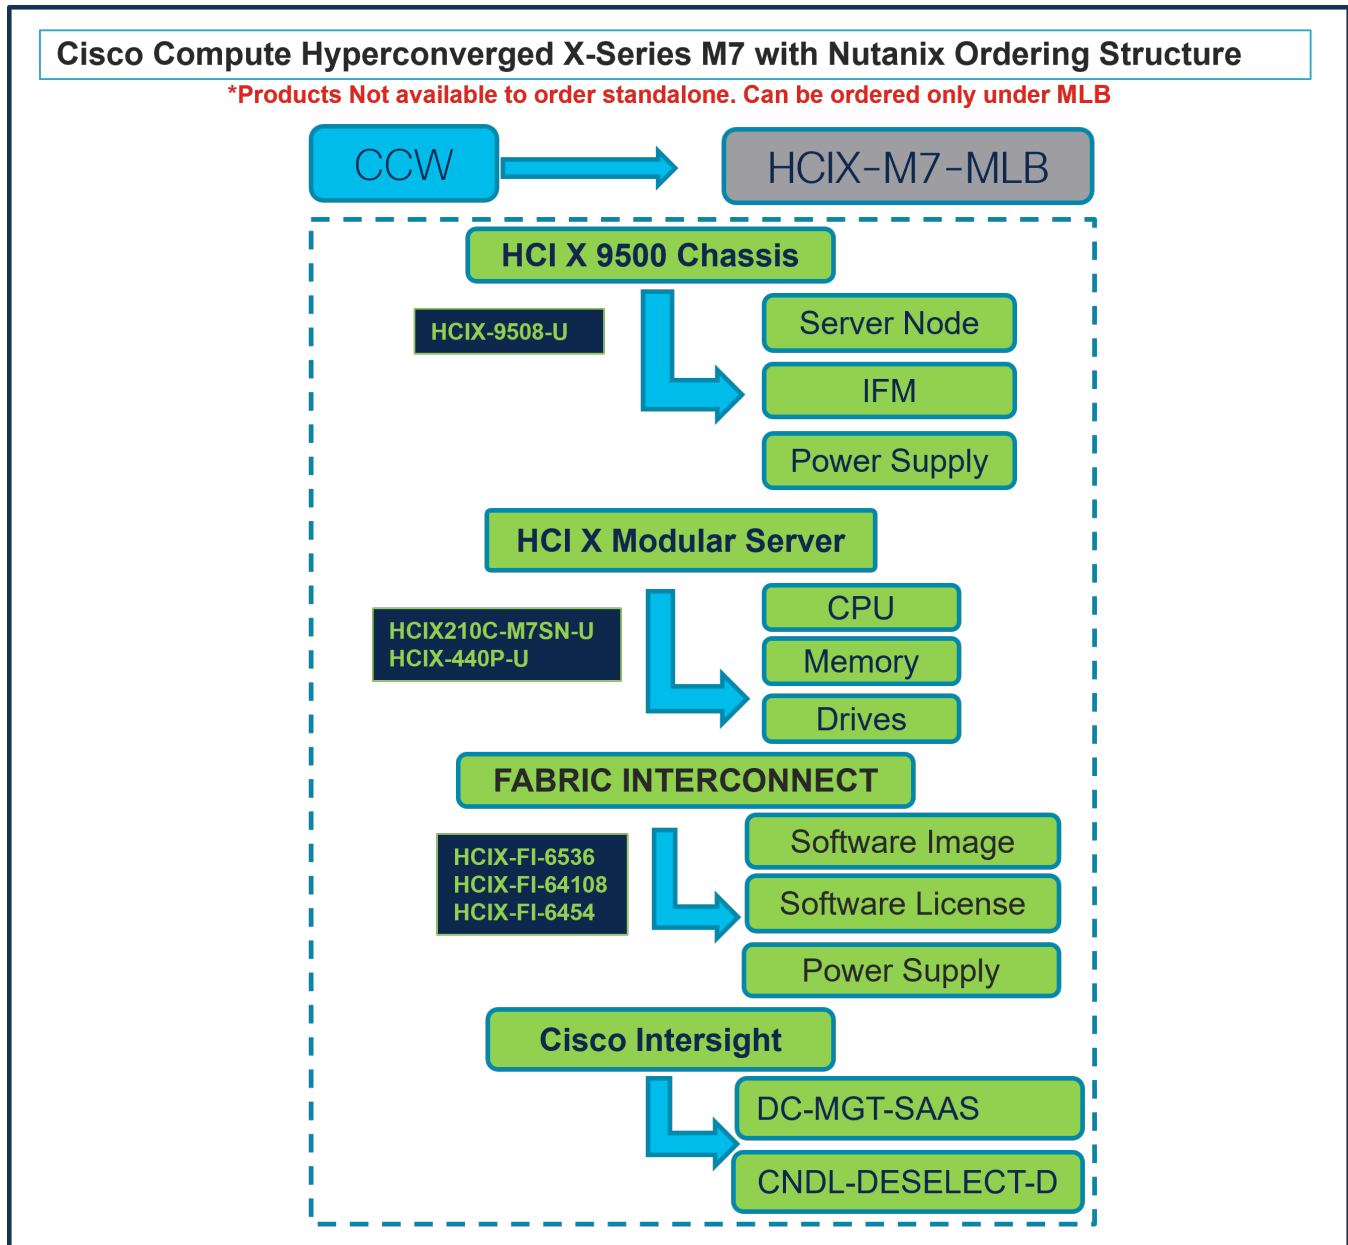

製品 ID (PID) カタログ

注： の部品番号の完全なリストについては、『[Nutanix-HCIX210c M7 All-NVMeノードを使用した Cisco コンピューティング ハイパーコンバージド](#)、[Cisco コンピューティング ハイパーコンバージド 9508 シャーシ](#) および [Cisco コンピューティング ハイパーコンバージド X440p PCIe ノードのスペック シート](#)』を参照してください。

表 1. 主要ラインのバンドル (MLB) の PID

製品 ID (PID)	説明
HCIX-M7-MLB	Nutanix MLB を使用した Cisco コンピューティング ハイパーコンバージド X シリーズ M7 このメジャー ラインバンドル (MLB) は、Cisco コンピューティング ハイパーコンバージド サーバーと、Intersight および Nutanix ソフトウェア PID で構成されます。

表 2. 表 3Cisco コンピューティング ハイパーコンバージド シャーシ メジャー ライン PID

製品 ID (PID)	説明
HCIX-9508-U	Cisco コンピューティング ハイパーコンバージド 9508 シャーシの構成
HCIX-9508=	Cisco コンピューティング ハイパーコンバージド 9508 シャーシ

表 3. Cisco コンピューティング ハイパーコンバージド サーバ ノード メジャー ライン PID

製品 ID (PID)	説明
HCIX210C-M7SN (All NVMe)	210cM7 All NVMe ハイパーコンバージド ノード。CPU、メモリ、ストレージなし
HCIX210C-M7SN-U (All NVMe)	210cM7 All NVMe ハイパーコンバージド ノード。CPU、メモリ、ストレージなし

表 4. Cisco コンピューティング ハイパーコンバージド PCIe ノードのメジャー ライン PID

製品 ID (PID)	説明
HCIX-440P	HCI X シリーズ第 4 世代の PCIe ノード
HCIX-440P-U	HCI X シリーズ第 4 世代の PCIe ノード

表 5. ファブリック インターコネクタメジャー ライン PID

製品 ID (PID)	説明
HCIX-FI-6536	Cisco Compute Hyperconverged ファブリック インターコネクタ 6536
HCIX-FI-64108	Cisco Compute Hyperconverged ファブリック インターコネクタ 64108
HCIX-FI-6454	Cisco Compute Hyperconverged ファブリック インターコネクタ 6454

表 6. Cisco Intersight メジャーライン PID

製品 ID (PID)	説明
DC-MGT-SAAS	Cisco Intersight SaaS
CNDL-DESELECT-D	条件付き選択解除

ステップバイステップの発注プロセス

このセクションでは、Nutanix を使用した Cisco Compute Hyperconverged M7 Server に固有のパッケージと PID に関して詳細に記載します。また、Nutanix 製品を使用した Compute Hyperconverged M7 Server が含まれるその他の購入プログラムやサブスクリプション パッケージに関する参照情報も提供します。

ステップ 1. Web ブラウザを起動し、[Cisco Commerce 見積もり作成ページ](#)に移動します。

ステップ 2. Cisco のログイン画面で、使用する Cisco.com のユーザー ID とパスワードを入力します。

ステップ 3. [見積 (Estimates)] ページで、SKU、PID、製品の説明、または製品ファミリー (HCIX-M7-MLB など) を入力して、この見積の基本設定を行い、注文する HCI 製品を検索します。

注：

- 部品番号の完全なリストについては、[Cisco Compute Hyperconverged with Nutanix-HCIX210c M7 All-NVMe Node](#)、[Cisco Compute Hyperconverged 9508 Chassis](#)、および [Cisco Compute Hyperconverged X440p PCIe Node Spec Sheets](#) を参照してください。
- 製品の設定に進む前に、Nutanix Sizer Tool (<https://sizer.nutanix.com/#/home>) を参照してください。

ステップ 4.

The screenshot shows the Cisco Commerce configurator interface. At the top, a diagram shows a blue box labeled 'CCW' with an arrow pointing to a grey box labeled 'HCIX-M7-MLB'. Below this, the interface has a search bar with the text 'Search by Sku , Program ID , Description and Product Family' and a search button labeled 'Add'. To the right of the search bar are buttons for 'Find Products & Solutions' and 'Actions'. Below the search bar is an information message: 'The product discounts are cascaded to subscription items, however subscription items may only be eligible for lower discounts. To apply the proper discount to subscription items, click on "MORE" and then, "Apply Discount".' Below the message are buttons for 'Remove Selected Lines', 'Apply Success Track', and 'More'. There is also a 'Filter By' dropdown menu set to 'All Items'. The main part of the interface is a table with the following columns: 'Hardware, Software and Services', 'Estimated Lead Time', 'Unit List Price (USD)', 'Qty', 'Unit Net Price (USD)', 'Discount (%)', and 'Extended Net Price (USD)'. The table contains one row for '1.0 HCIX-M7-MLB' with a quantity of 1, a unit list price of 0.00, and an extended net price of 0.00. Below the table, there is a warning icon and the text 'Invalid as of 08-May-2024 03:23:14 PDT'. At the bottom of the interface are buttons for 'Select Options', 'Validate', 'Recommended Content', 'Add Note', 'More Actions', and 'Add Subtotal'.

a. CCW で HCIX-M7-MLB PID を検索し、[追加 (Add)] ボタンをクリックします。

b. Configurator を入力するために、[オプションの選択 (Select Options)] をクリックします。

ステップ 5.

The screenshot shows a configuration tool interface. At the top, there's a header with 'Bundle Configuration HClX-M7-MLB', 'Estimated Lead Time 21 days', and 'Price List Global Price List (USD)'. Below this is a section for 'Set service preferences for this configuration' with 'Cancel' and 'Done' buttons. A warning message states: '1: CISCO INTERSIGHT requires a minimum of 1 component(s). Please add additional quantities as necessary. (CE100010) 2: The category CISCO INTERSIGHT is required. (CE100103) 3: Please refer to the Nutanix Sizer Tool: https://sizer.nutanix.com/#/home before you proceed to do the Product Configuration. (CE202322) 4: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322) 5: It is recommended that the user purchase Nutanix Software SKU: NTX-SW or NTX-SW-1Y. (CE202155)'. Below this is an information message: 'HCI X-9508-U has been added to the bundle category HCI X 9508 CHASSIS.' The main area is divided into 'Available Components' and 'Product' sections. The 'Available Components' section lists 'HCI X 9508 CHASSIS' with a unit list price of 8,530,006 USD and a plus icon. The 'Product' section shows 'HCI X 9508 CHASSIS' with a quantity of 1 and an 'Invalid' status. Red callouts 'a', 'b', and 'c' point to the plus icon, the 'Invalid' status, and the 'Edit Options' link respectively. A blue arrow points from the 'HCI X 9508 CHASSIS' header to a box labeled 'HCI X 9508-U', which then points to a box labeled 'Server Node'. Below 'Server Node' are boxes for 'IFM' and 'Power Supply'.

- a. MLB の下で「プラス」をクリックすることで、HCIX-9508-U ATO を検索します。
 - b. さらに構成が必要なため、HCIX-9508-U ATO ステータスが無効であることを通知します。
 - c. Configurator を入力するために、[オプションの編集 (Edit Option)] をクリックします。
- ステップ 6.

HCI X 9500 Chassis

HCIX-9508-U

Server Node

IFM/FIM

Power Supply

Product Configuration: HCIX-9508-U part of HCIX-M7-MLB
 Estimated Lead Time: 21 days
 Price List: Global
 Total (USD): 10,783.64

Configuration Summary

Category	Qty	Extended List Price (USD)
Hyperconverged Nodes		
Fabric Interconnect Module		
Intelligent Fabric Module		
X-Fabric Module		
Accessory		
Power Supply		
HCIX-PSU-2800AC	2	2,252.68
Power Cable		
X-Series Chassis SW		
Total		10,783.64
Estimated Lead Time		21 days

Hyperconverged Nodes

SKU	Estimated Lead Time	Unit List Price (USD)
HCIX210C-M7SN	21 days	6,376.38
CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz		

a. 左側のカテゴリ ウィンドウから [コンピューティング ノード (Compute Node)]、[ファブリック インターコネクト モジュール (Fabric Interconnect Module)]、または [インテリジェント ファブリック モジュール、電源モジュール、電源ケーブル (Power Supply and Power Cables)] を選択して、HCIX-9508-U を設定します。

b. 警告メッセージに従って、「シャーシ」の下で最小の必要な選択を行います。

ステップ 7.

Product Configuration: HCIX-9508-U part of HCIX-M7-MLB
 Estimated Lead Time: 21 days
 Price: Global Price List in US Dollars (USD)
 Total (USD): --

Configuration Summary

Category	Qty	Extended List Price (USD)
Hyperconverged Nodes		
HCIX210C-M7SN	1	--
HCIX-X10C-PT4F	1	--
HCIX-TPM-002C	1	--
HCIX-C-SW-LATEST	1	--
UCSX-C-M7-HS-F	1	0.00
UCSX-C-M7-HS-R	1	0.00
UCSC-BBLKD-M7	6	0.00
UCSX-M2-HWRD-FPS	1	0.00
UCS-DDR5-BLK	32	0.00
Total		--
Estimated Lead Time	21 days	

Hyperconverged Nodes

SKU	Estimated Lead Time	Unit List Price (USD)
HCIX210C-M7SN	21 days	--
CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz		

Custom Name: HCIX210C-M7SN (1) Qty: 1

- a. HCIX210C-M7SN は選択が必須で、さらに設定可能です。
- b. 警告メッセージに従って、「サーバー」の下で最小の必要な構成を行います。

ステップ 8.

Product Configuration: HCIX-9508-U part of HCIX-M7-MLB
 Estimated Lead Time: 21 days
 Price: Global Price List in US Dollars (USD)
 Total (USD): 24,684.74

Configuration Summary

Category	Qty	Extended List Price (USD)
Hyperconverged Nodes		
UCSX-M2-HWRD-FPS	1	0.00
UCS-DDR5-BLK	32	0.00
HCIX210C-M7SN (2)	1	6,376.38
HCIX-X10C-PT4F	1	520.94
HCIX-TPM-002C	1	53.23
HCIX-C-SW-LATEST	1	0.00
UCSX-C-M7-HS-F	1	0.00
UCSX-C-M7-HS-R	1	0.00
UCSC-BBLKD-M7	6	0.00
UCSX-M2-HWRD-FPS	1	0.00
Total		24,684.74
Estimated Lead Time	21 days	

Hyperconverged Nodes

SKU	Estimated Lead Time	Unit List Price (USD)
HCIX210C-M7SN	21 days	6,376.38
CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz		

Custom Name: HCIX210C-M7SN (1) Qty: 1
 Custom Name: HCIX210C-M7SN (2) Qty: 1

- サーバ: HCIX210C-M7SN は、ボックス内の数量を変更することで複数の数量で選択することも、[新規追加]ボタンをクリックして同じシャーシ内で異なる設定を行うこともできます。
- この例では、各 1 個ずつサーバーを選択して 2 インスタンスがあります。
- 左側のサーバー PID をクリックして、特定のインスタンスを構成します。

ステップ 9.

- 1 つのサーバー インスタンスの構成が別のインスタンスにコピーできます。ここに示すように右端の [コピー] ボタンをクリックします。
- 特定のインスタンスを選択し、[はい]をクリックします。

ステップ 10.

HCI X 9500 Chassis

HCIX210C-M7SN

CPU
Memory
Drives

Product Configuration: HCIX-9508-U, part of HCIX-M7-MLB | Estimated Lead Time: 21 days | Price: Glob...

Warnings:

- Hyperconverged Nodes quantity 1 allows Processor 4th Gen minimum of 2 and maximum of 2. Please correct the quantity of Processor 4th Gen. (CE100011)
- A selection of either HCIX-ML-V5D200GV2 or HCIX-ML-V5Q50G from Rear MEZZ - MLOM/PCI is required. Please adjust the selections. (CE200096)
- The quantity of Power Cable must be equal to the quantity of Power Supply selected. Please adjust the quantity. (CE200050)
- It is recommended that the user purchase Debug Cable: HCIX-C-DEBUGCBL. (CE202155)
- Use Power Calculator to determine the correct power supply. The Power Calculator can be found at <https://www.cisco.com/c/en/us/products/collateral/switches/switches-power-calculator.html>. (CF200000)

Configuration Summary

Category	Qty	Extended List Price (USD)
Hyperconverged Nodes		
HCIX210C-M7SN	1	--
HCIX-X10C-PT4F	1	--
HCIX-TPM-002C	1	--
HCIX-C-SW-LATEST	1	--
UCSX-C-M7-HS-F	1	0.00
UCSX-C-M7-HS-R	1	0.00
UCSC-BBLKD-M7	6	0.00
UCSX-M2-HWRD-FPS	1	0.00
UCS-DDR5-BLK	32	0.00
Total		--
Estimated Lead Time	21 days	

Options Search | Multiple Options Search

HCIX-9508-U > Hyperconverged Nodes > Hyperconverged Nodes > HCIX210C-M7SN

4th Gen 8000 Processor | 4th Gen 6000 Processor | 4th Gen 5000 Processor | 4th Gen 4000 Processor | Memory 4800 | Rear MEZZ - MLOM/PCI | GPU PCIe Node | Capacity Drives | Boot Drive | Security

SKU	Qty	Estimated Lead Time	Unit List Price (USD)
HCIX-CPU-I8444H Intel I8444H 2.9GHz/270W 16C/45MB DDR5 4800MT/s	Qty	21 days	--
HCIX-CPU-I8450H Intel I8450H 2GHz/250W 28C/75MB DDR5 4800MT/s	Qty	21 days	--
HCIX-CPU-I8452Y Intel I8452Y 2GHz/300W 36C/67.5MB DDR5 4800MT/s	Qty	21 days	--
HCIX-CPU-I8454H Intel I8454H 2.1GHz/270W 32C/82.5MB DDR5 4800MT/s	Qty	21 days	--
HCIX-CPU-I8458P Intel I8458P 2.7GHz/350W 44C/82.5MB DDR5 4800MT/s	Qty	21 days	--

Reset Configuration | Cancel | Done

- HCIX210C-M7SN を設定するには、右側のウィンドウにプロセッサ、メモリ、ドライブ、その他の周辺機器と PID が一覧表示されます。
- 警告メッセージに従って、最低限必要なオプション PID を構成します。
- 完了したら [完了 (Done)] をクリックします。

ステップ 11.

HCI X 9500 Chassis

HCIX-440P → **Riser**
GPU

Product Configuration: HCIX-9508-U part of HCIX-M7-MLB | Estimated Lead Time: 21 days | Price List: Global Price List in US Dollars (USD) | Total (USD): --

Configuration Summary

Category	Qty	Extended List Price (USD)
Hyperconverged Nodes		
HCIX210C-M7SN	1	--
HCIX-CPU-I6430	2	0.00
HCIX-MRX64G2RE1	16	--
HCIX-X10C-PT4F	1	--
HCIX-ML-V5D200GV2	1	--
HCIX-440P	1	--
HCIX-NVME4-3840	2	--
HCIX-M2-240G	2	--
HCIX-TPM-002C	1	--
Total		--
Estimated Lead Time	21 days	

Option Search | Multiple Options Search

HCIX-9508-U > Hyperconverged Nodes > Hyperconverged Nodes > HCIX210C-M7SN

4th Gen 8000 Processor | 4th Gen 6000 Processor | 4th Gen 5000 Processor | 4th Gen 4000 Processor | Memory 4800 | Rear MEZZ - MLOM/PCI | **GPU PCIe Node** | Capacity Drives | Boot Drive | Security

SKU	Qty	Estimated Lead Time	Unit List Price (USD)
<input checked="" type="radio"/> HCIX-440P	1	21 days	--
HCIX X-Series Gen4 PCIe node			

Clear Selection | Show Incompatible SKUs

- コンピューティング ノード:HCIX210C-M7SN で GPU PCIe ノード HCIX-440P を構成します。
- 左側のウィンドウでさらに設定するには、[HCIX-440P] をクリックします。

ステップ 12.

HCI X 9500 Chassis

HCIX-440P → **Riser**
GPU

Product Configuration: HCIX-9508-U part of HCIX-M7-MLB | Estimated Lead Time: 21 days | Price List: Global Price List in US Dollars (USD) | Total (USD): --

Configuration Summary

Category	Qty	Extended List Price (USD)
Hyperconverged Nodes		
HCIX210C-M7SN	1	--
HCIX-CPU-I6430	2	0.00
HCIX-MRX64G2RE1	16	--
HCIX-X10C-PT4F	1	--
HCIX-ML-V5D200GV2	1	--
HCIX-440P	1	--
HCIX-NVME4-3840	2	--
HCIX-M2-240G	2	--
HCIX-TPM-002C	1	--
Total		--
Estimated Lead Time	21 days	

Option Search | Multiple Options Search

HCIX-9508-U > Hyperconverged Nodes > Hyperconverged Nodes > HCIX210C-M7SN > GPU PCIe Node > HCIX-440P

Riser | GPU | Standard License | Education License | NVIDIA Opt Out

SKU	Qty	Estimated Lead Time	Unit List Price (USD)
<input type="radio"/> HCIX-RIS-A-440P	Qty	21 days	--
Riser A for 1x dual slot GPU per riser, 440P PCIe node			
<input type="radio"/> HCIX-RIS-B-440P	Qty	21 days	--
Riser B for 2x single slot GPUs per riser, 440P PCIe node			

Show Incompatible SKUs

- a. 右側のウィンドウで [ライザー、GPU、および NVIDIA ライセンス(Riser, GPU, and NVIDIA License)] を選択して、GPU PCIe ノード (HCIX-440P) を構成します。

注： HCIX-440P には [シャーシ:HCIX-9508-U] の下の X-ファブリック モジュール HCIX-F-9416-D の選択が必要です。

ステップ 13.

Bundle Configuration
HCIX-M7-MLB ⓘ

Estimated Lead Time
21 days

Price List
Global Price List (US

Set service preferences for this configuration ▾ Cancel Done

⚠ 1: CISCO INTERSIGHT requires a minimum of 1 component(s). Please add additional quantities as necessary. (CE100010)
2: The category CISCO INTERSIGHT is required. (CE100103)
3: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration. (CE202322)
4: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Extended List Price (USD)
HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 999999)			
HCIX-9508-U Valid ⓘ ⚠ CCHC 9508 Chassis Configured Add Custom Name Edit Options Edit Services/Subscriptions Remove Line		0.00	0.00
Add a HCI X 9508 CHASSIS from the left panel			
HCI X MODULAR SERVER > 0 Selected (Min 0, Max 999999)			
Add a HCI X MODULAR SERVER from the left panel			
FABRIC INTERCONNECT > 0 Selected (Min 0, Max 999999)			
Add a FABRIC INTERCONNECT from the left panel			
CISCO INTERSIGHT > 0 Selected (Min 1, Max 1)			
Add a CISCO INTERSIGHT from the left panel			

Check Path Translation

Configuration Summary		All prices shown in USD
Total		0.00
Estimated Lead Time		21 days

- a. ステータスには現在、[有効 (Valid)] として表示されています。
- b. 同じ構成の倍数の数量を増やします。
- c. 「PLUS」をクリックして、異なるオプション/数量の同じ製品を追加するか、異なる製品を選択します。

ステップ 14.

HCI X 9500 Chassis
HCIX-9508-U
➔
Services/Subscriptions

Bundle Configuration HCIX-M7-MLB	Estimated Lead Time 21 days	Price List Global Price List (USD)	Total 0.00
-------------------------------------	--------------------------------	---------------------------------------	---------------

Set service preferences for this configuration Cancel Done

⚠ 1: CISCO INTERSIGHT requires a minimum of 1 component(s). Please add additional quantities as necessary. (CE100010)

2: The category CISCO INTERSIGHT is required. (CE100103)

3: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration. (CE202322)

4: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)

Available Components	Unit List Price (USD)	HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 9999999)										
<div style="background-color: #f0f0f0; padding: 2px; margin-bottom: 5px;">HCI X 9508 CHASSIS</div> <div style="padding: 2px;"> <p>HCIX-9508-U CCHC 9508 Chassis Configured Estimated Lead Time: --</p> <p style="text-align: right; margin-top: 5px;">0.00 +</p> </div>		<table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Product</th> <th style="width: 15%;">Unit List Price (USD)</th> <th style="width: 15%;">Adjusted List Price (USD)</th> <th style="width: 10%;">Qty</th> <th style="width: 10%;">Extended List Price (USD)</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;"> <div style="display: flex; align-items: center;"> + HCIX-9508-U Valid ⚠ </div> <div style="font-size: 0.8em; margin-top: 2px;">CCHC 9508 Chassis Configured</div> <div style="font-size: 0.7em; margin-top: 2px;"> Add Custom Name Edit Options Edit Services/Subscriptions Remove Line </div> </td> <td style="text-align: right; padding: 2px;">0.00</td> <td style="text-align: right; padding: 2px;">0.00</td> <td style="text-align: center; padding: 2px;"><input style="width: 30px;" type="text" value="1"/></td> <td style="text-align: right; padding: 2px;">0.00</td> </tr> </tbody> </table> <p style="font-size: 0.8em; margin-top: 5px; text-align: center;">Add a HCI X 9508 CHASSIS from the left panel</p> <hr/> <p style="font-size: 0.8em; margin-top: 5px; text-align: center;">HCI X MODULAR SERVER > 0 Selected (Min 0, Max 999999)</p> <p style="font-size: 0.8em; margin-top: 5px; text-align: center;">Add a HCI X MODULAR SERVER from the left panel</p> <hr/> <p style="font-size: 0.8em; margin-top: 5px; text-align: center;">FABRIC INTERCONNECT > 0 Selected (Min 0, Max 9999999)</p> <p style="font-size: 0.8em; margin-top: 5px; text-align: center;">Add a FABRIC INTERCONNECT from the left panel</p> <hr/> <p style="font-size: 0.8em; margin-top: 5px; text-align: center;">CISCO INTERSIGHT > 0 Selected (Min 1, Max 1)</p> <p style="font-size: 0.8em; margin-top: 5px; text-align: center;">Add a CISCO INTERSIGHT from the left panel</p> <p style="font-size: 0.8em; margin-top: 5px;">Check Path Translation</p>	Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	<div style="display: flex; align-items: center;"> + HCIX-9508-U Valid ⚠ </div> <div style="font-size: 0.8em; margin-top: 2px;">CCHC 9508 Chassis Configured</div> <div style="font-size: 0.7em; margin-top: 2px;"> Add Custom Name Edit Options Edit Services/Subscriptions Remove Line </div>	0.00	0.00	<input style="width: 30px;" type="text" value="1"/>	0.00
Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)								
<div style="display: flex; align-items: center;"> + HCIX-9508-U Valid ⚠ </div> <div style="font-size: 0.8em; margin-top: 2px;">CCHC 9508 Chassis Configured</div> <div style="font-size: 0.7em; margin-top: 2px;"> Add Custom Name Edit Options Edit Services/Subscriptions Remove Line </div>	0.00	0.00	<input style="width: 30px;" type="text" value="1"/>	0.00								

Configuration Summary	All prices shown in USD
Total	0.00
Estimated Lead Time	21 days

- a. [サービス/サブスクリプションの編集 (Edit Services/Subscriptions)] をクリックして、ハードウェアサポートの期間を編集します。

注： ハードウェア サポートの期間は、ソフトウェア サブスクリプション期間と一致させることをお勧めします。

ステップ 15.

The screenshot displays the Cisco configuration page for 'HCI X 9500 Chassis'. At the top, there are labels for 'Service Subscription: HCIX-9508-U' and 'Price List: Global Price List in USD: HCIX-9508-U'. A blue arrow points from the 'HCI X 9500 Chassis' label to the 'Services/Subscriptions' label. The main content area includes a 'Service Options' section with a 'Choose Service Level from' dropdown set to 'Cisco Customer Experience L...' and a 'Time Duration' section with radio buttons for 'Duration', 'Delay service start to', and 'Co-Term service to'. The 'Duration' radio button is selected, and the 'Duration' input field contains the value '36'. A red arrow labeled 'a' points to this input field. Below this is a table of service SKUs:

Service SKU	Product SKU	Unit List Price (USD)	Qty	Total List Price (USD)
Cisco Customer Experience Level 1 (2 Items) SERVICE PROGRAM	L1NCO (CX LEVEL 1 8X7XNCDOS) SUMMARY		Duration 36 Months	
CON-L1NCO-HCIX9A8U CX LEVEL 1 8X7XNCDOS CCHC 9508 Chassis Config... SERVICE SKU	HCIX-9508-U CCHC 9508 Chassis Configured PRODUCT SKU	1,335.00	1	1,335.00
CON-L1NCO-HCIX2M7S CX LEVEL 1 8X7XNCDOS CCHC 210cM7 All NVMe C... SERVICE SKU	HCIX210C-M7SN CCHC 210cM7 All NVMe ComputeNode w/o CPU,Mem... PRODUCT SKU	3,237.00	1	3,237.00

At the bottom right, there is a 'Configuration Summary' section with a 'Services' dropdown and buttons for 'Cancel' and 'Done'. A red arrow labeled 'b' points to the 'Done' button.

- [期間 (Term Duration)] を入力します。
- [適用 (Apply)] をクリックし、[完了 (Done)] をクリックします。

注： Nutanix ミッションクリティカルソフトウェアサポートを購入した場合は、ハードウェアとソフトウェアの間で一貫した SLA 応答時間を確保するために、CX Success Track レベル 1 またはレベル 2 またはソリューションサポートにアップグレードすることをお勧めします。詳細については、https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf を参照してください。

ステップ 16.

Bundle Configuration
HCIX-M7-MLB

Estimated Lead Time: 21 days

Price List: Global Price

Total: 4,572.00

Get service preferences for this configuration

1: CISCO INTERSIGHT requires a minimum of 1 component(s). Please add additional quantities as necessary. (CE100010)
 2: The category CISCO INTERSIGHT is required. (CE100103)
 3: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration. (CE202322)
 4: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)

HCIX210C-M7SN-U has been added to the bundle category HCI X MODULAR SERVER.

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U Valid		4,572.00	1	4,572.00
CCHC 9508 Chassis Configured				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a HCI X 9508 CHASSIS from the left panel				
HCI X MODULAR SERVER > 1 Selected (Min 0, Max 99999)				
Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX210C-M7SN-U Invalid		0.00	1	0.00
CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a HCI X MODULAR SERVER from the left panel				
FABRIC INTERCONNECT > 0 Selected (Min 0, Max 99999)				
Add a FABRIC INTERCONNECT from the left panel				
CISCO INTERSIGHT > 0 Selected (Min 1, Max 1)				
Add a CISCO INTERSIGHT from the left panel				

- MLB の下で「プラス」をクリックすることで、HCIX210C-M7SN-U ATO を選択します。
- さらに構成が必要なため、HCIX210C-M7SN-U ATO ステータスが「無効」であることに注意してください。
- Configurator を入力するために、[オプションの編集 (Edit Option)] をクリックします。

ステップ 17.

HClX Modular Server

HClX210C-M7SN-U

CPU
Memory
Drives

Product Configuration: HClX210C-M7SN-U (part of HClX-M7-N) | Estimated Lead Time: 21 days | Total (USD): 0.00

Configuration Summary

Category	Qty	Extended List Price (USD)
Processor 4th Gen	1	0.00
Memory 4800	1	0.00
Front MEZZ - Controller	1	0.00
Rear MEZZ - MLOM/PCI	1	0.00
Capacity Drives	1	0.00
Boot Drive	1	0.00
Security	1	0.00
Total		0.00
Estimated Lead Time		21 days

Options List

SKU	Qty	Estimated Lead Time	Unit List Price (USD)
HCIX-CPU-I8444H Intel I8444H 2.9GHz/270W 16C/45MB DDR5 4800MT/s	2	21 days	0.00
HCIX-CPU-I8450H Intel I8450H 2GHz/250W 28C/75MB DDR5 4800MT/s	2	21 days	0.00
HCIX-CPU-I8452Y Intel I8452Y 2GHz/300W 36C/67.5MB DDR5 4800MT/s	2	21 days	0.00
HCIX-CPU-I8454H Intel I8454H 2.1GHz/270W 32C/82.5MB DDR5 4800MT/s	2	21 days	0.00
HCIX-CPU-I8458P Intel I8458P 2.7GHz/350W 44C/82.5MB DDR5 4800MT/s	2	21 days	0.00

- a. 左側のカテゴリ ウィンドウから周辺機器を選択して、HClX210C-M7SN-U を構成します。
- b. PID は右側のウィンドウにリストされます。CPU などの一部の PID は、タイプまたはシリーズに応じてグループ化されます。右側の SKU ウィンドウの上にあるグループ化されたオプションから選択します。
- c. 警告メッセージに従って、最低限必要なオプション PID を構成します。
- d. 完了したら [完了 (Done)] をクリックします。

ステップ 18.

HCI X Modular Server

HCIX210C-M7SN-U

CPU

Memory

Drives

Bundle Configuration: HCIX-M7-MLB
 Estimated Lead Time: 21 days
 Price List: Global Price List (USD)
 Total: 4,572.00

Set service preferences for this configuration

1: CISCO INTERSIGHT requires a minimum of 1 component(s). Please add additional quantities as necessary. (CE100010)
 2: The category CISCO INTERSIGHT is required. (CE100103)
 3: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration. (CE202322)
 4: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U Valid CCHC 9508 Chassis Configured	4,572.00	4,572.00	1	4,572.00
HCIX210C-M7SN-U Valid CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz	0.00	0.00	1	0.00

- ステータスには現在、[有効 (Valid)]として表示されています。
 - 同じ構成の倍数の数量を増やします。
 - 「PLUS」をクリックして、異なるオプション/数量の同じ製品を追加するか、異なる製品を選択します。
- ステップ 19.

HCI X Modular Server

HCIX210C-M7SN-U

Services/Subscriptions

Bundle Configuration: HCIX-M7-MLB
 Estimated Lead Time: 21 days
 Price List: Global Price List (USD)
 Total: 4,572.00

Set service preferences for this configuration

1: CISCO INTERSIGHT requires a minimum of 1 component(s). Please add additional quantities as necessary. (CE100010)
 2: The category CISCO INTERSIGHT is required. (CE100103)
 3: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration. (CE202322)
 4: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U Valid CCHC 9508 Chassis Configured	4,572.00	4,572.00	1	4,572.00
HCIX210C-M7SN-U Valid CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz	0.00	0.00	1	0.00

- a. [サービス/サブスクリプションの編集 (Edit Services/Subscriptions)] をクリックして、ハードウェアサポートの期間を編集します。

注： ハードウェア サポートの期間は、ソフトウェア サブスクリプション期間と一致させることをお勧めします。

ステップ 20.

The screenshot shows the 'Services/Subscriptions' configuration page for 'HCI X Modular Server'. At the top, there are callouts for 'HCI X Modular Server' and 'Services/Subscriptions'. Below, the 'Service Options' section includes a 'Duration' input field set to '36' and an 'Apply' button. A table below lists the service details:

Service SKU	Product SKU	Unit List Price (USD)	Qty	Total List Price (USD)
Cisco Customer Experience Level 1 (1 ITEM) SERVICE PROGRAM	L1NCO (CX LEVEL 1 8X7XNCDOS) SUMMARY			
CON-L1NCO-HCIX2M7N CX LEVEL 1 8X7XNCDOS CCHC 210cM7 All NVMe C...	HCIX210C-M7SN-U CCHC 210cM7 All NVMe ComputeNode w/o CPU, Mem...	3,237.00	1	3,237.00

At the bottom right, there is a 'Configuration Summary' table showing 'Services' with a total price of 3,237.00. A 'Done' button is also visible.

- a. [期間 (Term Duration)] を入力します。
- b. [適用 (Apply)] をクリックし、[完了 (Done)] をクリックします。

注： Nutanix ミッションクリティカルソフトウェアサポートを購入した場合は、ハードウェアとソフトウェアの間で一貫した SLA 応答時間を確保するために、CX Success Track レベル 1 またはレベル 2 またはソリューションサポートにアップグレードすることをお勧めします。詳細については、https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf を参照してください。

ステップ 21.

Bundle Configuration
HCIX-M7-MLB

Estimated Lead Time
21 days

Price List
Global Price List in US Dollars (USD)

Total
7,809.00

Set service preferences for this configuration

1: CISCO INTERSIGHT requires a minimum of 1 component(s). Please add additional quantities as necessary. (CE100010)
 2: The category CISCO INTERSIGHT is required. (CE100103)
 3: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration. (CE202322)
 4: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)

HCIX-440P-U has been added to the bundle category HCI X MODULAR SERVER.

Available Components

Component	Unit List Price (USD)
HCIX 9508 CHASSIS	
HCIX 9508 CHASSIS	
HCIX 210C-M7SN-U	0.00
CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz	
Estimated Lead Time: --	
HCIX-440P-U	0.00
HCI X-Series Gen4 PCIe node	
Estimated Lead Time: --	
FABRIC INTERCONNECT	
CISCO INTERSIGHT	

HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U CCHC 9508 Chassis Configured		4,572.00	1	4,572.00

HCI X MODULAR SERVER > 2 Selected (Min 0, Max 999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX210C-M7SN-U CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz		3,237.00	1	3,237.00
HCIX-440P-U HCI X-Series Gen4 PCIe node		0.00	1	0.00

FABRIC INTERCONNECT > 0 Selected (Min 0, Max 999999)

- MLB の下で「プラス」をクリックすることで、HCIX-440P-U ATO を検索します。
- さらに構成が必要なため、HCIX-440P-U ATO ステータスが「無効」であることに注意してください。
- Configurator を入力するために、[オプションの選択 (Select Options)] をクリックします。

ステップ 22.

Product Configuration
HCIX-440P-U part of HCIX-M7-MLB

Estimated Lead Time
-- days

Price List
Global Price List in US Dollars (USD)

Total (USD)
0.00

HCIX-440P-U quantity 1 requires a minimum quantity of 2 from Riser (CE100012)

Configuration Summary

Category	Qty	Extended List Price (USD)
Riser		
GPU		
NVIDIA License		
Total		0.00
Estimated Lead Time		--

HCI X MODULAR SERVER > Riser

SKU	Qty	Estimated Lead Time	Unit List Price (USD)
HCIX-RIS-A-440P Riser A for 1x dual slot GPU per riser, 440P PCIe node	2	21 days	0.00
HCIX-RIS-B-440P Riser B for 2x single slot GPUs per riser, 440P PCIe node	2	21 days	0.00

Show Incompatible SKUs

Reset Configuration

Cancel Done

- ライザーと GPU を選択して、GPU PCIe ノード : HCIX-440P-U を構成します。
- [完了 (Done)] をクリックします。

注： HCI X モジュラー サーバーを選択する必要があります : HCIX210C-M7SN-U および HCIX-440P-U の数量は、HCIX210C-M7SN-U 以下である必要があります。

ステップ 23.

Fabric Interconnect

HCIX-FI-6536
HCIX-FI-64108
HCIX-FI-6454

Software Image
Software License
Power Supply

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 999999)					
Product					
HCIX-9508-U Valid ⚠			4,572.00	1	4,572.00
CCHC 9508 Chassis Configured					
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line					
Add a HCI X 9508 CHASSIS from the left panel					
HCI X MODULAR SERVER > 2 Selected (Min 0, Max 99999)					
Product					
HCIX210C-M7SN-U Valid ⚠			3,237.00	1	3,237.00
CCHC 210xMT All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz					
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line					
Add a HCI X MODULAR SERVER from the left panel					
HCIX-440P-U Valid ⚠			0.00	1	0.00
HCI X-Series Gen4 PCIe node					
Add Custom Name Edit Options Remove Line					
Add a HCI X MODULAR SERVER from the left panel					
FABRIC INTERCONNECT > 2 Selected (Min 0, Max 999999)					
Product					
HCIX-FI-6536 Invalid ⚠			0.00	2	0.00
Cisco Compute Hyperconverged X Fabric Interconnect 6536					
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line					
Add a FABRIC INTERCONNECT from the left panel					
CISCO INTERSIGHT > 0 Selected (Min 1, Max 1)					
Add a CISCO INTERSIGHT from the left panel					

- MLB の下で「プラス」をクリックすることで、HCIX-FI-6536 ATO を検索します。
- さらに構成が必要なため、HCIX-FI-6536 ATO ステータスが無効であることに注意してください。
- Configurator を入力するために、[オプションの編集 (Edit Option)] をクリックします。

ステップ 24.

Fabric Interconnect

HCIX-FI-6536

Software Image
Software License
Power Supply

Product Configuration: HCIX-FI-6536 part of HCIX-M7-MLB
Estimated Lead Time: 21 days
Price List: GIG
Total (USD): 0.00

⚠️ 1: Please note that due to lead time issues we have decided to remove some of the low selling optics PIDs from the FI bundle. This PIDs are still orderable as spare. Complete list of optics and cable PID is available in the product spec sheet. (CE202322)
2: N10-MGT018 is defaulted under Software Image. (CE100033)
3: HCI-UCSM-MODE is defaulted under Deployment Mode. (CE100033)
4: HCI-FI-6500-SW is defaulted under Software License. (CE100033)

Category	Qty	Extended List Price (USD)
Deployment Mode		
HCI-UCSM-MC	1	0.00
Software Image		
N10-MGT018	1	0.00
Software License		
HCI-FI-6500-SW	1	0.00
Power Supply		
HCIX-PSU-6536-AC	2	0.00
Power Cable		
Total		0.00
Estimated Lead Time		21 days

SKU	Qty	Estimated Lead Time	Unit List Price (USD)
<input type="radio"/> CAB-250V-10A-BR Power Cord - 250V, 10A - Brazil	2	7 days	0.00
<input type="radio"/> CAB-JPN-3PIN Power Cord 3PIN Japan	2	21 days	0.00
<input type="radio"/> CAB-9K10A-AU Power Cord, 250VAC 10A 3112 Plug, Australia	2	7 days	0.00
<input type="radio"/> CAB-9K12A-NA Power Cord, 125VAC 13A NEMA 5-15 Plug, North America	2	7 days	0.00
<input type="radio"/> CAB-N5K6A-NA Power Cord, 200/240V 6A North America	2	7 days	0.00

Reset Configuration [Cancel] **Done**

- a. 左側のウィンドウから周辺機器を選択して、HCIX-FI-6536 を構成します。ソフトウェア イメージ、ソフトウェア ライセンス、および電源がデフォルトで選択されています。
- b. PID は右側のウィンドウにリストされます。電源ケーブルを選択してください。トランシーバ ケーブル、および QSFP ケーブルはオプションの選択です。
- c. 完了したら [完了 (Done)] をクリックします。

ステップ 25.

Fabric Interconnect

HCIX-FI-6536 → Software Image
Software License
Power Supply

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 9999999)				
Product				
HCIX-9508-U Valid	4,572.00		1	4,572.00
CCHC 9508 Chassis Configured				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a HCI X 9508 CHASSIS from the left panel				
HCI X MODULAR SERVER > 2 Selected (Min 0, Max 99999)				
Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX210C-M78N-U Valid		3,237.00	1	3,237.00
CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
HCIX-440P-U Valid	0.00		1	0.00
HCI X-Series Gen4 PCIe node				
Add Custom Name Edit Options Remove Line				
Add a HCI X MODULAR SERVER from the left panel				
FABRIC INTERCONNECT > 2 Selected (Min 0, Max 9999999)				
Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-FI-6536 Valid		0.00	2	0.00
Cisco Compute Hyperconverged X Fabric Interconnect 6536				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a FABRIC INTERCONNECT from the left panel				
CISCO INTERSIGHT > 0 Selected (Min 1, Max 1)				
Add a CISCO INTERSIGHT from the left panel				

- a. ステータスには現在、[有効 (Valid)]として表示されています。
- b. 同じ構成の倍数の数量を増やします。
- c. 「PLUS」をクリックして、異なるオプション/数量の同じ製品を追加するか、異なる製品を選択します。

ステップ 26.

Fabric Interconnect

HCIX-FI-6536

Services/Subscriptions

Available Components	Unit List Price (USD)	HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 9999999)																		
<ul style="list-style-type: none"> [-] HCI X 9508 CHASSIS <ul style="list-style-type: none"> HCIX-9508-U 0.00 CCHC 9508 Chassis Configured Estimated Lead Time: -- [+] HCI X MODULAR SERVER [+] FABRIC INTERCONNECT [+] CISCO INTERSIGHT 		<table border="1"> <thead> <tr> <th>Product</th> <th>Unit List Price (USD)</th> <th>Adjusted List Price (USD)</th> <th>Qty</th> <th>Extended List Price (USD)</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> [+] HCIX-9508-U Valid CCHC 9508 Chassis Configured </td> <td></td> <td>4,572.00</td> <td>1</td> <td>4,572.00</td> </tr> <tr> <td colspan="5" style="text-align: center;">Add a HCI X 9508 CHASSIS from the left panel</td> </tr> </tbody> </table>	Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	<ul style="list-style-type: none"> [+] HCIX-9508-U Valid CCHC 9508 Chassis Configured 		4,572.00	1	4,572.00	Add a HCI X 9508 CHASSIS from the left panel							
Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)																
<ul style="list-style-type: none"> [+] HCIX-9508-U Valid CCHC 9508 Chassis Configured 		4,572.00	1	4,572.00																
Add a HCI X 9508 CHASSIS from the left panel																				
		<table border="1"> <thead> <tr> <th>Product</th> <th>Unit List Price (USD)</th> <th>Adjusted List Price (USD)</th> <th>Qty</th> <th>Extended List Price (USD)</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> [+] HCIX210C-M75N-U Valid CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz </td> <td></td> <td>3,237.00</td> <td>1</td> <td>3,237.00</td> </tr> <tr> <td colspan="5" style="text-align: center;">Add a HCI X MODULAR SERVER from the left panel</td> </tr> </tbody> </table>	Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	<ul style="list-style-type: none"> [+] HCIX210C-M75N-U Valid CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz 		3,237.00	1	3,237.00	Add a HCI X MODULAR SERVER from the left panel							
Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)																
<ul style="list-style-type: none"> [+] HCIX210C-M75N-U Valid CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz 		3,237.00	1	3,237.00																
Add a HCI X MODULAR SERVER from the left panel																				
		<table border="1"> <thead> <tr> <th>Product</th> <th>Unit List Price (USD)</th> <th>Adjusted List Price (USD)</th> <th>Qty</th> <th>Extended List Price (USD)</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> [+] HCIX-440P-U Valid HCI X-Series Gen4 PCIe node </td> <td></td> <td>0.00</td> <td>1</td> <td>0.00</td> </tr> <tr> <td colspan="5" style="text-align: center;">Add a HCI X MODULAR SERVER from the left panel</td> </tr> </tbody> </table>	Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	<ul style="list-style-type: none"> [+] HCIX-440P-U Valid HCI X-Series Gen4 PCIe node 		0.00	1	0.00	Add a HCI X MODULAR SERVER from the left panel							
Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)																
<ul style="list-style-type: none"> [+] HCIX-440P-U Valid HCI X-Series Gen4 PCIe node 		0.00	1	0.00																
Add a HCI X MODULAR SERVER from the left panel																				
		<table border="1"> <thead> <tr> <th>Product</th> <th>Unit List Price (USD)</th> <th>Adjusted List Price (USD)</th> <th>Qty</th> <th>Extended List Price (USD)</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> [+] HCIX-FI-6536 Valid Cisco Compute Hyperconverged X Fabric Interconnect 6536 </td> <td></td> <td>0.00</td> <td>2</td> <td>0.00</td> </tr> <tr> <td colspan="5" style="text-align: center;">Add a FABRIC INTERCONNECT from the left panel</td> </tr> </tbody> </table>	Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	<ul style="list-style-type: none"> [+] HCIX-FI-6536 Valid Cisco Compute Hyperconverged X Fabric Interconnect 6536 		0.00	2	0.00	Add a FABRIC INTERCONNECT from the left panel							
Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)																
<ul style="list-style-type: none"> [+] HCIX-FI-6536 Valid Cisco Compute Hyperconverged X Fabric Interconnect 6536 		0.00	2	0.00																
Add a FABRIC INTERCONNECT from the left panel																				
		<table border="1"> <thead> <tr> <th>Product</th> <th>Unit List Price (USD)</th> <th>Adjusted List Price (USD)</th> <th>Qty</th> <th>Extended List Price (USD)</th> </tr> </thead> <tbody> <tr> <td colspan="5" style="text-align: center;">Add a CISCO INTERSIGHT from the left panel</td> </tr> </tbody> </table>	Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	Add a CISCO INTERSIGHT from the left panel												
Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)																
Add a CISCO INTERSIGHT from the left panel																				

- a. [サービス/サブスクリプションの編集 (Edit Services/Subscriptions)] をクリックして、ハードウェアサポートの期間を編集します。

注： ハードウェア サポートの期間は、ソフトウェア サブスクリプション期間と一致させることをお勧めします。

ステップ 27.

Fabric Interconnect

HCIX-FI-6536 → **Services/Subscriptions**

Service Subscription HCIX-FI-6536	Price List Global Price List in US Dollars (USD)	Service Total (USD) 6,144.00	Subscription Total (USD) 0.00
--------------------------------------	---	---------------------------------	----------------------------------

1 You may receive additional discounts because you selected two or more years of service. To review your discounts you can go to the Order or Quoting discount pages. (C0124)

Service | Non Serviceable Products

Service Options

Choose Service Level from Cisco Customer Experience L...

Search by Name & Description

Note: Cisco may still install another compatible service if required. Compatible services are the services that come with primary service and are based on products.

and/or

Time Duration

Duration

Delay service start to

Co-Term service to

Duration 36

Reset Apply

Service SKU	Product SKU	Unit List Price (USD)	Qty	Total List Price (USD)
Cisco Customer Experience Level 1 (1 ITEM) <small>SERVICE PROGRAM</small> L1NCO (CX LEVEL 1 8X7XNCDOS) <small>SUMMARY</small> CON-L1NCO-HCIXFI6B CX LEVEL 1 8X7XNCDOS Cisco Compute Hyperconve... <small>SERVICE SKU</small> Change Service Remove Service	HCIX-FI-6536 Cisco Compute Hyperconverged X Fabric Interconnect ... <small>PRODUCT SKU</small>	6,144.00	1	6,144.00

Remove All Services Remove All Additional Services

Configuration Summary All prices shown in USD

Services 6,144.00

Cancel Done

- a. [期間 (Term Duration)] を入力します。
- b. [適用 (Apply)] をクリックし、[完了 (Done)] をクリックします。

注： Nutanix ミッションクリティカルソフトウェアサポートを購入した場合は、ハードウェアとソフトウェアの間で一貫した SLA 応答時間を確保するために、CX Success Track レベル 1 またはレベル 2 またはソリューションサポートにアップグレードすることをお勧めします。詳細については、https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf を参照してください。

ステップ 28.

The screenshot displays a configuration interface with the following components and pricing:

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U CCHC 9508 Chassis Configured	4,572.00		1	4,572.00
Add a HCI X 9508 CHASSIS from the left panel				
HCI X MODULAR SERVER > 2 Selected (Min 0, Max 99999)				
HCIX210C-M7SN-U CCHC 210cM7 All NvMe ComputeNode w/o CPU,Memory,Storage,Mezz	3,237.00		1	3,237.00
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
HCIX-440P-U HCI X-Series Gen4 PCIe node	0.00		1	0.00
Add Custom Name Edit Options Remove Line				
Add a HCI X MODULAR SERVER from the left panel				
FABRIC INTERCONNECT > 2 Selected (Min 0, Max 99999)				
HCIX-FI-6536 Cisco Compute Hyperconverged X Fabric Interconnect 6536	6,144.00		2	12,288.00
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a FABRIC INTERCONNECT from the left panel				
CISCO INTERSIGHT > 1 Selected (Min 1, Max 1)				
DC-MGT-SAAS Cisco Intersight SaaS	0.00		1	0.00
Add Custom Name Edit Options Remove Line				
Requested Start Date	Requested For	Automatically Renews For	Billing Frequency	
11-May-2024	36 Months From 11-May-2024 To 10-May-2027	12 Months On 11-May-2027	Prepaid Term	

- ハードウェア サポートの期間は、ソフトウェア サブスクリプション期間と同調させることをお勧めしません。
- Cisco Intersight ソフトウェアを以前に購入していない場合は、Intersight を選択する必要があります。構成するには、「PLUS」をクリックして、[オプションの編集 (Edit Options)] をクリックします。

ステップ 29.

Cisco Intersight

➔
DC-MGT-SAAS

Offer Configuration DC-MGT-SAAS(Part of HCIX-M7-MLB)	Estimated Lead Time NA	Price List Global Price List (USD)	Total (USD) 0.00
Requested Terms and Billing			
Requested Start Date ⓘ 11-May-2024	Requested For 36 Months From 11-May-2024 To 10-May-2027	Automatically Renews For ⓘ 12 Months On 11-May-2027	Billing Frequency Prepaid Term
ⓘ 1: Cisco will apply a standard lead time to your requested start date based on the selected product. Cisco may not be able to honor the requested start date (RSD). In some cases, our systems may require additional lead-time to provision your services. Submitting a RSD that is too early could cause customer subscription billing issues. Verify the requested start date with your implementation team that aligns with customer deployment readiness. (C0742)			
ⓘ 2: Your subscription will start and be eligible to be invoiced: i) 30 days or less (7 days for A-FLEX/A-FLEX-3) after Cisco notifies you that any portion of the subscription is ready for you to provision OR, ii) the day any portion of the subscription is provisioned by Cisco, whichever of the two events happens first. (C01007)			
REQUESTED FOR 36 Months From 11-May-2024 To 10-May-2027			
Requested Start Date ⓘ a Day: 11 Month: May Year: 2024 <small>Enter any date up between 08-May-2024 and 05-Aug-2024</small>		End Date ⓘ b <input checked="" type="radio"/> Effective For 36 Months <small>Enter any whole month value from 1-96</small> <input type="radio"/> Co-Term to an End Date ⓘ Day: 10 Month: May Year: 2027 <small>Enter any date up between 08-Aug-2024 and 10-May-2032</small>	
Automatically Renews For ⓘ 12 Months On 11-May-2027 <input checked="" type="checkbox"/> On b 12 Months		Billing Frequency ⓘ Prepaid Term <input checked="" type="radio"/> Prepaid Term <input type="radio"/> Annual Billing <input type="radio"/> Quarterly Billing <input type="radio"/> Monthly Billing	
Cancel		Save Changes	

- a. 希望開始日 (RSD) は、HW Ship Date に依存するようになり、HW が出荷されると自動的に開始されます。RSD を変更すると、ソフトウェアは選択した RSD またはハードウェア出荷日のいずれか遅い方から開始されます。
- b. [終了日 (End Date)] (月単位の期間) はデフォルトで [36 か月 (36 Months)] に設定され、[自動更新 (オン/オフ) (Auto Renewal (on/off))] はデフォルトで [オフ (Off)] に設定され、[請求頻度 (Billing Frequency)] はデフォルトで [前払い期間 (Prepaid Term)] に設定されます。それに応じて設定を変更することもできます。

ステップ 30.

Cisco Intersight
➔
DC-MGT-SAAS

Offer Configuration DC-MGT-SAAS(Part of HCIX-M7-MLB)	Estimated Lead Time NA	Price List Global Price List (USD)	Total (USD) 2,520.00																																															
Requested Terms and Billing																																																		
Requested Start Date 11-May-2024	Requested For 36 Months From 11-May-2024 To 10-May-2027	Automatically Renews For 12 Months On 11-May-2027	Billing Frequency Prepaid Term																																															
<p>⚠ Please note that Cisco recommends Solution Support with Intersight which solves complex issues on average 44% faster than product support. For complete details, please refer to the following URL: https://www.cisco.com/c/m/en_us/customer-experience/support/solution-support.html (CE202322)</p> <p>i Your subscription will start and be eligible to be invoiced: i) 30 days or less (7 days for A-FLEX/A-FLEX-3) after Cisco notifies you that any portion of the subscription is ready for you to provision OR, ii) the day any portion of the subscription is provisioned by Cisco, whichever of the two events happens first. (C01007)</p>																																																		
Configuration Summary		DC-MGT-SAAS > Cisco Intersight 2.0 Infrastructure Services																																																
<p>Cisco Intersight 2.0 Infrastructure Services</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>SKU</th> <th>Qty</th> <th>List Price</th> </tr> </thead> <tbody> <tr> <td>DC-MGT-IS-SAAS-ES</td> <td>2 <small>Device</small></td> <td>\$35.00 <small>Per Device/Month</small></td> </tr> </tbody> </table> <p>Cisco Intersight Workload Optimizer (IWO) - SaaS</p> <p>Cisco Intersight Support</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>SKU</th> <th>Qty</th> <th>List Price</th> </tr> </thead> <tbody> <tr> <td>SVS-DCM-SUPT-BAS</td> <td>1 <small>Each</small></td> <td>\$0.00 <small>Per Each/Month</small></td> </tr> </tbody> </table> <p>Auto Expansion</p> <p>Total \$2,520.00</p> <p>Restore Configuration Cancel Review Changes</p>		SKU	Qty	List Price	DC-MGT-IS-SAAS-ES	2 <small>Device</small>	\$35.00 <small>Per Device/Month</small>	SKU	Qty	List Price	SVS-DCM-SUPT-BAS	1 <small>Each</small>	\$0.00 <small>Per Each/Month</small>	<p>Cisco Intersight 2.0 Infrastructure Services</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Device</th> <th>SKU</th> <th>Description</th> <th>Unit List Price (USD)</th> <th>Action</th> </tr> </thead> <tbody> <tr> <td><input type="text" value="2"/></td> <td>DC-MGT-IS-SAAS-ES <small>SA</small></td> <td>Infrastructure Services SaaS/CVA - Essentials</td> <td>\$35.00 <small>Per Device/Month</small></td> <td></td> </tr> <tr> <td><input type="text" value="Qty"/></td> <td>DC-MGT-IS-SAAS-AD <small>SA</small></td> <td>Infrastructure Services SaaS/CVA - Advantage</td> <td>Enter Qty to see List Price <small>Per Device/Month</small></td> <td></td> </tr> <tr> <td><input type="text" value="Qty"/></td> <td>DC-MGT-IS-PVAPP-ES <small>SA</small></td> <td>Infrastructure Services PVA - Essentials</td> <td>Enter Qty to see List Price <small>Per Device/Month</small></td> <td></td> </tr> <tr> <td><input type="text" value="Qty"/></td> <td>DC-MGT-IS-PVAPP-AD <small>SA</small></td> <td>Infrastructure Services PVA - Advantage</td> <td>Enter Qty to see List Price <small>Per Device/Month</small></td> <td></td> </tr> </tbody> </table> <p>Add-Ons</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Device</th> <th>SKU</th> <th>Description</th> <th>Unit List Price (USD)</th> <th>Action</th> </tr> </thead> <tbody> <tr> <td><input type="text" value="Qty"/></td> <td>DC-MGT-IS-UCSD</td> <td>UCS Director - 1 Server License (includes Network, Storage)</td> <td>Enter Qty to see List Price <small>Per Device/Month</small></td> <td></td> </tr> </tbody> </table>		Device	SKU	Description	Unit List Price (USD)	Action	<input type="text" value="2"/>	DC-MGT-IS-SAAS-ES <small>SA</small>	Infrastructure Services SaaS/CVA - Essentials	\$35.00 <small>Per Device/Month</small>		<input type="text" value="Qty"/>	DC-MGT-IS-SAAS-AD <small>SA</small>	Infrastructure Services SaaS/CVA - Advantage	Enter Qty to see List Price <small>Per Device/Month</small>		<input type="text" value="Qty"/>	DC-MGT-IS-PVAPP-ES <small>SA</small>	Infrastructure Services PVA - Essentials	Enter Qty to see List Price <small>Per Device/Month</small>		<input type="text" value="Qty"/>	DC-MGT-IS-PVAPP-AD <small>SA</small>	Infrastructure Services PVA - Advantage	Enter Qty to see List Price <small>Per Device/Month</small>		Device	SKU	Description	Unit List Price (USD)	Action	<input type="text" value="Qty"/>	DC-MGT-IS-UCSD	UCS Director - 1 Server License (includes Network, Storage)	Enter Qty to see List Price <small>Per Device/Month</small>	
SKU	Qty	List Price																																																
DC-MGT-IS-SAAS-ES	2 <small>Device</small>	\$35.00 <small>Per Device/Month</small>																																																
SKU	Qty	List Price																																																
SVS-DCM-SUPT-BAS	1 <small>Each</small>	\$0.00 <small>Per Each/Month</small>																																																
Device	SKU	Description	Unit List Price (USD)	Action																																														
<input type="text" value="2"/>	DC-MGT-IS-SAAS-ES <small>SA</small>	Infrastructure Services SaaS/CVA - Essentials	\$35.00 <small>Per Device/Month</small>																																															
<input type="text" value="Qty"/>	DC-MGT-IS-SAAS-AD <small>SA</small>	Infrastructure Services SaaS/CVA - Advantage	Enter Qty to see List Price <small>Per Device/Month</small>																																															
<input type="text" value="Qty"/>	DC-MGT-IS-PVAPP-ES <small>SA</small>	Infrastructure Services PVA - Essentials	Enter Qty to see List Price <small>Per Device/Month</small>																																															
<input type="text" value="Qty"/>	DC-MGT-IS-PVAPP-AD <small>SA</small>	Infrastructure Services PVA - Advantage	Enter Qty to see List Price <small>Per Device/Month</small>																																															
Device	SKU	Description	Unit List Price (USD)	Action																																														
<input type="text" value="Qty"/>	DC-MGT-IS-UCSD	UCS Director - 1 Server License (includes Network, Storage)	Enter Qty to see List Price <small>Per Device/Month</small>																																															

a. オファー DC-MGT-SAAS の下の Cisco Intersight 2.0 インフラストラクチャ サービス ライセンスの数量は、選択されたサーバの数量と同じである必要があります。数量を入力します。

ステップ 31.

Cisco Intersight
➔
DC-MGT-SAAS

Offer Configuration DC-MGT-SAAS(Part of HCIX-M7-MLB)	Estimated Lead Time NA	Price List Global Price List (USD)	Total (USD) 2,520.00																																								
Requested Terms and Billing																																											
Requested Start Date 11-May-2024	Requested For 36 Months From 11-May-2024 To 10-May-2027	Automatically Renews For 12 Months On 11-May-2027	Billing Frequency Prepaid Term																																								
<p>⚠ Please note that Cisco recommends Solution Support with Intersight which solves complex issues on average 44% faster than product support. For complete details, please refer to the following URL: https://www.cisco.com/c/m/en_us/customer-experience/support/solution-support.html (CE202322)</p> <p>i Your subscription will start and be eligible to be invoiced: i) 30 days or less (7 days for A-FLEX/A-FLEX-3) after Cisco notifies you that any portion of the subscription is ready for you to provision OR, ii) the day any portion of the subscription is provisioned by Cisco, whichever of the two events happens first. (C01007)</p>																																											
Configuration Summary		DC-MGT-SAAS > Cisco Intersight Support																																									
<p>Cisco Intersight Support</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>SKU</th> <th>Qty</th> <th>List Price</th> </tr> </thead> <tbody> <tr> <td>SVS-DCM-SUPT-BAS</td> <td>1 <small>Each</small></td> <td>\$0.00 <small>Per Each/Month</small></td> </tr> </tbody> </table> <p>Auto Expansion</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>SKU</th> <th>Qty</th> <th>List Price</th> </tr> </thead> <tbody> <tr> <td>DC-MGT-UCSC-1S</td> <td>2 <small>Device</small></td> <td>\$0.00 <small>Per Device/Month</small></td> </tr> <tr> <td>DC-MGT-ADOPT-BAS</td> <td>1 <small>License</small></td> <td>\$0.00 <small>Per License/Month</small></td> </tr> </tbody> </table> <p>Total \$2,520.00</p> <p>Restore Configuration Cancel Review Changes</p>		SKU	Qty	List Price	SVS-DCM-SUPT-BAS	1 <small>Each</small>	\$0.00 <small>Per Each/Month</small>	SKU	Qty	List Price	DC-MGT-UCSC-1S	2 <small>Device</small>	\$0.00 <small>Per Device/Month</small>	DC-MGT-ADOPT-BAS	1 <small>License</small>	\$0.00 <small>Per License/Month</small>	<p>Cisco Intersight Support</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Each</th> <th>SKU</th> <th>Description</th> <th>Unit List Price (USD)</th> <th>Action</th> </tr> </thead> <tbody> <tr> <td><input type="text" value="Qty"/></td> <td>SVS-SSTCS-DCMGMT <small>SA</small></td> <td>Solution Support for DC Mgmt</td> <td>Enter Qty to see List Price <small>Per Each/Month</small></td> <td></td> </tr> <tr> <td><input type="text" value="Qty"/></td> <td>SVS-L1DCS-INTER <small>SA</small></td> <td>CXL1 for INTERSIGHT</td> <td>Enter Qty to see List Price <small>Per Each/Month</small></td> <td></td> </tr> <tr> <td><input type="text" value="Qty"/></td> <td>SVS-L2DCS-INTER <small>SA</small></td> <td>CXL2 for INTERSIGHT</td> <td>Enter Qty to see List Price <small>Per Each/Month</small></td> <td></td> </tr> <tr> <td><input type="text" value="1"/></td> <td>SVS-DCM-SUPT-BAS</td> <td>Basic Support for DCM</td> <td>\$0.00 <small>Per Each/Month</small></td> <td></td> </tr> </tbody> </table>		Each	SKU	Description	Unit List Price (USD)	Action	<input type="text" value="Qty"/>	SVS-SSTCS-DCMGMT <small>SA</small>	Solution Support for DC Mgmt	Enter Qty to see List Price <small>Per Each/Month</small>		<input type="text" value="Qty"/>	SVS-L1DCS-INTER <small>SA</small>	CXL1 for INTERSIGHT	Enter Qty to see List Price <small>Per Each/Month</small>		<input type="text" value="Qty"/>	SVS-L2DCS-INTER <small>SA</small>	CXL2 for INTERSIGHT	Enter Qty to see List Price <small>Per Each/Month</small>		<input type="text" value="1"/>	SVS-DCM-SUPT-BAS	Basic Support for DCM	\$0.00 <small>Per Each/Month</small>	
SKU	Qty	List Price																																									
SVS-DCM-SUPT-BAS	1 <small>Each</small>	\$0.00 <small>Per Each/Month</small>																																									
SKU	Qty	List Price																																									
DC-MGT-UCSC-1S	2 <small>Device</small>	\$0.00 <small>Per Device/Month</small>																																									
DC-MGT-ADOPT-BAS	1 <small>License</small>	\$0.00 <small>Per License/Month</small>																																									
Each	SKU	Description	Unit List Price (USD)	Action																																							
<input type="text" value="Qty"/>	SVS-SSTCS-DCMGMT <small>SA</small>	Solution Support for DC Mgmt	Enter Qty to see List Price <small>Per Each/Month</small>																																								
<input type="text" value="Qty"/>	SVS-L1DCS-INTER <small>SA</small>	CXL1 for INTERSIGHT	Enter Qty to see List Price <small>Per Each/Month</small>																																								
<input type="text" value="Qty"/>	SVS-L2DCS-INTER <small>SA</small>	CXL2 for INTERSIGHT	Enter Qty to see List Price <small>Per Each/Month</small>																																								
<input type="text" value="1"/>	SVS-DCM-SUPT-BAS	Basic Support for DCM	\$0.00 <small>Per Each/Month</small>																																								

- a. Cisco Intersight License には、個別のサポートが付属しています。基本組み込み型サポートはデフォルトの選択です。顧客は、必要に応じてソリューション サポート、CX、サクセス トラック L1 および L2 (SAAS でのみサポート) にアップグレード可能です。

ステップ 32.

Bundle Configuration: HClX-M7-MLB
Estimated Lead Time: 21 days
Price List: Global Price List (USD)
Total: 22,817.00

Set service preferences for this configuration

1: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#home> before you proceed to do the Product Configuration. (CE202322)
2: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HClX 9508 CHASSIS > 1 Selected (Min 0, Max 999999)				
HClX-9508-U Valid		4,572.00	1	4,572.00
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a HClX 9508 CHASSIS from the left panel				
HClX X MODULAR SERVER > 2 Selected (Min 0, Max 999999)				
HClX210C-M7M-U Valid		3,237.00	1	3,237.00
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
HClX-440P-U Valid		0.00	1	0.00
Add Custom Name Edit Options Remove Line				
Add a HClX X MODULAR SERVER from the left panel				
FABRIC INTERCONNECT > 2 Selected (Min 0, Max 999999)				
HClX-FI-6536 Valid		6,144.00	2	12,288.00
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a FABRIC INTERCONNECT from the left panel				
CISCO INTERSIGHT > 1 Selected (Min 1, Max 1)				
DC-MGT-SAAS Valid		35.00	1	2,520.00
Add Custom Name Edit Options Remove Line				

Requested Start Date: 11-May-2024
Requested For: 36 Months From 11-May-2024 To 10-May-2027
Automatically Renews For: 12 Months On 11-May-2027
Billing Frequency: Prepaid Term

- a. 各製品のステータスが [有効 (Valid)] であり、警告メッセージがなくなると MLB の構成が完了します。
- b. 「PLUS」 をクリックして、展開して、各製品に行った選択を表示します。
- c. MLB 構成を完了するために、[完了 (Done)] をクリックします。

ステップ 33.

Available Components

- HCI X 9508 CHASSIS
- HCI X MODULAR SERVER
- FABRIC INTERCONNECT
- CISCO INTERSIGHT

Configuration Summary

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 999999)				
HCI X 9508 CHASSIS	4,572.00	4,572.00	1	4,572.00
HCI X MODULAR SERVER > 2 Selected (Min 0, Max 999999)				
HCI X MODULAR SERVER	3,237.00	3,237.00	1	3,237.00
HCI X MODULAR SERVER	0.00	0.00	1	0.00
FABRIC INTERCONNECT > 2 Selected (Min 0, Max 999999)				
FABRIC INTERCONNECT	6,144.00	6,144.00	2	12,288.00
CISCO INTERSIGHT > 1 Selected (Min 1, Max 1)				
CNDL-DESELECT-D	0.00	0.00	1	0.00

- a. CNDL-DESELECT-D は、お客様が EA 契約を介して Cisco Intersight ライセンスをすでに購入している場合、または注文が Disti Fulfillment である場合にのみ選択することを意図しています。

ステップ 34.

Configuration Summary

Category	Qty	Extended List Price (USD)
CNDL-DESELECT-D	1	0.00

Reason Codes

SKU	Qty	Estimated Lead Time	Unit List Price (USD)
OPTOUT-DISTI-ONLY	1	3 days	0.00
OPTOUT-EA-ONLY	1	3 days	0.00
OPTOUT-ENTL-SWAP	1	3 days	0.00

- a. 適切な [理由コード (Reason Code)] を選択してください

ステップ 35.

Bundle Configuration: HXIX-M7-MLB
Estimated Lead Time: 21 days
Price List: Global Price List (USD)
Total: 20,097.00

Get service preferences for this configuration. [Cancel] [Done]

1: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration. (CE202322)
2: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)
3: Please note that Intersight is required selection, if you have not previously purchased Intersight please make selection. (CE202322)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 999999)				
Product: HCIX-9508-U Valid		4,572.00	1	4,572.00
CCHC 9508 Chassis Configured				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a HCI X 9508 CHASSIS from the left panel				
HCI X MODULAR SERVER > 2 Selected (Min 0, Max 999999)				
Product: HCIX10C-M7SN-U Valid		3,237.00	1	3,237.00
CCHC 210cM7 All NVMs Complete Node w/o CPU/Memory/Storage/Mezz				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Product: HCIX-440P-U Valid		0.00	1	0.00
HCI X-Series Gen4 PCIe node				
Add Custom Name Edit Options Remove Line				
Add a HCI X MODULAR SERVER from the left panel				
FABRIC INTERCONNECT > 2 Selected (Min 0, Max 999999)				
Product: HCIX-FI-6536 Valid		6,144.00	2	12,288.00
Cisco Compute Hyperconverged X Fabric Interconnect 6536				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a FABRIC INTERCONNECT from the left panel				
CISCO INTERSIGHT > 1 Selected (Min 1, Max 1)				
Product: CNDL-DESELECT-D Valid		0.00	1	0.00
Conditional Deselect				
Add Custom Name Edit Options Remove Line				

- 各製品のステータスが [有効 (Valid)] であり、警告メッセージがなくなると MLB の構成が完了します。
- 「PLUS」をクリックして、展開して、各製品に行った選択を表示します。
- MLB 構成を完了するために、[完了 (Done)] をクリックします。

翻訳について

このドキュメントは、米国シスコ発行ドキュメントの参考和訳です。リンク情報につきましては、日本語版掲載時点で、英語版にアップデートがあり、リンク先のページが移動/変更されている場合がありますことをご了承ください。あくまでも参考和訳となりますので、正式な内容については米国サイトのドキュメントを参照ください。