



Configuring CSR1000V for SD-AVC


- [Allocating VM CPUs for Cisco CSR1000V, on page 1](#)

Allocating VM CPUs for Cisco CSR1000V

Use this task to allocate CPU resources when setting up a Cisco Cloud Services Router CSR1000V as a host for the SD-AVC network service.

Before you begin

- Step 1** On the VMware ESXi hypervisor client that is hosting the Cisco CSR, edit the CSR that is hosting the SD-AVC network service. Allocate 8 CPUs to the virtual machine. (For small-scale scenarios, fewer CPUs may be necessary. See [System Requirements: SD-AVC Network Service Host](#).)

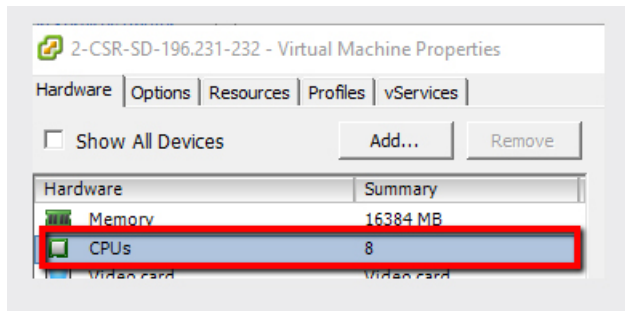

- Step 2** On the CSR device, execute the following:
- ```
(config)#platform resource service-plane-heavy
Please reboot to activate this template
```
- Step 3** Copy the running configuration to the starting configuration.
- ```
copy running-config startup-config
```
- Step 4** Reload the device.
- ```
reload
```

**Step 5** Use **show platform software cpu alloc** to check the number of CPU cores allocated.

Check the command output for the **Control plane cpu alloc** line. The output indicates 4 CPUs (numbered 0 to 3).

```
(config)#show platform software cpu alloc
CPU alloc information:
 Control plane cpu alloc: 0-3
 Data plane cpu alloc: 4-7
 Service plane cpu alloc: 0-3
 Template used: CLI-service_plane_heavy
```

**Note** If the VM has only 4 cores allocated, the **Control plane cpu alloc** line in the command output shows only a single CPU (numbered 0).

```
CPU alloc information:
 Control plane cpu alloc: 0
 Data plane cpu alloc: 1-3
 Service plane cpu alloc: 0
 Template used: CLI-control_plane_heavy
```

---