



Secure Firewall Management Center REST API Quick Start Guide, Version 7.2.0

First Published: 2022-05-31

Last Modified: 2022-05-31

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

The documentation set for this product strives to use bias-free language. For purposes of this documentation set, bias-free is defined as language that does not imply discrimination based on age, disability, gender, racial identity, ethnic identity, sexual orientation, socioeconomic status, and intersectionality. Exceptions may be present in the documentation due to language that is hardcoded in the user interfaces of the product software, language used based on standards documentation, or language that is used by a referenced third-party product.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© Cisco Systems, Inc. All rights reserved.



CONTENTS

CHAPTER 1	About the Management Center REST API	1
	About the Management Center REST API	1
	Whats New in 7.2	1
	Enabling the REST API	4
	Best Practices	4
	Additional Resources	4

CHAPTER 2	About the API Explorer	5
	About the API Explorer	5
	Authentication to the API Explorer	5
	Logging into API Explorer	6
	Setting the Domain	6
	Accessing the Legacy API Explorer	6
	Obtaining Sample Code with CodeGen	7
	Downloading the Open API Spec	7
	Generating Sample Code with the CodeGen Utility	8
	Viewing API Parameters	8

CHAPTER 3	Connecting with a Client	11
	Authentication from a REST API Client	11
	Requesting an Authentication Token	12
	Refreshing an Authentication Token	13

CHAPTER 4	Objects in the REST API	15
	Request Structure	15
	Bulk Rule Posting	17

Response Structure	18
Rate Limiting	20
Payload Limiting	20
Object Overrides	21
Field Renaming	22
Troubleshoot	22
DELETE packettracerfiles	22
POST task	22
Network Map	23
GET netmaphosts	23
DELETE netmaphosts	23
POST netmaphosts	23
GET vulns	23
DELETE vulns	24
POST vulns	24
Audit Services	24
GET auditrecords	24
Users	24
GET authroles	24
GET SSO Config	25
PUT SSO Config	25
GET duoconfigs	25
PUT duoconfigs	25
Deployment Services	26
GET deployabledevices	26
GET deployments	26
GET pendingchanges	26
POST deploymentrequests	26
GET jobhistories	26
PUT jobhistories	27
GET downloadreports	27
POST emailreports	27
POST rollbackrequests	27
Device Group Services	28

DELETE devicegrouprecords	28
PUT devicegrouprecords	28
POST devicegrouprecords	28
GET devicegrouprecords	28
Device Clusters	28
GET fddevicecluster	28
PUT fddevicecluster	29
POST fddevicecluster	29
DELETE fddevicecluster	30
POST fdclusterreadinesscheck	30
POST fdclusterdevicecommands	30
Device HA Pair Services	31
DELETE fddevicehapair	31
PUT fddevicehapair	31
POST fddevicehapairs	31
GET fddevicehapairs	32
DELETE failoverinterfacemacaddressconfigs	32
GET failoverinterfacemacaddressconfigs	32
POST failoverinterfacemacaddressconfigs	33
PUT failoverinterfacemacaddressconfigs	33
GET monitoredinterfaces	33
PUT monitoredinterfaces	33
Health Services	34
GET tunnelstatuses	34
GET tunnelsummaries	34
GET Health Alerts	34
GET Health Metrics	34
Chassis	35
GET fmcmanagedchassis	35
GET networkmodules	35
PUT networkmodules	35
PUT syncnetworkmodule	35
GET chassisinterfaces	36
GET networkmodules	36

POST breakoutinterfaces 36

GET evaluateoperation 36

POST joininterfaces 37

Device Services 37

POST copyconfigrequests 37

POST exports 37

POST imports 37

GET bgp routing 37

PUT bgp 38

POST bgp 38

DELETE bgp 38

DELETE devicerecords 38

PUT devicerecords 38

POST devicerecords 39

GET devicerecords 39

PUT fpphysicalinterfaces 39

GET fpphysicalinterfaces 39

DELETE fplogicalinterfaces 39

PUT fplogicalinterfaces 40

POST fplogicalinterfaces 40

GET fplogicalinterfaces 40

DELETE inlinesets 40

PUT inlinesets 41

POST inlinesets 41

GET inlinesets 41

GET Metrics 41

GET staticroutes 41

GET virtualrouters 42

PUT virtual routers 42

POST virtual routers 42

DELETE virtual routers 42

GET virtual BGP 43

PUT virtual bgp 43

POST virtual bgp 43

DELETE virtual bgp	43
GET virtual ipv4staticroutes	43
PUT virtual ipv4 static routes	44
POST virtual ipv4 static routes	44
DELETE virtual ipv4 static routes	44
GET virtual ipv6staticroutes	45
PUT virtual ipv6 static routes	45
POST virtual ipv6 static routes	45
DELETE virtual ipv6 static routes	46
GET virtual ospf interface	46
GET virtual ospfv2 routes	46
GET virtual static routes	47
DELETE ipv4staticroutes	47
PUT ipv4staticroutes	47
POST ipv4staticroutes	47
GET ipv4staticroutes	48
DELETE ipv6staticroutes	48
PUT ipv6staticroutes	48
POST ipv6staticroutes	48
GET ipv6staticroutes	48
GET ospf interface	49
GET ospfv2routes	49
GET ospfv3interfaces	49
GET ospfv3routes	50
GET ecmpzones	50
PUT ecmpzones	50
POST ecmpzones	50
DELETE ecmpzones	50
GET virtual ecmpzones	51
PUT virtual ecmpzones	51
POST virtual ecmpzones	51
DELETE virtual ecmpzones	51
POST packettracer	52
POST packettracerpcap	52

GET policybasedroutes	52
PUT policybasedroutes	52
POST policybasedroutes	52
DELETE policybasedroutes	53
GET virtualpolicybasedroutes	53
PUT virtualpolicybasedroutes	53
POST virtualpolicybasedroutes	53
DELETE virtualpolicybasedroutes	53
GET vteppolicies	54
PUT vteppolicies	54
POST vteppolicies	54
DELETE vteppolicies	54
DELETE virtualswitches	54
PUT virtualswitches	55
POST virtualswitches	55
GET virtualswitches	55
GET Virtual Tunnel Interfaces	55
PUT Virtual Tunnel Interfaces	56
POST Virtual Tunnel Interfaces	56
DELETE Virtual Tunnel Interfaces	56
DELETE vlaninterfaces	56
PUT vlaninterfaces	57
POST vlaninterfaces	57
GET vlaninterfaces	57
GET vniinterfaces	57
PUT vniinterfaces	58
POST vniinterfaces	58
DELETE vniinterfaces	58
PUT fpphysicalinterfaces	58
GET fpphysicalinterfaces	58
PUT physicalinterfaces	59
GET physicalinterfaces	59
GET bridgegroupinterfaces	59
POST bridgegroupinterfaces	60

PUT bridgegroupinterfaces	60
DELETE bridgegroupinterfaces	60
GET redundantinterfaces	60
POST redundantinterfaces	60
PUT redundantinterfaces	61
DELETE redundantinterfaces	61
GET bgp routing	61
GET bgp general settings	61
PUT bgpgeneralsettings	62
POST bgpgeneralsettings	62
DELETE bgpgeneralsettings	62
GET etherchannelinterfaces	62
POST etherchannelinterfaces	62
PUT etherchannelinterfaces	63
DELETE etherchannelinterfaces	63
GET subinterfaces	63
POST subinterfaces	63
PUT subinterfaces	64
DELETE subinterfaces	64
GET fpinterfacestatistics	64
POST interfaceevents	64
GET interfaceevents	64
GET commands	65
GET ftdallinterfaces	65
POST changemanagers	66
GET devicesettings	66
PUT devicesettings	66
DELETE eigrproutes	66
GET eigrproutes	66
POST eigrproutes	67
PUT eigrproutes	67
Intelligence Services	67
POST collections	67
POST discoveryinfo	67

GET element	68
DELETE incident	68
PUT incident	68
GET incident	68
PUT indicator	69
GET indicator	69
PUT observable	69
GET observable	69
PUT settings	70
GET settings	70
DELETE source	70
PUT source	70
POST source	71
GET source	71
License	71
GET smartlicenses	71
POST smartlicenses	71
GET devicelicense	72
PUT devicelicense	72
Search	72
GET globalsearch	72
GET objectsearch	72
GET policysearch	73
GET device	73
Integration Services	73
PUT cloudeventsconfigs	73
GET cloudeventsconfigs	73
PUT cloudregions	73
GET cloudregions	74
DELETE externallookups	74
PUT externallookups	74
POST externallookups	74
GET externallookups	74
DELETE packetanalyzerdevices	75

PUT packetanalyzerdevices	75
POST packetanalyzerdevices	75
GET packetanlyzerdevices	75
GET External Storage	76
PUT External Storage	76
GET FMC HA Statuses	76
GET dynamicattributesfeeds	76
PUT dynamicattributesfeeds	76
GET SecureX Configs	77
PUT SecureX Configs	77
GET ebssnapshot	77
POST ebssnapshot	77
POST testumbrellaconnections	77
GET umbrellaconnections	78
PUT umbrellaconnections	78
Object Services	78
GET AnyConnect Custom Attributes	78
GET AnyConnect Packages	78
DELETE anyconnectpackages	79
POST anyconnectpackages	79
PUT anyconnectpackages	79
GET anyconnectexternalbrowserpackages	79
DELETE anyconnectexternalbrowserpackages	79
POST anyconnectexternalbrowserpackages	80
PUT anyconnectexternalbrowserpackages	80
GET AnyConnect Profiles	80
DELETE anyconnectprofiles	80
POST anyconnectprofiles	81
PUT anyconnectprofiles	81
GET anyprotocolportobjects	81
GET applicationcategories	81
GET applicationfilters	81
PUT applicationfilters	82
POST applicationfilters	82

DELETE applicationfilters 82

GET applicationproductivities 82

GET applicationrisks 82

GET applications 83

GET applicationtags 83

GET applicationtypes 83

GET aspathlists 83

PUT aspathlists 84

POST aspathlists 84

DELETE aspathlists 84

POST bulkdynamicobjects 84

GET certenrollments 84

DELETE certenrollments 85

POST certenrollments 85

PUT certenrollments 85

GET communitylists 85

GET Certificate Maps 85

DELETE certificatemaps 86

POST certificatemaps 86

PUT certificatemaps 86

GET continents 86

GET countries 86

DELETE dnsservergroups 87

PUT dnsservergroups 87

POST dnsservergroups 87

GET dnsservergroups 87

POST dynamicobjectmappings 87

DELETE dynamicobjectmappings 88

GET dynamicobjects 88

POST dynamicobjects 88

DELETE dynamicobjects 88

PUT dynamicobjects 89

GET mappings 89

PUT mappings 89

DELETE mappings	89
GET endpointdevicetypes	90
GET expanded community lists	90
PUT expandedcommunitylists	90
POST expandedcommunitylists	90
DELETE expandedcommunitylists	91
GET extended access lists	91
PUT extendedaccesslists	91
POST extendedaccesslists	91
DELETE extendedaccesslists	91
GET extendedcommunitylists	92
PUT extendedcommunitylists	92
POST extendedcommunitylists	92
DELETE extendedcommunitylists	92
DELETE fqdns	92
PUT fqdns	93
POST fqdns	93
GET fqdns	93
GET geolocation	94
PUT geolocations	94
POST geolocations	94
DELETE geolocations	94
GET global time zones	94
GET groupolicies	95
DELETE groupolicies	95
POST groupolicies	95
PUT groupolicies	95
DELETE hosts	95
PUT hosts	96
POST hosts	96
GET hosts	96
GET hostscanpackages	96
DELETE hostscanpackages	97
POST hostscanpackages	97

PUT hostscanpackages	97
DELETE icmpv4objects	97
PUT icmpv4objects	97
POST icmpv4objects	98
GET icmpv4objects	98
DELETE icmpv6objects	98
PUT icmpv6objects	98
POST icmpv6objects	99
GET icmpv6objects	99
DELETE ikev1ipsecproposals	99
PUT ikev1ipsecproposals	99
POST ikev1ipsecproposals	100
GET ikev1ipsecproposals	100
DELETE ikev1policies	100
PUT ikev1policies	100
POST ikev1policies	100
GET ikev1policies	101
DELETE ikev2ipsecproposals	101
PUT ikev2ipsecproposals	101
POST ikev2ipsecproposals	101
GET ikev2ipsecproposals	101
DELETE ikev2policies	102
PUT ikev2policies	102
POST ikev2policies	102
GET ikev2policies	102
DELETE interfacegroups	102
PUT interfacegroups	103
POST interfacegroups	103
GET interfacegroups	103
GET interfaceobjects	103
GET intrusionrulegroups	104
PUT intrusionrulegroups	104
POST Intrusion Rule Groups	104
DELETE Intrusion Rule Groups	104

GET intrusionrules	105
PUT intrusionrules	105
POST intrusionrules	105
DELETE intrusionrules	105
GET ipv4addresspools	105
DELETE ipv4addresspools	106
POST ipv4addresspools	106
PUT ipv4addresspools	106
GET ipv6addresspools	106
DELETE ipv6addresspools	107
POST ipv6addresspools	107
PUT ipv6addresspools	107
GET ipv4prefixlists	107
PUT ipv4prefixlists	107
POST ipv4prefixlists	108
DELETE ipv4prefixlists	108
GET ipv6prefixlists	108
PUT ipv6prefixlists	108
POST ipv6prefixlists	108
DELETE ipv6prefixlists	108
GET isecuritygrouptags	109
GET keychain	109
DELETE keychain	109
PUT keychain	110
POST keychain	110
GET localrealmusers	110
PUT localrealmusers	111
POST localrealmusers	111
POST localrealmusers	111
GET networkaddresses	111
DELETE networkgroups	111
PUT networkgroups	112
POST networkgroups	112
GET networkgroups	112

DELETE networks	112
PUT networks	113
POST networks	113
GET networks	113
GET packettracerpcaplist	114
POST packettracerpcapupload	114
GET policy lists	114
PUT policylists	114
POST policylists	114
DELETE policylists	114
DELETE portobjectgroups	115
PUT portobjectgroups	115
POST portobjectgroups	115
GET portobjectgroups	115
GET ports	116
DELETE protocolportobjects	116
PUT protocolportobjects	116
POST protocolportobjects	117
GET protocolportobjects	117
GET radiusservergroups	117
DELETE radiusservergroups	117
POST radiusservergroups	118
PUT radiusservergroups	118
DELETE ranges	118
PUT ranges	118
POST ranges	118
GET ranges	119
GET realms	119
PUT realms	119
POST realms	119
DELETE realms	120
GET realmusergroups	120
GET realmusers	120
GET route maps	120

PUT routemaps	121
POST routemaps	121
DELETE routemaps	121
GET securitygrouptags	121
DELETE securityzones	121
PUT securityzones	122
POST securityzones	122
GET securityzones	122
GET SI DNS Feeds	122
GET SI DNS Lists	122
GET sinetworkfeeds	123
GET SI Network Lists	123
GET Sinkholes	123
GET siurlfeeds	123
GET siurllists	124
DELETE slamonitors	124
PUT slamonitors	124
POST slamonitors	124
GET slamonitors	124
GET SSO Servers	125
DELETE ssoservers	125
POST ssoservers	125
PUT ssoservers	125
GET standard access lists	125
PUT standardaccesslists	126
POST standardaccesslists	126
DELETE standardaccesslists	126
GET standard community lists	126
PUT standardcommunitylists	126
POST standardcommunitylists	127
DELETE standardcommunitylists	127
GET time ranges	127
PUT time ranges	127
POST time ranges	127

DELETE time ranges	128
GET time zone objects	128
PUT time zone objects	128
POST time zone objects	128
DELETE time zone objects	128
DELETE tunneltags	129
PUT tunneltags	129
POST tunneltags	129
GET tunneltags	129
GET umbrellaprotectionpolicies	129
POST umbrellaprotectionpolicies	130
GET urlcategories	130
DELETE urlgroups	130
PUT urlgroups	130
POST urlgroups	130
GET urlgroups	131
DELETE urls	131
PUT urls	131
POST urls	131
GET urls	132
GET Usage	132
GET variablesets	133
DELETE vlangrouptags	133
PUT vlangrouptags	133
POST vlangrouptags	133
GET vlangrouptags	133
DELETE vlantags	134
PUT vlantags	134
POST vlantags	134
GET vlantags	135
Policy Services	135
DELETE accesspolicies	135
PUT accesspolicies	135
POST accesspolicies	135

GET accesspolicies	136
DELETE accessrules	136
PUT accessrules	136
POST accessrules	136
GET accessrules	136
DELETE categories	137
PUT categories	137
POST categories	137
GET categories	137
PUT defaultactions	138
GET defaultactions	138
GET loggingsettings	138
PUT loggingsettings	138
GET securityintelligencepolicies	139
GET dnspolicies	139
GET allowdnrules	139
GET blockdnrules	139
GET dynamicaccesspolicies	139
PUT dynamicaccesspolicies	140
POST dynamicaccesspolicies	140
DELETE dynamicaccesspolicies	140
GET filepolicies	140
DELETE ftdnatpolicies	140
PUT ftdnatpolicies	141
POST ftdnatpolicies	141
GET ftdnatpolicies	141
DELETE ftds2svpns	141
PUT ftds2svpns	141
POST ftds2svpns	142
GET ftds2svpns	142
PUT advancedsettings	142
GET advancedsettings	142
DELETE endpoints	142
PUT endpoints	143

POST endpoints	143
GET endpoints	143
PUT ikessettings	143
GET ikessettings	144
PUT ipsecsettings	144
GET ipsecsettings	144
GET ipsecadvancedsettings	144
PUT ipsecadvancedsettings	145
GET ipseccryptomaps	145
PUT ipseccryptomaps	145
DELETE autonatrules	145
PUT autonatrules	145
POST autonatrules	146
GET autonatrules	146
PUT autonatrules	146
DELETE manualnatrules	146
PUT manualnatrules	146
POST manualnatrules	147
GET manualnatrules	147
GET natrules	147
DELETE natrules	147
PUT inheritancesettings	147
GET inheritancesettings	148
GET identitypolicies	148
GET intrusionpolicies	148
PUT intrusionpolicies	148
POST intrusionpolicies	149
DELETE intrusionpolicies	149
GET intrusionrulegroups	149
PUT intrusionrulegroups	149
POST intrusionrulegroups	149
GET intrusionrules	150
PUT intrusionrules	150
GET networkanalysispolicies	150

PUT networkanalysispolicies	150
POST networkanalysispolicies	151
DELETE networkanalysispolicies	151
GET Inspector Configurations	151
GET inspectoroverrideconfigs	151
PUT inspectoroverrideconfigs	151
DELETE prefilterpolicies	151
PUT prefilterpolicies	152
POST prefilterpolicies	152
GET prefilterpolicies	152
GET remoteaccessvpns	152
DELETE ravpns	152
POST ravpns	153
PUT ravpns	153
GET s2svpnsummaries	153
GET addressassignmentsettings	153
PUT addressassignmentsettings	153
GET connectionprofiles	154
DELETE connectionprofiles	154
POST connectionprofiles	154
PUT connectionprofiles	154
DELETE hitcounts	154
PUT hitcounts	155
GET hitcounts	155
DELETE prefilterrules	156
PUT prefilterrules	156
POST prefilterrules	156
GET prefilterrules	156
GET snmpalerts	156
GET syslogalerts	157
GET healthpolicies	157
GET ldapattributemaps	157
PUT ldapattributemaps	157
GET policylocks	158

POST policylocks	158
GET umbrelladnpolicies	158
DELETE umbrelladnpolicies	158
POST umbrelladnpolicies	158
PUT umbrelladnpolicies	159
GET umbrelladnrules	159
PUT umbrelladnrules	159
Policy Assignment Services	159
PUT policyassignments	159
POST policyassignments	159
GET policyassignments	160
Status Services	160
GET taskstatuses	160
System Information	160
GET domain	160
GET serverversion	160
Update Packages	161
POST Cancel Upgrades	161
POST Retry Ugrades	161
DELETE upgradepackages	161
GET upgradepackages	161
GET listapplicabledevices	162
POST upgradepackage	162
POST revertupgrades	162
GET upgradepackages: Monitor	162



CHAPTER 1

About the Management Center REST API

The Secure Firewall Management Center REST API provides a lightweight API to manage a management center.

- [About the Management Center REST API, on page 1](#)
- [Whats New in 7.2, on page 1](#)
- [Enabling the REST API, on page 4](#)
- [Best Practices, on page 4](#)
- [Additional Resources, on page 4](#)

About the Management Center REST API

With the release of management center REST API, you now have light-weight, easy-to-use option for managing Secure Firewall Threat Defense (formerly Firepower Threat Defense) and legacy devices through a management center.

The REST API is an application programming interface (API), based on “RESTful” principles, which you can quickly enable on any management center running version 6.1 or higher, and use with a REST client.

After installing a REST client, you can contact the specific management center's REST agent and use standard HTTP methods to access current configuration information, and issue additional configuration parameters.

Whats New in 7.2

No new features or functionality were added in version 7.2.

New API endpoints and Methods

Table 1: New Methods and Endpoints:

Name	Methods	URL
Chassis		
Evaluate Operation	GET	/api/v1/chassis/evaluate-operation
Breakout Interfaces	POST	/api/v1/chassis/breakout-interfaces

Name	Methods	URL
Join Interfaces	POST	/api/fmc_config/v1/domain/{domainID}/base/management/{deviceID}/network/interfaces
Deployment		
Download Reports	GET	/api/fmc_config/v1/domain/{domainID}/reports/reports/{deviceID}/network/downloads
Email Reports	GET	/api/fmc_config/v1/domain/{domainID}/reports/reports/{deviceID}/network/emailreports
Devices		
EIGRP Routes	GET, GET by ID, PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainID}/devices/{deviceID}/routing/eigrp/routes
Virtual EIGRP Routes	GET, GET by ID, PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainID}/virtual_devices/{deviceID}/routing/eigrp/routes
Device Settings	GET, PUT	/api/fmc_config/v1/domain/{domainID}/devices/{deviceID}/settings
Change Managers	POST	/api/fmc_config/v1/domain/{domainID}/devices/{deviceID}/management/change_managers
Integration		
EBS Snapshot	GET by ID, POST	/api/fmc_config/v1/domain/{domainID}/integration/ebs/snapshots
Test Umbrella Connections	POST	/api/fmc_config/v1/domain/{domainID}/integration/umbrella/connections/test
Umbrella Connections	GET, GET by ID, PUT, POST	/api/fmc_config/v1/domain/{domainID}/integration/umbrella/connections
Status		
Task Statuses	GET	/api/fmc_config/v1/domain/{domainID}/jobs/task/statuses
Object		
AnyConnect External Browser Packages	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainID}/object/anyconnect/browser_packages
AnyConnect Packages	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainID}/object/anyconnect/packages
AnyConnect Profiles	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainID}/object/anyconnect/profiles
Certificate Enrollments	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainID}/object/certificate/enrollments
Certificate Maps	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainID}/object/certificate/maps
Group Policies	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainID}/object/group/policies
Host Scan Packages	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainID}/object/hostscan/packages
IPv4 Address Pools	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainID}/object/ipv4/address/pools
IPv6 Address Pools	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainID}/object/ipv6/address/pools
Umbrella Protection Policies	GET, POST	/api/fmc_config/v1/domain/{domainID}/object/umbrella/protection/policies

Name	Methods	URL
Radius Server Groups	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/object/radiusservergroups
SSO Servers	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/object/ssoservers
Policy		
Auto NAT Rules	PUT, DELETE	/api/fmc_config/v1/domain/{domainUID}/policy/policies/{policyUID}/auto Rules
Manual NAT Rules	PUT, DELETE	/api/fmc_config/v1/domain/{domainUID}/policy/policies/{policyUID}/manual Rules
NAT Rules	DELETE	/api/fmc_config/v1/domain/{domainUID}/policy/policies/{policyUID}/rules
Health Policies	GET, GET by ID	/api/fmc_config/v1/domain/{domainUID}/policy/healthpolicies
Policy Locks	GET, POST	/api/fmc_config/v1/domain/{domainUID}/policy/operational/policylocks
RA VPNs	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/policy/ravpns
Address Assignment Settings	PUT	/api/fmc_config/v1/domain/{domainUID}/policy/vpns/{policyUID}/addressassignmentsettings(object)
Certificate Map Settings	PUT	/api/fmc_config/v1/domain/{domainUID}/policy/vpns/{policyUID}/certificatemappings(object)
Connection Profiles	PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/policy/vpns/{policyUID}/connectionprofiles
IPSec Advanced Settings	GET, GET by ID, PUT	/api/fmc_config/v1/domain/{domainUID}/policy/vpns/{policyUID}/ipsecanvancedsettings
IPSec Crypto Maps	GET, GET by ID, PUT	/api/fmc_config/v1/domain/{domainUID}/policy/vpns/{policyUID}/ipseccryptomaps
LDAP Attribute Maps	GET, GET by ID, PUT	/api/fmc_config/v1/domain/{domainUID}/policy/vpns/{policyUID}/ldapattributemaps
S2S VPN Summaries	GET	/api/fmc_config/v1/domain/{domainUID}/policy/s2svpnsummaries
Umbrella DNS Policies	GET, GET by ID, PUT, POST, DELETE	/api/fmc_config/v1/domain/{domainUID}/policy/umbrelladns/policies
Umbrella DNS Rules	GET, GET by ID, PUT	/api/fmc_config/v1/domain/{domainUID}/policy/umbrelladns/policies/{policyUID}/rules
Search		
Device	GET	/api/fmc_config/v1/domain/{domainUID}/search/device
License		
Device Licenses	GET, GET by ID, PUT, PUT by ID	/api/fmc_platform/v1/license/device/licenses
Smart Licenses	GET, POST	/api/fmc_platform/v1/license/smart/licenses
Updates		
Upgrade Snapshot	POST	/api/fmc_platform/v1/updates/upgradesnapshot
Troubleshoot		
Task	POST	/api/fmc_troubleshoot/v1/domain/{domainUID}/task

Enabling the REST API

In management center, the REST API is enabled by default. However, if you are intending to use the REST API, you should confirm that it is enabled.



Note If you are using UCAPL mode, check that the REST API is not enabled.

-
- Step 1** Navigate to System>Configuration>REST API Preferences>Enable REST API
- Step 2** Check the "Enable REST API" checkbox.
- Step 3** Click "Save". A "Save Successful" dialog will display when the REST API is enabled.
-

Best Practices

Cisco recommends the following best practices for optimal results with the REST API:

- Keep UI users and script users separate. Especially do not use the admin account as an API user.
- Do not give script users more privilege than needed.
- Always validate the content coming from the server.
- Validate/sanitize JSON content, as it may include embedded executable code.
- If you are using CC or UCAPL mode you should disable REST API access to the management center and managed devices.

Additional Resources

Additional resources for the management center REST API can be found on Cisco DevNet at <https://developer.cisco.com/firepower/>.



CHAPTER 2

About the API Explorer

- [About the API Explorer, on page 5](#)
- [Authentication to the API Explorer, on page 5](#)
- [Accessing the Legacy API Explorer, on page 6](#)
- [Obtaining Sample Code with CodeGen, on page 7](#)
- [Viewing API Parameters, on page 8](#)

About the API Explorer

The API Explorer provides a limited interface for the REST API as well as giving a view of the abilities of the REST API.

The API Explorer resides on the management center, and can be accessed via the management center at:

```
https://<management_center_IP_or_name>:<https_port>/api/api-explorer
```

Version 6.4 uses a new API Explorer, based on the OpenAPI Specification (OAS). You can still access the legacy API Explorer if you prefer.

As part of the OAS, you now use CodeGen to generate sample code.

This explorer provides the list of APIs available on the management center, and their details.

Authentication to the API Explorer

The REST API relies on the same authentication as the management center. Each function in the REST API maps to permissions in the management center.

You can log into the API Explorer using any account on the management center, but you will only be able to perform the functions for which the account has permissions. For more information on setting permissions for user roles, see the *Firepower Management Center Configuration Guide*.

The first time you connect to the API Explorer you may receive an error that the connection is not secure due to an invalid certificate. You will need to add an exception in your browser to use the certificate and accept the connection.

Logging into API Explorer

The REST API uses the same authentication and permission model as the management center. See the *Firepower Management Center Configuration Guide* for more information.

Before you begin

Make sure you have an account on your management center with the required permissions to perform the tasks you want to perform using the REST API.

Step 1 Navigate to the following URL: `https://<management_center_IP_or_name>:<https_port>/api/api-explorer`

If you experience an extended load time for the logon screen when using a Firefox browser, enter **about:support** in the search bar and click the **Refresh Firefox** option, then view the management center interface with self-signed certificates in the same Firefox browser. For more information, see <https://support.mozilla.org/en-US/kb/refresh-firefox-reset-add-ons-and-settings>.

Step 2 Log in with your username and password and click "Sign In"

What to do next

Locate the desired resource and request.

Setting the Domain

The REST API can perform functions globally, in the default domain, or in specific domains.

Before you begin

You must have a configured management center, an account with permissions to access the REST API in one or more domains configured on your management center.

In the upper right, drop down the `Domains` menu and select the desired domain.

What to do next

Locate the desired resource and request type.

Accessing the Legacy API Explorer

The API Explorer has changed for 6.4.0. While the newer API Explorer retains nearly all of the previous functionality, some users may prefer the older interface.

Before you begin



Note The Legacy Explorer will be removed in future releases of management center. Please use the Open API Specification for access to current REST API functionality in the future.

Make sure you have an account on your management center with the required permissions to perform the tasks you want to perform using the REST API.

Log in to the API Explorer at https://<management_center_IP_or_name>:<https_port>/api/api-explorer.

In the upper right-hand corner click on `Legacy Explorer`.

What to do next

Use the Legacy API Explorer as you would normally.

Obtaining Sample Code with CodeGen

You can use the CodeGen utility on the Open API Spec to generate sample code in a number of different languages. This utility is an open-source tool you can download online. The resultant code is meant primarily as an educational and bootstrapping tool.

The CodeGen utility creates sample code for the entire Open API Spec. As such, it generates sample code for every allowed method and endpoint in the REST API. The sample code can be in a variety of languages, including HTML, Perl, Python, and Java.

For complete documentation of the CodeGen utility go to <https://repo1.maven.org/maven2/io/swagger/swagger-codegen-cli/>

Downloading the Open API Spec

The Open API Spec is a standardized specification of a REST API. The Open API Spec for the management center REST API contains details about the endpoints, fields, parameters, and requirements of the API. You can use the API Spec to generate sample code as well as find specific information about API functionality.

The Open API Spec is a JSON file. It can be read by most text editors.

Before you begin

Have an account on the management center which is able to access the API Explorer.

Make sure that your browser is able to download from sites with self-signed certificates.

Step 1 Navigate to the following URL: https://<management_center_IP_or_name>:<https_port>/api/api-explorer

Step 2 Click on `Download Spec` in the upper right corner. Depending on your browser configuration, you will either be given a prompt to save the file, or be shown the file directly.

Step 3 Save the file. Be sure to note the destination and filename.

What to do next

Run the CodeGen utility on the downloaded file.

Generating Sample Code with the CodeGen Utility

The Swagger CodeGen utility allows you to generate sample code from an Open API Spec. This sample code can be in a variety of languages including Java, HTML, Python, and Perl.

Before you begin

Download the Swagger CodeGen Utility. It can be found at <https://repo1.maven.org/maven2/io/swagger/swagger-codegen-cli/>

Have a Java Runtime Environment installed on your computer

Download the management center REST API Open API Spec

Set environment variables to allow you to run the CodeGen utility

From the command line, run the command `java -jar ./swagger-codegen-cli-<VERSION>.jar generate -o <OUTPUT_PATH> -l <LANGUAGE> -i <OPEN_API_SPEC_FILE>`

Example:

```
java -jar ./swagger-codegen-cli-2.3.1.jar generate -o C:\work\code\api_schema\html -l html -i
fmc_swagger.json
```

<VERSION> is the specific version of the CodeGen utility you are using. It must match the filename of the CodeGen .jar file.

<OUTPUT_PATH> is the path to which you want to output the generated code.

<LANGUAGE> is the language which you want CodeGen to generate. Suggested options include `html`, `java`, `perl`, and `python`. Other options are possible, check the CodeGen documentation for the complete list of choices.

<OPEN_API_SPEC_FILE> is the Open API Spec file which you downloaded. This is the source from which CodeGen is generating example code. Without it, CodeGen cannot provide output.

What to do next

Find the generated code in the output path and use as desired. Generated code should be considered an example, and may not perform as desired unless modified to meet your needs.

Viewing API Parameters

Each resource has a set of parameters and fields associated with it. You can view the parameters and fields by performing any of the supported operations for that resource within API Explorer.

Before you begin

You must have a configured management center and an account on that center with the permissions required to use the desired REST API functions.

Step 1 Select the desired resource.

Step 2 Select one of the supported operations for that resource.



CHAPTER 3

Connecting with a Client

You can access the REST API using any REST API client. Typically REST API clients are available as browser plugins, but any REST API client is allowed.



Note If connecting to the REST API for the first time, you will receive a certificate warning. You need to accept the certificate in order to use the REST API.

- [Authentication from a REST API Client, on page 11](#)

Authentication from a REST API Client


Cisco recommends that you use different accounts for interfacing with the API and the User Interface. Credentials cannot be used for both interfaces simultaneously, and will be logged out without warning if used for both.

The first time you connect to the REST API you may receive an error that the connection is not secure due to an invalid certificate. Add an exception in your browser to use the certificate and accept the connection.

With Token Based Authentication you obtain a token by providing your username and password. You use this token to access an HTTP service for a limited time period without the need for the username and password with every request. In other words, to eliminate the need for authenticating with your username and password with each request, you replace user credentials with a uniquely generated access token, which you use for accessing resources for up to 30 minutes and can refresh up to three times.

The diagram below illustrates the concept of token-based authentication:

Token-Based Authentication

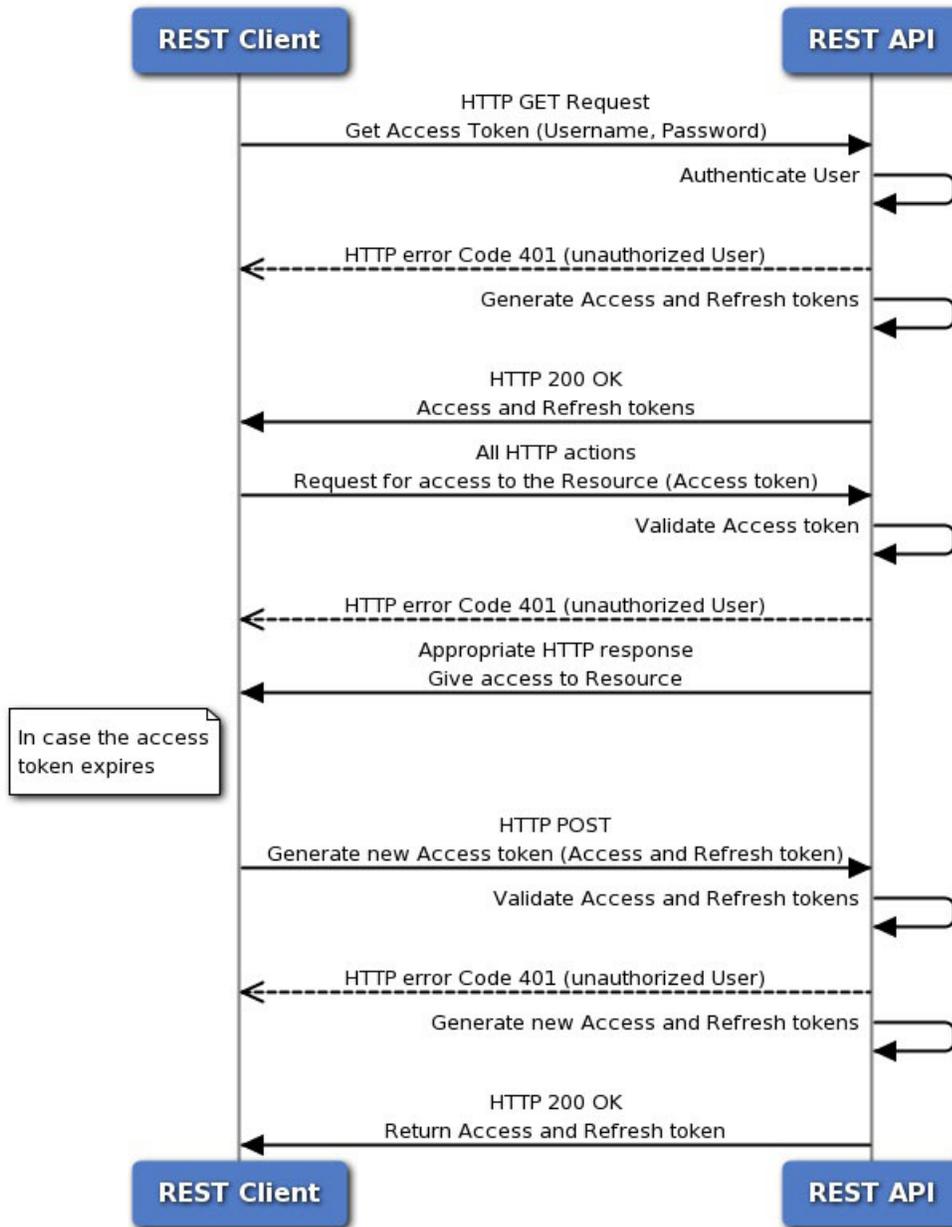

Requesting an Authentication Token

The Token Generation Utility provides an authentication token which can be used in your REST API client.

Before you begin

You must have a configured management center and an account on that center with credentials to use the REST API. You must also have a REST API Client which can perform basic authentication.

-
- Step 1** Open your REST API Client.
- Step 2** Set the client to make a POST command to the following URL:
`https://<management_center_IP_or_name>/api/fmc_platform/v1/auth/generatetoken.`
- Step 3** Include the username and password as a basic authentication header. The POST body should be blank.
-

What to do next

Add the header `X-auth-access-token:<authentication token value>` in requests to the API.

Add the headers `X-auth-access-token:<authentication token value>` and `X-auth-refresh-token:<refresh token value>` in requests to refresh the token as described in [Authentication from a REST API Client, on page 11](#)

Use the `Domain_UUID` from the authentication token in all REST requests to the server.

Refreshing an Authentication Token

management center REST API authentication tokens are valid for 30 minutes, and can be refreshed up to three times.

Before you begin

Obtain valid authentication and refresh tokens from the management center REST API. Ensure these tokens have been refreshed less than three times.

-
- Step 1** Open your REST API Client.
- Step 2** Set the client to make a POST command to the following URL:
`https://<management_center_IP_or_name>/api/fmc_platform/v1/auth/refreshtoken` with the headers `X-auth-access-token:<authentication token value>` and `X-auth-refresh-token:<refresh token value>`.
-

What to do next

Add the header `X-auth-access-token:<new authentication token value>` in requests to the API.

Add the header `X-auth-refresh-token:<new refresh token value>` in requests to refresh the token.



CHAPTER 4

Objects in the REST API

- [Request Structure](#), on page 15
- [Bulk Rule Posting](#), on page 17
- [Response Structure](#), on page 18
- [Rate Limiting](#), on page 20
- [Payload Limiting](#), on page 20
- [Object Overrides](#), on page 21
- [Field Renaming](#), on page 22
- [Troubleshoot](#), on page 22
- [Network Map](#), on page 23
- [Audit Services](#), on page 24
- [Users](#), on page 24
- [Deployment Services](#), on page 26
- [Device Group Services](#), on page 28
- [Device Clusters](#), on page 28
- [Device HA Pair Services](#), on page 31
- [Health Services](#), on page 34
- [Chassis](#), on page 35
- [Device Services](#), on page 37
- [Intelligence Services](#), on page 67
- [License](#), on page 71
- [Search](#), on page 72
- [Integration Services](#), on page 73
- [Object Services](#), on page 78
- [Policy Services](#), on page 135
- [Policy Assignment Services](#), on page 159
- [Status Services](#), on page 160
- [System Information](#), on page 160
- [Update Packages](#), on page 161

Request Structure

Request Structure:

Requests are sent to the management center as HTTPS requests with the Uniform Resource Identifier (URI) of the form described below:

```
https://<management_center_IP_or_name>:<https_port>/<object_URL>/object_UUIDoptions
```

Where:

- `<management_center_IP_or_name>`
is the IP address or Fully Qualified Domain Name of the management center
- `<https_port>`
is the port number used by the management center for HTTPS connections. This port is always 443.
- `<object_URL>`
is the specific URL for the desired resource. These URLs are unique for each resource and are given below.
- `options`
are the options given with the request. Options can be used to modify the output and filter results.
- `{UUID}`
Many URLs contain one or more UUIDs which must be specified. Most URIs include the domain UUID, which can be found in the Authentication Token. When deleting or modifying an object, or requesting information about a specific object, the URI will end with the object UUID.

Available request methods are:

- GET
– Retrieves data from the specified object. GET is a read-only operation.
- PUT
– Adds the supplied information to the specified object; returns a 404 Resource Not Found error if the object does not exist.



Note Currently PUT may be used to create a new object, but this ability may be removed in later releases. Use POST to create new objects and PUT to modify existing objects.

- POST
– Creates the object with the supplied information. POST operations should be followed with a payload consisting of the JSON object to be created, enclosed in braces:

```
{object}
```



Note The maximum number of rules you can use depends on memory of the device. There is no set limit, because complex rules use more memory. For rule performance and optimization guidelines, see the management center Configuration Guide.

- DELETE
 - Deletes the specified object.
- PATCH
 - **Not supported.**

The API supports query parameters for almost all requests. For GET requests, the following query parameters can be used to control the number of returned objects and the pagination:

- `expanded`
 - This is a True/False value which indicates whether you get a full listing of an item in a list or only a reference. Some fields will only show if this flag is set to true.
- `offset`
 - Indicates the position in the list where you want to start.
- `limit`
 - Indicates the number of items you want to retrieve in a page.

The API supports filtering on the basis of query parameters passed with a request. Filtering can be done based on specific attributes in a model. The parameters available for filtering vary by object, and are listed with the request below.

Bulk Rule Posting

Multiple access control rules can be added with a POST command using the bulk insert feature. This feature allows as many as 1,000 rules to be added at once.

This feature is only available for access rules.

The URL for this feature is:

```
https://{fmc_ip_or_name}:{https_port}/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{policy_UUID}/accessrules?bulk=true
```

The option:

```
?bulk=true
```

indicates that that multiple rules will be used in the payload of this request.

All objects in the payload of the bulk POST request must be of the same type. You cannot mix different objects in the same bulk request.

Unlike a normal POST operation, the bulk POST requires a list of JSON objects. This list may have as many as 1,000 objects or as few as one. The individual JSON objects must be enclosed in braces. Each object must be separated by commas, and the entire list is enclosed in brackets:

```
[{object}]
[{object1},{object2},{object3},{object4},{object5} ...]
```

The following query parameters are supported in bulk POST requests:

- `bulk=true`
 - This parameter specifies that the bulk POST feature is being used in the query. This parameter is **required** for bulk rule posting.

- `section=mandatory/default`

This parameter specifies the section into which the rules will be added. If this parameter is not used the section will be the default section. Only `mandatory` and `default` are allowed values. If a section is specified it must exist or the request will fail. If a section is specified, a category cannot be specified.

- `category=<Name of the category>`

This parameter specifies the category into which the rules will be added. If a category is specified it must exist or the request will fail. If a category is specified, a section cannot be specified.

- `insertAfter=<Index of rule>`

This parameter specifies that the rules will be inserted after the specified rule index. If no section or category is specified, the rules will be added to the section or category after the insertion point.

- `insertBefore=<Index of rule>`

This parameter specifies that the rules will be inserted before the specified rule index. If no section or category is specified, the rules will be added to the section or category before the insertion point. `insertBefore` takes precedence over `insertAfter` - if both are specified, the `insertBefore` parameter will apply.

When a rule or group of rules are inserted at an index which is part of either a section or a category, the category or section parameter can be used along with index to specify the insertion location of the rule(s). If an index is given along with a section or category, but the index is not in that section or category, you will receive an error.

If no index is specified, rules will be inserted after the end of the access policy. If a category or section is specified but no index is specified, rules will be inserted at the end of the category or section.

In any given POST all of the rules will be inserted at a single point. You cannot specify multiple insertion locations in a POST request.



Note Rule order affects how orders are parsed by the management center.

Response Structure



Note The REST API will serve only 25 results per page. This can be increased up to 1000 using the limit query parameter.

The response structure can be:

- **LOCATION** – Newly created resource ID; for POST only—holds the new resource ID (as a URI representation).
- **CONTENT-TYPE** – Media type describing the response message body; describes the representation and syntax of the response message body.
- Each response includes an HTTP status or error code. Available codes fall into these categories:

- 20x - A two-hundred series code indicates successful operation, including:
 - 200 200
 - "OK". Standard response for successful requests.
 - 201 201
 - "Created". Request completed; new resource created.
 - 202 202
 - "Accepted". Request accepted, but processing not complete.
 - 204 204
 - "No Content". Server successfully processed request; no content is being returned.
- 4xx - A four-hundred series code indicates a client-side error, including:
 - 400 400
 - "Bad Request". Invalid query parameters, including unrecognized parameters, missing parameters, or invalid values.

This can indicate that the object was edited or deleted via REST API such that the corresponding policy is invalidated.
 - 401 Invalid Session
 - Invalid session.
 - 404 404
 - "Not Found". The provided URL does not match an existing resource. For example, an HTTP DELETE may fail because the resource is unavailable.
 - 405 405
 - "Method Not Allowed". An HTTP request was presented that is not allowed on the resource; for example, a POST on a read-only resource.
 - 422 422
 - "Unprocessable Entity". The payload is too large. This will occur when you send a payload greater than 2048000 bytes.
 - The payload contains an unprocessable or unreadable entity such as a invalid attribut name or incorrect JSON syntax.
 - 429 Too Many Writes
 - Parallel add/update/delete operations are blocked. Please retry the request.
 - 429 429
 - "Too Many Requests". Too many requests were sent to the API. This error will occur if you send more than 120 requests per minute.
 - Too many concurrent requests. The system cannot accept more than 10 parallel requests from all clients.
 - Too many write operations per server. The API will only allow one PUT, POST, or DELETE request per user on a server at a time.

- 5xx - A five-hundred series code indicates a server-side error.

In the case of an error, in addition to the error code, the return response may include an error object containing more details about the error. The JSON error/warning response schema is as follows:

```
{
  "error": {
    "category": "FRAMEWORK",
    "messages": [
      {
        "description": "Action is mandatory to be specified."
      }
    ],
    "severity": "ERROR"
  }
}
```

where the object properties are:

Table 2: Object Properties

Property	Type	Description
messages	List of Dictionaries	List of error or warning messages
code	String	Error/Warning/Info code
details	String	Detailed message corresponding to Error/Warning/Info

Rate Limiting

The management center REST API implements rate limiting to reduce network load.

The API will accept no more than 120 messages per minute from an individual IP address. It will only allow 10 simultaneous connections per IP address. These are not configurable parameters.

If a client exceeds these limits, the API will give an HTTP 429 error.

Payload Limiting

The API cannot accept a message with a payload greater than 2048000 bytes. This applies to both the REST API and to API Explorer. This is not a configurable parameter.

If a message exceeds this limit, the API will give an HTTP 422 error.

Object Overrides

An override defines an alternate value for an object, which the system uses for the device or domain specified. In a single request user can create multiple overrides for multiple objects using bulk operation.

When an object is overridden, the alternate values will be provided for that object when it is requested. This does not overwrite the original values, which will return if the override is removed. The override gives alternate values for all fields in the object except for the `Name` and `Description` fields.

The URL for this feature is:

```
https://{fmc_ip_or_name}:{https_port}/api/fmc_config/v1/domain/{Domain_uuid} /object/hosts
```

Request payload to create an override for object “testhost” on domain “Global \ RETAIL” with the override value being “1.2.3.5”:

```
{
  "type": "Host",
  "value": "1.2.3.5",
  "overrides": {
    "parent": {
      "id": <Parent UUID>
      "type": "Host"
    },
    "target": {
      "name": "Global \ RETAIL",
      "id": <target domain UUID>,
      "type": "Domain"
    }
  },
  "overridable": true,
  "description": " ",
  "name": "testhost",
}
```

Optional:

```
?bulk=true
```

indicates the override creation for more than one object.

GET:

URL to list all overrides on a particular object:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}/overrides
```

URL for override for an object on a particular domain or device:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}?overrideTargetId={target_UUID}
```

URL for all the overrides on a particular domain or device:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/hosts?overrideTargetId={target_UUID}
```



Note When overridden, the parent object value will never change.

Field Renaming

The following fields have been renamed to remove biased terminology in the documentation. Note that the old fields are entirely replaced as of version 7.1 and no longer exist.

Table 3:

Name	URL	Previous Field Name	New Field Name
ftddevicecluster	/api/fmc/v1/domains/{domainUUID}/devices/ftddes	masterDevice	controlDevice
		master_device_UUID	control_device_UUID
		slaveDevices	dataDevices
		slave1_device_UUID	data1_device_UUID
		slave2_device_UUID	data2_device_UUID
		slave3_device_UUID	data3_device_UUID
Observable	/api/fmc/v1/domains/{domainUUID}/observables	whitelist	allowlist
Indicator	/api/fmc/v1/domains/{domainUUID}/indicators	whitelist	allowlist
Incident	/api/fmc/v1/domains/{domainUUID}/incidents	whitelist	allowlist
Source	/api/fmc/v1/domains/{domainUUID}/sources	whitelist	allowlist

Troubleshoot

DELETE packettracerfiles

Request Type: **DELETE**

Description: Deletes PCAP files from management center. If no ID is specified, deletes all packet tracer files from the management center.

URL: /api/fmc_troubleshoot/v1/domain/{domainUUID}/packettracer/files/

URL for Delete by ID:

/api/fmc_troubleshoot/v1/domain/{domainUUID}/packettracer/files/{pcapFileName}

Permissions: Devices > Troubleshoot > Packet Tracer > Modify Packet Tracer

POST task

Request Type: **POST**

Description: Creates a job or task.

URL: /api/fmc_troubleshoot/v1/domain/{domainUUID}/task

Permissions: Deploy Configuration to Devices.

Network Map

GET netmaphosts

Request Type: **GET**

Description: Retrieves a host associated with the ID in the Network Map. If no ID is specified, retrieves list of all hosts in the Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts/{objectId}`

URL for GET by ID: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts/{objectId}/{object_UUID}`

Permissions: Object Manager

Parameters available for filtering: ipAddress

DELETE netmaphosts

Request Type: **DELETE**

Description: Deletes the specified host in the Network Map. If no ID is specified, deletes the entire Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts/`

URL to delete a specific host: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST netmaphosts

Request Type: **POST**

Description: Creates a host in the Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts`

Permissions: Object Manager > Modify Object Manager

GET vulns

Request Type: **GET**

Description: Retrieves the vulnerability in the Network Map with the specified ID. If no ID is specified, retrieves list of all vulnerabilities in the Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/vulns/`

URL for GET by ID: `/api/fmc_netmap/v1/domain/{domainUUID}/vulns/{objectId}/`

Permissions: Policies > Network Discovery

Parameters available for filtering: ipAddress, source, port, protocol, id

DELETE vulns

Request Type: **DELETE**

Description: Deletes the the vulnerability in the Network Map with the specified ID. If no ID is specified, deletes all vulnerabilities in the Network Map.

URL: /api/fmc_netmap/v1/domain/{domainUUID}/vulns

URL for DELETE by ID: /api/fmc_netmap/v1/domain/{domainUUID}/vulns/{objectId}

Permissions: Policies > Network Discovery > Modify Network Discovery

Parameters available for filtering: ipAddress, source, port, protocol, id

source must be included for DELETE

POST vulns

Request Type: **POST**

Description: Creates a vulnerability in the Network Map.

URL: /api/fmc_netmap/v1/domain/{domainUUID}/vulns

Permissions: Policies > Network Discovery > Modify Network Discovery

Audit Services

GET auditrecords

Request Type: **GET**

Description: Retrieves audit records.

URL: /api/fmc_config/v1/domain/{domain_UUID}/audit/auditrecords

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/audit/auditrecords/{objectId}

Permissions: System > Monitoring > Audit

Parameters available for filtering: username, subsystem, source, starttime, endtime

Users

GET authroles

Request Type: **GET**

Description: Retrieves the list of all existing user roles in the system.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/authroles`

Permissions: System > User Management

Parameters available for filtering: none

GET SSO Config

Request Type: **GET**

Description: Retrieves the Single Signon Configuration for the device.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/ssosconfigs/{objectId}`

Permissions: System > User Management > Single Sign-On

Parameters available for filtering: none

PUT SSO Config

Request Type: **PUT**

Description: Modifies the Single Signon configuration for the device.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/ssosconfigs/{objectId}`

Permissions: System > User Management > Single Sign-On

GET duoconfigs

Request Type: **GET**

Description: Retrieves the Duo configuration associated with the specified ID. If no ID is specified, retrieves list of all Duo configurations.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/duoconfigs/`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/users/duoconfigs/{objectId}`

Permissions: System > User Management > Users

PUT duoconfigs

Request Type: **PUT**

Description: Modifies the Duo configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/duoconfigs/{objectId}`

Permissions: System > User Management > Users

Deployment Services

GET deployabledevices

Request Type: **GET**

Description: Retrieves list of all devices with configuration changes, ready to be deployed.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/deployment/deployabledevices`

Permissions: Deploy Configuration to Devices

Parameters available for filtering: name

GET deployments

Request Type: **GET**

Description: Retrieves deployment details for device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/deployabledevices/{containerUUID}/deployments`

Permissions: Deploy Configuration to Devices

Parameters available for filtering: startTime, endTime

GET pendingchanges

Request Type: **POST**

Description: Retrieves all the policy and object changes for the selected device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/deployabledevices/{containerUUID}/pendingchanges`

Permissions: Deploy Configuration to Devices

POST deploymentrequests

Request Type: **POST**

Description: Creates a request for deploying configuration changes to the specified device.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/deployment/deploymentrequests/{object_UUID}`

Permissions: Deploy Configuration to Devices

GET jobhistories

Request Type: **GET**

Description: Retrieves the specified deployment job. If no ID is provided, retrieves all the deployment jobs.

URL: `/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{objectId}`

Permissions: Deploy Configuration to Devices

Parameters available for filtering: Various filter criteria can be specified using the format

`deviceUUID:{uuid};startTime:start_time_in_secs;endTime:end_time_in_secs;rollbackApplicable:true_or_false`

PUT jobhistories

Request Type: **PUT**

Description: Modifies the the deployment job with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{objectId}`

Permissions: Deploy Configuration to Devices

GET downloadreports

Request Type: **GET**

Description: Retrieves the report for download.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{containerUUID}/operational/downloadreports`

Permissions: Overview > Reporting

POST emailreports

Request Type: **POST**

Description: Emails the deployment report.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{containerUUID}/operational/emailreports`

Permissions: Overview > Reporting

POST rollbackrequests

Request Type: **POST**

Description: Creates a request for rollback configuration to devices.

URL: `/api/fmc_config/v1/domain/{domainUUID}/deployment/rollbackrequest`

Permissions: Deploy Configuration to Devices

Device Group Services

DELETE devicegrouprecords

Request Type: **DELETE**

Description: Deletes a device group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

PUT devicegrouprecords

Request Type: **PUT**

Description: Modifies a device group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

POST devicegrouprecords

Request Type: **POST**

Description: Creates a device group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords`

Permissions: Devices > Device Management > Modify Devices

GET devicegrouprecords

Request Type: **GET**

Description: Retrieves the device group associated with the specified ID. If no ID is specified, retrieves list of all device groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords/{object_UUID}`

Permissions: Devices > Device Management > View Devices

Device Clusters

GET ftddevicecluster

Request Type: **GET**

Description: Retrieves or modifies the threat defense Cluster record associated with the specified ID. If no ID is specified for a GET, retrieves list of all threat defense Clusters.

The following fields have been replaced as of 7.1.0:

Previous Field Name	New Field Name
masterDevice	controlDevice
master_device_UUID	control_device_UUID
slaveDevices	dataDevices
slave1_device_UUID	data1_device_UUID
slave2_device_UUID	data2_device_UUID
slave3_device_UUID	data3_device_UUID

URL: /api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/{objectId}

Permissions: Devices > Device Management > View Devices

PUT ftddevicecluster

Request Type: **PUT**

Description: Modifies the threat defense Cluster record associated with the specified ID.

The following fields have been replaced as of 7.1.0:

Previous Field Name	New Field Name
masterDevice	controlDevice
master_device_UUID	control_device_UUID
slaveDevices	dataDevices
slave1_device_UUID	data1_device_UUID
slave2_device_UUID	data2_device_UUID
slave3_device_UUID	data3_device_UUID

URL: /api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/{objectId}

Permissions: Devices > Device Management > Modify Devices

POST ftddevicecluster

Request Type: **POST**

Description: Creates an threat defense Cluster record.

The following fields have been replaced as of 7.1.0:

Previous Field Name	New Field Name
masterDevice	controlDevice
master_device_UUID	control_device_UUID
slaveDevices	dataDevices
slave1_device_UUID	data1_device_UUID
slave2_device_UUID	data2_device_UUID
slave3_device_UUID	data3_device_UUID

URL: /api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/

Permissions: Devices > Device Management > Modify Devices

DELETE ftddevicecluster

Request Type: **DELETE**

Description: Deletes the threat defense Cluster record associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/{objectId}

Permissions: Devices > Device Management > Modify Devices

POST ftdclusterreadinesscheck

Request Type: **POST**

Description: Represents Cluster compatibility status for control(Readiness to become control) and data devices(compatible with control). This Readiness check is for platforms that support cluster bootstrap from management center (for e.g.4200).

URL: /api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftdclusterreadinesscheck

Permissions: Devices > Device Management > Modify Devices

Parameters available for filtering: skipControlReadiness: This is a query parameter, if given as true (skipControlReadiness=true) skips control readiness check and performs data devices compatibility with control.

POST ftdclusterdevicecommands

Request Type: **POST**

Description: Executes given command on the threat defense Cluster.

URL:

/api/fmc_config/v1/domain/{domainUUID}/deviceclusters/{containerUUID}/operational/ftdclusterdevicecommands

Filters available for use: Filter are operation and deviceUUID. Value of filter is of format:

```
deviceUUID:device
  uuid;operation:{enable|disable|control}
```

. `deviceUUID` is UUID of device and is a mandatory field. `operation` is the command that needs to be executed on device and is a mandatory field.

Permissions: Devices > Device Management > Modify Devices

Device HA Pair Services

DELETE `ftddevicehapair`

Request Type: **DELETE**

Description: Deletes a device high availability pair with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices



Note Run the *configure high-availability disable* command to remove the failover configurations from threat defense devices.

PUT `ftddevicehapair`

Request Type: **PUT**

Description: Sets any one of the following actions for the threat defense high availability device:

- Sets the failover trigger criteria for the device
- Switches states within the device
- Breaks or force-breaks the device

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{ha_container_UUID}`

Permissions: Devices > Device Management > Modify Devices

POST `ftddevicehapairs`

Request Type: **POST**

Description: Creates a high availability device pair with the specified primary and secondary object IDs. Do not perform the POST operation for more than one high availability pair at a time. Ensure that the current POST operation is completed successfully before proceeding to the next POST operation.



Note Typically, the first POST operation responds within 60 seconds. Cisco recommends that you perform subsequent POST operations at least 120 seconds after the first POST operation was initiated. The response of the POST operation includes a task object, with a task ID and task status. You can monitor the completion of the task by performing a GET operation on the task object with its task ID. For more information, see [GET taskstatuses](#), on page 160.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs

Permissions: Devices > Device Management > Modify Devices

GET ftddevicehapairs

Request Type: **GET**

Description: Retrieves the details associated with the specified high availability container ID. If no ID is specified, retrieves a list of all high availability container objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{ha_container_UUID}

Permissions: Devices > Device Management > Modify Devices

DELETE failoverinterfacemacaddressconfigs

Request Type: **DELETE**

Description: Deletes the threat defense high availability failover policy interface MAC addresses record associated with the specified threat defense high availability pair.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/failoverinterfacemacaddressconfigs

Permissions: Devices > Device Management > Modify Devices

GET failoverinterfacemacaddressconfigs

Request Type: **GET**

Description: Retrieves the threat defense high availability failover policy interface MAC addresses record associated with the specified threat defense HA pair. If no ID is specified for a GET, it retrieves the list of all threat defense high availability failover policy interface MAC addresses records.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/failoverinterfacemacaddressconfigs

URL for GET by ID :

/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/failoverinterfacemacaddressconfigs/{object_UUID}

Permissions: Devices > Device Management

POST failoverinterfacemacaddressconfigs

Request Type: **POST**

Description: Creates the threat defense high availability failover policy interface MAC addresses record associated with the specified threat defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/  
{hacontainer_UUID}/failoverinterfacemacaddressconfigs
```

Permissions: Devices > Device Management > Modify Devices

PUT failoverinterfacemacaddressconfigs

Request Type: **PUT**

Description: Modifies the threat defense high availability failover policy interface MAC addresses record associated with the specified threat defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/  
{hacontainer_UUID}/failoverinterfacemacaddressconfigs/{object_UUID}
```

Permissions: Devices > Device Management > Modify Devices

GET monitoredinterfaces

Request Type: **GET**

Description: Retrieves the threat defense high availability Monitored interface policy record associated with the specified threat defense HA pair. If no ID is specified for a GET, it retrieves the list of all threat defense high availability monitored interface policy records.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/  
{hacontainer_UUID}/monitoredinterfaces
```

URL for GET by ID :

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/  
{hacontainer_UUID}/monitoredinterfaces/{object_UUID}
```

Permissions: Devices > Device Management

PUT monitoredinterfaces

Request Type: **PUT**

Description: Modifies the threat defense high availability Monitored interface policy record associated with the specified threat defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicepairs/ftdevicepairs/  
{hacontainer_UUID}/monitoredinterfaces
```

Permissions: Devices > Device Management > Modify Devices

Health Services

GET tunnelstatuses

Request Type: **GET**

Description: Retrieves tunnel status for S2S VPN on all managed threat defenses.

URL: /api/fmc_config/v1/domain/{domainUUID}/health/tunnelstatuses

Permissions: Devices > Device Management

Parameters available for filtering: `vpnTopologyId:{uuid}` which filters the tunnel statuses by S2S VPN Topology id, `deviceId:{UUID}` which filters the tunnel statuses by Device id, `status:{TUNNEL_UP|TUNNEL_DOWN|UNKNOWN}` which filters the tunnel statuses by Tunnel Status and `sortBy{:|<|>}{Topology|Device|Status|LastChange}`. Filter operators : `and` < sorts in ascending order and `>` sorts in descending order.

GET tunnelsummaries

Request Type: **GET**

Description: Retrieves aggregated summary of tunnel status for S2S VPN on all managed threat defenses.

URL: /api/fmc_config/v1/domain/{domainUUID}/health/tunnelsummaries

Permissions: Devices > Device Management

Parameters available for filtering: `vpnTopologyId:{uuid}` which filters the tunnel summary by S2S VPN Topology id, `deviceId:{UUID}` which filters the tunnel summary by Device id and `groupBy:Topology|Device` which groups tunnel summary by Topology or Device.,

GET Health Alerts

Request Type: **GET**

Description: Retrieves health alerts.

URL: /api/fmc_config/v1/domain/{domainUUID}/health/alerts

Permissions: System > Health > Health Events

Parameters available for filtering: `startTime`, `endTime`, `deviceUUIDs`, `status`, `moduleIDs`

GET Health Metrics

Request Type: **GET**

Description: Retrieves health monitor metrics for the device.

URL: `/api/fmc_config/v1/domain/{domainUUID}/health/metrics`

Permissions: System > Health > Health Events

Parameters available for filtering: deviceUUIDs, metric, startTime, endTime, step, regexFilter, queryFunction

Chassis

GET fmcmanagedchassis

Request Type: **GET**

Description: Retrieves information on the specified chassis managed device. If no ID is given, retrieves list of all chassis managed devices.

URL: `/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{objectId}`

Permissions: Devices > Device Management

GET networkmodules

Request Type: **GET**

Description: Retrieves the information about the network module object associated with the ID. If no ID is specified, retrieves list of all network modules.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules/{objectId}`

Permissions: Devices > Device Management

PUT networkmodules

Request Type: **PUT**

Description: Modifies the specified network modules.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules/{objectId}`

Permissions: Devices > Device Management > Modify Devices

PUT syncnetworkmodule

Request Type: **PUT**

Description: Retrieve Network module data from FXOS and updates.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/operational/syncnetworkmodule`

Permissions: Devices > Device Management > Modify Devices

GET chassisinterfaces

Request Type: **GET**

Description: Retrieves the chassis interfaces associated with the ID. If no ID is specified, retrieves list of all chassis interfaces.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/chassisinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/chassisinterfaces/{interfaceUUID}`

Permissions: Devices > Device Management

GET networkmodules

Request Type: **GET**

Description: Retrieves the information about the network module object associated with the ID. If no ID is specified, retrieves list of all network modules.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules/{objectId}`

Permissions: Devices > Device Management

POST breakoutinterfaces

Request Type: **POST**

Description: Break interface.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/operational/breakoutinterfaces`

Permissions: Devices > Device Management > Modify Devices

GET evaluateoperation

Request Type: **GET**

Description: Validate interface usage.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/chassisinterfaces/{interfaceUUID}/evaluateoperation`

Permissions: Devices > Device Management

POST joininterfaces

Request Type: **POST**

Description: Join interfaces.

URL:

/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/operational/joininterfaces

Permissions: Devices > Device Management > Modify Devices

Device Services

POST copyconfigrequests

Request Type: **POST**

Description: Copies device configuration to the specified threat defense device.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devices/copyconfigrequests

Permissions: Devices > Device Management > Modify Devices

POST exports

Request Type: **POST**

Description: Package and export device configuration of specified threat defenses

URL: /api/fmc_config/v1/domain/{domainUUID}/devices/operational/exports

Permissions: System > Tools > Import/Export

POST imports

Request Type: **POST**

Description: Import device configuration from specified source for threat defenses.

URL: /api/fmc_config/v1/domain/{domainUUID}/devices/operational/imports

Permissions: System > Tools > Import/Export

GET bgp routing

Request Type: **GET**

Description: Retrieves list of all BGP (ipv4 and ipv6) associated with the specified device for specified vrf. If no device is specified, retrieves list of all BGP.

URL: /api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}

Permissions: Devices > Device Management

PUT bgp

Request Type: **PUT**

Description: Modifies BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST bgp

Request Type: **POST**

Description: Creates BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp`

Permissions: Devices > Device Management > Modify Devices

DELETE bgp

Request Type: **DELETE**

Description: Deletes the specified bgp object.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}`

Permissions: Devices > Device Management > Modify Devices

DELETE devicerecords

Request Type: **DELETE**

Description: Unregisters the specified device.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

PUT devicerecords

Request Type: **PUT**

Description: Modifies the device record associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

POST devicerecords

Request Type: **POST**

Description: Registers the specified device to the management center.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords`

Permissions: Devices > Device Management > Modify Devices

GET devicerecords

Request Type: **GET**

Description: Retrieves device information. If a device ID is specified, the information for the specified device is retrieved. If no ID is specified, retrieves information for all devices.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering: hostName

PUT fpphysicalinterfaces

Request Type: **PUT**

Description: Modifies a physical interface on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/fpphysicalinterfaces/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

GET fpphysicalinterfaces

Request Type: **GET**

Description: Retrieves information on the physical interface associated with the specified NGIPS device ID and interface ID. If no ID is specified, retrieves list of all physical interfaces associated with the specified NGIPS device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpphysicalinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpphysicalinterfaces/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering: name

DELETE fplogicalinterfaces

Request Type: **DELETE**

Description: Deletes logical interfaces on the specified device.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/fplogicalinterfaces/{object_UUID}

Permissions: Devices > Device Management > Modify Device

PUT fplogicalinterfaces

Request Type: **PUT**

Description: Modifies a logical interface on the specified device.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fplogicalinterfaces/{object_UUID}

Permissions: Devices > Device Management > Modify Device

POST fplogicalinterfaces

Request Type: **POST**

Description: Creates logical interfaces on the specified device.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fplogicalinterfaces

Permissions: Devices > Device Management > Modify Device

GET fplogicalinterfaces

Request Type: **GET**

Description: Retrieves the logical interface associated with the specified NGIPS device ID and interface ID. If no ID is specified, retrieves list of all logical interfaces associated with the specified NGIPS device ID.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fplogicalinterfaces

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fplogicalinterfaces/{object_UUID}

Permissions: Devices > Device Management

Parameters available for filtering: name

DELETE inlinesets

Request Type: **DELETE**

Description: Deletes inline sets on the specified device.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/inlinesets/{object_UUID}

Permissions: Devices > Device Management > Modify Device

PUT inlinesets

Request Type: **PUT**

Description: Modifies an inline set on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/inlinesets/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

POST inlinesets

Request Type: **POST**

Description: Creates inline sets on the specified device.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/inlinesets`

Permissions: Devices > Device Management > Modify Device

GET inlinesets

Request Type: **GET**

Description: Retrieves information on the inline set associated with the specified NGIPS device ID and inline set ID. If no inline set ID is specified, retrieves list of all inline sets associated with the specified NGIPS device ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/inlinesets`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/inlinesets/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering: name

GET Metrics

Request Type: **GET**

Description: Retrieves HealthMonitor metrics for the device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/metrics`

Permissions: Devices > Device Management

Parameters available for filtering: metric

GET staticroutes

Request Type: **GET**

Description: Retrieves the static route associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all static routes associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroute`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroutes/{objectId}`

Permissions: Devices > Device Management

GET virtualrouters

Request Type: **GET**

Description: Retrieves the the virtual router with the specified ID. If no ID is specified, retrieves list of all virtual routers.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{objectId}`

Permissions: Devices > Device Management

PUT virtual routers

Request Type: **PUT**

Description: Modifies a virtual router on the specified device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{objectId}`

Permissions: Devices > Device Management > Modify Device

POST virtual routers

Request Type: **POST**

Description: Creates virtual routers associated with the specified container.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters`

Permissions: Devices > Device Management > Modify Device

DELETE virtual routers

Request Type: **DELETE**

Description: Deletes the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{objectId}`

Permissions: Devices > Device Management > Modify Device

GET virtual BGP

Request Type: **GET**

Description: Retrieves specified BGP (ipv4 and ipv6) on the specified virtual router. If no ID is specified, retrieves list of all BGP on the virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`

Permissions: Devices > Device Management

PUT virtual bgp

Request Type: **PUT**

Description: Modifies BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bgp/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST virtual bgp

Request Type: **POST**

Description: Creates BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bgp`

Permissions: Devices > Device Management > Modify Devices

DELETE virtual bgp

Request Type: **DELETE**

Description: Deletes BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bgp/{objectId}`

Permissions: Devices > Device Management > Modify Devices

GET virtual ipv4staticroutes

Request Type: **GET**

Description: Retrieves specified IPv4 static route on the specified virtual router. If no ID is specified, retrieves list of all IPv4 static routes on the virtual router.

URL:

```
/api/fire_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes
```

URL for GET by ID:

```
/api/fire_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes/{objectId}
```



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management

PUT virtual ipv4 static routes

Request Type: **PUT**

Description: Modifies an IPv4 static route on the specified device.

URL:

```
/api/fire_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes/{objectId}
```



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

POST virtual ipv4 static routes

Request Type: **POST**

Description: Creates IPv4 static routes associated with the specified virtual router.

URL:

```
/api/fire_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes
```



Note For static routes (IPv4), the methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

DELETE virtual ipv4 static routes

Request Type: **DELETE**

Description: Deletes the specified IPv4 static route.

URL:

`/api/fire_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

GET virtual ipv6staticroutes

Request Type: **GET**

Description: Retrieves specified IPv6 static route on the specified virtual router. If no ID is specified, retrieves list of all IPv6 static routes on the virtual router.

URL:

`/api/fire_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes`

URL for GET by ID:

`/api/fire_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management

PUT virtual ipv6 static routes

Request Type: **PUT**

Description: Modifies a bridge group interface on the specified device.

URL:

`/api/fire_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

POST virtual ipv6 static routes

Request Type: **POST**

Description: Creates IPv6 static routes associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes`



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

DELETE virtual ipv6 static routes

Request Type: **DELETE**

Description: Deletes the specified IPv6 static route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`



Note The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

GET virtual ospf interface

Request Type: **GET**

Description: Retrieves specified OSPF interface associated with the specified virtual router. If no ID is specified, retrieves list of all OSPF interfaces associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface/{objectId}`

Permissions: Devices > Device Management

GET virtual ospfv2 routes

Request Type: **GET**

Description: Retrieves specified OSPFV2 process associated with the specified virtual router. If no ID is specified, retrieves list of all OSPF v2 process associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfv2routes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfv2routes/{objectId}`

Permissions: Devices > Device Management

GET virtual static routes

Request Type: **GET**

Description: Retrieves specified static routes (ipv4 and ipv6) associated with the specified virtual router. If no ID is specified, retrieves list of all Static routes (ipv4 and ipv6) associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroutes/{objectId}`

Permissions: Devices > Device Management

DELETE ipv4staticroutes

Request Type: **DELETE**

Description: Deletes the IPv4 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes/{object_UUID}`

Permissions: Devices > Devices Management > Modify Devices

PUT ipv4staticroutes

Request Type: **PUT**

Description: Modifies the IPv4 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes/{object_UUID}`

Permissions: Devices > Devices Management > Modify Devices

POST ipv4staticroutes

Request Type: **POST**

Description: Creates an IPv4 Static Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes`

Permissions: Devices > Device Management > Modify Devices

GET ipv4staticroutes

Request Type: **GET**

Description: Retrieves the IPv4 Static Route associated with the specified ID. If no ID is specified, retrieves list of all IPv4 Static Routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes`

URL for GET ID::

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes/{object_UUID}`

Permissions: Devices > Devices Management

DELETE ipv6staticroutes

Request Type: **DELETE**

Description: Deletes the IPv6 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

PUT ipv6staticroutes

Request Type: **PUT**

Description: Modifies the IPv6 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

POST ipv6staticroutes

Request Type: **POST**

Description: Creates an IPv6 Static Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes`

Permissions: Devices > Device Management > Modify Devices

GET ipv6staticroutes

Request Type: **GET**

Description: Retrieves the IPv6 Static Route associated with the specified ID. If no ID is specified, retrieves list of all IPv6 Static Routes.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes
```

URL for GET ID:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes/{object_UUID}
```

Permissions: Devices > Device Management

GET ospf interface

Request Type: **GET**

Description: Retrieves the OSPF interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all OSPF interfaces associated with the specified NGFW device ID.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface/{objectId}
```

Permissions: Devices > Device Management

GET ospfv2routes

Request Type: **GET**

Description: Retrieves OSPF V2 routes associated with the specified ID. If no ID is specified, retrieves list of all OSPF v2 routes.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv2routes
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv2routes/{objectId}
```

Permissions: Devices > Device Management

GET ospfv3interfaces

Request Type: **GET**

Description: Retrieves OSPF v3 interface associated with the specified ID. If no ID is specified, retrieves a list of all OSPF v3 interfaces.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3interfaces
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3interfaces/{objectId}
```

Permissions: Devices > Device Management

GET ospfv3routes

Request Type: **GET**

Description: Retrieves the OSPfv3 process associated with the specified ID. If no ID is specified, retrieves list of all OSPFv3 processes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3routes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3routes/{objectID}`

Permissions: Devices > Device Management

GET ecmpzones

Request Type: **GET**

Description: Retrieves the ECMP Zone associated with the specified ID. If no ID is specified, retrieves list of all ECMP Zones.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectID}`

Permissions: Policies > Network Discovery > Custom Topology

PUT ecmpzones

Request Type: **PUT**

Description: Modifies the ECMP Zone associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectID}`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

POST ecmpzones

Request Type: **POST**

Description: Creates an ECMP Zone.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

DELETE ecmpzones

Request Type: **DELETE**

Description: Deletes the ECMP Zone associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectId}`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

GET virtual ecmpzones

Request Type: **GET**

Description: Retrieves the ECMP Zone for the specified virtual router associated with the specified ID. If no ID is specified, retrieves list of all ECMP Zones.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ecmpzones`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ecmpzones/{objectId}`

Permissions: Policies > Network Discovery > Custom Topology

PUT virtual ecmpzones

Request Type: **PUT**

Description: Modifies the ECMP Zone for the specified virtual router associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectId}`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

POST virtual ecmpzones

Request Type: **POST**

Description: Creates an ECMP Zone for the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ecmpzones/`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

DELETE virtual ecmpzones

Request Type: **DELETE**

Description: Deletes the ECMP Zone for the specified virtual router associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectId}`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

POST packettracer

Request Type: **POST**

Description: Retrieves the Packet Tracer command output for a threat defense or Cluster.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/packettracer`

Permissions: Devices > Troubleshoot > Packet Tracer > Modify Packet Tracer

POST packettracerpcap

Request Type: **POST**

Description: Retrieves the Packet Tracer using a PCAP file command output for a device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/packettracerpcap`

Permissions: Devices > Troubleshoot > Packet Capture > Modify Packet Capture

GET policybasedroutes

Request Type: **GET**

Description: Retrieves the specified Policy Based Route. If no ID is specified, retrieves a list of all Policy Based Routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes/{objectId}`

Permissions: Devices > Device Management

PUT policybasedroutes

Request Type: **PUT**

Description: Modifies the Policy Based Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST policybasedroutes

Request Type: **POST**

Description: Creates the Policy Based Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes`

Permissions: Devices > Device Management > Modify Devices

DELETE policybasedroutes

Request Type: **DELETE**

Description: Deletes the Policy Based Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

GET virtualpolicybasedroutes

Request Type: **GET**

Description: Retrieves the specified Policy Based Route associated for the specified virtual router. If no ID is specified, retrieves a list of all Policy Based Routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes/{objectId}`

Permissions: Devices > Device Management

PUT virtualpolicybasedroutes

Request Type: **PUT**

Description: Modifies the Policy Based Route associated for the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST virtualpolicybasedroutes

Request Type: **POST**

Description: Creates the Policy Based Route associated for the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes`

Permissions: Devices > Device Management > Modify Devices

DELETE virtualpolicybasedroutes

Request Type: **DELETE**

Description: Deletes the Policy Based Route associated for the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedrules/{objectId}`

Permissions: Devices > Device Management > Modify Devices

GET vteppolicies

Request Type: **GET**

Description: Retrieves the VTEP Policy associated with the specified NGFW device ID and policy ID. If no ID is specified, retrieves list of all VTEP Policies associated with the specified NGFW device ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies/{objectId}`

Permissions: Devices > Device Management

PUT vteppolicies

Request Type: **PUT**

Description: Modifies the VTEP Policy associated with the specified NGFW device ID and policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST vteppolicies

Request Type: **POST**

Description: Creates a VTEP Policy on the specified NGFW device I.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies`

Permissions: Devices > Device Management > Modify Devices

DELETE vteppolicies

Request Type: **DELETE**

Description: Deletes the VTEP Policy associated with the specified NGFW device ID and policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies/{objectId}`

Permissions: Devices > Device Management > Modify Devices

DELETE virtualswitches

Request Type: **DELETE**

Description: Deletes a virtual switch on the specified device.

This method is only available on a Firepower 1010 device.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/virtualswitches/{object_UUID}
```

Permissions: Devices > Device Management > Modify Device

PUT virtualswitches

Request Type: **PUT**

Description: Modifies a virtual switch on the specified device.

This method is only available on a Firepower 1010 device.

URL:

```
/api/fmc_config/v1/domain/{UUID}/devices/devicerecords/{containerUUID}/virtualswitches/{object_UUID}
```

Permissions: Devices > Device Management > Modify Device

POST virtualswitches

Request Type: **POST**

Description: Creates a virtual switch on the specified device.

This method is only available on a Firepower 1010 device.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/virtualswitches
```

Permissions: Devices > Device Management > Modify Device

GET virtualswitches

Request Type: **GET**

Description: Retrieves virtual switch associated with the specified NGIPS device ID and virtual switch ID. If no virtual switch ID is specified, retrieves list of all virtual switches associated with the specified NGIPS device ID.

This method is only available on a Firepower 1010 device.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/virtualswitches

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/virtualswitches/{object_UUID}
```

Permissions: Devices > Device Management

Parameters available for filtering: name

GET Virtual Tunnel Interfaces

Request Type: **GET**

Description: Retrieves the virtual tunnel interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all virtual tunnel interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces/{objectId}`

Permissions: Devices > VPN

Parameters available for filtering: none

PUT Virtual Tunnel Interfaces

Request Type: **PUT**

Description: modifies the virtual tunnel interface associated with the specified NGFW device ID and/or interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces/{objectId}`

Permissions: Devices > VPN > Modify VPN

POST Virtual Tunnel Interfaces

Request Type: **POST**

Description: Creates a virtual tunnel interface on the NGFW device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces`

Permissions: Devices > VPN > Modify VPN

DELETE Virtual Tunnel Interfaces

Request Type: **DELETE**

Description: Deletes the virtual tunnel interface associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces/{objectId}`

Permissions: Devices > VPN > Modify VPN

DELETE vlaninterfaces

Request Type: **DELETE**

Description: Deletes the vlan interface associated with the specified NGFW device ID and interface ID.

This method is only available on a Firepower 1010 device.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/vlaninterfaces/{object_UUID}

Permissions: Devices > VPN > Modify VPN

PUT vlaninterfaces

Request Type: **PUT**

Description: Modifies the vlan interface associated with the specified NGFW device ID and interface ID.

This method is only available on a Firepower 1010 device.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/vlaninterfaces/{object_UUID}

Permissions: Devices > VPN > Modify VPN

POST vlaninterfaces

Request Type: **POST**

Description: Creates a vlan interface on the NGFW device.

This method is only available on a Firepower 1010 device.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/vlaninterfaces

Permissions: Devices > VPN > Modify VPN

GET vlaninterfaces

Request Type: **GET**

Description: Retrieves the vlan interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all vlan interfaces associated with the specified NGFW device ID.

This method is only available on a Firepower 1010 device.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/vlaninterfaces

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/vlaninterfaces/{object_UUID}

Permissions: Devices > VPN

Parameters available for filtering: name

GET vniinterfaces

Request Type: **GET**

Description: Retrieves the VNI interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves a list of all VNI interfaces on the NGFW device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces/{objectId}`

Permissions: Devices > Device Management

PUT vniinterfaces

Request Type: **PUT**

Description: Modifies the VNI interface associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST vniinterfaces

Request Type: **POST**

Description: Creates a VNI interface on the specified NGFW device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces`

Permissions: Devices > Device Management > Modify Devices

DELETE vniinterfaces

Request Type: **DELETE**

Description: Retrieves the VNI interface associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces/{objectId}`

Permissions: Devices > Device Management > Modify Devices

PUT fpphysicalinterfaces

Request Type: **PUT**

Description: Modifies a physical interface on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/fpphysicalinterfaces/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

GET fpphysicalinterfaces

Request Type: **GET**

Description: Retrieves information on the physical interface associated with the specified NGIPS device ID and interface ID. If no ID is specified, retrieves list of all physical interfaces associated with the specified NGIPS device ID.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpphysicalinterfaces
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpphysicalinterfaces/{object_UUID}
```

Permissions: Devices > Device Management

Parameters available for filtering: name

PUT physicalinterfaces

Request Type: **PUT**

Description: Modifies physical interfaces on a specified device.

URL: /api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/physicalinterfaces

Permissions: Devices > Device Management > Modify Device

GET physicalinterfaces

Request Type: **GET**

Description: Retrieves the physical interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all physical interfaces associated with the specified NGFW device ID.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/physicalinterfaces
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/physicalinterfaces/{object_UUID}
```

Permissions: Devices > Device Management

GET bridgegroupinterfaces

Request Type: **GET**

Description: Retrieves the bridge group interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all bridge group interfaces associated with the specified NGFW device ID.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces/{object_UUID}
```

Permissions: Devices > Device Management

POST bridgegroupinterfaces

Request Type: **POST**

Description: Creates bridge group interfaces associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces`

Permissions: Devices > Device Management > Modify Device

PUT bridgegroupinterfaces

Request Type: **PUT**

Description: Modifies a bridge group interface on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces`

Permissions: Devices > Device Management > Modify Device

DELETE bridgegroupinterfaces

Request Type: **DELETE**

Description: Deletes a bridge group interface associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces`

Permissions: Devices > Device Management > Modify Device

GET redundantinterfaces

Request Type: **GET**

Description: Retrieves the redundant interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all redundant interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces/{object_UUID}`

Permissions: Devices > Device Management

POST redundantinterfaces

Request Type: **POST**

Description: Creates redundant interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces`

Permissions: Devices > Device Management

PUT redundantinterfaces

Request Type: **PUT**

Description: Modifies redundant interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces`

Permissions: Devices > Device Management > Modify Device

DELETE redundantinterfaces

Request Type: **DELETE**

Description: Removes redundant interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces`

Permissions: Devices > Device Management

GET bgp routing

Request Type: **GET**

Description: Retrieves list of all BGP (ipv4 and ipv6) associated with the specified device for specified vrf. If no device is specified, retrieves list of all BGP.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}`

Permissions: Devices > Device Management

GET bgp general settings

Request Type: **GET**

Description: Retrieves BGP general settings associated with the specified device. If no device is specified, retrieves list of all BGP general settings.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings/{objectId}`

Permissions: Devices > Device Management

PUT bgpgeneralsettings

Request Type: **PUT**

Description: Modifies the specified BGP general settings.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST bgpgeneralsettings

Request Type: **POST**

Description: Creates BGP general settings.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings`

Permissions: Devices > Device Management > Modify Devices

DELETE bgpgeneralsettings

Request Type: **DELETE**

Description: Deletes the BGP general settings.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings/{objectId}`

Permissions: Devices > Device Management > Modify Devices

GET etherchannelinterfaces

Request Type: **GET**

Description: Retrieves the ethernet channel interface associated with the specified NGFW device ID and interface ID. If no ID is specified, retrieves list of all ethernet channel interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/etherchannelinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/etherchannelinterfaces/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering:

POST etherchannelinterfaces

Request Type: **POST**

Description: Creates ethernet channel interfaces on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/etherchannelinterfaces`

Permissions: Devices > Device Management > Modify Device

PUT etherchannelinterfaces

Request Type: **PUT**

Description: Modifies an ethernet channel interfaces on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/etherchannelinterfaces/`

Permissions: Devices > Device Management > Modify Device

DELETE etherchannelinterfaces

Request Type: **DELETE**

Description: Removes ethernet channel interfaces from a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/etherchannelinterfaces`

Permissions: Devices > Device Management

GET subinterfaces

Request Type: **GET**

Description: Retrieves the sub-interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all sub-interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces/{object_UUID}`

Permissions: Devices > Device Management

POST subinterfaces

Request Type: **POST**

Description: Creates sub interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces`

Permissions: Devices > Device Management

PUT subinterfaces

Request Type: **PUT**

Description: Modifies a sub interface on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces/`

Permissions: Devices > Device Management > Modify Device

DELETE subinterfaces

Request Type: **DELETE**

Description: Deletes sub interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces`

Permissions: Devices > Device Management

GET fpinterfacestatistics

Request Type: **GET**

Description: Retrieves list of statistics for all interfaces associated with the specified NGIPS device ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpinterfacestatistics`

Permissions: Devices > Device Management

Parameters available for filtering: name

POST interfaceevents

Request Type: **POST**

Description: Creates netmod events on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/interfaceevents`

Permissions: Devices > Device Management > Modify Device

GET interfaceevents

Request Type: **GET**

Description: Retrieves list of all netmod events on the device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/interfaceevents`

Permissions: Devices > Device Management

GET commands

Request Type: **GET**

Description: Retrieves the list of all command line interface commands available on the device. If a command is specified in the payload, retries the output of that command.

The below table lists the commands which can be used with the `commands` service. Some commands are only allowed with certain parameters, or specific parameters may not be allowed, as specified in the **Blocked** column.

Command	Blocked
show version	
show failover	
show dhcpd	show dhcpd binding, show dhcpd statistics
show ip	
show aaa-server	
show logging	show logging asdm, show logging queue
show snmp-server	
show running-config {any}	show running-config {no parameters}
show ssl	
show firewall	
show logging	
show network	
show ntp	
show banner	

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/commands`

Permissions: Devices > Device Management

GET ftdallinterfaces

Request Type: **GET**

Description: Retrieves all types of interfaces.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/ftdallinterfaces`

Permissions: Devices > Device Management

Parameters available for filtering: `filter`: This is a query parameter to fetch specific type of interfaces.

Supported Filter Criteria are :

`ccleligibleInterface: {boolean}; interfaceMode: {mode}; virtualRouterId: {uuid}; named: {boolean};`

`cclEligibleInterface` : Filter to get ccl eligible interface, filter value should always be `true`. `interfaceMode` : Filter using interface mode. Supported only for routed device. Allowed value is `ROUTED` Cannot be used with `cclEligibleInterface` filter. `virtualRouterId` : Supported only for routed device. Cannot be used with `cclEligibleInterface` filter. `named` : Supported only for routed device. Cannot be used with `cclEligibleInterface` filter.

POST changemanagers

Request Type: **POST**

Description: API to support migrating configuration management of FTD from FMC to CDO.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/operational/changemanagers`

Permissions: System > Configuration

GET devicesettings

Request Type: **GET**

Description: Retrieves the Device Settings.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicesettings/{containerUUID}`

Permissions: Devices > Device Management

PUT devicesettings

Request Type: **PUT**

Description: Modifies the Device Settings.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicesettings/{containerUUID}`

Permissions: Devices > Device Management > Modify Devices

DELETE eigrproutes

Request Type: **DELETE**

Description: Deletes the specified EIGRP.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/eigrproutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

GET eigrproutes

Request Type: **GET**

Description: Retrieves the EIGRP associated with the specified ID. If no ID is specified, retrieves list of all EIGRP.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/eigrproutes/{objectId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/eigrproutes/{objectId}/{object_UUID}`

Permissions: Devices > Device Management

POST eigrproutes

Request Type: **POST**

Description: Creates an EIGRP.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/eigrproutes`

Permissions: Devices > Device Management > Modify Devices

PUT eigrproutes

Request Type: **PUT**

Description: Modifies the EIGRP associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/eigrproutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

Intelligence Services

POST collections

Request Type: **POST**

Description: Adds a collections from a TAXII source.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/collections`

Permissions: Intelligence

POST discoveryinfo

Request Type: **POST**

Description: Adds information about TAXII collections available from a source.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/discoveryinfo`

Permissions: Intelligence

GET element

Request Type: **GET**

Description: Retrieves the intelligence-enabled sensor associated with the specified ID. If no ID is specified, retrieves list of all intelligence-enabled sensors.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/element`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/element/{object_UUID}`

Permissions: Intelligence

DELETE incident

Request Type: **DELETE**

Description: Deletes an incident.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/incident/{object_UUID}`

Permissions: Intelligence

PUT incident

Request Type: **PUT**

Description: Modifies an intelligence incident with the specified object ID.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/incident/{object_UUID}`

Permissions: Intelligence

GET incident

Request Type: **GET**

Description: Retrieves the intelligence incident associated with the specified ID. If no ID is specified, retrieves list of all intelligence incidents. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/incident`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/incident/{object_UUID}`

Permissions: Intelligence

PUT indicator

Request Type: **PUT**

Description: Modifies an indicator with the specified object ID.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/indicator/{object_UUID}`

Permissions: Intelligence

GET indicator

Request Type: **GET**

Description: Retrieves the indicator associated with the specified ID. If no ID is specified, retrieves list of all indicators. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/indicator`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/indicator/{object_UUID}`

Permissions: Intelligence

PUT observable

Request Type: **PUT**

Description: Modifies an observable with the specified object ID.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/observable/{object_UUID}`

Permissions: Intelligence

GET observable

Request Type: **GET**

Description: Retrieves the observable associated with the specified ID. If no ID is specified, retrieves list of all observables. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/observable`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/observable/{object_UUID}`

Permissions: Intelligence

PUT settings

Request Type: **PUT**

Description: Activates or deactivates an intelligence setting.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/settings/{value}`

Permissions: Intelligence

GET settings

Request Type: **GET**

Description: Retrieves the on/off settings for the specified value. If no ID is specified, retrieves list of all TID settings.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/settings`

URL for GET by value: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/settings/{value}`

Permissions: Intelligence

DELETE source

Request Type: **DELETE**

Description: Deletes an intelligence source from the device.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/source/{object_UUID}`

Permissions: Intelligence

PUT source

Request Type: **PUT**

Description: Modifies an intelligence source with the specified object ID.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source/{object_UUID}`

Permissions: Intelligence

POST source

Request Type: **POST**

Description: Adds a source for intelligence information.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source`

Permissions: Intelligence

GET source

Request Type: **GET**

Description: Retrieves the intelligence source associated with the specified ID. If no ID is specified, retrieves list of all intelligence sources. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.



Note As of 7.1.0 `whitelist` is now `allowlist`

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source/{object_UUID}`

Permissions: Intelligence

License

.

GET smartlicenses

Request Type: **GET**

Description: Retrieves the retrieving assigned device licenses associated with the ID. If no ID is specified, retrieves list of all assigned device licenses.

URL: `/api/fmc_platform/v1/license/smartlicenses`

URL for GET by ID: `/api/fmc_platform/v1/license/smartlicenses/{object_UUID}`

Permissions: System > Licenses > Smart Licenses

POST smartlicenses

Request Type: **POST**

Description: Updates device licenses.

URL: /api/fmc_platform/v1/license/smartlicenses

Permissions: System > Licenses > Smart Licenses

GET devicelicense

Request Type: **GET**

Description: Retrieves the Device Licenses.

URL: /api/fmc_platform/v1/license/devicelicense/{objectId}

Permissions: Devices > Device Management

PUT devicelicense

Request Type: **PUT**

Description: Modifies the Device Licenses.

URL: /api/fmc_platform/v1/license/devicelicense/{objectId}

Permissions: Devices > Device Management > Modify Devices

Search

GET globalsearch

Request Type: **GET**

Description: Search for objects and policies matching specified text or IP address.

URL: /api/fmc_config/v1/domain/{domainUUID}/search/globalsearch

Permissions: Analysis > Search

Parameters available for filtering: Text or IP address used for filtering.

GET objectsearch

Request Type: **GET**

Description: Search for objects matching specified text or IP address.

URL: /api/fmc_config/v1/domain/{domainUUID}/search/object

Permissions: Analysis > Search

Parameters available for filtering: Text or IP address used for filtering.

GET policysearch

Request Type: **GET**

Description: Search for policies matching specified text or IP address (literal values in policies).

URL: `/api/fmc_config/v1/domain/{domainUUID}/search/policy`

Permissions: Analysis > Search

Parameters available for filtering: Text or IP address used for filtering.

GET device

Request Type: **GET**

Description: Search for devices matching specified text.

URL: `/api/fmc_config/v1/domain/{domainUUID}/search/device`

Permissions: Devices

Integration Services

PUT cloudeventsconfigs

Request Type: **PUT**

Description: Modifies the cloud event configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/cloudeventsconfigs/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET cloudeventsconfigs

Request Type: **GET**

Description: Retrieves the cloud event configuration associated with the specified ID. If no ID is specified for a GET, retrieves a list of all cloud event configuration objects.

URL for listing: `/api/fmc_config/v1/domain/{domainUUID}/integration/cloudeventsconfigs`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/integration/cloudeventsconfigs/{objectId}`

Permissions: Object Manager

PUT cloudregions

Request Type: **PUT**

Description: Modifies the cloud region configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/cloudregions/{object_UUID}`

Permissions: System > Integration > Cloud Services

GET cloudregions

Request Type: **GET**

Description: Retrieves the cloud region configuration associated with the specified ID. If no ID is specified for a GET, retrieves list of all cloud regions.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/integration/cloudregions/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/integration/cloudregions/{object_UUID}`

Permissions: System > Integration > Cloud Services

DELETE externallookups

DELETE externallookups

Description: Deletes the external lookup objects with the specified UUID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

PUT externallookups

Request Type: **PUT**

Description: Modifies externallookups objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

POST externallookups

POST externallookups

Description: Creates externallookups objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups`

Permissions: Object Manager>Modify Object Manager

GET externallookups

GET externallookups

Retrieves the externallookups object associated with the specified ID. If no ID, retrieves list of all externallookups objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups/{object_UUID}

Permissions: Object Manager>Modify Object Manager

Parameters available for filtering:

DELETE packetanalyzerdevices

Request Type: **DELETE**

Description: Deletes the packet analyzer object with the specified UUID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/integration/packetanalyzerdevices/{object_UUID}

Permissions: Object Manager>Modify Object Manager

PUT packetanalyzerdevices

Request Type: **PUT**

Description: Modifies the packet analyzer object with the specified UUID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/integration/packetanalyzerdevices/{object_UUID}

Permissions: Object Manager>Modify Object Manager

POST packetanalyzerdevices

Request Type: **POST**

Description: Creates PKI enrollments objects with the specified parameters.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/packetanalyzerdevices

Permissions: Object Manager

GET packetanalyzerdevices

Request Type: **GET**

Description: Retrieves the packetanalyzerdevices object associated with the specified ID. If no ID, retrieves list of all packetanalyzerdevices objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/integration/packetanalyzerdevices

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/integration/packetanalyzerdevices/{object_UUID}

Permissions: Object Manager>Modify Object Manager

Parameters available for filtering:

GET External Storage

Request Type: **GET**

Description: Retrieves the external event storage configuration associated with the specified ID. If no ID is specified for a GET, retrieves a list of all external event storage configurations.

URL for listing: `/api/fmc_config/v1/domain/{domainUUID}/integration/externalstorage`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/integration/externalstorage/{objectId}`

Permissions: System > Integration

Parameters available for filtering: None

PUT External Storage

Request Type: **PUT**

Description: Modifies the external event storage configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/externalstorage/{objectId}`

Permissions: System > Integration

GET FMC HA Statuses

Request Type: **GET**

Description: Retrieves management center HA Statuses.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/fmchastatuses`

Permissions: System>Integration>High Availability

GET dynamicattributesfeeds

Request Type: **GET**

Description: Retrieves Dynamic Attributes Feeds.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/dynamicattributesfeeds`

Permissions: Devices > VPN

PUT dynamicattributesfeeds

Request Type: **PUT**

Description: Updates Dynamic Attributes Feeds.t

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/dynamicattributesfeeds`

Permissions: Devices > VPN > Modify VPN

GET SecureX Configs

Request Type: **GET**

Description: Retrieves the SecureX configuration associated with the specified ID. If no ID is specified for a GET, retrieves list of all SecureX configurations.

URL: /api/fmc_config/v1/domain/{domainUUID}/integration/securexconfigs

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/integration/securexconfigs/{objectId}

Permissions: System>SecureX

PUT SecureX Configs

Request Type: **PUT**

Description: Modifies the SecureX configuration associated with the specified ID

URL: /api/fmc_config/v1/domain/{domainUUID}/integration/securexconfigs/{objectId}

Permissions: System>SecureX

GET ebssnapshot

Request Type: **GET**

Description: Retrieves the EBS snapshot. associated with the specified ID. If no ID is specified, retrieves list of all EBS snapshots.

URL: /api/fmc_config/v1/domain/{domainUUID}/integration/ebssnapshot/{objectId}

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/integration/ebssnapshot/{objectId}/{object_UUID}

Permissions: Integration > Other Integrations

POST ebssnapshot

Request Type: **POST**

Description: Creates an EBS snapshot..

URL: /api/fmc_config/v1/domain/{domainUUID}/integration/ebssnapshot

Permissions: Integration > Other Integrations

POST testumbrellaconnections

Request Type: **POST**

Description: Tests connection to the umbrella cloud.

URL: /api/fmc_config/v1/domain/{domainUUID}/integration/operational/testumbrellaconnections

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

GET umbrellaconnections

Request Type: **GET**

Description: Retrieves the Umbrella connection configuration associated with the specified ID. If no ID is specified, retrieves a list of all Umbrella connections.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/umbrellaconnections/{objectId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/integration/umbrellaconnections/{objectId}/{object_UUID}`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy

PUT umbrellaconnections

Request Type: **PUT**

Description: Modifies the specified Umbrella connections configuration.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/umbrellaconnections/{objectId}`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

Object Services

GET AnyConnect Custom Attributes

Request Type: **GET**

Description: Retrieves the AnyConnect Custom Attribute associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect Custom Attribute objects.

URL for listing: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes/{objectId}`

URL to list all overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes/{containerUUID}/override`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value

GET AnyConnect Packages

Request Type: **GET**

Description: Retrieves the AnyConnect Package associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect Package objects..

URL for listing: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectpackages`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectpackages/{objectId}`

Permissions: Object Manager

DELETE anyconnectpackages

Request Type: **DELETE**

Description: Deletes the AnyConnect Package associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectpackages/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST anyconnectpackages

Request Type: **POST**

Description: Creates an anyconnectpackages object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectpackages`

Permissions: Object Manager > Modify Object Manager

PUT anyconnectpackages

Request Type: **PUT**

Description: Modifies the AnyConnect Package associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectpackages/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET anyconnectexternalbrowserpackages

Request Type: **GET**

Description: Retrieves the AnyConnect External Browser Package associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect External Browser Package objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

DELETE anyconnectexternalbrowserpackages

Request Type: **DELETE**

Description: Deletes the AnyConnect External Browser Package associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST anyconnectexternalbrowserpackages

Request Type: **POST**

Description: Creates an AnyConnect External Browser Package.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages`

Permissions: Object Manager > Modify Object Manager

PUT anyconnectexternalbrowserpackages

Request Type: **PUT**

Description: Modifies the AnyConnect External Browser Package associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET AnyConnect Profiles

Request Type: **GET**

Description: Retrieves the AnyConnect Profile associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect Profile objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectprofiles`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectprofiles/{objectId}`

Permissions: Object Manager

Parameters available for filter: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value.

Parameters available for filter: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value.

DELETE anyconnectprofiles

Request Type: **DELETE**

Description: Deletes the AnyConnect Profile associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectprofiles/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST anyconnectprofiles

Request Type: **POST**

Description: Creates an AnyConnect Profile.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/anyconnectprofiles

Permissions: Object Manager > Modify Object Manager

PUT anyconnectprofiles

Request Type: **PUT**

Description: Modifies the AnyConnect Profile associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/anyconnectprofiles/{objectId}

Permissions: Object Manager > Modify Object Manager

GET anyprotocolportobjects

Request Type: **GET**

Description: Retrieves the any protocol port object associated with the specified ID. If no ID is specified, retrieves list of all protocol port objects with the protocol set to All.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/anyprotocolportobjects

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/object/anyprotocolportobjects/{object_UUID}

Permissions: Object Manager

GET applicationcategories

Request Type: **GET**

Description: Retrieves the application category object associated with the specified ID. If no ID is specified, retrieves list of all application category objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/applicationcategories

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/object/applicationcategories/{object_UUID}

Permissions: Object Manager

GET applicationfilters

Request Type: **GET**

Description: Retrieves the application filter object associated with the specified ID. If no ID is specified, retrieves list of all application filter objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/applicationfilters

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/object/applicationfilters/{object_UUID}

Permissions: Object Manager

PUT applicationfilters

Request Type: **PUT**

Description: Modifies the application filter object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/applicationfilters/{objectId}

Permissions: Object Manager > Modify Object Manager > Modify Object Manager

POST applicationfilters

Request Type: **POST**

Description: Creates or overrides the application filter object with the specified parameters.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/applicationfilters

Permissions: Object Manager > Modify Object Manager > Modify Object Manager

DELETE applicationfilters

Request Type: **DELETE**

Description: Deletes the application filter object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/applicationfilters/{objectId}

Permissions: Object Manager > Modify Object Manager > Modify Object Manager

GET applicationproductivities

Request Type: **GET**

Description: Retrieves the application productivity object associated with the specified ID. If no ID is specified, retrieves list of all application productivity objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/applicationproductivities

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/object/applicationproductivities/{object_UUID}

Permissions: Object Manager

GET applicationrisks

Request Type: **GET**

Description: Retrieves the application risk object associated with the specified ID. If no ID is specified, retrieves list of all application risk objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/applicationrisks

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/object/applicationrisks/{object_UUID}

Permissions: Object Manager

GET applications

Request Type: **GET**

Description: Retrieves the application object associated with the specified ID. If no ID is specified, retrieves list of all application objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/applications

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/object/applications/{object_UUID}

Permissions: Object Manager

GET applicationtags

Request Type: **GET**

Description: Retrieves the application tag object associated with the specified ID. If no ID is specified, retrieves list of all application tag objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/applicationtags

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/object/applicationtags/{object_UUID}

Permissions: Object Manager

GET applicationtypes

Request Type: **GET**

Description: Retrieves the application type object associated with the specified ID. If no ID is specified, retrieves list of all application type objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/applicationtypes

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/object/applicationtypes/{object_UUID}

Permissions: Object Manager

GET aspathlists

Request Type: **GET**

Description: Retrieves the autonomous system path list associated with the specified ID. If no ID is specified, retrieves list of all autonomous system paths.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/aspathlists

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/aspathlists/{objectId}

Permissions: Object Manager

PUT aspathlists

Request Type: **PUT**

Description: Modifies the AsPath List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/aspathlists/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST aspathlists

Request Type: **POST**

Description: Creates an AsPath List object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/aspathlists`

Permissions: Object Manager > Modify Object Manager

DELETE aspathlists

Request Type: **DELETE**

Description: Deletes the AsPath List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/aspathlists/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST bulkdynamicobjects

Request Type: **POST**

Description: Adds Dynamic Object Mappings for specific Dynamic Objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/bulkdynamicobjects`

Permissions: Devices > VPN > Modify VPN

GET certenrollments

Request Type: **GET**

Description: Retrieves the PKI enrollments object associated with the specified ID. If no ID is specified for a GET, retrieves list of all PKI enrollment objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/certenrollments`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/certenrollments/{parent_object_UUID}`

Permissions: Devices > Device Management > View Devices

DELETE certenrollments

Request Type: **DELETE**

Description: Deletes the Certificate Enrollment associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certenrollments/{objectId}`

Permissions: Devices > VPN > Modify VPN

POST certenrollments

Request Type: **POST**

Description: Creates a the Certificate Enrollment.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certenrollments`

Permissions: Devices > VPN > Modify VPN

PUT certenrollments

Request Type: **PUT**

Description: Modifies the Certificate Enrollment associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certenrollments/{objectId}`

Permissions: Devices > VPN > Modify VPN

GET communitylists

Request Type: **GET**

Description: Retrieves the community list associated with the specified ID. If no ID is specified, retrieves all community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/communitylists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/communitylists/{objectId}`

Permissions: Object Manager

GET Certificate Maps

Request Type: **GET**

Description: Retrieves the Certificate Map associated with the specified ID. If no ID is specified for a GET, retrieves list of all Certificate Map objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certificatemaps`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/certificatemaps/{objectId}`

Permissions: Devices > Certificates

Parameters available for filtering: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value.

DELETE certificatemaps

Request Type: **DELETE**

Description: Deletes the Certificate Map associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certificatemaps/{objectId}`

Permissions: Devices > VPN > Modify VPN

POST certificatemaps

Request Type: **POST**

Description: Creates a Certificate Map.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certificatemaps`

Permissions: Devices > VPN > Modify VPN

PUT certificatemaps

Request Type: **PUT**

Description: Modifies the Certificate Map associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certificatemaps/{objectId}`

Permissions: Devices > VPN > Modify VPN

GET continents

Request Type: **GET**

Description: Retrieves the continent object associated with the specified ID. If no ID is specified, retrieves list of all continent objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/continents`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/continents/{object_UUID}`

Permissions: Object Manager

GET countries

Request Type: **GET**

Description: Retrieves the country object associated with the specified ID. If no ID is specified, retrieves list of all country objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/countries`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/countries/{object_UUID}`

Permissions: Object Manager

DELETE dnsservergroups

Request Type: **DELETE**

Description: Deletes a DNS server group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

PUT dnsservergroups

Request Type: **PUT**

Description: Modifies a DNS server group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups`

Permissions: Devices > Device Management > Modify Devices

POST dnsservergroups

Request Type: **POST**

Description: Creates a DNS server group group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups`

Permissions: Devices > Device Management > Modify Devices

GET dnsservergroups

Request Type: **GET**

Description: Retrieves the DNS server group associated with the specified ID. If no ID is specified, retrieves list of all dns server groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/dnsservergroups/{object_UUID}`

Description: Retrieves all(Domain and Device) overrides on a ICMPV4 object. Response will always be in expanded form. If passed, the "expanded" query parameter will be ignored.

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domainUUID}/object/dnsservergroups/{containerUUID}/overrides/{objectId}`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domainUUID}/object/dnsservergroups/{containerUUID}/overrides`

Permissions: Devices > Device Management > View Devices

POST dynamicobjectmappings

Request Type: **POST**

Description: Adds Dynamic Object Mappings for specific Dynamic Objects

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjectmappings

Permissions: Object Manager > Modify Object Manager

DELETE dynamicobjectmappings

Request Type: **DELETE**

Description: Removes Dynamic Object Mappings for specific Dynamic Objects.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjectmappings

Parameters available for filtering:

Parameter	Values
Objects with ids:	"ids:id1,id2,..."
Unused objects:	"unusedOnly:true"
Name starts with:	"nameStartsWith:{name-pattern}"
Agent ID:	"agentId:{Agent ID}"

Permissions: Object Manager > Modify Object Manager

GET dynamicobjects

Request Type: **GET**

Description: Retrieves the Dynamic Object associated with the specified ID. If no ID is specified for a GET, retrieves list of all Dynamic Objects.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectIdOrName}

Permissions: Object Manager

Parameters available for filtering: name (Cannot be used if object ID is specified in path.)

POST dynamicobjects

Request Type: **POST**

Description: Creates or overrides the Dynamic Objects with the specified parameters.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects

Permissions: Object Manager > Modify Object Manager

DELETE dynamicobjects

Request Type: **DELETE**

Description: Deletes the Dynamic Object associated with the specified ID. If used without an ID, deletes objects selected by filtering.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/

URL for DELETE by ID:

/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectIdOrName}

Parameters available for filtering:

Parameter	Values
Objects with ids:	"ids:id1,id2,..."
Unused objects:	"unusedOnly:true"
Name starts with:	"nameStartsWith:{name-pattern}"

Permissions: Object Manager > Modify Object Manager

PUT dynamicobjects

Request Type: **PUT**

Description: Modifies the Dynamic Object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectId}

Permissions: Object Manager > Modify Object Manager

GET mappings

Request Type: **GET**

Description: Retrieves the Dynamic Object Mappings associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectIdOrName}/mappings

Permissions: Object Manager

PUT mappings

Request Type: **PUT**

Description: Adds Dynamic Object Mappings associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectId}/mappings

Permissions: Object Manager > Modify Object Manager

DELETE mappings

Request Type: **DELETE**

Description: Removes the Dynamic Object Mappings associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectId}/mappings

Parameters available for filtering:

Parameter	Values
Objects with ids:	"ids:id1,id2,..."
Unused objects:	"unusedOnly:true"
Name starts with:	"nameStartsWith:{name-pattern}"
Agent ID:	"agentId:{Agent ID}"

Permissions: Object Manager > Modify Object Manager

GET endpointdevicetypes

Request Type: **GET**

Description: Retrieves the endpoint device type object associated with the specified ID. If no ID is specified, retrieves list of all endpoint device type objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/endpointdevicetypes

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/object/endpointdevicetypes/{object_UUID}

Permissions: Object Manager

GET expanded community lists

Request Type: **GET**

Description: Retrieves the expanded community list associated with the specified ID. If no ID is specified, retrieves all community lists.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/expandedcommunitylists

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/object/expandedcommunitylists/{objectId}

Permissions: Object Manager

PUT expandedcommunitylists

Request Type: **PUT**

Description: Modifies the specified expanded community list.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/expandedcommunitylists/{objectId}

Permissions: Object Manager > Modify Object Manager

POST expandedcommunitylists

Request Type: **POST**

Description: Creates an expanded community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/expandedcommunitylists`

Permissions: Object Manager > Modify Object Manager

DELETE expandedcommunitylists

Request Type: **DELETE**

Description: Deletes the specified expanded community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/expandedcommunitylists/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET extended access lists

Request Type: **GET**

Description: Retrieves extended access list associated with the specified ID. If no ID is specified, retrieves list of all extended access lists.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/extendedaccesslists`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/extendedaccesslists/{object_UUID}`

Permissions: Devices > Device Management > View Devices

PUT extendedaccesslists

Request Type: **PUT**

Description: Modifies the extended access list associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedaccesslists/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST extendedaccesslists

Request Type: **POST**

Description: Creates an extended access lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedaccesslists`

Permissions: Object Manager > Modify Object Manager

DELETE extendedaccesslists

Request Type: **DELETE**

Description: Deletes the extended access list associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedaccesslists/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET extendedcommunitylists

Request Type: **GET**

Description: Retrieves the extended community list associated with the specified ID. If no ID is specified, retrieves list of all extended community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{objectId}`

URL for GET overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{containerUUID}/overrides`

URL for GET overrides by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{containerUUID}/overrides/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value and `"type:{type}"` to search for specific type of the object. For ExtendedCommunityLists supported types are Standard and Expanded.

PUT extendedcommunitylists

Request Type: **PUT**

Description: Modifies the extended community list with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST extendedcommunitylists

Request Type: **POST**

Description: Creates an extended community list.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists`

Permissions: Object Manager > Modify Object Manager

DELETE extendedcommunitylists

Request Type: **DELETE**

Description: Deletes extended community list with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{objectId}`

Permissions: Object Manager > Modify Object Manager

DELETE fqdns

Request Type: **DELETE**

Description: Deletes the FQDN object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT fqdns

Request Type: **PUT**

Description: Modifies the FQDN object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST fqdns

Request Type: **POST**

Description: Creates or overrides the FQDN objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET fqdns

Request Type: **GET**

Description: Retrieves the FQDN object associated with the specified ID. If no ID is specified for a GET, retrieves list of all FQDN objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{fqdn_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET geolocation

Request Type: **GET**

Description: Retrieves the geolocation object associated with the specified ID. If no ID is specified, retrieves list of all geolocation objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/geolocations`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/geolocations/{object_UUID}`

Permissions: Object Manager

PUT geolocations

Request Type: **PUT**

Description: Modifies the geolocation object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/geolocations/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST geolocations

Request Type: **POST**

Description: Creates or overrides the Geolocation objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/geolocations`

Permissions: Object Manager > Modify Object Manager

DELETE geolocations

Request Type: **DELETE**

Description: Deletes the geolocation object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/geolocations/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET global time zones

Request Type: **GET**

Description: Retrieves the global time zone object associated with the specified ID. If no ID is specified, retrieves list of all global time zone objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/globaltimezones`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/globaltimezones/{objectId}`

Permissions: Object Manager

GET grouppolicies

Request Type: **GET**

Description: Retrieves the VPN group policies associated with the specified ID. If no ID is specified for a GET, retrieves list of all VPN group policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/grouppolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/grouppolicies/{objectId}`

Permissions: Devices > VPN

DELETE grouppolicies

Request Type: **DELETE**

Description: Deletes the VPN group policies associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/grouppolicies/{objectId}`

Permissions: Devices > VPN > Modify VPN

POST grouppolicies

Request Type: **POST**

Description: Creates a VPN group policy

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/grouppolicies`

Permissions: Devices > VPN > Modify VPN

PUT grouppolicies

Request Type: **PUT**

Description: Modifies the VPN group policies associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/grouppolicies/{objectId}`

Permissions: Devices > VPN > Modify VPN

DELETE hosts

Request Type: **DELETE**

Description: Deletes the specified host object.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT hosts

Request Type: **PUT**

Description: Modifies a host object.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST hosts

Request Type: **POST**

Description: Creates or overrides the host objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET hosts

Request Type: **GET**

Description: Retrieves the host object associated with the specified ID. If no ID is specified, retrieves list of all host objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET hostscanpackages

Request Type: **GET**

Description: Retrieves HostScan packages. If no ID is specified for a GET, retrieves list of all HostScan packages.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages/{objectId}`

Permissions: Devices

DELETE hostscanpackages

Request Type: **DELETE**

Description: Deletes the HostScan package with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages/{objectId}`

Permissions: Devices > Device Management > Modify Devices

POST hostscanpackages

Request Type: **POST**

Description: Creates a HostScan package.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages`

Permissions: Devices > Device Management > Modify Devices

PUT hostscanpackages

Request Type: **PUT**

Description: Modifies the HostScan package with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages/{objectId}`

Permissions: Devices > Device Management > Modify Devices

DELETE icmpv4objects

Request Type: **DELETE**

Description: Deletes the specified ICMPv4 port.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT icmpv4objects

Request Type: **PUT**

Description: Modifies ICMPv4 port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST icmpv4objects

Request Type: **POST**

Description: Creates or overrides the ICMPv4 port objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects`

URL for Bulk Post : `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET icmpv4objects

Request Type: **GET**

Description: Retrieves the ICMPv4 object associated with the specified ID. If no ID, retrieves list of all ICMPv4 objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmp4objects?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmp4objects/{icmpv4object_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmp4objects/{icmp4object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

DELETE icmpv6objects

Request Type: **DELETE**

Description: Deletes the specified ICMPv6 port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT icmpv6objects

Request Type: **PUT**

Description: Modifies ICMPv6 port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST icmpv6objects

Request Type: **POST**

Description: Creates or overrides the ICMPv6 port objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET icmpv6objects

Request Type: **GET**

Description: Retrieves the ICMPv6 object associated with the specified ID. If no ID is specified, retrieves list of all ICMPv6 objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{icmpv6object_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{icmpv6object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

DELETE ikev1ipsecproposals

Request Type: **DELETE**

Description: Deletes the IKEv1 IPsec Proposal associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals/{ikev1ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT ikev1ipsecproposals

Request Type: **PUT**

Description: Modifies the IKEv1 IPsec Proposal associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals/{ikev1ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

POST ikev1ipsecproposals

Request Type: **POST**

Description: Creates the IKEv1 IPsec Proposal associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals

Permissions: Object Manager > Modify Object Manager

GET ikev1ipsecproposals

Request Type: **GET**

Description: Retrieves the IKEv1 IPsec Proposal associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv1 IPsec Proposal objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ikev1ipsecproposals

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals/{ikev1ipsecproposal_UUID}

Permissions: Object Manager

DELETE ikev1policies

Request Type: **DELETE**

Description: Deletes the IKEv1 policy object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies/{ikev1policy_UUID}

Permissions: Object Manager > Modify Object Manager

PUT ikev1policies

Request Type: **PUT**

Description: Modifies the IKEv1 policy object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies/{ikev1policy_UUID}

Permissions: Object Manager > Modify Object Manager

POST ikev1policies

Request Type: **POST**

Description: Creates the IKEv1 policy object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies

Permissions: Object Manager > Modify Object Manager

GET ikev1policies

Request Type: **GET**

Description: Retrieves the IKEv1 policy object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv1 policy objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ikev1policies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies/{ikev1policy_UUID}`

Permissions: Object Manager

DELETE ikev2ipsecproposals

Request Type: **DELETE**

Description: Deletes the IKEv2 IPsec Proposal associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals/{ikev2ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT ikev2ipsecproposals

Request Type: **PUT**

Description: Modifies the IKEv2 IPsec Proposal associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals/{ikev2ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

POST ikev2ipsecproposals

Request Type: **POST**

Description: Creates the IKEv2 IPsec Proposal associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals`

Permissions: Object Manager > Modify Object Manager

GET ikev2ipsecproposals

Request Type: **GET**

Description: Retrieves the IKEv2 IPsec Proposal associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv2 IPsec Proposal objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ikev2ipsecproposals`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals/{ikev2ipsecproposal_UUID}`

Permissions: Object Manager

DELETE ikev2policies

Request Type: **DELETE**

Description: Deletes the IKEv2 object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/ikev2policies/{ikev2policy_UUID}

Permissions: Object Manager > Modify Object Manager

PUT ikev2policies

Request Type: **PUT**

Description: Modifies the IKEv2 object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/ikev2policies/{ikev2policy_UUID}

Permissions: Object Manager > Modify Object Manager

POST ikev2policies

Request Type: **POST**

Description: Creates the IKEv2 object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/ikev2policies

Permissions: Object Manager > Modify Object Manager

GET ikev2policies

Request Type: **GET**

Description: Retrieves the IKEv2 object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv2 IPsec Proposal objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ikev2policies

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2policies/{ikev2policy_UUID}

Permissions: Object Manager

DELETE interfacegroups

Request Type: **DELETE**

Description: Deletes the Interface group objects associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}

URL on a particular object:

/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}?overrideTargetId={target_UUID}

Permissions: Object Manager > Modify Object Manager

PUT interfacegroups

Request Type: **PUT**

Description: Modifies the Interface group objects associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST interfacegroups

Request Type: **POST**

Description: Creates or overrides the Interface group objects associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET interfacegroups

Request Type: **GET**

Description: Retrieves the Interface group objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all interface group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{interfacegroups_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{interfacegroups_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET interfaceobjects

Request Type: **GET**

Description: Retrieves list of all the interface objects both security zones and interface groups.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects?overrideTargetId={target_UUID}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects/{object_UUID}`

URL to list all overrides on a particular object::

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects/{interfaceobjects_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects/{interfaceobjects_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET intrusionrulegroups

Request Type: **GET**

Description: Retrieves the Snort3 Intrusion rule group. If no ID is specified, retrieves a list of all Snort3 Intrusion rule groups.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy

Parameters available for filtering: Value is of format (including quotes): filter=name:Browser OR filter=name:Browser/Firefox OR filter=showonlyparents:true OR filter=showonlyparents:false OR filter=issystemdefined:true OR issystemdefined:false.

PUT intrusionrulegroups

Request Type: **PUT**

Description: Modifies the Snort3 Intrusion rule group with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

POST Intrusion Rule Groups

Request Type: **POST**

Description: Creates or overrides the Snort3 Intrusion rule group with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

DELETE Intrusion Rule Groups

Request Type: **DELETE**

Description: Deletes the specified Snort3 intrusion rule group.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

GET intrusionrules

Request Type: **GET**

Description: Retrieves the Snort3 Intrusion rule group. If no ID is specified, retrieves a list of all Snort3 Intrusion rule groups.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/intrusionrules

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/intrusionrules/{objectId}

Permissions: Policies > Access Control > Intrusion Policy

Parameters available for filtering: Value is of format (including quotes): filter=gid:123 OR filter=sid:123 OR filter=gid:123;sid:456 OR filter=overrides:true OR filter=overrides:true;ipspolicy:UUID1,UUID2,UUID3 OR filter=fts:123. ipspolicy is comma separated Snort3 Intrusion Policy UUID.

PUT intrusionrules

Request Type: **PUT**

Description: Creates or modifies the Snort3 rule with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/intrusionrules

URL for PUT by ID: /api/fmc_config/v1/domain/{domainUUID}/object/intrusionrules/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

POST intrusionrules

Request Type: **POST**

Description: Creates or overrides the Snort3 rules with the specified parameters.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/intrusionrules

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

DELETE intrusionrules

Request Type: **DELETE**

Description: Deletes the specified Snort3 rule.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/intrusionrules/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

GET ipv4addresspools

Request Type: **GET**

Description: Retrieves the IPv4 Address Pool object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IPv4 Address Pool objects.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools

URL for overrides:

/api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools/{containerUUID}/overrides

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools/{objectId}

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

DELETE ipv4addresspools

Request Type: **DELETE**

Description: Deletes the IPv4 Address Pool object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools/{objectId}

Permissions: Object Manager > Modify Object Manager

POST ipv4addresspools

Request Type: **POST**

Description: Creates an IPv4 Address Pool object.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools

Permissions: Object Manager > Modify Object Manager

PUT ipv4addresspools

Request Type: **PUT**

Description: Modifies the IPv4 Address Pool object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools/{objectId}

Permissions: Object Manager > Modify Object Manager

GET ipv6addresspools

Request Type: **GET**

Description: Retrieves the IPv6 Address Pool object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IPv6 Address Pool objects.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools

URL for overrides:

/api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools/{containerUUID}/overrides

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools/{objectId}

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

DELETE ipv6addresspools

Request Type: **DELETE**

Description: Deletes the IPv6 Address Pool object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools/{objectId}

Permissions: Object Manager > Modify Object Manager

POST ipv6addresspools

Request Type: **POST**

Description: Creates an IPv6 Address Pool object.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools

Permissions: Object Manager > Modify Object Manager

PUT ipv6addresspools

Request Type: **PUT**

Description: Modifies the IPv6 Address Pool object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools/{objectId}

Permissions: Object Manager > Modify Object Manager

GET ipv4prefixlists

Request Type: **GET**

Description: Retrieves the IPv4 prefix list associated with the specified ID. If no ID is specified, retrieves all IPv4 prefix lists.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists/{objectId}

Permissions: Object Manager

PUT ipv4prefixlists

Request Type: **PUT**

Description: Modifies the IPv4 Prefix List associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists/{objectId}

Permissions: Object Manager > Modify Object Manager

POST ipv4prefixlists

Request Type: **POST**

Description: Creates an IPv4 Prefix List.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists

Permissions: Object Manager > Modify Object Manager

DELETE ipv4prefixlists

Request Type: **DELETE**

Description: Deletes the IPv4 Prefix List associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists/{objectId}

Permissions: Object Manager > Modify Object Manager

GET ipv6prefixlists

Request Type: **GET**

Description: Retrieves the IPv6 prefix list associated with the specified ID. If no ID is specified, retrieves all IPv6 prefix lists.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv6prefixlists

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/ipv6prefixlists/{objectId}

Permissions: Object Manager

PUT ipv6prefixlists

Request Type: **PUT**

Description: Modifies the IPv6 Prefix List associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv6prefixlists/{objectId}

Permissions: Object Manager > Modify Object Manager

POST ipv6prefixlists

Request Type: **POST**

Description: Creates an IPv6 Prefix List.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/ipv6prefixlists

Permissions: Object Manager > Modify Object Manager

DELETE ipv6prefixlists

Request Type: **DELETE**

Description: Deletes the IPv6 Prefix List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6prefixlists/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET isecuritygroup tags

Request Type: **GET**

Description: Retrieves the ISE security group tag object with the specified ID. If no ID is specified, retrieves list of all ISE security group tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/isecuritygroup tags`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/isecuritygroup tags/{object_UUID}`

Permissions: Object Manager

GET keychain

Request Type: **GET**

Description: Retrieves the keychain object associated with the specified ID. If no ID is specified for a GET, retrieves list of all keychain objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}`

URL to list all overrides on a particular object. If the object ID is not specified, displays all keychain objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychains_UUID}/overrides/{objectId}`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains?overrideTargetId={target_UUID}`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}?overrideTargetId={target_UUID}`



Note The target UUID could be that of a domain or a device.

Permissions: Object Manager

DELETE keychain

Request Type: **DELETE**

Description: Deletes the keychain object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}?overrideTargetId={target_UUID}`



Note The target UUID could be that of a domain or a device.

Permissions: Object Manager > Modify Object Manager

PUT keychain

Request Type: **PUT**

Description: Modifies the keychain object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}

URL to edit or update an override on a particular object:

/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}

Permissions: Object Manager > Modify Object Manager

POST keychain

Request Type: **POST**

Description: Creates or overrides the keychain objects with the specified parameters.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/keychains

URL for Bulk Post:

/api/fmc_config/v1/domain/{domain_UUID}/object/keychains?bulk=true

URL to create an override on a particular object:

/api/fmc_config/v1/domain/{domain_UUID}/object/keychains



Attention If override was not set when creating the key chain object:

1. Using PUT, update the override property of the key chain object to "true".
 2. Create the POST override for the key chain object.
-

Permissions: Object Manager > Modify Object Manager

GET localrealmusers

Request Type: **GET**

Description: Retrieves the local realm user object associated with the specified ID. If no ID is specified, retrieves list of all local realm user objects.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers/{objectId}

Permissions: System > Integration > Realms

Parameters available for filtering: To filter users by realm, use `realm:{realmUUID}`. To filter users by name, use `name:{name}`

PUT localrealmusers

Request Type: **PUT**

Description: Modifies the local realm user object with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers/{objectId}`

Permissions: System > Integration > Realms > Modify Realms

POST localrealmusers

Request Type: **POST**

Description: Creates or overrides the local realm user objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers`

Permissions: System > Integration > Realms > Modify Realms

POST localrealmusers

Request Type: **DELETE**

Description: Deletes the specified local realm user object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET networkaddresses

Request Type: **GET**

Description: Retrieves list of all network and host objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkaddresses`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkaddresses?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkaddresses?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

DELETE networkgroups

Request Type: **DELETE**

Description: Deletes the specified Network Group.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT networkgroups

Request Type: **PUT**

Description: Modifies a Network Group.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST networkgroups

Request Type: **POST**

Description: Creates or overrides the network group with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET networkgroups

Request Type: **GET**

Description: Retrieves the network group object associated with the specified ID. If no ID is specified, retrieves list of all network group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{networkgroups_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{networkgroups_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

DELETE networks

Request Type: **DELETE**

Description: Deletes the specified network objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT networks

Request Type: **PUT**

Description: Modifies network objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST networks

Request Type: **POST**

Description: Creates or overrides the network objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET networks

Request Type: **GET**

Description: Retrieves the network objects associated with the specified ID. If no ID is specified, retrieves list of all network objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{network_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{network_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET packettracerpcaplist

Request Type: **GET**

Description: Retrieves all the PCAP files in the most recently uploaded fashion.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/packettracerpcaplist`

Permissions: Devices > Troubleshoot > Packet Capture

POST packettracerpcapupload

Request Type: **POST**

Description: Imports a PCAP file from Packet Tracer.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/packettracerpcapupload`

Permissions: Devices > Troubleshoot > Packet Capture > Modify Packet Capture

GET policy lists

Request Type: **GET**

Description: Retrieves the policy list associated with the specified ID. If no ID is specified, retrieves all policy lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists/{objectId}`

Permissions: Object Manager

PUT policylists

Request Type: **PUT**

Description: Modifies the Policy List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists/{objectId}`

Permissions: Object Manager > Modify Objects

POST policylists

Request Type: **POST**

Description: Creates a Policy List.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists`

Permissions: Object Manager > Modify Objects

DELETE policylists

Request Type: **DELETE**

Description: Deletes the Policy List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists/{objectId}`

Permissions: Object Manager > Modify Objects

DELETE portobjectgroups

Request Type: **DELETE**

Description: Deletes the specified port object groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT portobjectgroups

Request Type: **PUT**

Description: Modifies port object groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST portobjectgroups

Request Type: **POST**

Description: Creates or overrides the port object groups with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET portobjectgroups

Request Type: **GET**

Description: Retrieves the port object group object associated with the specified ID. If no ID is specified, retrieves list of all port object group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups?overrideTargetId={target_UUID}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{portobjectgroup_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{portobjectgroup_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

GET ports

Request Type: **GET**

Description: Retrieves list of all port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ports`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ports?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ports?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

DELETE protocolportobjects

Request Type: **DELETE**

Description: Deletes the specified protocol port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT protocolportobjects

Request Type: **PUT**

Description: Modifies protocol port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST protocolportobjects

Request Type: **POST**

Description: Creates or overrides the protocol port objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET protocolportobjects

Request Type: **GET**

Description: Retrieves the protocol port object associated with the specified ID. If no ID is specified, retrieves list of all protocol port objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects?overrideTargetId={target_UUID}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}`

URL to list all overrides on a particular object::

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{protocolportobject_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{protocolportobject_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET radiusservergroups

Request Type: **GET**

Description: Retrieves the Radius Server Group associated with the specified ID. If no ID is specified for a GET, retrieves list of all Radius Server Group objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

DELETE radiusservergroups

Request Type: **DELETE**

Description: Deletes the Radius Server Group associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups/{objectId}`

Permissions: Object Manager > Modify Object Manager

POST radiusservergroups

Request Type: **POST**

Description: Creates a Radius Server Group.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups`

Permissions: Object Manager > Modify Object Manager

PUT radiusservergroups

Request Type: **PUT**

Description: Modifies the Radius Server Group associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups/{objectId}`

Permissions: Object Manager > Modify Object Manager

DELETE ranges

Request Type: **DELETE**

Description: Deletes the specified address range.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT ranges

Request Type: **PUT**

Description: Modifies an address range.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST ranges

Request Type: **POST**

Description: Creates or overrides an address range with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET ranges

Request Type: **GET**

Description: Retrieves the address range object associated with the specified ID. If no ID is specified, retrieves list of all address range objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{range_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{range_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

GET realms

Request Type: **GET**

Description: Retrieves the realm object associated with the specified ID. If no ID is specified, retrieves list of all realm objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/realms`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/realms/{object_UUID}`

Permissions: System > Integration > Realms

PUT realms

Request Type: **PUT**

Description: Modifies the realm object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/realms/{objectId}`

Permissions: System > Integration > Realms > Modify Realms

POST realms

Request Type: **POST**

Description: Creates or overrides the realm objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/realms`

Permissions: System > Integration > Realms > Modify Realms

DELETE realms

Request Type: **DELETE**

Description: Deletes the specified realm object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/realms/{objectId}`

Permissions: System > Integration > Realms > Modify Realms

GET realmusergroups

Request Type: **GET**

Description: Retrieves the realm user group object associated with the specified ID. If no ID is specified, retrieves list of all realm user group objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusergroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusergroups/{object_UUID}`

Permissions: Object Manager

Parameters available for filtering: realmUuid



Note This is a required parameter.

GET realmusers

Request Type: **GET**

Description: Retrieves the realm user object associated with the specified ID. If no ID is specified, retrieves list of all realm user objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusers`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusers/{object_UUID}`

Permissions: Object Manager

Parameters available for filtering: realmUuid



Note This is a required parameter.

GET route maps

Request Type: **GET**

Description: Retrieves the route map associated with the specified ID. If no ID is specified, retrieves list of all route maps.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps/{objectId}`

Permissions: Object Manager

PUT routemaps

Request Type: **PUT**

Description: Modifies the RouteMap with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps/{objectId}`

Permissions: Object Manager > Modify Objects

POST routemaps

Request Type: **POST**

Description: Creates a RouteMap.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps`

Permissions: Object Manager > Modify Objects

DELETE routemaps

Request Type: **DELETE**

Description: Deletes the RouteMap with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps/{objectId}`

Permissions: Object Manager > Modify Objects

GET securitygrouptags

Request Type: **GET**

Description: Retrieves the custom security group tag object associated with the specified ID. If no ID is specified, retrieves list of all custom security group tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/securitygrouptags`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/securitygrouptags/{object_UUID}`

Permissions: Object Manager

Parameters available for filtering: name

DELETE securityzones

Request Type: **DELETE**

Description: Deletes the specified securityzone objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/securityzones/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

PUT securityzones

Request Type: **PUT**

Description: Modifies a securityzone object.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/securityzones/{object_UUID}

Permissions: Object Manager>Modify Object Manager

POST securityzones

Request Type: **POST**

Description: Creates or overrides the securityzone objects with the specified parameters.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/securityzones

URL for Bulk Post: /api/fmc_config/v1/domain/{domain_UUID}/object/securityzones?bulk=true

Permissions: Object Manager > Modify Object Manager

GET securityzones

Request Type: **GET**

Description: Retrieves the security zone objects associated with the specified ID. If no ID is specified, retrieves list of all security zone objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/securityzones

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/object/securityzones/{object_UUID}

Permissions: Object Manager

Parameters available for filtering: name

GET SI DNS Feeds

Request Type: **GET**

Description: Retrieves the Security Intelligence DNS feed objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence DNS feed objects.

URL: /api/fmc_config/v1/domain/{domainUUID}/object/sidnsfeeds

URL for GET by ID: /api/fmc_config/v1/domain/{domainUUID}/object/sidnsfeeds/{objectId}

Permissions: Object Manager

GET SI DNS Lists

Request Type: **GET**

Description: Retrieves the Security Intelligence DNS list objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence DNS list objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/sidnslists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/sidnslists/{objectId}`

Permissions: Object Manager

GET sinetworkfeeds

Request Type: **GET**

Description: Retrieves the Security Intelligence Network Feed objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence Network Feed objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/sinetworkfeeds`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/sinetworkfeeds/{objectId}`

Permissions: Object Manager

GET SI Network Lists

Request Type: **GET**

Description: Retrieves the Security Intelligence network list objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence network list objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/sinetworklists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/sinetworklists/{objectId}`

Permissions: Object Manager

GET Sinkholes

Request Type: **GET**

Description: Retrieves the Sinkhole objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Sinkhole objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/sinkholes`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/sinkholes/{objectId}`

Permissions: Object Manager

GET siurlfeeds

Request Type: **GET**

Description: Retrieves the Security Intelligence url feed object associated with the specified ID. If no ID is specified, retrieves list of all Security Intelligence url feed objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/siurlfeeds`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/siurlfeeds/{object_UUID}`

Permissions: Object Manager

GET siurllists

Request Type: **GET**

Description: Retrieves the Security Intelligence url list object associated with the specified ID. If no ID is specified, retrieves list of all Security Intelligence url list objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/siurllists

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/object/siurllists/{object_UUID}

Permissions: Object Manager

DELETE slamonitors

Request Type: **DELETE**

Description: Deletes the sla monitor object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors/{object_UUID}

Permissions: Object Manager > Modify Object Manager

PUT slamonitors

Request Type: **PUT**

Description: Modifies the sla monitor object associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors/{object_UUID}

Permissions: Object Manager > Modify Object Manager

POST slamonitors

Request Type: **POST**

Description: Creates or overrides a SLA monitor with the specified parameters.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors

URL for Bulk Post: /api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors?bulk=true

Permissions: Object Manager > Modify Object Manager

GET slamonitors

Request Type: **GET**

Description: Retrieves the SLA Monitors associated with the specified ID. If no ID is specified, retrieves list of all SLA Monitors.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors

URL by GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors/{object_UUID}

Permissions: Object Manager

GET SSO Servers

Request Type: **GET**

Description: Retrieves the SSO Server Policy Object associated with the specified ID. If no ID is specified, retrieves list of all SSO Server Policy Objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers`

URL for all overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers/{containerUUID}/overrides`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers/{objectId}`

Permissions: System > User Management > Single Sign-On (SSO)

Parameters available for filtering: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value

DELETE ssoservers

Request Type: **DELETE**

Description: Deletes SSO Server Policy Object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers/{objectId}`

Permissions: System > User Management > Single Sign-On (SSO)

POST ssoservers

Request Type: **POST**

Description: Creates an SSO Server Policy Object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers`

Permissions: System > User Management > Single Sign-On (SSO)

PUT ssoservers

Request Type: **PUT**

Description: Modifies SSO Server Policy Object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers/{objectId}`

Permissions: System > User Management > Single Sign-On (SSO)

GET standard access lists

Request Type: **GET**

Description: Retrieves the standard community list associated with the specified ID. If no ID is specified, retrieves all standard community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists/{objectId}`

Permissions: Object Manager

PUT standardaccesslists

Request Type: **PUT**

Description: Modifies the Standard Access List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists/{objectId}`

Permissions: Object Manager > Modify Objects

POST standardaccesslists

Request Type: **POST**

Description: Creates a Standard Access List.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists`

Permissions: Object Manager > Modify Objects

DELETE standardaccesslists

Request Type: **DELETE**

Description: Deletes the Standard Access List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists/{objectId}`

Permissions: Object Manager > Modify Objects

GET standard community lists

Request Type: **GET**

Description: Retrieves the standard community list associated with the specified ID. If no ID is specified, retrieves all standard community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists/{objectId}`

Permissions: Object Manager

PUT standardcommunitylists

Request Type: **PUT**

Description: Modifies the Standard Community List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists/{objectId}`

Permissions: Object Manager > Modify Objects

POST standardcommunitylists

Request Type: **POST**

Description: Creates a Standard Community List.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists`

Permissions: Object Manager > Modify Objects

DELETE standardcommunitylists

Request Type: **DELETE**

Description: Deletes the Standard Community List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists/{objectId}`

Permissions: Object Manager > Modify Objects

GET time ranges

Request Type: **GET**

Description: Retrieves the time range object associated with the specified ID. If no ID is specified, retrieves list of all time range objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges/{objectId}`

Permissions: Object Manager

PUT time ranges

Request Type: **PUT**

Description: Modifies a time range object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges/{objectId}`

Permissions: Object Manager

POST time ranges

Request Type: **POST**

Description: Creates or overrides a time range object with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges`

Permissions: Object Manager > Modify Object Manager

DELETE time ranges

Request Type: **DELETE**

Description: Deletes the time range object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges/{objectId}`

Permissions: Object Manager > Modify Object Manager

GET time zone objects

Request Type: **GET**

Description: Retrieves the time zone object associated with the specified ID. If no ID is specified, retrieves list of all time zone objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{objectId}`

URL to list all overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{containerUUID}/overrides`

Permissions: Object Manager

PUT time zone objects

Request Type: **PUT**

Description: Modifies a time zone object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{objectId}`

Permissions: Object Manager

POST time zone objects

Request Type: **POST**

Description: Creates or overrides a time zone object with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects`

Permissions: Object Manager > Modify Object Manager

DELETE time zone objects

Request Type: **DELETE**

Description: Deletes the time zone object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{objectId}`

Permissions: Object Manager > Modify Object Manager

DELETE tunneltags

Request Type: **DELETE**

Description: Deletes the tunnel tag object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags/{object_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT tunneltags

Request Type: **PUT**

Description: Modifies the tunnel tag object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags/{object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST tunneltags

Request Type: **POST**

Description: Creates or overrides a tunnel tag with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/tunneltags`

Permissions: Object Manager > Modify Object Manager

GET tunneltags

Request Type: **GET**

Description: Retrieves the tunnel tag object associated with the specified ID. If no ID is specified, retrieves list of all tunnel tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags/{object_UUID}`

Permissions: Object Manager

GET umbrellaprotectionpolicies

Request Type: **GET**

Description: Retrieves the umbrella protection policy associated with the specified ID from the umbrella cloud. If no ID is specified, retrieves list of all umbrella protection policies from the umbrella cloud.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/operational/umbrellaprotectionpolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/operational/umbrellaprotectionpolicies/{object_UUID}`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy

POST umbrellaprotectionpolicies

Request Type: **POST**

Description: Creates an umbrella protection policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/operational/umbrellaprotectionpolicies`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

GET urlcategories

Request Type: **GET**

Description: Retrieves the url category object associated with the specified ID. If no ID is specified, retrieves list of all url category objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlcategories`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlcategories/{object_UUID}`

Permissions: Object Manager

DELETE urlgroups

Request Type: **DELETE**

Description: Deletes the specified urlgroup objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT urlgroups

Request Type: **PUT**

Description: Modifies urlgroup objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST urlgroups

Request Type: **POST**

Description: Creates or overrides the urlgroup objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups`

URL for Bulk Post : `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET urlgroups

Request Type: **GET**

Description: Retrieves the url group objects associated with the specified ID. If no ID is specified, retrieves list of all url group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{urlgroup_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{urlgroup_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

DELETE urls

Request Type: **GET**

Description: Deletes the specified URL.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT urls

Request Type: **PUT**

Description: Modifies a URL.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{parent_object_UUID}`

Permissions: Object Manager

POST urls

Request Type: **POST**

Description: Creates or overrides the URLs with the specified parameters.

URL: /api/fmc_config/v1/domain/{domain_UUID}/object/urls

URL for Bulk Post : /api/fmc_config/v1/domain/{domain_UUID}/object/urls?bulk=true

Permissions: Object Manager > Modify Object Manager

GET urls

Request Type: **GET**

Description: Retrieves the url objects associated with the specified ID. If no ID is specified, retrieves list of all url objects.

URL for listing: /api/fmc_config/v1/domain/{domain_UUID}/object/urls

URL for all the overrides on a particular domain or device:

/api/fmc_config/v1/domain/{domain_UUID}/object/urls?overrideTargetId={target_UUID}

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}

URL to list all overrides on a particular object:

/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{url_UUID}/overrides

URL for override for an object on a particular domain or device:

/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{url_UUID}?overrideTargetId={target_UUID}

URL for listing only unused objects:

/api/fmc_config/v1/domain/{domain_UUID}/object/urls?filter=unusedOnly:true

URL for searching by name or value:

/api/fmc_config/v1/domain/{domain_UUID}/object/urls?filter=nameOrValue:{name_or_value}

Permissions: Object Manager

GET Usage

Request Type: **GET**

Description:

Find usage of specified object uuid and type across objects and policies. Supported object types:

Type	Value
Network	NetworkAddress, Host, Network, Range, FQDN, NetworkGroup
Port	Port, ProtocolPortObject, PortObjectGroup, ICMPV4Object, ICMPV6Object, AnyProtocolPortObject
VLAN tag	VlanTag, VlanGroupTag
URL	Url, UrlGroup

URL: /api/fmc_config/v1/domain/{domainUUID}/object/operational/usage

Parameters available for filtering: Specify uuid "uuid:object-uuid" and "type:object-type" and type of object.

Permissions: Object Manager

GET variablesets

Request Type: **GET**

Description: Retrieves the variable set object associated with the specified ID. If no ID is specified, retrieves list of all variable set objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/variablesets`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/variablesets/{object_UUID}`

Permissions: Object Manager

DELETE vlangrouptags

Request Type: **DELETE**

Description: Deletes the specified vlangrouptag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT vlangrouptags

Request Type: **PUT**

Description: Modifies vlangrouptag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST vlangrouptags

Request Type: **POST**

Description: Creates or overrides the VLAN group tags with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?bulk=true`

Permissions: Object Manager > Modify Object Managers

GET vlangrouptags

Request Type: **GET**

Description: Retrieves the vlan group tag objects associated with the specified ID. If no ID is specified, retrieves list of all vlan group tag objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{vlangrouptag_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{vlangrouptag_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager > Modify Object Manager

DELETE vlantags

Request Type: **DELETE**

Description: Deletes the specified VLAN tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

PUT vlantags

Request Type: **PUT**

Description: Modifies VLAN tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

POST vlantags

Request Type: **POST**

Description: Creates or overrides the VLAN tags with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags`

URL for Bulk Post : `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?bulk=true`

Permissions: Object Manager > Modify Object Manager

GET vlantags

Request Type: **GET**

Description: Retrieves the vlantag objects associated with the specified ID. If no ID is specified, retrieves list of all vlantag objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{vlantag_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{vlantag_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

Policy Services

DELETE accesspolicies

Request Type: **DELETE**

Description: Deletes the access control policy with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{object_UUID}`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

PUT accesspolicies

Request Type: **PUT**

Description: Modifies an access control policy.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{object_UUID}`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

POST accesspolicies

Request Type: **POST**

Description: Creates an access control policy with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

GET accesspolicies

Request Type: **GET**

Description: Retrieves the access control policy associated with the specified ID. If no ID is specified, retrieves a list of all access control policies.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{object_UUID}`

Permissions: Policies

DELETE accessrules

Request Type: **DELETE**

Description: Deletes an access control rule in the specified access control policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules/{object_UUID}`

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

PUT accessrules

Request Type: **PUT**

Description: Modifies an access control rule in the specified access control policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules/{object_UUID}`

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

POST accessrules

Request Type: **POST**

Description: Creates an access control rule in the specified access control policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules`

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

GET accessrules

Request Type: **GET**

Description: Retrieves the access control rule associated with the specified policy ID and rule ID. If no rule ID is specified, retrieves list of all access rules associated with the specified policy ID.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules/{object_UUID}

Permissions: Policies>Access Control>Access Control Policy

DELETE categories

Request Type: **DELETE**

Description: Deletes a category associated with the specified policy ID.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/categories/{object_UUID}

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

PUT categories

Request Type: **PUT**

Description: Modifies the category associated with the specified policy ID.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/categories/{object_UUID}

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

POST categories

Request Type: **POST**

Description: Creates a category for access control policies.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/categories

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

GET categories

Request Type: **GET**

Description: Retrieves the category associated with the specified policy ID. If no ID is specified, retrieves list of all categories associated with the specified policy ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/categories

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/categories/{object_UUID}

Permissions: Policies > Access Control > Access Control Policy

PUT defaultactions

Request Type: **PUT**

Description: Modifies the default action associated with the specified access control policy ID and default action ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/defaultactions/{object_UUID}`

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

GET defaultactions

Request Type: **GET**

Description: Retrieves the default action associated with the specified access control policy ID and default action ID. If no default action ID is specified, retrieves list of all default actions associated with the specified access control policy ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/defaultactions`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/defaultactions/{object_UUID}`

Permissions: Policies>Access Control>Access Control Policy

GET loggingsettings

Request Type: **GET**

Description: Retrieves the logging setting associated with the specified access control policy ID and default action ID. If no default action ID is specified, retrieves list of all default actions associated with the specified access control policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/loggingsettings`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/loggingsettings/{object_UUID}`

Permissions: Policies

PUT loggingsettings

Request Type: **PUT**

Description: Modifies the logging setting associated with the specified access control policy ID and default action ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/loggingsettings/{objectId}`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

GET securityintelligencepolicies

Request Type: **GET**

Description: Retrieves the security intelligence policy associated with the specified Access Policy. If no ID is specified for a GET, retrieves all security intelligence policies.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/securityintelligencepolicies`

URL for GET by ID:

`/api/fmc_config/v1/dmain/{domainUUID}/policy/accesspolicies/{containerUUID}/securityintelligencepolicies/{objectId}`

Permissions: Intelligence

GET dnspolicies

Request Type: **GET**

Description: Retrieves the DNS Policy. If no ID is specified, retrieves a list of all DNS policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dnspolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/policy/dnspolicies/{objectId}`

Permissions: Policies > Access Control > DNS Policy

Parameters available for filtering: name.

GET allowdnrules

Request Type: **GET**

Description: Retrieves all the allow rules for a given DNS Policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dnspolicies/{containerUUID}/allowdnrules`

Permissions: Policies > Access Control > DNS Policy

Parameters available for filtering: name

GET blockdnrules

Request Type: **GET**

Description: Retrieves all the block rules for a given DNS Policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dnspolicies/{containerUUID}/blockdnrules`

Permissions: Policies > Access Control > DNS Policy

Parameters available for filtering: name

GET dynamicaccesspolicies

Request Type: **GET**

Description: Retrieves the Dynamic Access Policy. If no ID is specified for a GET, retrieves list of all Dynamic Access Policies.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies/{objectId}

Permissions: Devices > VPN

PUT dynamicaccesspolicies

Request Type: **PUT**

Description: Modifies the Dynamic Access Policy associated with the specified rule ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies/{objectId}

Permissions: Devices > VPN > Modify VPN

POST dynamicaccesspolicies

Request Type: **POST**

Description: Creates a Dynamic Access policy associated.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies

Permissions: Devices > VPN > Modify VPN

DELETE dynamicaccesspolicies

Request Type: **DELETE**

Description: Deletes the Dynamic Access Policy associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies/{objectId}

Permissions: Devices > VPN > Modify VPN

GET filepolicies

Request Type: **GET**

Description: Retrieves the file policy object associated with the specified ID. If no ID is specified, retrieves list of all file policy objects.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/filepolicies

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/policy/filepolicies/{object_UUID}

Permissions: Policies>Access Control>Malware & File Policy

DELETE ftdnatpolicies

Request Type: **DELETE**

Description: Deletes the threat defense NAT policy with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{object_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

PUT ftdnatpolicies

Request Type: **PUT**

Description: Modifies an threat defense NAT policy with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{object_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

POST ftdnatpolicies

Request Type: **POST**

Description: Creates a threat defense device NAT policy with the specified parameters.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies

URL for Bulk Post: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies?bulk=true

Permissions: Devices>NAT>NAT List >Modify NAT policy

GET ftdnatpolicies

Request Type: **GET**

Description: Retrieves the threat defense NAT policy associated with the specified ID. If no ID is specified, retrieves a list of all threat defense NAT policies.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{object_UUID}

Permissions: Devices>NAT>NAT List

DELETE ftds2svpns

Request Type: **DELETE**

Description: Deletes the threat defense Site to Site VPN topology associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}

Permissions: Devices > VPN > Modify VPN

PUT ftds2svpns

Request Type: **PUT**

Description: Modifies a threat defense Site to Site VPN topology associated with the specified ID.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}

Permissions: Devices > VPN > Modify VPN

POST ftds2svpns

Request Type: **POST**

Description: Creates a threat defense Site to Site VPN topology with the specified parameters.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns

Permissions: Devices > VPN > Modify VPN

GET ftds2svpns

Request Type: **GET**

Description: Retrieves the threat defense Site to Site VPN topology associated with the specified ID. If no ID is specified, retrieves a list of all threat defense Site to Site VPN topologies.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}

Permissions: Devices > VPN

PUT advancedsettings

Request Type: **PUT**

Description: Modifies advanced settings inside a VPN Site to Site Topology.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/advancedsettings/{advancedsetting_UUID}

Permissions: Devices > VPN > Modify VPN

GET advancedsettings

Request Type: **GET**

Description: Retrieves an advanced settings inside a VPN Site to Site Topology. If no ID is specified for a GET, retrieves list containing a single AdvancedSettings entry of the topology.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/advancedsettings

URL for GET by ID: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/advancedsettings/{advancedSetting_UUID}

Permissions: Devices > VPN

DELETE endpoints

Request Type: **DELETE**

Description: Deletes all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/endpoints/{endpoint_UUID}`

Permissions: Devices > VPN > Modify VPN

PUT endpoints

Request Type: **PUT**

Description: Modifies all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/endpoints/{endpoint_UUID}`

Permissions: Devices > VPN > Modify VPN

POST endpoints

Request Type: **POST**

Description: Creates all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/endpoints`

Permissions: Devices > VPN > Modify VPN

GET endpoints

Request Type: **GET**

Description: Retrieves all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology. If no ID is specified for a GET, retrieves list of all Endpoints of a topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/endpoints`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/endpoints/{endpoint_UUID}`

Permissions: Devices > VPN

PUT ikesettings

Request Type: **PUT**

Description: Modifies the IKE Settings associated with the specified ID inside a VPN Site to Site Topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpns/{topology_UUID}/ikesettings/{ikesetting_UUID}`

Permissions: Devices > VPN > Modify VPN

GET ikesettings

Request Type: **GET**

Description: Retrieves the IKE Settings associated with the specified ID inside a VPN Site to Site Topology. If no ID is specified for a GET, retrieves IKE Settings of a topology.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/ikesettings

URL for GET by ID:

/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/ikesettings/{ikesetting_UUID}

Permissions: Devices > VPN

PUT ipsecsettings

Request Type: **PUT**

Description: Modifies an IPsec Proposal settings inside a VPN Site to Site Topology.

URL:

/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/ipsecsettings/{ipsecsetting_UUID}

Permissions: Devices > VPN > Modify VPN

GET ipsecsettings

Request Type: **GET**

Description: Retrieves an IPsec Proposal Settings inside a VPN Site To Site Topology. If no ID is specified for a GET, retrieves list containing a single IPsec Settings entry of the topology.

URL: /api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/ipsecsettings

URL for GET by ID: /api/fmc_config/v1/domain/DomainUUID/policy/ftds2svpn/{topology_UUID}/ipsecsettings/{ipsecsetting_UUID}

Permissions: Devices > VPN

GET ipsecadvancedsettings

Request Type: **GET**

Description: Retrieves IPsec Advance Setting inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single IPSEC Advance Setting entry of the topology.

URL:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpn/{containerUUID}/ipsecadvancedsettings/{objectId}

URL for GET by ID:

/api/fmc_config/v1/domain/{domainUUID}/policy/ravpn/{containerUUID}/ipsecadvancedsettings/{objectId}/{object_UUID}

Permissions: Object Manager

PUT ipsecadvancedsettings

Request Type: **PUT**

Description: Modifies IPsec Advance Setting inside a VPN RA Topology.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ipsecadvancedsettings/{objectId}
```

Permissions: Object Manager > Modify Object Manager

GET ipsecryptomaps

Request Type: **GET**

Description: Retrieves IPsec Crypto Map Setting inside a VPN RA Topology. If no ID is specified, retrieves list containing a single IPSEC Crypto Map Setting entry of the topology.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ipsecryptomaps/{objectId}
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ipsecryptomaps/{objectId}/{object_UUID}
```

Permissions: Object Manager

PUT ipsecryptomaps

Request Type: **PUT**

Description: Modifies IPsec Crypto Map Setting inside a VPN RA Topology.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ipsecryptomaps/{objectId}
```

Permissions: Object Manager > Modify Object Manager

DELETE autonatrules

Request Type: **DELETE**

Description: Deletes a NAT rule with the specified parameters.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/autonatrules/{object_UUID}
```

Permissions: Devices>NAT>NAT List >Modify NAT policy

PUT autonatrules

Request Type: **PUT**

Description: Modifies a NAT rule with the specified parameters.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/autonatrules/{autonatrule_UUID}
```

Permissions: Devices>NAT>NAT List >Modify NAT policy

POST autonatrules

Request Type: **POST**

Description: Creates a NAT policy with the specified parameters.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/autonatrules`

Permissions: Devices>NAT>NAT List >Modify NAT policy

GET autonatrules

Request Type: **GET**

Description: Retrieves the NAT rule associated with the specific ID. If no ID is specified, retrieves a list of all NAT rules.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/autonatrules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies{container_UUID}/autonatrules/{object_UUID}`

Permissions: Devices>NAT>NAT List

PUT autonatrules

Request Type: **PUT**

Description: Modifies a NAT rule with the specified parameters.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/autonatrules/{autonatrule_UUID}`

Permissions: Devices>NAT>NAT List >Modify NAT policy

DELETE manualnatrules

Request Type: **POST**

Description: Deletes a manual NAT rule in the specified NAT policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules/{object_UUID}`

Permissions: Devices>NAT>NAT List >Modify NAT policy

PUT manualnatrules

Request Type: **PUT**

Description: Modify a manual NAT rule in the specified NAT policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules/{object_UUID}`

Permissions: Devices>NAT>NAT List >Modify NAT policy

POST manualnatrules

Request Type: **POST**

Description: Creates manual NAT rules with the specified parameters.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules`

Permissions: Devices>NAT>NAT List >Modify NAT policy

GET manualnatrules

Request Type: **GET**

Description: Retrieves the manual NAT rule associated with the specified ID. If no ID is specified, retrieves a list of all manual NAT rules.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules/{object_UUID}`

Permissions: Devices>NAT>NAT List

GET natrules

Request Type: **GET**

Description: Retrieves the list of all NAT rules (manual and auto) associated with the specified NAT policy.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/natrules`

Permissions: Devices>NAT>NAT List

DELETE natrules

Request Type: **DELETE**

Description: Deletes the NAT rule (manual or auto) associated with the specified policy ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ftdnatpolicies/{containerUUID}/natrules`

Permissions: Devices > NAT > NAT List > Modify NAT policy

PUT inheritancesettings

Request Type: **PUT**

Description: Modifies the inheritance settings associated with specified Access Policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/inheritancesettings/{object_UUID}`

Permissions: Policies > Access Control Policy > Modify Access Control Policy

GET inheritancesettings

Request Type: **GET**

Description: Retrieves the inheritance settings associated with specified Access Policy. If no ID is specified, retrieves a list of all inheritance settings.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/inheritancesettings/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/inheritancesettings/{object_UUID}`

Permissions: Policies > Access Control Policy

GET identitypolicies

Request Type: **GET**

Description: Retrieves the Identity Policy associated with the specified ID. If no ID is specified, retrieves all Identity Policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/identitypolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/policy/identitypolicies/{objectId}`

Permissions: Policies > Access Control > Identity Policy

GET intrusionpolicies

Request Type: **GET**

Description: Retrieves the intrusion policy associated with the specified ID. If no ID is specified, retrieves list of all intrusion policies.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/intrusionpolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/intrusionpolicies/{object_UUID}`

Permissions: Policies > Access Control > Intrusion Policy

PUT intrusionpolicies

Request Type: **PUT**

Description: Modifies the intrusion policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

POST intrusionpolicies

Request Type: **POST**

Description: Creates an intrusion policy with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

DELETE intrusionpolicies

Request Type: **DELETE**

Description: Deletes the intrusion policy associated with the specified ID.

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/intrusionpolicies/{object_UUID}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

GET intrusionrulegroups

Request Type: **GET**

Description: Retrieves the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID. If no rule ID is specified for a GET, retrieves list of all Snort 3 intrusion rulegroups associated with the policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy

PUT intrusionrulegroups

Request Type: **PUT**

Description: Modifies the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

POST intrusionrulegroups

Request Type: **PUT**

Description: Modifies the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

GET intrusionrules

Request Type: **GET**

Description: Retrieves the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID. If no rule ID is specified for a GET, retrieves list of all Snort 3 intrusion rules associated with the policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrules/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy

PUT intrusionrules

Request Type: **PUT**

Description: Modifies the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrules/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

GET networkanalysispolicies

Request Type: **GET**

Description: Retrieves the network analysis policy with the specified ID. If no ID is specified, retrieves list of all network analysis policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{objectId}`

Permissions: Policies > Access Control > Access Control Policy

PUT networkanalysispolicies

Request Type: **PUT**

Description: Modifies the network analysis policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{objectId}`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

POST networkanalysispolicies

Request Type: **POST**

Description: Creates a network analysis policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

DELETE networkanalysispolicies

Request Type: **DELETE**

Description: Deletes the network analysis policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{objectId}`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

GET Inspector Configurations

Request Type: **GET**

Description: Retrieves the Snort3 custom NAP.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{containerUUID}/inspectorconfigs`

Permissions: Policies > Access Control > Access Control Policy

GET inspectoroverrideconfigs

Request Type: **GET**

Description: Retrieves the Snort3 custom NAP override.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{containerUUID}/inspectoroverrideconfigs`

Permissions: Policies > Access Control > Access Control Policy

PUT inspectoroverrideconfigs

Request Type: **GET**

Description: Modifies the Snort3 custom NAP override.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{containerUUID}/inspectorconfigs`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

DELETE prefilterpolicies

Request Type: **DELETE**

Description: Deletes a prefilter policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

PUT prefilterpolicies

Request Type: **PUT**

Description: Modifies a prefilter policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

POST prefilterpolicies

Request Type: **POST**

Description: Creates a prefilter policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

GET prefilterpolicies

Request Type: **GET**

Description: Retrieves the prefilter policy associated with the specified ID. If no ID is specified, retrieves a list of all prefilter policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy

GET remoteaccessvpns

Request Type: **GET**

Description: Retrieves the threat defense RA VPN topology associated with the specified ID. If no ID is specified for a GET, retrieves list of all threat defense RA VPN topologies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{objectId}`

Permissions: Devices > VPN

DELETE ravpns

Request Type: **DELETE**

Description: Deletes Firewall Threat Defense RA VPN topology associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{objectId}`

Permissions: Devices > VPN > Modify VPN

POST ravpns

Request Type: **POST**

Description: Creates a Firewall Threat Defense RA VPN topology.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns`

Permissions: Devices > VPN > Modify VPN

PUT ravpns

Request Type: **PUT**

Description: Modifies Firewall Threat Defense RA VPN topology associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{objectId}`

Permissions: Devices > VPN > Modify VPN

GET s2svpnsummaries

Request Type: **GET**

Description: Retrieves all the configured S2S VPN in the system , with short summary along with the health of the tunnels

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/s2svpnsummaries`

Permissions: Devices > VPN

GET addressassignmentsettings

Request Type: **GET**

Description: Retrieves Address Assignment Setting inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single Address Assignment Setting entry of the topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/addressassignmentsettings`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/addressassignmentsettings/{objectId}`

Permissions: Devices > VPN

PUT addressassignmentsettings

Request Type: **PUT**

Description: Modifies Address Assignment Setting inside a VPN RA Topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/addressassignmentsettings/{objectId}`

Permissions: Devices > VPN > Modify VPN

GET connectionprofiles

Request Type: **GET**

Description: Retrieves Connection Profile data inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single Connection Profile entry of the topology.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles/{objectId}`

Permissions: Devices > VPN

DELETE connectionprofiles

Request Type: **DELETE**

Description: Deletes the Connection Profile data with the associated ID inside a VPN RA Topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles/{objectId}`

Permissions: Devices > VPN > Modify VPN

POST connectionprofiles

Request Type: **POST**

Description: Creates a Connection Profile inside a VPN RA Topology.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles`

Permissions: Devices > VPN > Modify VPN

PUT connectionprofiles

Request Type: **PUT**

Description: Modifies the Connection Profile data with the associated ID inside a VPN RA Topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles/{objectId}`

Permissions: Devices > VPN > Modify VPN

DELETE hitcounts

Request Type: **DELETE**

Description: Deletes the hit count information and resets the hit count to zero for an assigned policy or rule in a device, from the management center.

Note that the DELETE operation returns a 200 (OK) message upon successful completion of the operation.

URLs:

- `/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`
- `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`

Permissions:

- Policies>Access Control Policy>Modify Access Control Policy
- Policies>Prefilter Policy>Modify Prefilter Policy

PUT hitcounts

Request Type: **PUT**

Description: Retrieves the latest hit count information for a device against an assigned policy, and stores it in the management center.

URLs:

- `/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`
- `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`

Permissions:

- Policies>Access Control Policy>Modify Access Control Policy
- Policies>Prefilter Policy>Modify Prefilter Policy

GET hitcounts

Request Type: **GET**

Description: Retrieves the last collected hit count information for a device against an assigned policy or its rules, from the management center.

Note that during the GET operation, hit counts will be automatically pre-fetched from the device if it is the first retrieval being done against a specific device.

URLs:

- `/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`
- `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`

Permissions:

- Policies>Access Control Policy>Modify Access Control Policy
- Policies>Prefilter Policy>Modify Prefilter Policy

DELETE prefilterrules

Request Type: **DELETE**

Description: Deletes the prefilter rule associated with the specified rule ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

PUT prefilterrules

Request Type: **PUT**

Description: Modifies the prefilter rule associated with the specified rule ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

POST prefilterrules

Request Type: **POST**

Description: Creates a prefilter rule.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

GET prefilterrules

Request Type: **GET**

Description: Retrieves the prefilter rule associated with the specified rule ID. If no ID is specified, retrieves list of all prefilter rules.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy

GET snmpalerts

Request Type: **GET**

Description: Retrieves the SNMP alert object associated with the specified ID. If no ID is specified, retrieves a list of all SNMP alert objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/snmpalerts`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/snmpalerts/{object_UUID}`

Permissions: Policies > Actions > Alerts > View Alerts

GET syslogalerts

Request Type: **GET**

Description: Retrieves the syslog alert object associated with the specified ID. If no ID is specified, retrieves a list of all syslog alert objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/syslogalerts`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/syslogalerts/{object_UUID}`

Permissions: Policies > Actions > Alerts

GET healthpolicies

Request Type: **GET**

Description: Retrieves the Health Policy with the associated ID. If no ID is specified, retrieves a list of all Health Policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/healthpolicies/{objectId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/healthpolicies/{objectId}/{object_UUID}`

Permissions: System > Health > Health Policy

GET ldapattributemaps

Request Type: **GET**

Description: Retrieves LDAP Attribute Maps inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single LDAP Attribute Maps of the topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ldapattributemaps/{objectId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ldapattributemaps/{objectId}/{object_UUID}`

Permissions: Devices > VPN

PUT ldapattributemaps

Request Type: **PUT**

Description: Modifies the LDAP Attribute Map with the specified ID inside a VPN RA Topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/ldapattributemaps/{objectId}`

Permissions: Devices > VPN > Modify VPN

GET policylocks

Request Type: **GET**

Description: Retrieves the policy lock statuses for access policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/operational/policylocks`

Permissions: Policies > Access Control > Access Control Policy

POST policylocks

Request Type: **POST**

Description: Locks or unlocks the specified Access Control policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/operational/policylocks`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

GET umbrelladnpolicies

Request Type: **GET**

Description: Retrieves the umbrella DNS policy associated with the specified ID. If no ID is specified, retrieves list of all umbrella DNS policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnpolicies/{objectId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnpolicies/{objectId}/{object_UUID}`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy

DELETE umbrelladnpolicies

Request Type: **DELETE**

Description: Deletes the umbrella DNS policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnpolicies/{objectId}`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

POST umbrelladnpolicies

Request Type: **POST**

Description: Creates an umbrella DNS policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnpolicies`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

PUT umbrelladnspolicies

Request Type: **PUT**

Description: Modifies the umbrella DNS policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies/{objectId}`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

GET umbrelladnsrules

Request Type: **GET**

Description: Retrieves the the umbrella DNS Rule associated with the specified ID. If no ID is specified, retrieves list of all umbrella DNS rules.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies/{containerUUID}/umbrelladnsrules/{objectId}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies/{containerUUID}/umbrelladnsrules/{objectId}/{object_UUID}`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy

PUT umbrelladnsrules

Request Type: **PUT**

Description: Modifies the umbrella DNS Rule associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/umbrelladnspolicies/{containerUUID}/umbrelladnsrules/{objectId}`

Permissions: Policies > Access Control > DNS Policy > Umbrella DNS Policy > Modify Umbrella DNS Policy

Policy Assignment Services

PUT policyassignments

Request Type: **PUT**

Description: Modifies an assigned access policy to add a new device or a new device group.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/assignment/policyassignments/{object_UUID}`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

POST policyassignments

Request Type: **POST**

Description: Assigns an unassigned access policy to devices or device groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/assignment/policyassignments`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

GET policyassignments

Request Type: **GET**

Description: Retrieves the policy assignment associated with the specified ID. If no ID is specified, retrieves a list of all policy assignments to target devices.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/assignment/policyassignments`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/assignment/policyassignments/{object_UUID}`

Permissions: Policies > Access Control > Access Control Policy

Parameters available for filtering: name

Status Services

GET taskstatuses

Description: Retrieves information about a previously submitted pending job/task with the specified ID. This is currently supported for device registration and deployment jobs.

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/job/taskstatuses/{object_UUID}`

Permissions: Modify Devices/Deployment

System Information

GET domain

Request Type: **GET**

Description: Requests version information for the domain. If no ID is specified, retrieves a list of all domains.

URL: `/api/fmc_platform/v1/info/domain/{domain_UUID}/`

URL for GET by ID: `/api/fmc_platform/v1/info/domain/{domain_UUID}/{object_UUID}`

Permissions: System > Domains

GET serverversion

Request Type: **GET**

Description: Requests version information for the server. If no ID is specified, retrieves a list of all servers.

URL: /api/fmc_platform/v1/info/serverversion

URL for GET by ID: /api/fmc_platform/v1/info/serverversion/{objectID}

Permissions:

Update Packages

POST Cancel Upgrades

Request Type: **POST**

Description: This POST operation cancels software upgrade packages to applicable devices running threat defense.

URL: /api/fmc_platform/v1/updates/cancelupgrades

Permissions: System > Tools > Scheduling

POST Retry Upgrades

Request Type: **POST**

Description: This POST operation retries software upgrade packages to applicable devices running threat defense.

URL: /api/fmc_platform/v1/updates/retryupgrades

Permissions: System > Updates

DELETE upgradepackages

Request Type: **DELETE**

Description: Deletes a specific threat defense upgrade package from the managing management center.

URL: /api/fmc_platform/v1/updates/upgradepackages/{package_UUID}

Permissions: System > Tools > Scheduling

GET upgradepackages

Request Type: **GET**

Description: Retrieves a list of locally available threat defense upgrade packages, including major upgrades, maintenances release upgrades, and hotfixes.

URL: /api/fmc_platform/v1/updates/upgradepackages

URL for GET by ID: /api/fmc_platform/v1/updates/upgradepackages/{package_UUID}

Permissions: System > Tools

GET listapplicabledevices

Request Type: **GET**

Description: Lists registered device containers that support the specific upgrade package.

URL: /api/fmc_platform/v1/updates/upgradepackages/{container_UUID}/applicabledevices

Permissions: System > Tools > Scheduling

POST upgradepackage

Request Type: **POST**

Description: Dependent on the parameters, this POST operation either pushes available software upgrade packages to applicable devices running threat defense or initiates the upgrade process for applicable devices running threat defense. This process is applicable for standalone, clustered, or high availability pairs with the following limitations:

- For all configurations, ensure that the current POST operation is completed successfully before proceeding to the next POST operation.
- Perform the POST operation on the primary node of a high availability pair. Do not perform the POST operation for more than one high availability pair at a time.
- Perform the POST operation on the



Note Typically, the first POST operation responds within 60 seconds. Cisco recommends that you perform subsequent POST operations at least 120 seconds after the first POST operation was initiated. The response of the POST operation includes a task object, with a task ID and task status. You can monitor the completion of the task by performing a GET operation on the task object with its task ID. For more information, see [GET taskstatuses](#), on page 160.

URL: /api/fmc_platform/v1/updates/upgrades/

Permissions: System > Tools > Scheduling

POST revertupgrades

Request Type: **POST**

Description: Triggers reversion of an upgrade.

URL: /api/fmc_platform/v1/updates/revertupgrades

Permissions: System > Tools > Scheduling

GET upgradepackages: Monitor

Request Type: **GET**

Description: Monitors the upgrade process once you have executed the POST upgrade task.

URL: /api/fmc_platform/v1/domain/{domain_UUID}/job/taskstatuses/{task_ID}

Permissions: System > Tools > Scheduling

