



CPS vDRA Operations Guide, Release 20.2.0 (1)

First Published: 2020-08-27

Last Modified: 2020-10-06

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2020 Cisco Systems, Inc. All rights reserved.



CONTENTS

PREFACE

Preface	xi
About This Guide	xi
Audience	xi
Additional Support	xi
Conventions (all documentation)	xii
Communications, Services, and Additional Information	xiii
Important Notes	xiii

CHAPTER 1

Managing CPS vDRA Cluster	1
Accessing CPS vDRA Management CLI	1
Access Via Web Browser	1
Access Via SSH	3
Starting CPS vDRA Cluster	3
Stopping Application Services In CPS vDRA Cluster	4
Starting Services In CPS vDRA Cluster	5
Stopping External Services In CPS vDRA Cluster	5
Starting External Services In CPS vDRA Cluster	5
Restarting An Individual Docker Service	5
CPS External Authentication and Authorization	6
vDRA Containers	7
Installing New Software Images	13
Upgrading To A New Software Version	13
Aborting an Upgrade	13
Downgrading to Previous Software Version	14
Aborting a Downgrade	15

CHAPTER 2	Prometheus and Grafana	17
	Introduction	17
	Prometheus	17
	Grafana	18
	Additional Grafana Documentation	18
	Data Source Supported	18
	Manage Grafana Users	19
	Connect to Grafana	20
	Grafana Roles	21

CHAPTER 3	Managing CPS Interfaces And APIs	23
	CPS vDRA Interfaces And APIs	23
	CRD REST API	23
	Grafana	24
	JMX Interface	24
	OSGi Console	25
	Policy Builder GUI	25
	DRA Central GUI	26
	SVN Interface	26
	Multi-user Policy Builder	27
	Revert Configuration	27
	Publishing Data	29
	CRD APIs	29
	Limitations	29
	Setup Requirements	29
	Policy Builder	29
	Architecture	33
	MongoDB Caching	33
	API Endpoints And Examples	34
	Query API	34
	Create API	35
	Update API	36
	Delete API	37

Data Comparison API	37
Table Drop API	39
Export API	39
Import API	40
Snapshot POST API	41
Snapshot GET API	42
Revert API	43
Tips for Usage	43
View Logs	43
Logging Support Using Journald	44
Bulk Provisioning of Records in SLF Database	44
CSV File	45
Bulk Upload API	45
Bulk Upload Status	46
vDRA Peer API	48

CHAPTER 4

CPS Statistics	49
Bulk Statistics Overview	49
CPS Statistics	51
Bulk Statistics Collection	51
Retention of CSV Files	52
Diameter Monitoring KPIs	52
Example CPS Statistics	64
Sample CSV Files	64
Sample Output	65

CHAPTER 5

CLI Commands	67
CLI Command Overview	70
CLI Command Modes	70
OPERATIONAL Mode	70
CONFIG Mode	72
abort	73
alert rule	73
alert snmp-v2-destination	76

[alert snmp-v3-destination](#) **77**
[apply patches](#) **78**
[binding cluster-binding-dbs imsiapn-msisdn](#) **79**
[binding db-connection](#) **79**
[binding db-connection-settings](#) **81**
[binding db-max-record-limit](#) **83**
[binding db-read-connection-settings](#) **84**
[binding shard-metadata-db-connection](#) **86**
[binding throttle-db-operation](#) **87**
[clear](#) **88**
[compare](#) **89**
[consul](#) **89**
[control-plane relay](#) **91**
[database cluster](#) **92**
[database cluster db-name config-server name](#) **93**
[database cluster db-name config-server-seed name](#) **94**
[database cluster db-name multi-db-collections noOfShardsPerDB](#) **95**
[database cluster db-name router name](#) **96**
[database cluster db-name shard name](#) **97**
[database cluster db-name shard shard-name shard-server name](#) **98**
[database cluster db-name shard shard-name shard-server-seed name](#) **100**
[database cluster db-name sharding-db name](#) **101**
[database cluster db-name sharding-db-seed name](#) **102**
[database cluster db-name ipv6-zone-sharding](#) **103**
[database cluster db-name ipv6-zones-range zone-name zone-range range-name start pool-starting-address
end pool- ending-address](#) **104**
[database cluster db-name shard shard-name zone-name zone-name](#) **105**
[database delete all-bindings-sessions](#) **106**
[database delete ipv6bindings](#) **107**
[db-authentication set-password database redis password](#) **108**
[db-authentication show-password database redis](#) **109**
[db-authentication remove-password database redis](#) **109**
[db-authentication show-password database mongo](#) **110**
[db-authentication set-password database mongo password](#) **111**

db-authentication remove-password database mongo	111
db-authentication change-password database mongo	112
db-authentication sync-password database mongo	113
db-authentication enable-transition-auth database mongo	113
db-authentication disable-transition-auth database mongo	114
db-authentication rolling-restart database mongo	114
db-authentication rolling-restart-parallel database mongo	115
db-authentication rolling-restart-parallel-status database mongo	116
db-authentication rolling-restart-status database mongo	117
db connect admin	118
db connect binding	118
db connect session	119
debug collect-db-logs-advanced collect	119
debug collect-db-logs-advanced scan	120
debug packet-capture gather	121
debug packet-capture purge	122
debug packet-capture start	123
debug tech	123
docker connect	124
docker exec	125
docker restart	125
docker start	126
docker stop	126
dra migration	127
enable-migration	127
enable-mongo-sharded-db-as-primary-db	128
enable-skipping-probe-message-binding-lookup	128
end	129
external-aaa pam gid-mapping	130
license feature	131
load	131
logger set	133
logger clear	134
monitor log application	134

monitor log container	135
monitor log engine	136
nacm rule-list	136
network dns server	138
network dns host	139
network virtual-service	139
network virtual-service name host	142
ntp server	143
revert	144
rollback configuration	144
scheduling external-service	145
scheduling vm-target	146
show alert status	148
show configuration	149
show configuration commit	149
show configuration rollback	150
show database	151
show docker engine	154
show docker service	155
show dra-distributor	156
show history	160
show license details	161
show log application	162
show log engine	162
show logger level	162
show orchestrator-database-status	163
show patches	164
show running-config binding db-connection-settings	164
show running-config binding db-read-connection-settings	165
show running-config binding shard-metadata-db-connection	165
show scheduling effective-scheduler	166
show scheduling status	166
show scheduling vm-target	167
show system diagnostics	168

show system history	169
show system secrets open	170
show system secrets paths	170
show system software available-versions	171
show system software docker-repository	172
show system software version	172
show system software iso stage file	172
show system software iso details	173
show system status	174
show system status debug	175
show system status downgrade	175
show system status running	176
show system status upgrade	176
statistics bulk file	177
statistics bulk interval	178
statistics detail	179
statistics icmp-ping	180
statistics summary	181
Storage Health Check Service Commands	182
system abort-downgrade	183
system abort-upgrade	183
system downgrade	183
system disable-debug	185
system disable-external-services	186
system enable-debug	186
system enable-external-services	187
system secrets add-secret	187
system secrets remove-secret	188
system secrets set-passcode	189
system secrets unseal	189
system software iso stage clean	190
system software iso stage pull	190
system software iso activate	191
system software iso delete	192

[system software iso load](#) **193**

[system start](#) **194**

[system stop](#) **195**

[system upgrade](#) **195**



Preface

- [About This Guide, on page xi](#)
- [Audience, on page xi](#)
- [Additional Support, on page xi](#)
- [Conventions \(all documentation\), on page xii](#)
- [Communications, Services, and Additional Information, on page xiii](#)
- [Important Notes, on page xiii](#)

About This Guide

This document is a part of the Cisco Policy Suite documentation set.

For information about available documentation, see the *CPS Documentation Map* for this release at [Cisco.com](https://www.cisco.com).

Audience

This guide is best used by these readers:

- Network administrators
- Network engineers
- Network operators
- System administrators

This document assumes a general understanding of network architecture, configuration, and operations.

Additional Support

For further documentation and support:

- Contact your Cisco Systems, Inc. technical representative.
- Call the Cisco Systems, Inc. technical support number.
- Write to Cisco Systems, Inc. at support@cisco.com.

- Refer to support matrix at <https://www.cisco.com/c/en/us/support/index.html> and to other documents related to Cisco Policy Suite.

Conventions (all documentation)

This document uses the following conventions.

Conventions	Indication
bold font	Commands and keywords and user-entered text appear in bold font .
<i>italic font</i>	Document titles, new or emphasized terms, and arguments for which you supply values are in <i>italic font</i> .
[]	Elements in square brackets are optional.
{x y z }	Required alternative keywords are grouped in braces and separated by vertical bars.
[x y z]	Optional alternative keywords are grouped in brackets and separated by vertical bars.
string	A nonquoted set of characters. Do not use quotation marks around the string or the string will include the quotation marks.
courier font	Terminal sessions and information the system displays appear in courier font.
<>	Nonprinting characters such as passwords are in angle brackets.
[]	Default responses to system prompts are in square brackets.
!, #	An exclamation point (!) or a pound sign (#) at the beginning of a line of code indicates a comment line.



Note

Means reader take note. Notes contain helpful suggestions or references to material not covered in the manual.



Caution

Means reader be careful. In this situation, you might perform an action that could result in equipment damage or loss of data.

**Warning****IMPORTANT SAFETY INSTRUCTIONS.**

Means danger. You are in a situation that could cause bodily injury. Before you work on any equipment, be aware of the hazards involved with electrical circuitry and be familiar with standard practices for preventing accidents. Use the statement number provided at the end of each warning to locate its translation in the translated safety warnings that accompanied this device.

SAVE THESE INSTRUCTIONS

**Note**

Regulatory: Provided for additional information and to comply with regulatory and customer requirements.

Communications, Services, and Additional Information

- To receive timely, relevant information from Cisco, sign up at [Cisco Profile Manager](#).
- To get the business impact you're looking for with the technologies that matter, visit [Cisco Services](#).
- To submit a service request, visit [Cisco Support](#).
- To discover and browse secure, validated enterprise-class apps, products, solutions and services, visit [Cisco Marketplace](#).
- To obtain general networking, training, and certification titles, visit [Cisco Press](#).
- To find warranty information for a specific product or product family, access [Cisco Warranty Finder](#).

Cisco Bug Search Tool

[Cisco Bug Search Tool](#) (BST) is a web-based tool that acts as a gateway to the Cisco bug tracking system that maintains a comprehensive list of defects and vulnerabilities in Cisco products and software. BST provides you with detailed defect information about your products and software.

Important Notes

**Important**

Any feature or GUI functionality that is not documented may not be supported in this release or may be customer specific, and must not be used without consulting your Cisco Account representative.



CHAPTER 1

Managing CPS vDRA Cluster

- [Accessing CPS vDRA Management CLI, on page 1](#)
- [Starting CPS vDRA Cluster, on page 3](#)
- [Stopping Application Services In CPS vDRA Cluster, on page 4](#)
- [Starting Services In CPS vDRA Cluster, on page 5](#)
- [Stopping External Services In CPS vDRA Cluster, on page 5](#)
- [Starting External Services In CPS vDRA Cluster, on page 5](#)
- [Restarting An Individual Docker Service, on page 5](#)
- [CPS External Authentication and Authorization, on page 6](#)
- [vDRA Containers, on page 7](#)
- [Installing New Software Images, on page 13](#)
- [Upgrading To A New Software Version, on page 13](#)
- [Downgrading to Previous Software Version, on page 14](#)

Accessing CPS vDRA Management CLI

There are two options for accessing the CPS vDRA Management CLI.

Access Via Web Browser

Perform the following steps to access the CPS vDRA Management CLI:

-
- Step 1** Enter the following URL in Firefox or Chrome:
`https://<masterip>/`
 - Step 2** Login to the application using your user ID and password.
 - Step 3** Follow the Installation Management hyperlink in the following screen:

Figure 1: CPS DRA Login




The image shows a login form for the CPS DRA interface. At the top, there is a dark grey header with the Cisco logo and the word "CISCO" in white. Below the header, the form is white and contains the following elements:

- Username:** A text input field containing the text "admin".
- Password:** A password input field with a blue border and a blue glow effect, containing five dots and a vertical cursor.
- Sign in:** A blue button with the text "Sign in" in white.
- Copyright:** The text "© Cisco Systems 2017" centered below the button.

Step 4 In the Management screen, click the **Login** link to display the in-browser terminal window.

Figure 2: Installation Management

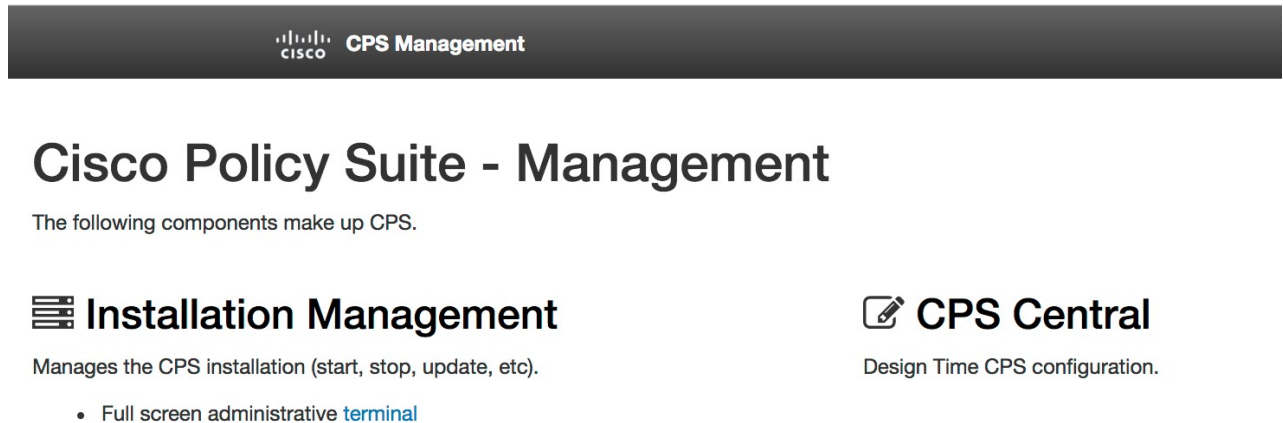

CPS Management

Cisco Policy Suite - Management

The following components make up CPS.

Installation Management

Manages the CPS installation (start, stop, update, etc).


- Full screen administrative [terminal](#)

CPS Central

Design Time CPS configuration.

Step 5 Login with a valid user name and password.

Figure 3: Management Terminal Link

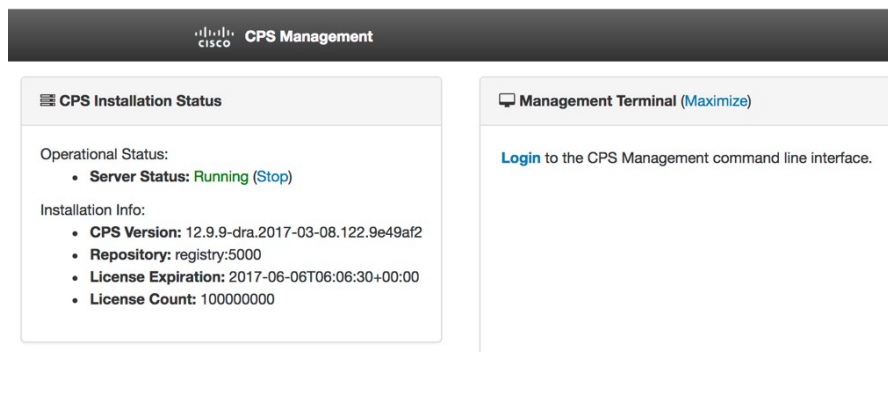

CPS Management

CPS Installation Status

Operational Status:

- **Server Status:** Running ([Stop](#))

Installation Info:

- **CPS Version:** 12.9.9-dra.2017-03-08.122.9e49af2
- **Repository:** registry:5000
- **License Expiration:** 2017-06-06T06:06:30+00:00
- **License Count:** 100000000

Management Terminal (Maximize)

[Login](#) to the CPS Management command line interface.

Access Via SSH

Access is available to the CPS vDRA via SSH listening on port 2024 of the master virtual machine. This port must be open in the OpenStack security rules in order to access the Management CLI via SSH.

Starting CPS vDRA Cluster

A CPS vDRA cluster is a self-organizing cluster that does not require operator actions to configure the system when you follow the instructions found in the installation guide. The system self-organizes by following the algorithm:

1. The cluster master node is started and bootstraps the Docker engine, an embedded Docker registry, the Weave overlay network, and the CPS vDRA scheduling application.

2. The worker nodes are started either after the master node is started or in parallel. The bootstrapping of the Docker engine and Weave overlay network point back to the master node.
3. The scheduling function on the master node begins an auto discovery function on engine startup of the Docker engines that have joined the Weave overlay network.
4. For each engine discovered, the system queries the Docker engine configuration to discover the node identifier and the role within the cluster that the engine will perform. The roles are used by the scheduling function to map application services to the appropriate virtual machines.
 - a. The CPS vDRA application (for both Policy DRA and IMS DRA solutions) supports the following roles:
 1. master – This is always the master scheduling node.
 2. control-a[b] – This is a control node that works in concert with the other control node and the master node to provide OAM support for the application.
 3. diameter-endpoint – This is the node where all diameter traffic terminals.
 4. binding-worker – This is the node where binding/slf queries are executed.
 - b. The vDRA Binding and SLF application supports the following roles:
 1. master – This is always the master scheduling node.
 2. control-a[b] – control node that works in concert with the other control nodes and the master node to provide OAM support for the application.
 3. persistence-router – node where binding/slf queries are routed.
 4. persistence-db – nodes where the binding database replica sets are located.
5. As the Docker engines are registered, the scheduling application begins executing a controlled startup by starting modules as the underlying engines become available.
 - a. A module is a set of interrelated services that are started, stopped and scaled as a set of related processes. These processes are either collocated on the same virtual machine or across multiple virtual machines. There are three type of modules that exist:
 1. infrastructure – These are core modules that are not shutdown when the application shuts down.
 2. application – These are modules that are removed when the application is shutdown.
 3. External – These are external services that are installed on the system and whose images are built and loaded outside of the system. See the **scheduling external-service** command for more information on configuring external services.

Stopping Application Services In CPS vDRA Cluster

The modules of type “application” can be shut down in a controlled manner by running the **system stop** command. This command will unload all modules in reverse run-level order and stop the associated running Docker services.

Starting Services In CPS vDRA Cluster

The modules of type “application” can be started in a controlled manner by running the **system start** command. This command will start all modules in run-level order and schedule the underlying Docker services on the registered Docker engines.

Stopping External Services In CPS vDRA Cluster

The modules of type “external” can be shut down in a controlled manner by running the **system disable-external-services** command. This command will unload all modules in reverse run-level order and stop the associated running Docker services.

Starting External Services In CPS vDRA Cluster

The modules of type “external” can be shut down in a controlled manner by running the **system enable-external-services** command. This command will unload all modules in reverse run-level order and stop the associated running Docker services.

Restarting An Individual Docker Service

Perform the following steps to restart an individual docker service:

Step 1 Run the **show docker service** command to locate the container ID of the service to restart.

```
scheduler# show docker service
```

PENALTY MODULE BOX	MESSAGE	INSTANCE	NAME	VERSION	ENGINE	CONTAINER ID	STATE
admin-db false	-	1	mongo-admin-a	3.6.9.0	aio	mongo-admin-a	HEALTHY
admin-db false	-	1	mongo-admin-arb	3.6.9.0	aio	mongo-admin-arb	HEALTHY
admin-db false	-	1	mongo-admin-b	3.6.9.0	aio	mongo-admin-b	HEALTHY
admin-db false	-	1	mongo-admin-setup	12.9.9-SNAPSHOT	aio	mongo-admin-setup	HEALTHY
consul false	-	1	consul-1	12.9.9-SNAPSHOT	aio	consul-1	HEALTHY
consul false	-	1	consul-2	12.9.9-SNAPSHOT	aio	consul-2	HEALTHY
consul false	-	1	consul-3	12.9.9-SNAPSHOT	aio	consul-3	HEALTHY
foobar false	-	1	foobar	3.2.6.0	aio	foobar	HEALTHY
grafana false	-	1	grafana	12.9.9-SNAPSHOT	aio	grafana	HEALTHY
haproxy-common false	-	1	haproxy-common	12.9.9-SNAPSHOT	aio	haproxy-common-s1	HEALTHY

```

orchestrator-ui 1      orchestrator-ui  12.9.9-SNAPSHOT aio    orchestrator-ui  HEALTHY
false          -
subversion     1      svn              12.9.9-SNAPSHOT aio    svn              HEALTHY
false          -

```

- Step 2** Using the provided container-id, run the **docker restart container-id container-id** command. This will issue a non-graceful stop on the Docker container and move the state of the container to ABORTED. The container will stay in this state for 10 seconds before restarting.
- Step 3** Verify the health of the restarted docker service by running the **show docker service** command again and waiting for the service to progress into the HEALTHY state. Optionally the log of the individual container can be followed by running the **monitor log container container-id** using the same container ID from [Step 2, on page 6](#).

CPS External Authentication and Authorization

CPS system supports LDAP external authentication and authorization.

Based on Conf-D group configurations, CPS roles are assigned to the applications running on CPS cluster.

The following command configures the gid mapping for various roles.

```

admin@orchestrator(config)# external-aaa pam gid-mapping
1000 policy-admin
admin@orchestrator(config-gid-mapping-1000/policy-admin)# commit
Commit complete

```

You can also view the status of configuration with the following command:

```
admin@orchestrator# show running-config external-aaa | tab
```

Sample Output:

```

admin@orchestrator# show running-config external-aaa | tab
GID GROUP
-----
1000 policy-admin

```

Conf-D Group to CPS Roles Description

The following table describes the CPS roles and Conf-D groups of applications/services:

Table 1: Conf-D Group to CPS Roles Description

Application/Service	CPS Role	Conf-D Groups
Control center	SUMADMIN	crd-read-write
Control center	READONLY	crd-read-only
Policy Builder	READ&WRITE	policy-admin
Policy Builder	READ	*
SVN	READ&WRITE	policy-admin
SVN	READ	*

Application/Service	CPS Role	Conf-D Groups
Grafana	Admin	grafana-admin
Grafana	Editor	grafana-editor
Grafana	Viewer	*

* Indicates all authenticated users

Bulkstats conf-D group: sftp daemon running on port 2026 retrieves all statistics within the /var/broadhop/stats directory. Users associated to the “bulkstats” or “admin” group are able to retrieve statistics.

Oper conf-D group is not used.

vDRA Containers

The following table describes the modules, containers, and the respective VM location in vDRA:

Module	Container	VM on which container runs	Description
admin-db	mongo-admin-a	master	Stores the collection of system and CRD related configurations
admin-db	mongo-admin-b	control-a	Stores the collection of system and CRD related configurations
admin-db	mongo-admin-c	control-b	Stores the collection of system and CRD related configurations
admin-db	mongo-admin-setup	master	Sets up the mongo database cluster across the master, control-a and control-b
binding	binding	dra-worker	Provides functionality for handling the requests from diameter-endpoint to binding database and vice versa
cc-monitor	cc-monitor	control-a, control-b	Manages haproxy instance for memcached servers and also for the collection of consolidated qns and engine logs.

Module	Container	VM on which container runs	Description
configuration-engine	configuration-engine	control-a	Maintains confd configuration engine details
consul	consul-1	master	Service discovery and configuration
consul	consul-2	control-a	Service discovery and configuration
consul	consul-3	control-b	Service discovery and configuration
control-plane	control-plane	master,control-a, control-b	Passes topology information via control messages from publishers to subscribers.
control-plane	control-plane-monitor	master,control-a, control-b	Monitors server running in control-plane container and restarts if the same is not responsive or down
diameter-endpoint	diameter-endpoint	dra-director	Maintains Diameter endpoint inbound and outbound connections,message handling and routing function.
diameter-endpoint	diameter-redis-q-a	dra-director	Facilitate inter process communication of application messages across nodes.
diameter-endpoint	diameter-redis-q-a-monitor	dra-director	Monitor IPC server process in "diameter-redis-q-a" and restarts if the same is not responsive or down
diameter-endpoint	global-control-plane	dra-director	Passes topology information via control messages from publishers to subscribers across DRA installations

Module	Container	VM on which container runs	Description
diameter-endpoint	interface-mover	dra-director	Provides functionality for moving of SCTP interface from host to inside container.
diameter-endpoint	socket-forwarder	dra-director	Forwards the socket bind connections from host to inside container
docker-registry	registry	master	Internal docker registry for storing and distributing of images running on the system
docker-registry	registry-extra	master	Utility container to support docker registry
grafana	grafana	control-a/control-b	Provides a graphical or text-based representation of statistics and counters collected in the Prometheus database
haproxy-common	haproxy-api	on all nodes except dra-worker	haproxy instance for the load balancing of API servers
haproxy-common	haproxy-common	on all nodes except dra-worker	Common haproxy instance for the load balancing of Policy Builder, Grafana, orchestrator CLI and UI, API, CC, etc.
haproxy-int-api	haproxy-int-api	control-a	haproxy instance for the load balancing of internal API servers.
haproxy-prometheus	haproxy-prometheus	control-a/control-b	haproxy instance for the load balancing of Prometheus services.

Module	Container	VM on which container runs	Description
memcached-vip	lbvip02		In-memory key-value store for small chunks of arbitrary data (strings, objects) from results of database calls, API calls, or page rendering. Intended for use in speeding up dynamic web applications by alleviating database load.
mongo-node	mongo	master, control-a, control-b	Maintains sharded clusters for managing of huge data.
mongo-node	mongo-monitor	master, control-a, control-b	Monitoring of Mongo shards that run on Mongo containers.
mongo-node	mongo-status	master	Monitoring of Mongo database configurations
monitoring	collectd-host	All	The collection utility collectd is used for collecting and storing statistics from each VM to the centralized collection nodes on the control-A and control-B virtual machines. The centralized collector writes the collected data to output CSV files.
monitoring	dnsmasq	All	Used for internal DNS forwarding and caching
monitoring	dnsmasq-monitor	All	Monitoring and managing dnsmasq container
monitoring	docker-host-info	All	System utility container used for executing all system related commands
monitoring	keepalived	All	Manages the VIPs configured via VRRP protocol

Module	Container	VM on which container runs	Description
monitoring	keepalived-monitor	All	Monitors the keepalived process running on the system and starts the keepalived process with the given VIP name
monitoring	node-exporter	All	Exporter for the System metrics like CPU, RAM, DISK etc
monitoring	node-exporter-monitor	All	Monitoring of node exporter container
monitoring	ntpd	All	NTP service for time synchronization that runs either realtime or on client process based on the reachability of the NTP server .
orchestrator	orchestrator	master	<ol style="list-style-type: none"> 1. Creates and maintains docker engines 2. Schedules and manages docker services 3. All system operations like upgrade, downgrades 4. CLI operations 5. Alert and SNMP functionalities et
orchestrator-backup-a	orchestrator-backup-a	control-a	Provides high availability support for the functionalities carried out by the orchestrator.
orchestrator-backup-b	orchestrator-backup-b	control-b	Provides high availability support for the functionalities carried out by the orchestrator.
orchestrator-ui	orchestrator-ui	master, control-a, control-b	To access the management console via HTTP

Module	Container	VM on which container runs	Description
policy-builder	policy-builder	control-a, control-b	Service configurations and policy rules
prometheus	blackbox-exporter	master, control-a, control-b	Note: Will be obsolete in future releases, as ICMP statistics are now collected from orchestrator
prometheus	prometheus-hi-res	master, control-a, control-b	Monitors the system at 5-second intervals with 24-hour history
prometheus	prometheus-planning	master, control-a, control-b	Monitors the system at 120-second intervals with 365-day history
prometheus	prometheus-trending	master, control-a, control-b	Monitors the system at 20-second intervals with 30-day history
prometheus	statistics-gathering	master, control-a, control-b	Collection of statistics related to java applications as bulk stats
stats	collectd-jmx	control-a, control-b	Collection of statistics related to jmx using collectd
stats	stats-relay	control-a, control-b	Collection of statistics related to relay interfaces using collectd
stats	stats-sftp	control-a, control-b	Collection of statistics related to sftp
subversion	svn	control-a/control-b	Maintains all the CPS policy configurations and has repositories in which files can be created, updated and deleted
zvision	haproxy-zvision	master, control-a, control-b	haproxy instance for the load balancing of zvision servers
zvision	zvision	master, control-a, control-b	Provides functionality of Zing VM monitoring

Installing New Software Images

When a new ISO is provided with software, you need to perform the following steps to upgrade the current system software:

-
- Step 1** Download the ISO image from CCO site.
- Step 2** Copy the ISO to DRA VNF /data/iso/staged-isos.
- Step 3** Run the following commands:
- ```
system software iso load category product file <ISO file name>
activate true

show system software available-versions
```
- Step 4** Repeat the steps for the DRA database ISO.
- 

## Upgrading To A New Software Version

Perform the following steps to upgrade to a new software version:

- 
- Step 1** Run the following command:
- ```
system software iso load category product file cisco-policy-dra.iso activate true
```
- Step 2** In the Management CLI, run **show system software available-versions** to determine if the correct version of has been uploaded:
- ```
scheduler# show system software available-versions
VERSION

12.9.9-dra.2017-03-08.122.9e49af2
```
- Step 3** In the Management CLI, run the **system upgrade version** command to upgrade to the version found in Step 2:
- ```
scheduler# system upgrade version 12.9.9-dra.2017-03-08.122.9e49af2
```
- At this point the application will begin downloading the new scheduling and application images from the on-board Docker Registry. The download will take several seconds and the scheduler application will disconnect and restart. You must re-login after the disconnect occurs.
- Step 4** In the Management CLI, run the **show scheduling status** command to validate the progress of the upgrade.
-

Aborting an Upgrade

If an in-progress upgrade needs to be aborted, run the **system abort-upgrade** command. This will immediately stop all scheduling activities. Reverting to the previous versions is triggered by the downgrade to a previous software version procedure.

Downgrading to Previous Software Version

Perform the following steps to downgrade to a previous software version:

Step 1 Select the qualifier for the version you want to downgrade and then activate the ISOs for downgrading as shown in the following example:

```
admin@orchestrator[mps114fdrm01v]# system abort-upgrade
admin@orchestrator[mps114fdrm01v]# show system software iso details
| tab
CATEGORY NAME          VERSION QUALIFIER          CREATED          ACTIVE SIZE
MB
-----
product cisco-policy-dra 13.1.1 dra.2017-12-06.1366.b800a6d 2018-03-02T23:37:21.848+00:00 false
1339.99
product cisco-policy-dra 13.1.1 dra.2018-02-28.1793.f618c58 2018-03-12T22:42:19.225+00:00 false
1341.93
product cisco-policy-dra 13.1.1 dra.2018-03-28.1938.f618c58 2018-04-13T21:10:34.872+00:00 true
1342.13
admin@orchestrator[mps114fdrm01v]# system software iso activate category product
name cisco-policy-dra version 13.1.1 qualifier dra.2018-02-28.1793.f618c58
```

Step 2 In the Management CLI, run the **show system software available-versions** to determine if the correct version has been uploaded:

```
scheduler# show system software available-versions
VERSION
-----
12.9.9-dra.2017-03-08.122.9e49af2
```

Step 3 In the Management CLI, run the **system downgrade version** command to upgrade to the version found in [Step 2, on page 14](#):

```
scheduler# system downgrade version 12.9.9-dra.2017-03-08.122.9e49af2
```

At this point the application begins downloading the new scheduling and application images from the on-board Docker Registry. The download takes several seconds and the scheduler application disconnects and restarts. You must re-login after the disconnect occurs.

Note During downgrade, make sure consul is using the proper snapshot file after downgrade. If a consul snapshot was taken before the upgrade to the running version, find the list of available consul snapshots using the following command:

```
scheduler# consul list-snapshots
```

Select the correct consul snapshot for the version to be downgraded and downgrade DRA and consul using the following command:

```
scheduler# system downgrade version 12.9.9-dra.2017-03-08.122.9e49af2 consul-downgrade true
snapshot-name 12.9.9-dra.snap
```

Step 4 In the Management CLI, run the **show scheduling status** command to validate the progress of the upgrade.

Aborting a Downgrade

If an in-progress downgrade needs to be aborted, run the **system abort-downgrade** command. This will immediately stop all scheduling activities. Reverting to the previous versions is triggered by the upgrading to a new software version procedure.



CHAPTER 2

Prometheus and Grafana

- [Introduction, on page 17](#)
- [Prometheus, on page 17](#)
- [Grafana, on page 18](#)
- [Connect to Grafana , on page 20](#)
- [Grafana Roles, on page 21](#)

Introduction

CPS system, application statistics and Key Performance Indicators (KPI) are collected by the system and are displayed using a browser-based graphical metrics tool. This chapter provides a high-level overview of the tools CPS uses to collect and display these statistics.

Prometheus

Prometheus is an application that is used to actively gather statistics and trigger alerts from the running virtual machines and application services. The CPS vDRA cluster deploys the following Prometheus services on each control node and on the master node:

- Prometheus Hi-Res – this instance of the Prometheus service is monitoring the system at 5 second intervals with 24-hour history
- Prometheus Trending – this instance of the Prometheus service is monitoring the system at 20 second intervals with 30-day history
- Prometheus Planning – this instance of the Prometheus service is monitoring the system at 120 second intervals with 365-day history

Internally, the Prometheus servers scrape statistics from target statistics sources on a regular basis. The following target data sources are included:

- Host Node Exporter for Host VM statistics.
- Mongo DB Exporter for Database statistics.
- Application Statistics.

In addition to scrapping, statistics in the Prometheus servers can be configured using the Management CLI alert rule command to trigger alerts on error conditions. In this scenario, a user defines the alert rule and the configuration for that rule is pushed into the Prometheus servers. It can generate SNMPv2 and SNMPv3 alarm based on the NMS destination configured in the system. You can configure multiple SNMP destination (SNMPv2, SNMPv3) to receive the alarms at multiple NMS.



Note Currently, SNMP get and walk facility is not supported.

For more information on Prometheus, refer <https://prometheus.io/>.

Grafana

Grafana is a third-party metrics dashboard and graph editor provided with CPS 7.0 and higher. Grafana provides a graphical or text-based representation of statistics and counters collected in the Prometheus database.



Note After the DRA Director (DD) failover/reboot, the TPS values in Grafana dashboards takes approx. 5 minutes to fetch and display the latest updated values. Until the values are updated, Grafana displays the old data.

Additional Grafana Documentation

This chapter provides information about the CPS implementation of Grafana. For more information about Grafana, or access the general Grafana documentation, refer to: <http://docs.grafana.org>.

Data Source Supported

The CPS implementation uses the Prometheus data source and does not use graphite for queries. This requires the definition of queries to use the Prometheus query format as defined in <https://prometheus.io/docs/querying/basics/>.



Note If the control VM that hosts Grafana goes down, then the Prometheus data also not available during that downtime after the same control VM (hosting Grafana) is back. This results in some missing data. As a workaround, you can add the Prometheus datasource of other control VM in Grafana UI that was up during that downtime and view the missing statistics.



Note The `top` command output must not be compared with the Grafana CPU statistics panel display.

Manage Grafana Users



Note In Grafana, admin users can invite new users by email or a link. However, this is not supported in CPS vDRA.

Perform the following to add a new Grafana:

1. Enter config mode

```
scheduler# config
Entering configuration mode terminal
scheduler(config)#
```

2. Enter the **aaa authentication** command to create the user:

```
scheduler(config)# aaa authentication users user test2 gid 100 uid 9000 homedir / password
testpassword ssh_keydir /
scheduler(config-user-test2)# commit
scheduler(config-user-test2)# exit
```



Note The **gid**, **uid**, **homedir** and **ssh_keydir** are required but not used by the application.

Add User To A Viewer Operational Group

In config mode, add the user to the “oper” group and commit as follows:

```
scheduler(config)# nacm groups group oper user-name test2
scheduler(config-group-oper)# commit
```

Add User To A Grafana Editor Group

In config mode, add the user to the “grafana-editor” group and commit as follows:

```
scheduler(config)# nacm groups group grafana-editor user-name test2
scheduler(config-group-grafana-editor)# commit
```

Add User To A Grafana Admin Group

In config mode, add the user to the “grafana-admin” group and commit as follows:

```
scheduler(config)# nacm groups group grafana-admin user-name test2
scheduler(config-group-grafana-admin)# commit
```

Change A Grafana Users Password

In the Management CLI, issue the **aaa authentication users user change-password** command as follows:

```
scheduler# aaa authentication users user test2 change-password
Value for 'old-password' (<string>): *****
Value for 'new-password' (<string>): *****
Value for 'confirm-password' (<string>): *****
scheduler#
System message at 2017-03-08 21:17:18...
Commit performed by system via system using system.
```

Specify Access Restrictions for a Group


For more information, see the `nacm rule-list` command.

Connect to Grafana

Use the following URL to access Grafana and enter the user name and password:

`https://<masterip>/grafana/`

Figure 4: Grafana Login

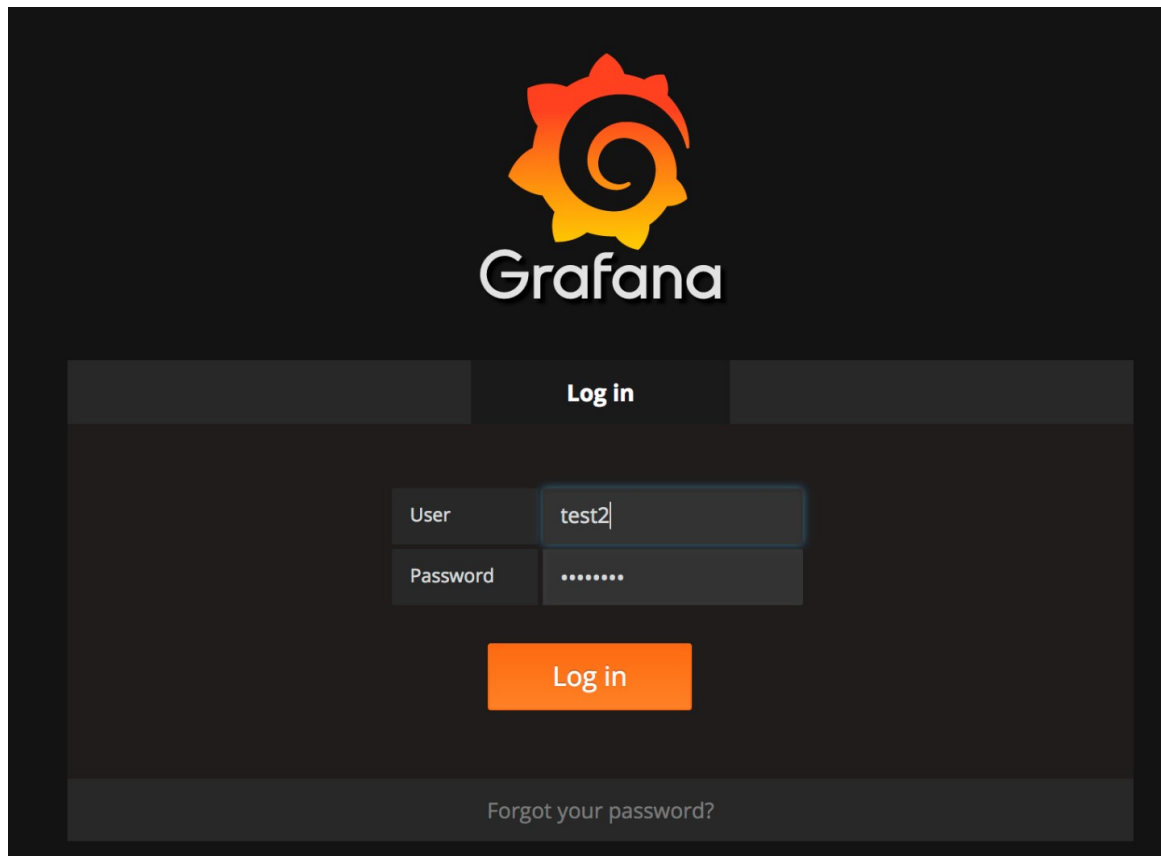

**Attention**

DRA is using the Grafana login page maintained as a part of Grafana code base. By default, when you open a web page in a new tab by clicking on a link with `target="_blank"`, you allow an attacker to redirect users clicking such a link to another web page. The issue is that the redirect concerns the initial tab (your web page), not the newly opened window. Also, the redirect is done without any warning. This can be used as a very effective phishing method. This kind of phishing method is called (reverse) tab nabbing. This issue of `target="_blank"` attribute is present in Grafana 5.2.3 used by DRA.

If you have to use `target="_blank"` attribute, you must also add : `rel="noopener"`. This attribute sets the **window.opener** value to null (forbids any URL change on the referring page). The `rel="noopener"` attribute has been added in the latest version of Grafana for fixing this issue.

This is not a security vulnerability in CPS product. CPS uses Grafana in a controlled environment and no tab nabbing is possible.

Grafana Roles

The following types of user roles are supported:

- Admin: An admin user can view, update and create dashboards. Also, the admin can edit and add data sources and organization users.
- Viewer: A viewer can only view dashboards and cannot not save or create them.
- Editor: An editor can view, update and create dashboards.



CHAPTER 3

Managing CPS Interfaces And APIs

- [CPS vDRA Interfaces And APIs, on page 23](#)
- [Multi-user Policy Builder, on page 27](#)
- [CRD APIs, on page 29](#)
- [Architecture, on page 33](#)
- [API Endpoints And Examples, on page 34](#)
- [Logging Support Using Journald, on page 44](#)
- [Bulk Provisioning of Records in SLF Database, on page 44](#)
- [vDRA Peer API, on page 48](#)

CPS vDRA Interfaces And APIs

CPS vDRA includes various application APIs to configure and manage the application.

CRD REST API

Purpose

The Custom Reference Data (CRD) REST API enables the query of creation, deletion, and update of CRD table data without the need to access the Control Center GUI. The CRD APIs are available using an HTTP REST interface.

URL and Port

`https:// <master ip or control node >:443/custrefdata`

Protocol

HTTPS

Accounts and Roles

Security for the CRD REST API is accomplished by using HTTP basic authentication to support read-only and read-write access to the CRD REST API.

Assigning a Read-Only User

Use the **nacm groups group** command to assign the user to the "crd-read-only" group.

For Example, nacm groups group crd-read-only user-name oper

Grafana

Purpose

Grafana is a metrics dashboard and graph editor used to display graphical representations of system, application KPIs, bulkstats of various CPS components.



Note

After the DRA Director (DD) failover/reboot, the TPS values in Grafana dashboards takes approx. 5 minutes to fetch and display the latest updated values. Until the values are updated, Grafana displays the old data.

URL and Port

https:// <master ip or control node >:443/grafana

Protocol

HTTPS

Accounts and Roles

For more information on adding or deleting these user accounts, refer to the *Prometheus and Grafana* chapter in this guide.

JMX Interface

Purpose

Java Management Extension (JMX) interface can be used for managing and monitoring applications and system objects.

Resources to be managed or monitored are represented by objects called managed beans (mbeans). MBean represents a resource running in JVM and external applications can interact with mbeans through the use of JMX connectors and protocol adapters for collecting statistics (pull), for getting/setting application configurations (push/pull), and notifying events like faults or state changes(push).

CLI Access

Perform the following steps to access the jmxterm:

1. Run **docker connect** *container-id*.
2. Run the jmxterm command from the CLI prompt to bring up the jmx terminal

Port

All applications run on port 9045.

This port is not exposed externally.

Accounts and Roles

Not applicable.

OSGi Console

Purpose

CPS is based on Open Service Gateway initiative (OSGi) and OSGi console is a command-line shell which can be used for analyzing problems at OSGi layer of the application. It may become necessary to connect to the OSGi console to execute specific commands. These commands are not documented in this guide but the connection process is described below.

CLI Access

Use the following command to access the OSGi console:

1. Run the command **docker connect** *container-id*.
2. `telnet <ip> <port>`

Ports

All applications run on port 9091 within the executing container.

This port is not exposed externally.

Accounts and Roles

Not applicable.

Policy Builder GUI

Purpose

Policy Builder is the alternative web-based client interface for the configuration of the Cisco Policy Suite.

URL and Port

`https://<master or control ip>/pb`

Protocol

HTTPS

Accounts and Roles

Assigning a Read-Only User

It is not necessary to assign a read-only role. Any valid user that can login will have read-only access.

Assigning a Read-Write User

Use the **nacm groups group** command to assign the user to the "policy-admin" group.

For example, `nacm groups group policy-admin user-name admin`

DRA Central GUI

Purpose

DRA Central is the primary web-based client interface for the configuration and operational control of the CPS vDRA.

URL and Port

`https://<master or control ip>/central/dra/`

Protocol

HTTPS

Accounts and Roles

Assigning a Read-Only User

Use the **nacm groups group** command to assign the user to the "policy-ro" group.

Assigning a Read-Write User

Use the **nacm groups group** command to assign the user to the "policy-admin" group.

For example: `nacm groups group policy-admin user-name admin`

SVN Interface

Apache™ Subversion (SVN) is the versioning and revision control system used within CPS. It maintains all the CPS policy configurations and has repositories in which files can be created, updated and deleted. SVN maintains the file difference each time any change is made to a file on the server and for each change it generates a revision number.

In general, most interactions with SVN are performed via Policy Builder.

CLI Access

From a remote machine with the SVN client installed, use the following command to access SVN:

Access all files from the server as follows:

```
svn checkout --username <username> --password <password> <SVN Repository URL> <Local Path>
```

Example:

```
svn checkout --username admin --password admin https://<master ip or control ip>/repos/
```

If *<Local Path>* is not provided, files are checked out to the current directory.

Check-in the changed files to the server as follows:


```
svn commit --username <username> --password <password> <Local Path> -m "modified config"
```

Example:

```
svn commit --username broadhop --password broadhop /root/configuration -m "modified config"
```

Update local copy to latest from SVN:

```
svn update <Local Path>
```

Example:

```
svn update /root/configuration/
```

Check current revision of files:

```
svn info <Local Path>
```

Example:

```
svn info /root/configuration/
```

Use **svn --help** for a list of other commands.

Protocol

HTTPS

URL and Port

```
https://<master or control ip>/repos/
```

Accounts and Roles

Assigning a Read-Only User

It is not necessary to assign a read-only role. Any valid user that can login will have read-only access.

Assigning a Read-Write User

Use the **nacm groups group** command to assign the user to the "policy-admin" group.

For example, `nacm groups group policy-admin user-name admin`

Multi-user Policy Builder

Multiple users can be logged into Policy Builder at the same time.

In the event that two users attempt to make changes on same screen and one user saves their changes to the client repository, the other user may receive errors. In such cases the user must return to the login page, revert the configuration, and repeat their changes.


Revert Configuration

You can revert the configuration if changes since the last publish/save to client repository are not wanted.

This can also be necessary in the case of a 'syn conflict' error where both `perfclient01` and `perfclient02` are in use at the same time by different users and publish/save to client repository changes to the same file. The effect of reverting changes is that all changes since the publish/save to client repository will be undone.

- Step 1** On the Policy Builder login screen, verify the user for which changes need to be reverted is correct. This can be done by clicking **Edit** and verifying that the Username and Password fields are correct.


Figure 5: Verifying User

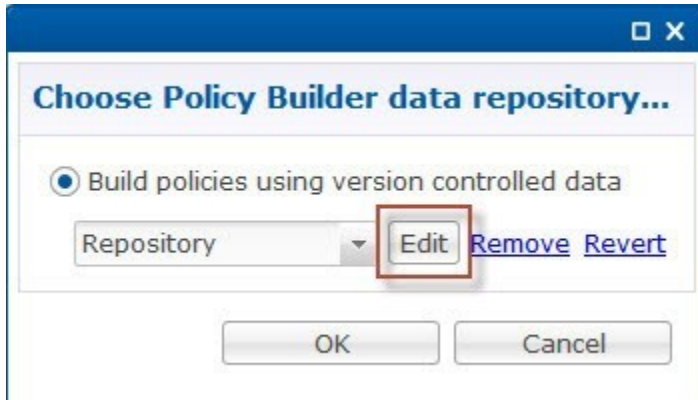

- Step 2** Click **Revert**.

The following confirmation dialog opens.

Figure 6: Revert Confirmation Message

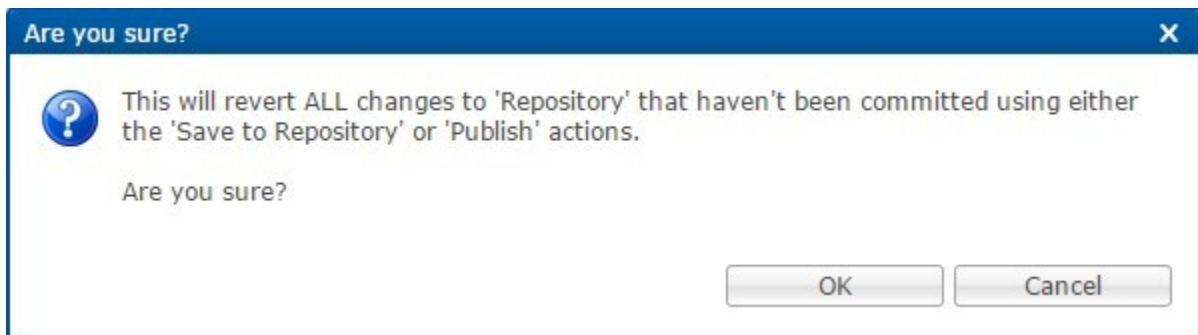

- Step 3** Click **OK** to revert back to the earlier configuration. The following dialog confirms that the changes are reverted successfully.

Figure 7: Success Confirmation Message



Publishing Data

This section describes publishing Cisco Policy Builder data to the Cisco Policy Server. Publishing data occurs in the Cisco Policy Builder client interface, but affects the Cisco Policy Server.

Cisco Policy Builder manages data stored in two areas:

- The Client Repository stores data captured from the Policy Builder GUI in Subversion. This is a place where trial configurations can be developed and saved without affecting the operation of the Cisco Policy Builder server data.

The default URL is <http://svn/repos/configuration>.

- The Server Repository is where a copy of the client repository is created/updated and where the CPS picks up changes. This is done on Publish from Policy Builder.

The default URL is <http://svn/repos/run>.

CRD APIs

You can use Custom Reference Data (CRD) APIs to query, create, delete, and update CRD table data without the need to utilize the Control Center interface. The CRD APIs are available via a REST interface.

Limitations

These APIs allow maintenance of the actual data rows in the table. They do not allow the creation of new tables or the addition of new columns. Table creation and changes to the table structure must be completed via the Policy Builder application.

All table names should be in lowercase alphanumeric to utilize these APIs. Spaces and special characters are not allowed in the table name.

- Table names containing uppercase characters will return code 400 Bad Request.
- Spaces in the name are not allowed and will be flagged as an error in Policy Builder.
- Special characters even when escaped or encoded in ASCII throw errors with the APIs and should not be used.

Setup Requirements

Policy Builder

- Step 1** Log in to the Policy Builder.
- Step 2** Select **Reference Data** tab.
- Step 3** Select **Systems** from the left pane.
- Step 4** Select and expand your system name.
- Step 5** Select **Plugin Configurations** (or a sub cluster or instance), a Custom Reference Data Configuration plugin configuration is defined.

The following parameters can be configured under **Custom Reference Data Configuration**:

Table 2: Custom Reference Data Configuration Parameters

Parameter	Description
Primary Database IP Address	IP address of the primary sessionmgr database. This should remain the default of mongo-admin-a.
Secondary Database IP Address	Optional, this field is the IP address of a secondary, backup, or failover sessionmgr database. This should remain the default of mongo-admin-b.
Database Port	Port number of the sessionmgr. It should be the same for both the primary and secondary databases.
Db Read Preference	<p>Read preference describes how sessionmgr clients route read operations to members of a replica set. You can select from the following drop-down list:</p> <ul style="list-style-type: none"> • Primary: Default mode. All operations read from the current replica set primary. • PrimaryPreferred: In most situations, operations read from the primary but if it is unavailable, operations read from secondary members. • Secondary: All operations read from the secondary members of the replica set. • SecondaryPreferred: In most situations, operations read from secondary members but if no secondary members are available, operations read from the primary. <p>For more information, refer to http://docs.mongodb.org/manual/core/read-preference/.</p>
Connection Per Host	<p>Number of connections that are allowed per database host.</p> <p>Default value is 100.</p>

Step 6 In **Reference Data** tab > **Custom ReferenceData Tables**, at least one Custom Reference Data Table must be defined.

Figure 8: Custom Reference Data Configuration

Custom Reference Data Table

***Name** **Display Name** **Cache Results** **Activation Condition**

***Columns**

*Name	Display Name	*Use In Conditions	*Type	Key	Required
key1		<input checked="" type="checkbox"/>	Text	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
field1		<input checked="" type="checkbox"/>	Text	<input type="checkbox"/>	<input type="checkbox"/>
field2		<input checked="" type="checkbox"/>	Text	<input type="checkbox"/>	<input type="checkbox"/>

Column Details

Valid Values
The values allowed in Control Center for this column

All
 List of Valid Values

*Name	Display Name

Valid values pulled from another table's column (key)

Validation
Validation used by Control Center

Regular Expression

Regular Expression Description

Runtime Binding
Which rows match when a message is received

None
 Bind to Subscriber AVP code
 Bind to Session/Policy State Field

 Bind to a result column from another table

 Bind to Diameter request AVP code

Matching Operator
eq

Actions

Copy:

The following parameters can be configured under Custom Reference Data Table:

Table 3: Custom Reference Data Table Parameters

Field	Description
Name	Name of the table that will be stored in the database. It should start with alphanumeric characters, should be lowercase or uppercase but not mixed case, and should not start with numbers, no special characters are allowed, use “_” to separate words. For example, logical_apn = GOOD, logicalAPN = BAD, no_spaces.
Display Name	Name of the table that will be displayed in Control Center.
Cache Results	Indicates if the tables should be cached in memory and should be checked for production.
Activation Condition	Custom Reference Data Trigger that needs to be true before evaluating this table. It can be used to create multiple tables with the same data depending on conditions or to improve performance if tables do not need to be evaluated based on initial conditions.
Best Match	When enabled, it allows '*' to be used in the values of the data and the best matching row is returned.

Field	Description
Evaluation Order	Indicates the order the tables within the search table group should be evaluated. Starting with 0 and increasing.
Columns	
Name	Name of the column in the database.
Display Name	More readable display name.
Use In Conditions	Represents the availability of the row for conditions in Policies or Use Case Templates. There is a performance cost to having these enabled, so it is recommended to disable unless they are required.
Type	Determines the values in the control centre as described below: <ul style="list-style-type: none"> • Text: Value can be any character. For example, example123!. • Number: Value should be a whole number. For example, 1234. • Decimal: Value can be any number. For example, 1.234. • True/False: Value can be true or false. For example, true. • Date: Value should be a date without time component. For example, May 17th 2020. • DateTime: Value should be a date and time. For example, May 17th, 2020 5:00pm.
Key	Indicates that this column is all or part of the key for the table that makes this row unique. By default, a key is required. Keys also are allowed to set the Runtime Binding fields to populate this data from the current message/session. Typically, keys are bound to data from the current session (APN, RAT Type) and other values are derived from them. Keys can also be set to a value derived from another custom reference data table.
Required	Indicates whether this field will be marked required in Control Center. A key is always required.
Column Details	
Valid Values	
All	All the values of the type selected by the user.
List of Valid	A list of name/display name pairs that will be used to create the list. Valid values can also contain a name which will be the actual value of the column and a display value which allows the Control Center to display use name.
Name	The name of the column in the database.
Display Name	Readable display name.
Validation	

Field	Description
Regular Expression	The Java regular expression that will be run on the proposed new cell value to validate it.
Regular Expression Description	A message to the user indicating what the regular expression is trying to check.
Runtime Binding	Runtime binding is how key column data gets filled out (bound) from data in the current session. There are multiple ways to bind this data and it is also possible to set an operator to define what should match (equals, less than, etc).
None	
Bind to Subscriber AVP	This pulls the value from an AVP on the subscriber. It will also pull values from a session AVP or a Policy Derived AVP.
Bind to Session/Policy State	This pulls the value from a Policy State Data Retriever which knows how to retrieve a single value for a session.
Bind to a result column from another table	This allows the key to be filled out from a columns value from another table. This allows 'normalizing' the table structure and not having on giant table with a lot of duplicated values.
Bind to Diameter request AVP code	This allows the key be filled out from an AVP on the diameter request.
Matching Operator	This allows the row to be 'matched' in other ways than having the value be 'equals'. Default value is equals. <ul style="list-style-type: none"> • eq: Equal • ne: Not Equal • gt: Greater than • gte: Greater than or equal • lt: Less than • lte: Less than or equal

Architecture

MongoDB Caching

The MongoDB database containing the CRD tables and the data is located in the MongoDB instance specified in the CRD plugin configuration.

The database is named `cust_ref_data`.

Two system collections exist in that database and do not actually contain CRD data:

- system.indexes - It is used by MongoDB. These are indices set on the database.
- crdversion - It contains a document indicating the version of all the CRD tables you have defined. The version field increments by one every time you make a change or add data to any of the CRD tables.

A collection is created for each CRD table defined in Policy Builder.

- This collection contains a document for each row you define in the CRD table.
- Each document contains a field for each column you define in the CRD table.
- The field contains the value specified for the column for that row in the table.
- Additionally, there is a `_id` field which contains the internal key used by MongoDB and `_version` which is used by CPS to provide optimistic locking protection, essentially to avoid two threads overwriting the other's update, on the document.

Setting the Cache Results to true (checked) is the default and recommended settings in most cases as it yields the best performance. Use of the cached copy also removes the dependency on the availability of the CRD database. So if there is an outage or performance issue the policy decisions utilizing the CRD data will not be impacted.

The cached copy of the table is refreshed on CPS restart and whenever the API writes a change to the CRD table, otherwise the cached copy is used and the database is not accessed.

API Endpoints And Examples

The URL used to access the CRD API is located at `https://<masterip or control ip>/custrefdata/<tablename>/_<operation>`

Query API

Purpose

Returns all rows currently defined in the specified table.

HTTP Operation Type

GET

Example URL

`https://<master or control ip>:8443/custrefdata/test/_query`

Example URL with Filtering

`https://<master or control ip>:8443/custrefdata/test/_query?key1=Platinum`

Payload

None, although parameters can be specified on the URL for filtering.

Response

Success returns code 200 Ok; XML indicating rows defined is returned. If there are no records in the table, 200 Ok is returned with empty rows in it.

If the table does not exist, code 400 Bad Request is returned.

Example Response without Filtering

```
<rows>
  <row>
    <field code="field1" value="1004"/>
    <field code="field2" value="testee"/>
    <field code="key1" value="Platinum"/>
  </row>
  <row>
    <field code="field1" value="1004"/>
    <field code="field2" value="testee"/>
    <field code="key1" value="Platinum99"/>
  </row>
  <row>
    <field code="field1" value="field1example1"/>
    <field code="field2" value="field2example1"/>
    <field code="key1" value="key1example1"/>
  </row>
  <row>
    <field code="field1" value="field1example2"/>
    <field code="field2" value="field2example2"/>
    <field code="key1" value="key1example2"/>
  </row>
</rows>
```

Example Response with Filtering

```
<rows>
<rows>
  <row>
    <field code="field1" value="1004"/>
    <field code="field2" value="testee"/>
    <field code="key1" value="Platinum"/>
  </row>
</rows>
```

The response returns keys with the tag “field code”. If you want to use the output of Query as input to one of the other APIs, the tag needs to be changed to “key code”. Currently using “field code” for a key returns code 404 Bad Request and a java.lang.NullPointerException.

Create API

Purpose

Create a new row in the specified table.

HTTP Operation Type

POST

Example Endpoint URL

https://<master or control ip>:8443/custrefdata/test/_create

Example Payload

```
<row>
  <key code="key1" value="Platinum"/>
  <field code="field1" value="1004"/>
  <field code="field2" value="testee"/>
</row>
```

Response

Success returns code 200 Ok; no data is returned. The key cannot already exist for another row; submission of a duplicate key returns code 400 Bad Request.

If creating a row fails, API returns 400 Bad Request.



Note Create API does not support SVN CRD table operations and displays the following error message when Srv Crd Data checkbox is enabled in CRD table configuration:

Create operation is not allowed for subversion table

Update API

Purpose

Updates the row indicated by the key code in the table with the values specified for the field codes.

HTTP Operation Type

POST

Example Endpoint URL

https://<master or control ip>:8443/custrefdata/test/_update

Example Payload

```
<row>
  <key code="key1" value="Platinum"/>
  <field code="field1" value="1005"/>
  <field code="field2" value="tester"/>
</row>
```

Response

Success returns code 200 Ok; no data is returned. The key cannot be changed. Any attempt to change the key returns code 404 Not Found.

If updating a row fails, API returns 400 Bad Request.



Note Update API does not support SVN CRD table operations and displays the following error message when Srv Crd Data checkbox is enabled in CRD table configuration:

Update operation is not allowed for subversion table

Delete API

Purpose

Removes the row indicated by the key code from the table.

HTTP Operation Type

POST

Example Endpoint URL

https://<master or control ip>:8443/custrefdata/test/_delete

Example Payload

```
<row>
<key code="key1" value="Platinum"/>/>
</row>
```

Response

Success returns code 200 Ok; no data is returned. If the row to delete does not exist, code 404 Not Found is returned.

If deleting a row fails, API returns 400 Bad Request.



Note Delete API does not support SVN CRD table operations and displays the following error message when Srv Crd Data checkbox is enabled in CRD table configuration:

Delete operation is not allowed for subversion table

Data Comparison API

Purpose

Determines whether the same CRD table data content is being used at different data centers.

The following three optional parameters can be provided to the API:

- **tableName**: Returns the checksum of a specified CRD table `tableName` indicating if there is any change in the specified table. If the value returned is same on different servers, it means there is no change in the configuration and content of that table.

- **includeCrdversion:** Total database checksum contains combination of checksum of all CRD tables configured in Policy Builder. If this parameter is passed as true in API, then total database checksum includes the checksum of "crdversion" table. Default value is false.
- **orderSensitive:** Calculates checksum of the table by utilizing the order of the CRD table content. By default, it does not sort the row checksums of the table and returns order sensitive checksum of every CRD table. Default value is true.

custrefdata/_checksum

Database level Checksum API returns checksum details for all the CRD tables and the database. If the value returned is same on different servers, there will be no change in the configuration and content of any CRD table configured in Policy Builder.

HTTP Operation Type

GET

Example Endpoint URL

https://<master or control ip>:8443/custrefdata/_checksum

Response

```
<response>
  <checksum><all-tables-checksum></checksum>
  <tables>
    <table name="<table-1-name>" checksum="<checksum-of-table-1>" />
    <table name="<table-2-name>" checksum="<checksum-of-table-2>" />

    <table name="<table-n-name>" checksum="<checksum-of-table-n>" />
  </tables>
</response>
```

/custrefdata/_checksum?tableName=<user-provided-table-name>

Table specific Checksum API returns the checksum details for the specific CRD table. If the value returned is same on different servers, there will be no change in the configuration and content of that table.

HTTP Operation Type

GET

Example Endpoint URL

https://<master or control ip>:8443 /custrefdata/_checksum?tableName=<user-provided-table-name>

Response

```
<response>
  <tables>
    <table name="<user-provided-table-name>" checksum="<checksum-of-specified-table>" />
  </tables>
</response>
```



Note Table specific Checksum API does not support SVN CRD table operations and displays the following error message when Snv Crd Data checkbox is enabled in CRD table configuration:

Checksum operation is not allowed for subversion table

Table Drop API

Purpose

Drops custom reference table from MongoDB to avoid multiple stale tables in the system.

The Table Drop API is used in the following scenarios:

- If a CRD table does not exist in Policy Builder but exists in the database, the API can be used to delete the table from the database.
- If a CRD table exists in Policy Builder and database, the API cannot delete the table from the database. If this is attempted the API will return an error: “Not permitted to drop this table as it exists in Policy Builder”.
- If a CRD table does not exist in Policy Builder and database, the API will also return an error `No table found:<tablename>`.

/custrefdata/<table_name>/_drop

HTTP Operation Type

POST

Example Endpoint URL

`https://<master or control ip>:8443/custrefdata/<table_name>/_drop`



Note Drop API does not support SVN CRD table operations and displays the following error message when Snv Crd Data checkbox is enabled in CRD table configuration:

Drop operation is not allowed for subversion table

Export API

Purpose

Exports single and multiple CRD table and its data.

/custrefdata/_export?tableName=<table_name>

Exports single CRD table and its data.

Returns an archived file containing csv file with information of specified CRD table `table_name`.

HTTP Operation Type

GET

Example Endpoint URL

`https://<master or control ip>:8443/custrefdata/_export?tableName=<table_name>`

`/custrefdata/_export`

Exports all CRD tables and its data.

Returns an archived file containing csv file with information for each CRD Table.

HTTP Operation Type

GET

Example Endpoint URL

`https://<master or control ip>:8443 /custrefdata/_export`



Note Export API does not support Svn CRD tables and displays the following warning message in the Response Header "Export-Warning":

Datasource for tables [table1, table2,...] is subversion. Response will not contain data for these tables and skipped SVN CRD tables to be a part of archive.

Import API

Purpose

Imports CRD table and its data.

It takes an archived file as an input which contains one or more csv files containing CRD tables information.



Note If you try to import multiple CRD tables during traffic it may have call flow impact. It is recommended to import multiple CRD tables during Maintenance Window (MW).

HTTP Operation Type

POST

Example Endpoint URL

`https://<master or control ip>:8443/custrefdata/_import`

`https://<lbvip01>:8443/custrefdata/_import?batchOperation=true`

`https://<lbvip01>:8443/custrefdata/_import?batchOperation=false&duplicateValidation=true`



-
- Note**
1. The "batchOperation" flag is used to insert CRD data in the batch. The default value is true and if you do not provide it in the request parameter the default value is taken.
 2. The "duplicateValidation" flag is used to validate or invalidate duplicate data in the archive. The default value is true and if you do not provide it in the request parameter the default value is taken which means it will always validate your data as duplicate.
 3. If "batchOperation" is true, the API will validate your data as duplicate data regardless of the value provided for "duplicateValidation".
-



-
- Note** Import API supports SVN CRD table operations in the following scenarios:
- If the archive contains only mongodb tables, success message is displayed in the response.
 - If the archive contains only SVN tables, success and warning messages are displayed in the response.
 - If the archive contains both mongodb and SVN tables, success and warning messages are displayed in the response.
-

Snapshot POST API

Purpose

Creates a snapshot of the CRD tables on the system. The created snapshot will contain CRD table data, policy configuration and checksum information for all CRD tables.

`/custrefdata/_snapshot?userId=<user_id>&userComments=<user_comments>`

HTTP Operation Type

POST

Example Endpoint URL

`https://<master or control ip>:8443/custrefdata/_snapshot?userId=<user_id>&userComments=<user_comments>`

Optional Parameters

userComments



Note Snapshot POST API does not support export of the contents of Svn CRD tables. The API returns the following warning message if there are any Svn CRD tables present while creating snapshot:

Datasource for tables [table_1, table_2...] is subversion. Data for these tables will not come from database (mongodb)

Snapshot GET API

Purpose

Enables you to get the list of all valid snapshots in the system.

The following information is available in the list of snapshots:

- Snapshot name
- Snapshot path
- Date and time of snapshot creation
- User comments provided on creation of the snapshot
- Checksum information of CRD tables
- Policy configuration SVN version number

/custrefdata/_snapshot

HTTP Operation Type

GET

Example Endpoint URL

https://<master or control ip>:8443/custrefdata/_snapshot

Example Response

```
<snapshots>
  <snapshot>
    <name><date-and-time>_<user-id></name>
    <snapshotPath>/var/broadhop/snapshot/20160620011825306_<user-id></snapshotPath>
    <creationDateAndTime>20/06/2016 01:18:25:306</creationDateAndTime>
    <comments>snapshot-1 june</comments>
    <policyVersion>903</policyVersion>
    <checksum checksum="60f51dfd4cd4554910da44a776c66db1">
      <table name=<table-name-1> checksum="<table-checksum-1>"/>
        ...
      <table name=<table-name-n> checksum="<table-checksum-n>"/>
    </checksum>
  </snapshot>
</snapshots>
```



```
</snapshot>
</snapshots>
```



Note Snapshot GET API does not return checksum information of Svn CRD tables as they are not part of created snapshots.

Revert API

Purpose

Enables you to revert the CRD data to a specific snapshot. If the specific snapshot name is not provided, the API will revert to the latest snapshot.

/custrefdata/_revert?snapshotName=<snapshot_name>

HTTP Operation Type

POST

Example Endpoint URL

https://<master or control ip>:8443/custrefdata/_revert?snapshotName=<snapshot_name>

Optional Parameter

snapshotName



Note Revert API does not support reverting of CRD data for Svn CRD tables. For Svn CRD table, it clears the mongodb table and displays the following warning message:

Datasource for tables [table_1, table_2...] is subversion. Data for these tables will be reverted using svn datasource not from database (mongodb)

Tips for Usage

The Query API is a GET operation which is the default operation that occurs when entering a URL into a typical web browser.

The POST operations, Create, Update, and Delete, require the use of a REST client so that the payload and content type can be specified in addition to the URL. REST clients are available for most web browsers as plug-ins or as part of web service tools, such as SoapUI. The content type when using these clients should be specified as application/xml or the equivalent in the chosen tool.

View Logs

You can view the API logs with the following commands:

- monitor log application – tail the current application log
- monitor log engine – tail the current engine log
- monitor log container – tail a specific container log
- show log application - view the current application log
- show log engine – view the current engine log

Logging Support Using Journald

To monitor and view logs, [journald](#) system service has been added that collects and stores logging data. It creates and maintains structured, indexed journals based on logging information received from a variety of sources. The following is a sample of CLI commands:

- `monitor log application` - This command is used to tail the current Policy Server (qns) log.
- `monitor log engine` - This command is used to tail the current Policy Server (qns) engine log
- `monitor log container <container id>` - This command is used to tail the container logs.
- `show log application` - This command opens the consolidated logs.
- `show log engine` - This command is used to open the consolidate engine logs using Linux 'less' command.

For further log access, you need to connect to the OpenStack control node and from there to respective master or control node. For example, to connect to master/control nodes use the following command:

```
ssh -i cps.pem cps@IPAddress
```

where, *IPAddress* is the IP address of the master or control node.

To access the logs once you are connected to control node, use the following command:

```
docker logs container-id
```

For example, use `docker logs mongo-s1` to display all the logs of mongo-s1 container.

Bulk Provisioning of Records in SLF Database

CPS vDRA provides APIs for bulk provisioning of subscriber records in the SLF database.

You can use the CSV file to provision create and update of bulk subscriber records using SLF API. You can also check the status of the upload using the API.



Note SLF bulk provisioning generates high number of database write operations in a short duration of time. To spread out the operations over a period of time and mitigate the performance issue, configure the transactions per second (TPS) for SLF provisioning in Policy Builder.

For more information, see the *CPS vDRA Configuration Guide*.

CSV File

The CSV file format is used to bulk provision the subscriber records in SLF database. The Actions column in the CSV file determines whether the record is for creation, updation, or deletion.

You can use # in the beginning of the line to indicate comments in the CSV file. The line is ignored when the file is processed.

Table 4: CSV File Format

Column	Description
Action	The action to be performed on the subscriber record. <ul style="list-style-type: none"> • Create - creates subscriber record if it does not exist. • Put – creates the subscriber record, if it does not exist; if subscriber record already exists, updates the subscriber record. • Delete – deletes the subscriber record, if it exists.
Subscriber Id	The subscriber ID of the subscriber.
IMSI	The IMSI of the subscriber. If the same subscriber has multiple IMSI, then add multiple IMSI columns for the subscriber.
MSISDN	The MSISDN of the subscriber. If the same subscriber has multiple MSISDN, then add multiple MSISDN columns for the subscriber.
Destination:<Tag>	The destinations of the subscriber. To provision multiple destinations, add column name/header with prefix “Destination:” and suffix it with the tag, for example: Destination:HSS, Destination:MME, Destination:PCRF, etc

Sample CSV File

```
Action, Subscriber Id, IMSI, IMSI, MSISDN, MSISDN, Destination:MME, Destination:HSS
Put, 1001, 34101, 34102, 91001, 91002, MME1, HSS1
Put, 1001, 34101, , 91005, , MME2, HSS2
Delete, 1010, , , , ,
```

Bulk Upload API

Schedules the SLF bulk subscribers provisioning task. Bulk Upload API takes the input as csv file and schedules the job to execute in the background.

Request

Method: POST

URI: /dra/slfapi/subscriber/bulkUpload

Header: Content-Type: multipart/form-data

Body: CSV File

Request Example

```
HTTP POST /dra/slfapi/subscriber/bulkUpload
```

Response Example

```
HTTP STATUS: 202 (Accepted)
{
  "success": {
    "code": 1,
    "message": "Request accepted, slf bulk upload task is scheduled for execution"
  }
}
```

Example of Curl Command

```
curl -X POST --progress-bar -H "Content-Type: multipart/form-data"
-H "Content-Type: application/json" \ -F "file=@create_subscribers.csv"
https://<MasterIP>/dra/slfapi/subscriber/bulkUpload --insecure
-u admin:admin
```

The file named create_subscribers.csv must be created before running this command.

Bulk Upload Status

Returns the list of bulk upload status of the bulk provisioning sorted by the latest first. Latest 10 statuses would be saved in the system for reference, old status will automatically get purged.

The following table describes the fields in the Bulk Upload Status:

Table 5: Bulk Upload Status

Field	Description
fileName	The name of csv file uploaded.
startTime	The time when task was scheduled.
endTime	The time when task was finished
approxEndTime	The future time when task is expected to be finished
status	The status of the task Status can be one of these statuses (scheduled, in-progress, complete, failed)
statusMessage	The detailed status of the task

Field	Description
numberOfTotalSubscriber	Total number of subscriber in csv file
numberOfPending	The number of subscriber pending for execution
numberOfComplete	The number of subscriber, whose execution is finished
numberOfSuccess	The number of subscriber provisioned successfully.
numberOfFailure	The number of subscriber failed in provisioning.
failedSubscriber	This field contains the failure reason for each failed subscriber. This is a map, with key as error code and value as the list of failed subscribers.

Request

Method: GET

URI: /dra/slfapi/subscriber/bulkUploadStatus

Request Example

HTTP GET /dra/slfapi/subscriber/bulkUploadStatus

Response Example

HTTP STATUS: 200

```
[{
  "approxEndTime": "08-17-2017 13:31:59",
  "failedSubscriber": {
    "1001": [
      "1000000000",
      "1000000001",
      "1000000002"
    ]
  },
  "fileName": "create_subscribers_1k.csv",
  "numberOfComplete": 700,
  "numberOfFailure": 3,
  "numberOfPending": 300,
  "numberOfSuccess": 697,
  "numberOfTotalSubscriber": 1000,
  "startTime": "08-17-2017 13:30:16",
  "status": "complete",
  "statusMessage": "Slf bulk upload task execution is in progress"
},
{
  "endTime": "08-18-2017 12:41:27",
  "failedSubscriber": {},
  "fileName": "create_subscribers_10.csv",
  "numberOfComplete": 10,
  "numberOfFailure": 0,
  "numberOfPending": 0,
  "numberOfSuccess": 10,
  "numberOfTotalSubscriber": 10,
  "startTime": "08-18-2017 12:41:27",
  "status": "complete",
```

```
    "statusMessage": "Slf bulk upload task is completed"  
  }  
}]
```

Example of Curl Command

```
curl -X GET --progress-bar -H "Content-Type:  
application/json" \https://<MasterIP>/dra/slfapi/subscriber/bulkUploadStatus  
--insecure -u admin:admin
```

vDRA Peer API

The vDRA Peer API provides a REST API interface for the following functions:

- view active and inactive peer endpoints - local and remote
- view peer details for each host and/or peer key
- peer status logs

For more information about the Peer API, see the API RAML at: <https://<master ip>/dra/docs/api/>



CHAPTER 4


CPS Statistics

- [Bulk Statistics Overview](#), on page 49
- [CPS Statistics](#), on page 51
- [Bulk Statistics Collection](#), on page 51
- [Diameter Monitoring KPIs](#), on page 52
- [Example CPS Statistics](#), on page 64

Bulk Statistics Overview

Bulk Statistics are the statistics that are gathered over a given time period and written to a set of CSV files. These statistics can be used by external analytic processes and/or network management systems. The architecture of CPS bulk statistic collection is shown in the following illustration.

Figure 9: DRA Bulk Statistic Collection Architecture

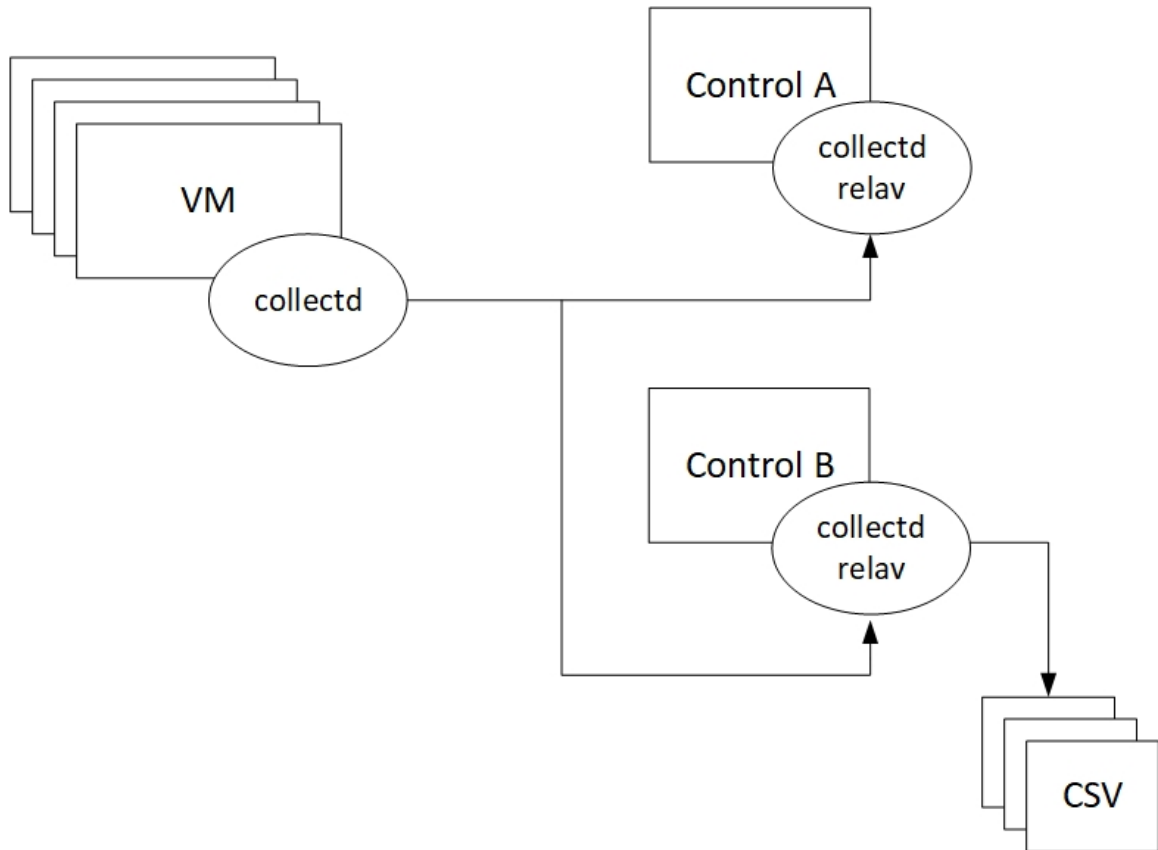

The collection utility collectd is used for collecting and storing statistics from each VM. Detailed collectd documentation can be found on <http://collectd.org/>.

Collectd within CPS is deployed with nodes relaying data using the collectd network plug-in (<https://collectd.org/wiki/index.php/Plugin:Network>) to the centralized collection nodes on the control-A and control-B virtual machines. The centralized collector writes the collected data to output CSV files.



Note Control A and Control B collect bulk statistics independently. As a result, it is normal to have slight differences between the two files. For example, control-A will generate a file at time t and control-B will generate a file at time t +/- the clock drift between the two machines.

As a best practice, always use the bulk statistics collected from Control-A. Control-B can be used as a backup in the event of failure of control-A.

In the event that Control-A becomes unavailable, statistics will still be gathered on Control-B. Statistics data is not synchronized between Control-A and Control-B, so a gap would exist in the collected statistics while control-A is down.



Note The collectd collection mechanism are separate from the Prometheus / Grafana Monitoring.

CPS Statistics

The list of statistics available in CPS is consolidated in an Excel spreadsheet. After CPS is installed, this spreadsheet can be found in the following location:

<https://<masterip>/dra/docs/stats/bulk-stats.html>

Bulk Statistics Collection

By default, CPS outputs a bulk statistics CSV file to the `/var/broadhop/stats/` directory on the control-A and control-B VMs in five-minute intervals.

An `scp` / `sftp` daemon running on port 2026 retrieves all statistics within the `/var/broadhop/stats` directory. Only locally defined users within the scheduling application associated to the “bulkstats” or “admin” group are able to retrieve statistics.

You can also retrieve statistics by logging into the virtual machine directly and retrieving the statistics from the `/data/stats` directory.

The default naming standard is `bulk-hostname-YYYY-MM-DD-HH-MI.csv`

These CSV files include all statistics collected from all VMs during the five-minute interval.



Note If a statistic is generated by the system multiple times within the five-minute interval, only the last measured statistics is collected in the CSV file.

The following list is a sample of the file names created in the `/var/broadhop/stats/` directory on the control-A VM:

```
[root@control-1 stats]# pwd
/data/stats-relay-s1/var/broadhop/stats [root@control-A stats]# ls
bulk-control-A-201510131350.csv
bulk-control-A-201510131355.csv
bulk-control-A-201510131400.csv
bulk-control-A-201510131405.csv
bulk-control-A-201510131410.csv
bulk-control-A-201510131415.csv
bulk-control-A-201510131420.csv
bulk-control-A-201510131425.csv
bulk-control-A-201510131430.csv
bulk-control-A-201510131435.csv
bulk-control-A-201510131440.csv
bulk-control-A-201510131445.csv
bulk-control-A-201510131450.csv
bulk-control-A-201510131455.csv
bulk-control-A-201510131500.csv
bulk-control-A-201510131505.csv
bulk-control-A-201510131510.csv
bulk-control-A-201510131515.csv
bulk-control-A-201510131520.csv
bulk-control-A-201510131525.csv
bulk-control-A-201510131530.csv
bulk-control-A-201510131535.csv
bulk-control-A-201510131540.csv
```

```

bulk-control-A-201510131545.csv
bulk-control-A-201510131550.csv
bulk-control-A-201510131555.csv
bulk-control-A-201510131600.csv
bulk-control-A-201510131605.csv
bulk-control-A-201510131610.csv
bulk-control-A-201510131615.csv
bulk-control-A-201510131620.csv
bulk-control-A-201510131625.csv
bulk-control-A-201510131630.csv

```

Retention of CSV Files

CPS retains each bulk statistics CSV file on the control-A/B VM for two days; after which the file is automatically removed.

If you need to preserve these CSV files, you must back up the files or move them to an alternate system.

Diameter Monitoring KPIs

The following table describes CPS KPIs that are useful for monitoring Diameter message traffic.



Note As each deployment is unique, no recommended ranges are provided. Cisco recommends monitoring these KPIs for a period of time (1-3 months) to establish a baseline. Deviations can then be monitored from the baseline values.

Table 6: Diameter Monitoring KPIs

Appld/ Monitoring Area	Category	Statistic	Description	Availability/Node
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Gx_CCR-I_2001. qns_stat.success	Success message count for return code 2001	Policy Director
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Gx_CCR-I_2001. qns_stat.total _time_in_ms	Total milliseconds of successful messages with return code matching 2001	Policy Director

Appld/ Monitoring Area	Category	Statistic	Description	Availability/Node
Gx/F	Diameter Round Trip	node[x].messages.e2e_ _<domain>_[realm_] Gx_CCR-I_3xxx. qns_stat.success	Success count of messages with return code matching 3XXX	Policy Director
Gx/F	Diameter Round Trip	node[x].messages.e2e_ _<domain>_[realm_] Gx_CCR-I_4xxx. qns_stat.success	Success count of messages with return code matching 4XXX	Policy Director
Gx/F	Diameter Round Trip	node[x].messages.e2e_ _<domain>_[realm_] Gx_CCR-I_5xxx. qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director
Gx/A	Diameter Input Queue	node1.counters.[realm_] Gx_CCR-I.qns_count	Count of messages successfully sent to the policy engine	Policy Server (qns)
Gx/F	Diameter Round Trip	node[x].messages.e2e_ _<domain>_[realm_] Gx_CCR-U_2001. qns_stat.success	Success message count for return code 2001	Policy Director
Gx/F	Diameter Round Trip	node[x].messages.e2e_ _<domain>_[realm_] Gx_CCR-U_2001. qns_stat.total_time_in_ms	Total milliseconds of successful messages with return code matching 2001	Policy Director
Gx/F	Diameter Round Trip	node[x].messages.e2e_ _<domain>_[realm_] Gx_CCR-U_3xxx. qns_stat.success	Success count of messages with return code matching 3XXX	Policy Director
Gx/F	Diameter Round Trip	node[x].messages.e2e_ _<domain>_[realm_] Gx_CCR-U_4xxx. qns_stat.success	Success count of messages with return code matching 4XXX	Policy Director
Gx/F	Diameter Round Trip	node[x].messages.e2e_ _<domain>_[realm_] Gx_CCR-U_5xxx. qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director

Appld/ Monitoring Area	Category	Statistic	Description	Availability/Node
Gx/A	Diameter Input Queue	node1.counters. [realm_] Gx_CCR-U. qns_count	Count of messages successfully sent to the policy engine	Policy Server (qns)
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Gx_CCR-U_2001. qns_stat.success	Success message count for return code 2001	Policy Director
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Gx_CCR-U_2001. qns_stat.total_time_in_ms	Total milliseconds of successful messages with return code matching 2001	Policy Director
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Gx_CCR-U_3xxx. qns_stat.success	Success count of messages with return code matching 3XXX	Policy Director
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Gx_CCR-U_4xxx. qns_stat.success	Success count of messages with return code matching 4XXX	Policy Director
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Gx_CCR-U_5xxx. qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director
Gx/A	Diameter Input Queue	node1.counters. [realm_] Gx_CCR-U. qns_count	Count of messages successfully sent to the policy engine	Policy Server (qns)
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Gx_CCR-T_2001. qns_stat.success	Success message count for return code 2001	Policy Director
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Gx_CCR-T_2001. qns_stat.total_time_in_ms	Total milliseconds of successful messages with return code matching 2001	Policy Director

Appld/ Monitoring Area	Category	Statistic	Description	Availability/Node
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Gx_CCR-T_3xxx. qns_stat.success	Success count of messages with return code matching 3XXX	Policy Director
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Gx_CCR-T_4xxx. qns_stat.success	Success count of messages with return code matching 4XXX	Policy Director
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Gx_CCR-T_5xxx. qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director
Gx/A	Diameter Input Queue	node1.counters.[realm_] Gx_CCR-T.qns_count	Count of messages successfully sent to the policy engine	Policy Server (qns)
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Gx_RAR_2001. qns_stat.success	Success message count for return code 2001	Policy Director
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Gx_RAR_2001. qns_stat.total_time_in_ms	Total milliseconds of successful messages with return code matching 2001	Policy Director
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Gx_RAR_3xxx. qns_stat.success	Success count of messages with return code matching 3XXX	Policy Director
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Gx_RAR_4xxx. qns_stat.success	Success count of messages with return code matching 4XXX	Policy Director
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Gx_RAR_5xxx. qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director

ApplId/ Monitoring Area	Category	Statistic	Description	Availability/Node
Gx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Gx_RAR_timeout. qns_stat.success	Success timeout count for RAR message	Policy Director
Gx/A	Diameter Input Queue	node1.counters.[realm_] Gx_RAA.qns_count	Count of all messages sent to the policy engine	Policy Server (qns)
Gx/A	Diameter Input Queue	node1.messages. in_q_Gx_RAA. qns_stat.error	Count of messages failed to be sent to the policy engine	Policy Server (qns)
Gx/A	Diameter Input Queue	node1.messages. in_q_Gx_RAA. qns_stat.success	Count of messages successfully sent to the policy engine	Policy Server (qns)
Gx/E	Diameter Output Queue	node1.counters.[realm_] Gx_RAR.qns_count	Count of messages successful sent to the Policy Director (LB)	Policy Server (qns)
Rx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Rx_AAR_2001. qns_stat.success	Success message count for return code 2001	Policy Director
Rx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Rx_AAR_2001. qns_stat.total_time_in_ms	Total milliseconds of successful messages with return code matching 2001	Policy Director
Rx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Rx_AAR_3xxx. qns_stat.success	Success count of messages with return code matching 3XXX	Policy Director
Rx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Rx_AAR_4xxx. qns_stat.success	Success count of messages with return code matching 4XXX	Policy Director
Rx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Rx_AAR_5xxx. qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director

Appld/ Monitoring Area	Category	Statistic	Description	Availability/Node
Rx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Rx_AAR_timeout. qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director
Rx/A	Diameter Input Queue	node1.counters. [realm_] Rx_RAA.qns_count	Count of messages successful sent to the Policy Director (LB)	Policy Server (qns)
Rx/A	Diameter Input Queue	node1.counters. [realm_] Rx_AAR_drop. qns_count	Count of messages dropped due to exceedingSLA	Policy Server (qns)
Rx/E	Diameter Output Queue	node1.counters. [realm_] Rx_AAA_2001. qns_count	Count of AAA messages with result-code = 2001 sent successfully to the PolicyDirector (LB)	Policy Server (qns)
Rx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Rx_ASR_2001. qns_stat.success	Success message count for return code 2001	Policy Director
Rx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Rx_ASR_2001. qns_stat.total_time_in_ms	Total milliseconds of successful messages with return code matching2001	Policy Director
Rx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Rx_ASR_3xxx. qns_stat.success	Success count of messages with return code matching 3XXX	Policy Director
Rx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Rx_ASR_4xxx. qns_stat.success	Success count of messages with return code matching 4XXX	Policy Director
Rx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Rx_ASR_5xxx. qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director
Rx/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Rx_ASR_retry. qns_count	Retry count for ASR message	Policy Server (qns)

Appld/ Monitoring Area	Category	Statistic	Description	Availability/Node
Rx/A	Diameter Input Queue	node1.counters.[realm_]Rx_ASA_bypass.qns_count	Count of message that do not require processing by the policy engine	Policy Server (qns)
Rx/A	Diameter Input Queue	node1.counters.[realm_]Rx_ASA.qns_count	Count of messages successfully sent to the policy engine	Policy Server (qns)
Rx/A	Diameter Input Queue	node1.counters.[realm_]Rx_ASA_drop.qns_count	Count of messages dropped due to exceedingSLA	Policy Server (qns)
Rx/F	Diameter Round Trip	node[x].messages.e2e_<domain>_[realm_]Rx_RAR_2001.qns_stat.success	Success message count for return code 2001	Policy Director
Rx/F	Diameter Round Trip	node[x].messages.e2e_<domain>_[realm_]Rx_RAR_2001.qns_stat.total_time_in_ms	Total milliseconds of successful messages with return code matching2001	Policy Director
Rx/F	Diameter Round Trip	node[x].messages.e2e_<domain>_[realm_]Rx_RAR_3xxx.qns_stat.success	Success count of messages with return code matching 3XXX	Policy Director
Rx/F	Diameter Round Trip	node[x].messages.e2e_<domain>_[realm_]Rx_RAR_4xxx.qns_stat.success	Success count of messages with return code matching 4XXX	Policy Director
Rx/F	Diameter Input Queue	node[x].messages.e2e_<domain>_[realm_]Rx_RAR_5xxx.qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director
Rx/A	Diameter Input Queue	node1.counters.[realm_]Rx_RAA_bypass.qns_count	Count of message that do not require processing by the policy engine	Policy Server (qns)
Rx/A	Diameter Output Queue	node1.counters.[realm_]Rx_RAA.qns_count	Count of messages successfully sent to the policy engine	Policy Server (qns)

Appld/ Monitoring Area	Category	Statistic	Description	Availability/Node
Rx/A	Diameter Round Trip	node1.counters.[realm_] Rx_RAA_drop.qns_count	Count of messages dropped due to exceedingSLA	Policy Server (qns)
Rx/F	Diameter Round Trip	node[x].messages.e2e_<domain>_[realm_] Rx_STR_2001.qns_stat.success	Success message count for return code 2001	Policy Director
Rx/F	Diameter Round Trip	node[x].messages.e2e_<domain>_[realm_] Rx_STR_2001.qns_stat.total_time_in_ms	Total milliseconds of successful messages with return code matching2001	Policy Director
Rx/F	Diameter Round Trip	node[x].messages.e2e_<domain>_[realm_] Rx_STR_3xxx.qns_stat.success	Success count of messages with return code matching 3XXX	Policy Director
Rx/F	Diameter Round Trip	node[x].messages.e2e_<domain>_[realm_] Rx_STR_4xxx.qns_stat.success	Success count of messages with return code matching 4XXX	Policy Director
Rx/F	Diameter Round Trip	node[x].messages.e2e_<domain>_[realm_] Rx_STR_5xxx.qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director
Rx/A	Diameter Input Queue	node1.counters.[realm_] Rx_STR.qns_count	Count of messages successful sent to the policy engine	Policy Server (qns)
Rx/A	Diameter Input Queue	node1.counters.[realm_] Rx_STR_drop.qns_count	Count of messages dropped due to exceedingSLA	Policy Server (qns)
Rx/A	Diameter Input Queue	node1.messages.in_q_Rx_STR.qns_stat.success	Count of messages successful sent to the policy engine	Policy Server (qns)
Rx/A	Diameter Input Queue	node1.messages.in_q_Rx_STR.qns_stat.total_time_in_ms	Total milliseconds of messages successfully sent to the policy engine	Policy Server (qns)

Appld/ Monitoring Area	Category	Statistic	Description	Availability/Node
Rx/D	Engine Message	node1.messages. diameter_Rx_STR. qns_stat.success	Success message count	Policy Server (qns)
Rx/D	Engine Message	node1.messages. diameter_Rx_STR.qns_stat. total_time_in_ms	Total milliseconds of successful messages	Policy Server (qns)
Rx/E	Diameter Input Queue	node1.counters. [realm_] Rx_STA_2001. qns_count	Count of STA messages with result-code = 2001 sent successfully to the PolicyDirector (LB)	Policy Server (qns)
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Sy_SLR_2001. qns_stat.success	Success message count for return code 2001	Policy Director
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Sy_SLR_2001. qns_stat.total_time_in_ms	Total milliseconds of successful messages with return code matching 2001	Policy Director
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Sy_SLR_3xxx. qns_stat.success	Success count of messages with return code matching 3XXX	Policy Director
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Sy_SLR_4xxx. qns_stat.success	Success count of messages with return code matching 4XXX	Policy Director
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Sy_SLR_5xxx. qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director
Sy/A	Diameter Input Queue	node1.counters. [realm_] Sy_SLR_bypass. qns_count	Count of message that do not require processing by the policy engine	Policy Server (qns)

Appld/ Monitoring Area	Category	Statistic	Description	Availability/Node
Sy/A	Diameter Input Queue	node1.counters.[realm_] Sy_SLR.qns_count	Count of messages successful sent to the policy engine	Policy Server (qns)
Sy/A	Diameter Input Queue	node1.counters.[realm_] Sy_SLR_drop.qns_count	Count of messages dropped due to exceedingSLA	Policy Server (qns)
Sy/A	Diameter Input Queue	node1.messages.in_q_Sy_SLA.qns_stat.success	Count of messages successfully sent to the policy engine	Policy Server (qns)
Sy/A	Diameter Input Queue	node1.messages.in_q_Sy_SLA.qns_stat.total_time_in_ms	Total milliseconds of messages successfully sent to the policy engine	Policy Server (qns)
Sy/D	Engine Message	node1.messages.diameter_Sy_SLA.qns_stat.success	Success message count	Policy Server (qns)
Sy/D	Engine Message	node1.messages.diameter_Sy_SLA.qns_stat.total_time_in_ms	Total milliseconds of successful messages	Policy Server (qns)
Sy/B	Diameter Action	node1.actions.send.diameter_Sy_SLR.qns_stat.success	Success actions count	Policy Server (qns)
Sy/B	Diameter Action	node1.actions.send.diameter_Sy_SLR.qns_stat.total_time_in_ms	Total milliseconds of successful messages	Policy Server (qns)
Sy/F	Diameter Round Trip	node[x].messages.e2e_<domain>_[realm_] Sy_SNR_2001.qns_stat.success	Success message count for return code 2001	Policy Director
Sy/F	Diameter Round Trip	node[x].messages.e2e_<domain>_[realm_] Sy_SNR_2001.qns_stat.total_time_in_ms	Total milliseconds of successful messages with return code matching2001	Policy Director

Appld/ Monitoring Area	Category	Statistic	Description	Availability/Node
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Sy_SNR_3xxx. qns_stat.success	Success count of messages with return code matching 3XXX	Policy Director
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Sy_SNR_4xxx. qns_stat.success	Success count of messages with return code matching 4XXX	Policy Director
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Sy_SNR_5xxx. qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director
Sy/A	Diameter Input Queue	node1.counters. [realm_] Sy_SNR.qns_count	Count of messages successful sent to the policy engine	Policy Server (qns)
Sy/A	Diameter Input Queue	node1.counters. [realm_] Sy_SNR_drop. qns_count	Count of messages dropped due to exceedingSLA	Policy Server (qns)
Sy/A	Diameter Input Queue	node1.messages. in_q_ Sy_SNR. qns_stat.success	Count of messages successfully sent to the policy engine	Policy Server (qns)
Sy/A	Diameter Input Queue	node1.messages. in_q_Sy_SNR. qns_stat. total_time_in_ms	Total milliseconds of messages successfully sent to the policy engine	Policy Server (qns)
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_[realm_] Sy_STR_2001. qns_stat.success	Success message count for return code 2001	Policy Director
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Sy_STR_2001. qns_stat. total_time_in_ms	Total milliseconds of successful messages with return code matching2001	Policy Director

Appld/ Monitoring Area	Category	Statistic	Description	Availability/Node
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Sy_STR_3xxx. qns_stat.success	Success count of messages with return code matching 3XXX	Policy Director
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Sy_STR_4xxx. qns_stat.success	Success count of messages with return code matching 4XXX	Policy Director
Sy/F	Diameter Round Trip	node[x].messages. e2e_<domain>_ [realm_] Sy_STR_5xxx. qns_stat.success	Success count of messages with return code matching 5XXX	Policy Director
Sy/A	Diameter Input Queue	node1.counters. [realm_] Sy_STA_bypass. qns_count	Count of message that do not require processing by the policy engine	Policy Server (qns)
Sy/A	Diameter Input Queue	node1.counters. [realm_] Sy_STA.qns_count	Count of messages successful sent to the policy engine	Policy Server (qns)
Sy/A	Diameter Input Queue	node1.counters. [realm_] Sy_STA_drop.qns_count	Count of messages dropped due to exceedingSLA	Policy Server (qns)
Sy/A	Diameter Input Queue	node1.messages. in_q_Sy_STA. qns_stat.success	Count of messages successfully sent to the policy engine	Policy Server (qns)
Sy/A	Diameter Input Queue	node1.messages. in_q_Sy_STA. qns_stat.total_time_in_ms	Total milliseconds of messages successfully sent to the policy engine	Policy Server (qns)
Sy/D	Engine Message	node1.messages. diameter_Sy_STA. qns_stat.success	Success message count	Policy Server (qns)
Sy/D	Engine Message	node1.messages. diameter_Sy_STA. qns_stat.total_time_in_ms	Total milliseconds of successful messages	Policy Server (qns)

Appld/ Monitoring Area	Category	Statistic	Description	Availability/Node
Sy/B	Diameter Action	node1.actions.send.diameter_Sy_STR.qns_stat.success	Success actions count	Policy Server (qns)
Sy/B	Diameter Action	node1.actions.send.diameter_Sy_STR.qns_stat.total_time_in_ms	Total milliseconds of successful actions	Policy Server (qns)
Sy/E	Diameter Output Queue	node1.counters.[realm_]Sy_STR.qns_count	Count of messages successfully sent to the Policy Director (LB)	Policy Server (qns)

Example CPS Statistics

Sample CSV Files

The following list is a sample of the file names created in the /var/broadhop/stats directory on the control-A VM.

```
[root@control-A stats]# pwd
/var/broadhop/stats [root@control-A stats]# ls
bulk-control-A-201510131350.csv
bulk-control-A-201510131355.csv
bulk-control-A-201510131400.csv
bulk-control-A-201510131405.csv
bulk-control-A-201510131410.csv
bulk-control-A-201510131415.csv
bulk-control-A-201510131420.csv
bulk-control-A-201510131425.csv
bulk-control-A-201510131430.csv
bulk-control-A-201510131435.csv
bulk-control-A-201510131440.csv
bulk-control-A-201510131445.csv
bulk-control-A-201510131450.csv
bulk-control-A-201510131455.csv
bulk-control-A-201510131500.csv
bulk-control-A-201510131505.csv
bulk-control-A-201510131510.csv
bulk-control-A-201510131515.csv
bulk-control-A-201510131520.csv
bulk-control-A-201510131525.csv
bulk-control-A-201510131530.csv
bulk-control-A-201510131535.csv
bulk-control-A-201510131540.csv
bulk-control-A-201510131545.csv
bulk-control-A-201510131550.csv
bulk-control-A-201510131555.csv
bulk-control-A-201510131600.csv
bulk-control-A-201510131605.csv
bulk-control-A-201510131610.csv
bulk-control-A-201510131615.csv
```

```
bulk-control-A-201510131620.csv  
bulk-control-A-201510131625.csv  
bulk-control-A-201510131630.csv
```

Sample Output

C,<VM_name>,node1.actions.send.diameter_Gx_CCA-I.qns_stat.success,19 where the <VM_Name> indicates the VM where statistics has been collected.

A sample bulk statistics.csv file is shown below:

```
C,qns01,node1.actions.SaveSubscriberActionImpl.qns_stat.error,0  
C,qns01,node1.actions.SaveSubscriberActionImpl.qns_stat.success,6  
C,qns01,node1.actions.send.diameter_Gx_CCA-I.qns_stat.error,0  
C,qns01,node1.actions.send.diameter_Gx_CCA-I.qns_stat.success,19  
C,qns01,node1.actions.send.diameter_Gx_CCA-T.qns_stat.error,0  
C,qns01,node1.actions.send.diameter_Gx_CCA-T.qns_stat.success,9  
D,qns01,node1.messages.in_q_Gx_CCR-I.qns_stat.total_time_in_ms,14  
D,qns01,node1.messages.in_q_Gx_CCR-T.qns_stat.total_time_in_ms,2  
D,qns01,node1.messages.in_q_Gx_CCR-U.qns_stat.total_time_in_ms,1  
D,qns01,node1.messages.in_q_Gx_RAA.qns_stat.total_time_in_ms,0  
D,qns01,node1.messages.in_q_Sh_SNA.qns_stat.total_time_in_ms,2  
D,qns01,node1.messages.in_q_Sh_UDA.qns_stat.total_time_in_ms,0  
D,qns01,node1.messages.TimerExpired.qns_stat.total_time_in_ms,7244  
D,qns01,node1.spr.createSubscriber.qns_stat.total_time_in_ms,29  
D,qns01,node1.spr.deleteSubscriber.qns_stat.total_time_in_ms,40  
D,qns01,node1.spr.getSubscriber.qns_stat.total_time_in_ms,44  
D,qns01,node1.spr.updateSubscriber.qns_stat.total_time_in_ms,21  
G,1b02,node1.ldap.SITELDAP.qns_ldap_connection.MaximumAvailableConnections,10.0  
G,1b02,node1.ldap.SITELDAP.qns_ldap_connection.NumAvailableConnections,0.0  
G,1b02,node1.thread.gauge.daemon_thread_count,80.0  
G,1b02,node1.thread.gauge.live_thread_count,184.0
```




CHAPTER 5

CLI Commands

- CLI Command Overview, on page 70
- CLI Command Modes, on page 70
- abort, on page 73
- alert rule, on page 73
- alert snmp-v2-destination, on page 76
- alert snmp-v3-destination, on page 77
- apply patches, on page 78
- binding cluster-binding-dbs imsiapn-msisdnapn, on page 79
- binding db-connection, on page 79
- binding db-connection-settings, on page 81
- binding db-max-record-limit, on page 83
- binding db-read-connection-settings, on page 84
- binding shard-metadata-db-connection, on page 86
- binding throttle-db-operation, on page 87
- clear, on page 88
- compare, on page 89
- consul, on page 89
- control-plane relay, on page 91
- database cluster, on page 92
- database cluster *db-name* config-server *name* , on page 93
- database cluster *db-name* config-server-seed *name*, on page 94
- database cluster *db-name* multi-db-collections *noOfShardsPerDB*, on page 95
- database cluster *db-name* router *name* , on page 96
- database cluster *db-name* shard *name*, on page 97
- database cluster *db-name* shard *shard-name* shard-server *name*, on page 98
- database cluster *db-name* shard *shard-name* shard-server-seed *name*, on page 100
- database cluster *db-name* sharding-db *name*, on page 101
- database cluster *db-name* sharding-db-seed *name*, on page 102
- database cluster *db-name* ipv6-zone-sharding, on page 103
- database cluster *db-name* ipv6-zones-range *zone-name* zone-range *range-name* start *pool-starting-address* end *pool- ending-address*, on page 104
- database cluster *db-name* shard *shard-name* zone-name *zone-name* , on page 105
- database delete all-bindings-sessions, on page 106

- database delete ipv6bindings, on page 107
- db-authentication set-password database redis password, on page 108
- db-authentication show-password database redis, on page 109
- db-authentication remove-password database redis, on page 109
- db-authentication show-password database mongo, on page 110
- db-authentication set-password database mongo password, on page 111
- db-authentication remove-password database mongo, on page 111
- db-authentication change-password database mongo, on page 112
- db-authentication sync-password database mongo, on page 113
- db-authentication enable-transition-auth database mongo, on page 113
- db-authentication disable-transition-auth database mongo, on page 114
- db-authentication rolling-restart database mongo, on page 114
- db-authentication rolling-restart-parallel database mongo, on page 115
- db-authentication rolling-restart-parallel-status database mongo, on page 116
- db-authentication rolling-restart-status database mongo, on page 117
- db connect admin, on page 118
- db connect binding, on page 118
- db connect session, on page 119
- debug collect-db-logs-advanced collect, on page 119
- debug collect-db-logs-advanced scan, on page 120
- debug packet-capture gather, on page 121
- debug packet-capture purge, on page 122
- debug packet-capture start, on page 123
- debug tech, on page 123
- docker connect, on page 124
- docker exec, on page 125
- docker restart, on page 125
- docker start, on page 126
- docker stop, on page 126
- dra migration, on page 127
- end, on page 129
- external-aaa pam gid-mapping , on page 130
- license feature, on page 131
- load, on page 131
- logger set, on page 133
- logger clear, on page 134
- monitor log application, on page 134
- monitor log container, on page 135
- monitor log engine, on page 136
- nacm rule-list, on page 136
- network dns server, on page 138
- network dns host, on page 139
- network virtual-service , on page 139
- network virtual-service name host, on page 142
- ntp server, on page 143
- revert, on page 144

- [rollback configuration](#), on page 144
- [scheduling external-service](#), on page 145
- [scheduling vm-target](#), on page 146
- [show alert status](#), on page 148
- [show configuration](#), on page 149
- [show configuration commit](#), on page 149
- [show configuration rollback](#), on page 150
- [show database](#), on page 151
- [show docker engine](#), on page 154
- [show docker service](#), on page 155
- [show dra-distributor](#), on page 156
- [show history](#), on page 160
- [show license details](#), on page 161
- [show log application](#), on page 162
- [show log engine](#), on page 162
- [show logger level](#), on page 162
- [show orchestrator-database-status](#), on page 163
- [show patches](#), on page 164
- [show running-config binding db-connection-settings](#), on page 164
- [show running-config binding db-read-connection-settings](#), on page 165
- [show running-config binding shard-metadata-db-connection](#), on page 165
- [show scheduling effective-scheduler](#), on page 166
- [show scheduling status](#), on page 166
- [show scheduling vm-target](#), on page 167
- [show system diagnostics](#), on page 168
- [show system history](#) , on page 169
- [show system secrets open](#) , on page 170
- [show system secrets paths](#) , on page 170
- [show system software available-versions](#) , on page 171
- [show system software docker-repository](#) , on page 172
- [show system software version](#) , on page 172
- [show system software iso stage file](#), on page 172
- [show system software iso details](#), on page 173
- [show system status](#), on page 174
- [show system status debug](#), on page 175
- [show system status downgrade](#) , on page 175
- [show system status running](#) , on page 176
- [show system status upgrade](#) , on page 176
- [statistics bulk file](#), on page 177
- [statistics bulk interval](#), on page 178
- [statistics detail](#), on page 179
- [statistics icmp-ping](#), on page 180
- [statistics summary](#), on page 181
- [Storage Health Check Service Commands](#), on page 182
- [system abort-downgrade](#), on page 183
- [system abort-upgrade](#) , on page 183

- [system downgrade](#), on page 183
- [system disable-debug](#), on page 185
- [system disable-external-services](#), on page 186
- [system enable-debug](#), on page 186
- [system enable-external-services](#), on page 187
- [system secrets add-secret](#) , on page 187
- [system secrets remove-secret](#) , on page 188
- [system secrets set-passcode](#) , on page 189
- [system secrets unseal](#) , on page 189
- [system software iso stage clean](#), on page 190
- [system software iso stage pull](#), on page 190
- [system software iso activate](#), on page 191
- [system software iso delete](#), on page 192
- [system software iso load](#), on page 193
- [system start](#) , on page 194
- [system stop](#) , on page 195
- [system upgrade](#) , on page 195

CLI Command Overview

The command-line interface (CLI) is one of the available user interfaces to configure and monitor the launched application. This user interface provides direct access to execute commands via remote access methods over SSH.

In addition to the CLI, Cisco CPS provides a NETCONF and RESTCONF interface for API access to the application.

CLI Command Modes

The CLI provides two separate command modes – OPERATIONAL and CONFIG.

Each command mode has a separate set of commands available for configuration and monitoring of the application. Entering a “?” at the command prompt will indicate the list of available commands for execution within a given mode.

When you start a session, the default mode is OPERATIONAL mode. From this mode, you can access monitoring “show” commands, debugging commands and system maintenance commands. You can enter CONFIG mode to change configuration by issuing the “config” command at the OPERATIONAL prompt.

OPERATIONAL Mode

Logging into the master VM on port 2024 via SSH will allow you to access OPERATIONAL mode. The login into the system will require the use of a username and password. You may attempt to enter a correct password up to three times before the connection attempt is refused.

The commands available at the OPERATIONAL level are separate from the ones available at the CONFIG level. In general, the OPERATIONAL commands encompass monitoring, debugging, and maintenance activity a user will perform.

To list the available OPERATIONAL commands, use the following command:

Table 7: List Commands of OPERATIONAL Mode

Command	Purpose
scheduler# ?	Lists the user OPERATIONAL commands

Example:

```
scheduler# ?
Possible completions:
  aaa                AAA management
  apply              Automatically query for mandatory elements
  autowizard         Change working directory
  cd                 Clear parameter
  clear              Confirm a pending commit
  compare            Compare running configuration to another configuration or a file
  complete-on-space Enable/disable completion on space
  config             Manipulate software configuration information
  db                 DB connection and monitoring
  debug              Debug commands
  describe           Display transparent command information
  devtools           Enable/disable development tools
  display-level      Configure show command display level
  docker             Docker Management
  exit               Exit the management session
  file               Perform file operations
  help               Provide help information
  history            Configure history size
  id                 Show user id information
  idle-timeout       Configure idle timeout
  ignore-leading-space Ignore leading whitespace (true/false)
  job                Job operations
  logger             Log level management
  logout             Logout a user
  monitor            Application monitoring
  no                 Negate a command or set its defaults
  output-file        Copy output to file or terminal
  paginate           Paginate output from CLI commands
  prompt1            Set operational mode prompt
  prompt2            Set configure mode prompt
  pwd                Display current mode path
  quit               Exit the management session
  screen-length      Configure screen length
  screen-width       Configure screen width
  script             Script actions
  send               Send message to terminal of one or all users
  show               Show information about the system
  show-defaults      Show default values when showing the configuration
  source             File to source
  system             System management
  terminal            Set terminal type
  timestamp          Enable/disable the display of timestamp
  who                Display currently logged on users
  write              Write configuration
scheduler#
```

The list of commands will vary based on the version of software installed.

CONFIG Mode

Within OPERATIONAL mode, you can enter CONFIG mode by issuing the “config” command. In general, the CONFIG commands modify the system configuration.

To enter CONFIG mode, use the following command:

Table 8: Enter CONFIG mode

Command	Purpose
scheduler# config	Enter CONFIG mode of the CLI

In CONFIG mode, the prompt changes to include a “(config)” at the end of the prompt.

Example:

```
scheduler# config
Entering configuration mode terminal
scheduler(config)#
```

To list the available CONFIG commands, use the following command:

Table 9: List commands in CONFIG mode

Command	Purpose
scheduler(config)# ?	List the user CONFIG commands

Example:

```
scheduler(config)# ?
Possible completions:
aaa          AAA management
alert        Alert status
alias        Create command alias.
binding      Binding DB connections
control-plane Cross data center control plane
docker       Docker Management
license      CPS License Management
nacm         Access control
ntp          NTP configuration
scheduling   Service scheduling
session      Global default CLI session parameters
statistics   Application statistics
system       System configuration
user         User specific command aliases and default CLI session parameters
webui        Web UI specific configuration
---
abort        Abort configuration session
annotate     Add a comment to a statement
clear        Remove all configuration changes
commit       Commit current set of changes
compare      Compare configuration
copy         Copy a list entry
describe     Display transparent command information
do           Run an operational-mode command
end          Terminate configuration session
exit         Exit from current mode
help         Provide help information
insert       Insert a parameter
```

load	Load configuration from an ASCII file
move	Move a parameter
no	Negate a command or set its defaults
pwd	Display current mode path
rename	Rename an identifier
resolved	Conflicts have been resolved
revert	Copy configuration from running
rollback	Roll back database to last committed version
save	Save configuration to an ASCII file
service	Modify use of network based services
show	Show a parameter
tag	Manipulate statement tags
top	Exit to top level and optionally run command
validate	Validate current configuration

abort

Used to terminate a configuration session and discard all uncommitted changes without system confirmations. You can use the abort command in any configuration mode.

Syntax

```
abort
```

Command Mode

CONFIG

VNFs

All

Command Usage

Use the abort command to terminate a configuration session and return to the operational mode from any configuration mode. This command causes all uncommitted configuration changes to be discarded. You are not prompted to commit the changes.

Examples

The following is an example:

```
aaa authentication users user test1 password test123 gid 100 homedir / ssh_keydir / uid
9340
admin@orchestrator[an-master](config-user-test1)# exit
admin@orchestrator[an-master](config)# abort
admin@orchestrator[an-master]#
```

alert rule

Creates a new alerting rule.

The alerting rule allows automatic creation of internal and SNMP traps based on system conditions. The Prometheus monitoring application must be running for alerts to trigger properly. If all Prometheus servers are down, then the system does not generate alerts.

Syntax

```
alert rule name duration duration event-host-label event-host-label expression expression
message message snmp-clear-message snmp-clear-message snmp-facility { application | hardware
| networking | os | proc | virtualization } snmp-severity { alert | critical | debug |
emergency | error | info | none | notice | warning }
```

Command Parameters

Table 10: Parameter Description

Command Parameter	Description
name	The name of the alert rule.
duration	The duration measured the condition must exist before triggering an alarm. The format of the duration is <value><unit>. The value is any positive integer and the unit is one of the following: <ul style="list-style-type: none"> • s – second • m – minute • h – hour
event-host-label (optional)	The label received by the alerting engine from the Prometheus monitoring application. The application generates one alert per unique value of the given label. The valid labels are determined by the query executed and can be found by executing the query without the comparison operators in the Grafana application on a sample dashboard. If not defined, then the alert is considered global.
expression	The expression that makes up the alerting rule. The expression is built using a Prometheus expressions (https://prometheus.io/docs/querying/basics/) and must conform to the rules defined in the Prometheus alerting documentation: https://prometheus.io/docs/alerting/rules/
message	A configurable message to be sent with the alert. This message supports substitution of labels as defined in the templating section of the Prometheus documentation: https://prometheus.io/docs/alerting/rules/ . The resultant alert message is sent in any associated SNMP traps when the alert is triggered.

Command Parameter	Description
snmp-clear-message (optional)	A configurable message that is sent as the clear message when the alert condition is no longer valid.
snmp-facility (optional)	The target snmp-facility to use when generating SNMP trap: <ul style="list-style-type: none"> • application • hardware • networking • os • proc • virtualization Default is application.
snmp-severity	The target snmp-severity to use when generating an SNMP trap: <ul style="list-style-type: none"> • alert • critical • debug • emergency • error • info • none • notice • warning Default is alert.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the alert rule command to define monitoring rules for the system. When you create a new alert rule, the alert rule is exported to the Prometheus monitoring servers, which are monitoring the system on a 1-second interval. The Prometheus servers monitor the underlying expression defined in the alert rule and send alerts

scheduling OAM node when they are triggered or when they are cleared. The OAM node tracks internally the status of all alerts and sends any SNMP traps if SNMP servers are defined.

Examples

The following example generates an alert when `node_load > 3`:

```

alert rule test
  expression      "node_load5 > 3"
  event-host-label instance
  message        "Node level exceeds 3"
  snmp-facility  application
  snmp-clear-message "Node level below 3"
!
```

alert snmp-v2-destination

Creates a new SNMPv2 destination.

Creation of a SNMPv2 destination causes the system to forward any triggered/cleared alerts to the SNMPv2 destination.

Syntax

```
alert snmp-v2-destination nms-address community community
```

Command Parameters

Table 11: Parameter Description

Command Parameter	Description
nms-address	The address to send SNMPv2 traps.
Community	The community to use for SNMPv2 traps

Command Mode

CONFIG

VNFs

All

Command Usage

Use the `alert snmp-v2-destination` to forward alerts from the system to an external SNMPv2 trap receiver. The traps are sent using the following algorithm:

- Sent once when the alert is cleared
- Sent once when the alert is firing
- Sent once if the OAM application is restarted and the alert is firing.

Examples

The following example sends all alerts to community “test” with address 10.10.10.10.

```
scheduler(config)# alert snmp-v2-destination 10.10.10.10 community test
```

alert snmp-v3-destination

Creates a new SNMPv3 destination.

Creation of a SNMPv3 destination causes the system to forward any triggered/cleared alerts to the SNMPv3 destination.

Syntax

```
alert snmp-v3-destination nms-address auth-password auth-password auth-proto auth-proto
engine-id engine-id privacy-password privacy-password user user
```

Command Parameters

Table 12: Parameter Description

Command Parameter	Description
nms-address	The address to send SNMPv3 traps.
auth-password	Authentication passphrase used for authenticated SNMPv3 messages.
auth-proto	Authentication protocol used for authenticated SNMPv3 messages. Valid values are MD5 and SHA
engine-id	Context engine id as a hexadecimal string.
privacy-password	Privacy passphrase used for encrypted SNMPv3 messages.
privacy-protocol	Privacy protocol used for encrypted SNMPv3 messages. Valid values are DES and AES.
user	Security name used for authenticated SNMPv3 messages.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the alert snmp-v3-destination to forward alerts from the system to an external SNMPv2 trap receiver. The traps are sent using the following algorithm:

- Sent once when the alert is cleared
- Sent once when the alert is firing
- Sent once if the OAM application is restarted and the alert is firing.

Examples

The following example sends all alerts to community “test” with address 10.10.10.10.

```
scheduler(config)# alert snmp-v3-destination 10.10.10.10 user test auth-proto SHA
auth-password test engine-id 0x01020304 privacy-protocol AES privacy-password test
```

apply patches

Applies patches that are staged in the /data/orchestrator/patches/ directory of the master VM.

This command should only be used by the Cisco TAC and Engineering team to address specific problems and debug the application.

Syntax

```
apply patches
```

Command Parameters

Table 13: Parameter Description

Command Parameter	Description
Service Name or Prefix	The exact name of the service to apply the patch or the prefix of the services to apply.

Command Mode

OPERATIONAL

VNFs

All

Command Usage

This command should only be used at the recommendation of Cisco TAC and Engineering teams.

binding cluster-binding-dbs imsiapn-msisdnapn

Used to configure same connection pool on IMSIAPN-MSISDNAPN database transactions.



Note This command is applicable only for application client based sharding.

Syntax

```
binding cluster-binding-dbs imsiapn-msisdnapn
no binding cluster-binding-dbs
```

Command Mode

CONFIG

VNFs

DRA

Command Usage

Use this CLI to indicate to the application that IMSI APN bindings DB and MSISDN APN Bindings DB will use the same connection pool for DB transactions.

IMSI-APN connection settings for both read and write will apply to this combined pool.

In this mode change in MSISDN APN connection settings for read or write connection pools will have no effect.



Note This is not recommended for small setups. It is required for the setups for which the database spans across 48 shards or more.

Examples

The following is an example:

```
admin@orchestrator(config)# binding cluster-binding-dbs imsiapn-msisdnapn
```

binding db-connection

Adds additional binding db connections from the DRA to a DRA binding database.



Note This command is applicable only for MongoDB based sharding.

Syntax

```
binding db-connection { ipv4 | ipv6 | imsiapn | msisdnapn| slf } address port
```

Command Parameters

Table 14: Parameter Description

Command Parameter	Description
ipv4	Connection definition for the IPv4 binding database.
ipv6	Connection definition for the IPv6 binding database.
imsiapn	Connection definition for the IMSI-APN binding database.
msisdnapn	Connection definition for the MSISDN-APN binding database.
slf	Connection definition for the SLF database.
address	Address of the binding DRA database. This is either an IP address or an FQDN.
port	Port of the binding DRA database.

Command Mode

CONFIG

VNFs

DRA

Command Usage

Use the binding db-connection command to instruct the application on how to connect to the remote binding database. In general, there should be configuration lines entered per binding database type in order to support high availability.

Examples

The following configuration defines two redundant connections per database.

```
binding db-connection ipv6 172.16.82.195 27017
!
binding db-connection ipv6 172.16.82.196 27017
!
binding db-connection ipv4 172.16.82.195 27017
!
binding db-connection ipv4 172.16.82.196 27017
!
binding db-connection imsiapn 172.16.82.195 27017
!
binding db-connection imsiapn 172.16.82.196 27017
!
```

```
binding db-connection msisdnapn 172.16.82.195 27017
!
binding db-connection msisdnapn 172.16.82.196 27017
!
binding db-connection slf 172.16.82.195 27017
!
binding db-connection slf 172.16.82.196 27017
!
```

binding db-connection-settings

Used to configure the write mongo connection settings. The connections are used for database create/update and delete of session and bindings.



Note This command is applicable for MongoDB based and application client based sharding.

Syntax

```
binding db-connection-settings { drasession | imsiapn | ipv4 | ipv6 | msisdnapn | range |
slf } acceptable-latency-difference-for-read connect-timeout connections-per-host
max-wait-time socket-timeout
```

```
no binding db-connection-settings <database>
```



Note For Policy DRA, supported values are drasession/imsiapn/ipv4/ipv6/msisdnapn.

Command Parameters

Table 15: Parameter Description

Command Parameter	Description
drasession	Connection definition for the DRA session database.
imsiapn	Connection definition for the IMSI-APN binding database.
ipv4	Connection definition for the IPv4 binding database.
ipv6	Connection definition for the IPv6 binding database.
msisdnapn	Connection definition for the MSISDN-APN binding database.
range	Port range to be used.
slf	Connection definition for the SLF database.
acceptable-latency-difference-for-read	The maximum difference in ping-time latency between the fastest ping time and the slowest of the chosen servers. Default: 5

Command Parameter	Description
connect-timeout	Connection timeout in milliseconds. It is used only when establishing a new connection. Default: 500
connections-per-host	Maximum number of connections allowed per host for this MongoClient instance. Those connections are kept in a pool when idle. Once the pool is exhausted, any operation requiring a connection blocks waiting for an available connection. Default: 10
max-wait-time	Maximum wait time in milliseconds that a thread may wait for a connection to become available. Default: 500
socket-timeout	Socket timeout in milliseconds. It is used for I/O socket read and write operations. Default: 1000

Command Mode

CONFIG

VNFs

DRA

Command Usage

Use the `binding db-connection-settings` command to configure the write mongo connection settings.

Examples

The following is an example:

```
admin@orchestrator(config)# binding db-connection-settings ?
Possible completions:
  drasession  imsiapn  ipv4  ipv6  msisdnapn  range  slf

admin@orchestrator(config)# binding db-connection-settings drasession ?
Possible completions:
  acceptable-latency-difference  connect-timeout  connections-per-host  max-wait-time
socket-timeout  <cr>

admin@orchestrator(config-db-connection-settings- drasession)# acceptable-latency-difference
?
Possible completions:
  <int>[5]
admin@orchestrator(config-db-connection-settings- drasession)# connect-timeout ?
Possible completions:
  <int>[500]

admin@orchestrator(config-db-connection-settings- drasession)# connections-per-host ?
Possible completions:
  <int>[10]
```



```
admin@orchestrator(config-db-connection-settings- drasession)# max-wait-time ?
Possible completions:
  <int>[500]

admin@orchestrator(config-db-connection-settings- drasession )# socket-timeout ?
Possible completions:
  <int>[1000]
```

binding db-max-record-limit

Used to configure maximum record limit on session and bindings.

Syntax

```
binding db-max-record-limit { all | drasession | imsiapn | ipv4 | ipv6 | msisdnapn | range
| slf } <limit>

no binding db-max-record-limit drasession <limit>
```

Command Parameters

Table 16: Parameter Description

Command Parameter	Description
all	Maximum record limit on drasession, ipv6, ipv4, imsiapn and msisdnapn.
drasession	Maximum record limit on DRA session.
imsiapn	Maximum record limit on IMSI-APN.
ipv4	Maximum record limit on IPv4.
ipv6	Maximum record limit on IPv6.
msisdnapn	Maximum record limit on MSISDN-APN.
range	Not Applicable
slf	Not Applicable
limit	Maximum number of records to be stored in database. Default: Value of limit depends on deployment and number of shards. Hence, no default value for limit.

Command Mode

CONFIG

VNFs

DRA

Command Usage

Use the `db-max-record-limit` command to configure maximum record limit on session and bindings.

Examples

The following is an example:

```

admin@orchestrator[master-0m] (config)# binding db-max-record-limit
Possible completions:
  all drasession imsiapn ipv4 ipv6 msisdnapn range slf

admin@orchestrator[master-0m] (config)# binding db-max-record-limit all 1000
admin@orchestrator[master-0m] (config)# binding db-max-record-limit drasession 1000
admin@orchestrator[master-0m] (config)# binding db-max-record-limit imsiapn 1000
admin@orchestrator[master-0m] (config)# binding db-max-record-limit ipv4 1000
admin@orchestrator[master-0m] (config)# binding db-max-record-limit ipv6 1000
admin@orchestrator[master-0m] (config)# binding db-max-record-limit msisdnapn 1000

```

binding db-read-connection-settings

Used to configure the read mongo connection parameters.



Note This command is applicable only for application client based sharding.

Read connections are used for:

- Rx-AAR based binding look up
- Rest API binding query
- Reset of next evaluation time for both sessions and bindings
- Health checks

Syntax

```

binding db-read-connection-settings { drasession | imsiapn | ipv4 | ipv6 | msisdnapn | range
| slf } acceptable-latency-difference-for-read connect-timeout-for-read
connections-per-host-for-read max-wait-time-for-read socket-timeout-for-read

no binding db-read-connection-settings <database>

```



Note For Policy DRA, supported values are drasession/imsiapn/ipv4/ipv6/msisdnapn.

Command Parameters

Table 17: Parameter Description

Command Parameter	Description
drasession	Connection definition for the DRA session database.

Command Parameter	Description
imsiapn	Connection definition for the IMSI-APN binding database.
ipv4	Connection definition for the IPv4 binding database.
ipv6	Connection definition for the IPv6 binding database.
msisdnapn	Connection definition for the MSISDN-APN binding database.
range	Port range to be used.
slf	Connection definition for the SLF database.
acceptable-latency-difference-for-read	The maximum difference in ping-time latency between the fastest ping time and the slowest of the chosen servers. Default: 5
connect-timeout-for-read	Connection timeout in milliseconds for read connection. It is used only when establishing a new connection. Default: 500
connections-per-host-for-read	Maximum number of connections allowed per host for this MongoClient instance of read connection. Those connections are kept in a pool when idle. Once the pool is exhausted, any operation requiring a connection blocks waiting for an available connection. Default: 5
max-wait-time-for-read	Maximum wait time in milliseconds that a thread may wait for a connection to become available. Default: 500
socket-timeout-for-read	Socket timeout in milliseconds. It is used for I/O socket read and write operations. Default: 1000

Command Mode

CONFIG

VNFs

DRA

Command Usage

Use the `binding db-read-connection-setting` commands to configure the read mongo connection parameters. Applicable only for connection with client-sharded database cluster.

Examples

The following is an example for setting the connection-per-host for read connections with session-db to 5:

```
admin@orchestrator[master-0](config)# binding db-read-connection-settings drasession
connections-per-host-for-read 5
```

binding shard-metadata-db-connection

Used to configure binding shard metadata database connections from DRA to a DRA shard metadata binding database.



Note This command is applicable only for application client based sharding.

Syntax

```
binding shard-metadata-db-connection { all | drasession | imsiapn | ipv4 | ipv6 | loadmetrics
  | msisdnapn | range } <ip-address> <port>
```

```
no binding shard-metadata-db-connection { drasession | imsiapn | ipv6 | loadmetrics |
  msisdnapn } <ip-address> <port>
```

Command Parameters

Table 18: Parameter Description

Command Parameter	Description
all	Connection definition for Session, IPv4, IPv6, IMSI-APN, MSISDN-APN shard metadata binding database.
drasession	Connection definition for the Session binding shard metadata database.
imsiapn	Connection definition for the IMSI-APN shard metadata binding database.
ipv4	Connection definition for the IPv4 binding shard metadata database.
ipv6	Connection definition for the IPv6 binding shard metadata database.
loadmetrics	Connection definition for the IMSI-APN or MSISDN-APN shard metadata binding database.
msisdnapn	Connection definition for the MSISDN-APN shard metadata binding database.
range	Not Applicable
ip-address	Address of the binding DRA database. This is either an IP address or an FQDN.
port	Port number of the binding DRA database.

Command Mode

CONFIG

VNFs

DRA

Command Usage

Use the `binding shard-metadata-db-connection` command to instruct the application on how to connect to the remote shard metadata binding database. In general, there should be configuration lines entered per binding database type in order to support high availability.

Examples

The following configuration defines two redundant connections per database:

```
binding shard-metadata-db-connection drasession 172.16.82.195 27017
!
binding shard-metadata-db-connection drasession 172.16.82.196 27017
!
binding shard-metadata-db-connection ipv6 172.16.82.195 27017
!
binding shard-metadata-db-connection ipv6 172.16.82.196 27017
!
binding shard-metadata-db-connection ipv4 172.16.82.195 27017
!
binding shard-metadata-db-connection ipv4 172.16.82.196 27017
!
binding shard-metadata-db-connection imsiapn 172.16.82.195 27017
!
binding shard-metadata-db-connection imsiapn 172.16.82.196 27017
!
binding shard-metadata-db-connection msisdnapn 172.16.82.195 27017
!
binding shard-metadata-db-connection msisdnapn 172.16.82.196 27017
!
binding shard-metadata-db-connection loadmetrics 172.16.82.195 27017
!
binding shard-metadata-db-connection loadmetrics 172.16.82.196 27017
!
```

binding throttle-db-operation

Used to configure CPU usage threshold value for read and write database operations.

**Note**

This command is applicable only for application client based sharding.

Syntax

```
binding throttle-db-operation { range | read | write } max-cpu-usage <cpu_value>
no binding throttle-db-operation { range | read | write } max-cpu-usage
```

Command Parameters

Table 19: Parameter Description

Command Parameter	Description
range	Not applicable.
read	CPU threshold for read database operations.
write	CPU threshold for write database operations.
cpu_value	CPU threshold value.

Command Mode

CONFIG

VNFs

DRA

Command Usage

Use the `binding throttle-db-operation` command to configure the read and write CPU threshold value to throttle the read and write database operations.

Examples

The following configuration defines CPU threshold value for read and write database operations:

```
binding throttle-db-operation read max-cpu-usage 70
!
binding throttle-db-operation write max-cpu-usage 70
!
```

clear

Used to clear uncommitted changes.

Syntax

```
clear
```

Command Mode

CONFIG

VNFs

All

Command Usage

Use the clear command to discard all the uncommitted changes.

Examples

The following is an example:

```
clear
All configuration changes will be lost. Proceed? [yes, NO]
```

compare

Used to compare the similar configurations.

Syntax

```
compare cfg <configuration path> to <configuration path>
```

Command Mode

CONFIG

VNFs

All

Command Usage

- To compare the similar configurations in configuration mode.
- Need to represent exact ideal configuration paths.

Examples

The following is an example:

```
compare cfg aaa authentication users user admin to aaa authentication users user oper
- password $1$ftGF2fQE$4P145tnwbouLSr8pbm4EW1;
+ password $1$sFadxrqrz$Tp88/Go3jTNUuloSdPB9K.;
- ssh_keydir /var/confd/homes/oper/.ssh;
+ ssh_keydir /var/confd/homes/admin/.ssh;
- homedir /var/confd/homes/oper;
+ homedir /var/confd/homes/admin;
```

consul

Used to list, save, delete, and restore the consul snapshot from the /data/orchestrator/config/snapshot/ directory.

Syntax

```
consul [list-snapshots | save-snapshot snapshot-name nameofsnapshot | restore-snapshot
snapshot-name nameofsnapshot | delete-snapshot nameofsnapshot]
```

Command Parameters

Table 20: Parameter Description

Command Parameter	Description
list-snapshots	Lists all the snapshots present in /data/orchestrator/config/snapshot/ directory.
save-snapshot	Saves the snapshot.
snapshot-name <i>nameofsnapshot</i>	Snapshot name.
restore-snapshot	Restore the snapshot.
delete-snapshot	Delete the snapshot.

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the `consul` command to list, save, delete, and restore the consul snapshot in the /data/orchestrator/config/snapshot/ directory.

Examples

The following are the examples:

```
admin@orchestrator[ss-master-binding-0]# consul list-snapshots
Snapshot Name
*****
19.5.5-20200105_131756.6477
19.5.8-20200214_025459.6674
*****
admin@orchestrator[ss-master-binding-0]# consul save-snapshot snapshot-name snap1
result Snapshot is created in /data/orchestrator/config/snapshot-consul/snap1
admin@orchestrator[ss-master-binding-0]# consul list-snapshots
Snapshot Name
*****
19.5.5-20200105_131756.6477
19.5.8-20200214_025459.6674
```



```

snap1

*****
admin@orchestrator[ss-master-binding-0]# consul save-snapshot snapshot-name snap2
result Snapshot is created in /data/orchestrator/config/snapshot-consul/snap2
admin@orchestrator[ss-master-binding-0]# consul list-snapshots
Snapshot Name
*****

19.5.5-20200105_131756.6477
19.5.8-20200214_025459.6674
snap1
snap2

*****
admin@orchestrator[ss-master-binding-0]# consul delete-snapshot snap2
Snapshot is deleted
admin@orchestrator[ss-master-binding-0]# consul list-snapshots
Snapshot Name
*****

19.5.5-20200105_131756.6477
19.5.8-20200214_025459.6674
snap1

*****
admin@orchestrator[ss-master-binding-0]# consul restore-snapshot ?
Possible completions:
  snapshot-name
admin@orchestrator[ss-master-binding-0]# consul restore-snapshot snapshot-name snap1
result Snapshot restore success.
admin@orchestrator[ss-master-binding-0]# consul list-snapshots
Snapshot Name
*****

19.5.5-20200105_131756.6477
19.5.8-20200214_025459.6674
snap1

*****
admin@orchestrator[ss-master-binding-0]# consul delete-snapshot snap1
Snapshot is deleted
admin@orchestrator[ss-master-binding-0]#

```

control-plane relay

Adds additional control-plane entries between two disconnected CPS vDRA sites.

Syntax

```
control-plane relay name address address port port
```

Command Parameters

Table 21: Parameter Description

Command Parameter	Description
Name	A short name describing the connection.

Command Parameter	Description
address	An IP address or FQDN of the connection. IPv6 address must be enclosed in square brackets.
port (optional)	The destination port of the connection. Defaults to 6379 if not defined.

Command Mode

CONFIG

VNFs

DRA

Command Usage

Use the control-plane relay command to instruct the application how which links it should use to relay CPS vDRA control traffic. CPS vDRA control traffic is the traffic that describes the current endpoints within a site and the relay IPs for site to site communication. For a 2 site model there should be at least 4 entries defined in this definition (two for each site). For a 3 site model there should be at least 6 entries in this definition.

Examples

The following configuration adds a relay connection to siteA over address 10.10.10.10 port 6379.

```
scheduler(config)# control-plane relay siteA-1 address 10.10.10.10 port 6379
```

database cluster

Create a MongoDB database sharded cluster.

Syntax

```
database cluster name sharded-cluster-master {true|false}
no database cluster name
```

Command Parameters*Table 22: Parameter Description*

Command Parameter	Description
Name	A short name describing the DB cluster. Each application will use a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records.

Command Parameter	Description
sharded-cluster-master	This parameter indicates if the current VNF will execute provisioning operations on the given cluster. If multiple VNF (s) have the same database cluster configuration only one of them should have the “sharded-cluster-master” set to true.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the database cluster command and sub-commands to instruct the application to provision a database cluster for use in application database operations.

Examples

The following is an example of creating a “binding” sharded cluster that is being managed by the current VNF.

```
scheduler(config)# database cluster binding sharded-cluster-master true
```

database cluster *db-name* config-server *name*

Add a MongoDB configuration server process to the named database cluster.



Note This command is applicable only for MongoDB based sharding.

Syntax

```
database cluster db-name config-server name address address  
no database cluster db-name config-server name
```

Command Parameters

Table 23: Parameter Description

Command Parameter	Description
DB Name	A short name describing the DB cluster. Each application will use a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records
Name	A short description of the config server name.
address	The IPv4 or IPv6 address of the config server. This parameter does not accept FQDN address format.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the database cluster config-server to add a config-server to the system.

Examples

The following is an example of adding a new config server to the “binding” cluster.

```
scheduler(config)# database cluster binding config-server cfg-1 address 10.10.10.10
```

database cluster *db-name* config-server-seed *name*

Set the initial seed configuration server for boot-strapping the MongoDB replica set initialization process.



Note This command is applicable only for MongoDB based sharding.

Syntax

```
database cluster db-name config-server-seed name
```

Command Parameters

Table 24: Parameter Description

Command Parameter	Description
DB Name	A short name describing the DB cluster. Each application will use a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records
Name	A reference to the configuration server name that will act as the seed for bootstrapping the initial replica set.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the database cluster config-server-seed command to set the initial seed configuration server for bootstrapping the MongoDB replica set initialization process. This is required if a config server is set.

Examples

The following is an example of setting `cfg-1` as the initial seed for a new config server to the “binding” cluster.

```
scheduler(config)# database cluster binding config-server-seed cfg-1
```

database cluster *db-name* multi-db-collections *noOfShardsPerDB*

Used to add a MongoDB sharding configuration server process to the named database cluster.



Note This command is applicable only for application client based sharding.

Syntax

```
database cluster db-name mutli-db-collections noOfShardsPerDB  
no database cluster db-name multi-db-collections
```

Command Parameters

Table 25: Parameter Description

Command Parameter	Description
DB Name	A short name describing the database cluster. Each application uses a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records.
noOfShardsPerDB	Number of shards created per database.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the database cluster multi-db-cluster to create those number of shards per database.

Examples

The following is an example of enabling multi-db-collections to the “binding” cluster.

```
admin@orchestrator[master-hostname] (config) # database cluster binding multi-db-collections
2
```

database cluster *db-name* router *name*

Add a new MongoDB router to the named DB cluster.



Note This command is applicable only for MongoDB based sharding.

Syntax

```
database cluster db-name router name
```

Command Parameters

Table 26: Parameter Description

Command Parameter	Description
DB Name	A short name describing the DB cluster. Each application will use a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records
Name	A short description of the router name.
address	The IPv4 or IPv6 address of the config server. This parameter does not accept FQDN address format
port	The port to bind the router. Generally 27017

Command Mode

CONFIG

VNFs

All

Command Usage

Use the database cluster router command to add a router to named database cluster. Full initialization of database cluster requires at least one router to be defined and often for HA purposes multiple routers are required.

Examples

The following is an example of adding a router to the “binding” cluster.

```
scheduler(config)# database cluster binding router router-1 address 10.10.10.10 port 27017
```

database cluster *db-name* shard *name*

Add a new MongoDB shard to the named database cluster.

Syntax

```
database cluster db-name shard name
```

```
no database cluster db-name shard name
```

Command Parameters

Table 27: Parameter Description

Command Parameter	Description
DB Name	A short name describing the DB cluster. Each application will use a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records
Name	A short description of the shard name.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the database cluster shard command to add a new shard to the named database cluster. Full initialization of database cluster requires at least the definition of one shard and often for scaling purposes multiple shards are required.

Examples

The following is an example of adding a shard to the “binding” cluster.

```
database cluster binding shard shard-1
```

database cluster *db-name* shard *shard-name* shard-server *name*

Add a new MongoDB shard to the named DB cluster.

Syntax

```
database cluster db-name shard shard-name shard-server name address address port port
[arbiter {true|false}] [memory_allocation_percent percent] [priority priority] [voter
{true|false}] [storage-engine {IN_MEMORY|MMAPv1|WT}]
```

```
no database cluster db-name shard shard-name server name
```



Note

When creating replica set, ensure that all ports are the same, i.e, the replica set should have same port for ARBITER, PRIMARY, and SECONDARY.

Command Parameters

Table 28: Parameter Description

Command Parameter	Description
DB Name	A short name describing the DB cluster. Each application will use a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records
Shard Name	A short description of the shard name.
Name	A short description of the server name.
address	The IPv4 or IPv6 address of the router server. This parameter does not accept FQDN address format.
port	The port to bind the router. Generally -27017
arbiter	Indicates if this node is only an arbiter node.
memory_allocation_percent	Percent (expresses as a positive integer) of the amount of memory to allocate to the DB process for the in-memory storage option.
priority	Relative priority of the node in the shard
voter	Whether this node is a voter.
storage-engine	The storage engine to provision for the process. Valid values are: <ul style="list-style-type: none"> • IN_MEMORY - pure in memory storage • MMAPv1 – Memory mapped files • WT –wired tigger

Command Mode

CONFIG

VNFs

All

Command Usage

Use the database cluster shard server command to add a new server to named database cluster. Full initialization of database cluster requires at least the definition of one shard server and for HA at least 3 nodes are required.

Examples

The following is an example of adding a new shard to the “binding” cluster.

```
scheduler(config)# database cluster binding shard shard-1 shard-server server-1 storage-engine
WT address 10.10.10.10 port 27017
```



Note Ports to be used for all database operations must be in the range of 27017 to 27047. Ports outside the defined range are not supported since the application must limit the port mappings. The selected range is sufficient for 30 Mongo processes on a given node.

database cluster *db-name* shard *shard-name* shard-server-seed *name*

Set the initial seed shard server for boot-strapping the MongoDB replica set initialization process.

Syntax

```
database cluster db-name shard shard-name shard-server-seed name
```

Command Parameters

Table 29: Parameter Description

Command Parameter	Description
DB Name	A short name describing the DB cluster. Each application will use a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records
Shard Name	A short description of the shard name.
Name	A reference to the shard server name that will act as the seed for bootstrapping the initial replica set.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the database cluster shard-server-seed command to set the initial seed shard server for boot-strapping the MongoDB replica set initialization process. This is required if a shard is defined.



Note To create or add a member to an existing replica set, you must also run the Mongo console-based commands as shown: `mongo> rs.add("name")`

To remove a replica set or a shard in a sharded cluster case, remove the member from the Mongo console as shown: `mongo> rs.remove("name")`

You must also navigate to the container and the VM on which the member resides and clear the data manually. The data path is the same as the one that is used when the replica-set member is created. Typically, the path is `//mmapv1-tmpfs-2xxxx` where `2xxxx` is the port where the replica set member is started.

Examples

The following is an example of setting server-1 as the initial seed for a new shard called “shard-1” to the “binding” cluster.

```
scheduler(config)# database cluster binding shard shard-1 shard-server-seed server-1
```

database cluster *db-name* sharding-db *name*

Adds a MongoDB sharding configuration server process to the named database cluster.



Note This command is applicable only for application client based sharding.

Syntax

```
database cluster db-name sharding-db name address address
no database cluster db-name sharding-db name
```

Command Parameters

Table 30: Parameter Description

Command Parameter	Description
DB Name	A short name describing the database cluster. Each application uses a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records.
Name	A short description of the sharding database name.
address	The IPv4 or IPv6 address of the configuration server. This parameter does not accept FQDN address format.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the database cluster sharding-db to add a sharding config-server to the system.

Examples

The following is an example of adding new sharding database to “binding” cluster.

```
admin@orchestrator[master-hostname] (config)# database cluster binding sharding-db shdb-1
address 10.10.10.10
```

database cluster *db-name* sharding-db-seed *name*

Sets the initial seed configuration server for boot-strapping the MongoDB replica set initialization process.



Note This command is applicable only for application client based sharding.

Syntax

```
database cluster db-name sharding-db-seed name
```

Command Parameters

Table 31: Parameter Description

Command Parameter	Description
DB Name	A short name describing the database cluster. Each application uses a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records.
Name	A reference to the configuration server name that will act as the seed for bootstrapping the initial replica set.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the database cluster sharding-db-seed command to set the initial seed configuration server for boot-strapping the MongoDB replica set initialization process. This is required if a sharding database is set.

Examples

The following is an example of setting shdb-1 as the initial seed for a new sharding database to the “binding” cluster.

```
admin@orchestrator[master-hostname](config)# database cluster binding sharding-db-seed
shdb-1
```

database cluster *db-name* ipv6-zone-sharding

Enable the zone-based sharding for IPv6. When zone-based sharding is enabled on IPv6 database, hash-based sharding can still be configured on other databases.

Syntax

```
database cluster <db name> ipv6-zone-sharding true/false
```

Command Parameters**Table 32: Parameter Description**

Command Parameter	Description
DB Name	A short name describing the DB cluster. Each application uses a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records.
ipv6-zone-sharding	Enables (true) or disables (false) zone-based sharding for IPv6 database. Default: False

Command Mode

CONFIG

VNFs

DRA

```
database cluster db-name ipv6-zones-range zone-name zone-range range-name start pool-starting-address end pool- ending-address
```

Command Usage

Use database cluster binding `ipv6-zone-sharding` to enable/disable zone sharding on IPv6 database.

Examples

The following is an example of enabling zone-based sharding for the IPv6 database in the cluster `binding`:

```
database cluster binding ipv6-zone-sharding true
```

database cluster *db-name* ipv6-zones-range *zone-name* zone-range *range-name* start *pool-starting-address* end *pool-ending-address*

Create zones for IPv6 shards based on IPv6 pools, so that the primary member of the replica set for an IPv6 address resides at the same physical location as the PGW assigning addresses from the IPv6 pool. This results in local writes (and reads) for the IPv6 binding database.



Note It is possible to create multiple ranges for each zone. Configure the IPv6 ranges in short format only.

Syntax

```
database cluster <db name> ipv6-zones-range <zone-name> zone-range <range-name> start <pool starting address> end <pool ending address>
```

Command Parameters

Table 33: Parameter Description

Command Parameter	Description
DB Name	A short name describing the DB cluster. Each application uses a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records.
Zone name	A short name describing Zone name. Unique name to identify the zone that the shard configuration uses to map to zone.
Range name	A short name describing the range within the zone.
Pool Starting Address	The starting IPv6 Prefix address for the particular range that can be from same physical location as PGW.

Command Parameter	Description
Pool Ending Address	The ending IPv6 Prefix address for the particular range that can be from same physical location as PGW.

Command Mode

CONFIG

VNFs

DRA Binding

Command Usage

This command creates a zone and also creates ranges for the zone.

Examples

The following is an example of creating a IPv6 zone with name `pune` for the cluster `binding` and a range of `2003:3051:0000:0001` to `2003:3051:0000:0500` for the zone:

```
database cluster binding ipv6-zones-range pune zone-range range1 start 2003:3051:0000:0001
end 2003:3051:0000:0500
```

database cluster *db-name* shard *shard-name* zone-name zone-name

Add shards to a zone.

Syntax

```
database cluster <db name> shard <shard name> zone-name <zone-name>
```

Command Parameters**Table 34: Parameter Description**

Command Parameter	Description
DB Name	A short name describing the DB cluster. Each application uses a set of pre-defined names and this name should match one of the application names. For example, DRA uses the name “binding” for storing binding and session records.
Zone name	A short name describing Zone name.
Shard name	A short description of the shard name.

Command Mode

CONFIG

VNFs

DRA Binding

Command Usage

Use the command to add the shard to a zone.

Examples

The following is an example of mapping the IPv6 zone with name `pune` with the shard `shard-1` in the cluster binding:

```
database cluster binding shard shard-1 zone-name pune
```

database delete all-bindings-sessions

Deletes the data belonging to given range and zone for all the bindings and sessions databases.

Syntax

```
database delete all-bindings-sessions <bindings-cluster-name> <sessions-cluster-name>
<zone-name> <start-address> <end-address>
```

Command Parameters

Table 35: Parameter Description

Command Parameter	Description
bindings-cluster-name	Specifies the bindings cluster name on which deletion jobs has to be performed.
sessions-cluster-name	Specifies the sessions cluster name on which deletion job has to be performed.
zone-name	Specifies the zone from which bindings have to be deleted. Note <ul style="list-style-type: none"> • If zone name is default, bindings records (all types and sessions) for the specified range data are deleted from all shards in database clusters. • If zone name is not default, bindings records (all types include sessions) for the specified range data are deleted from shards assigned to the specified zone.
start-address	Start address of IPv6 address range.
end-address	End address of IPv6 address range.

Command Mode

OPERATIONAL

VNFs

Binding

Command Usage

Use the `database delete all-bindings-sessions zone` command to delete IPv6 bindings and all the associated bindings for the specified address range from the specified zone.

Examples

The following example deletes IPv6 bindings and all the associated bindings from a specific zone:

```
database delete all-bindings-sessions imsi-msisdn session-ipv6-AB pune 7507:9903:1808:8000
7507:9903:1808:8fff
```

The following example deletes IPv6 bindings and all the associated bindings from the default zone:

```
database delete all-bindings-sessions imsi-msisdn session-ipv6-AB default 7507:9903:1808:8000
7507:9903:1808:8fff
```

database delete ipv6bindings

Deletes IPv6 bindings for the specified address range from the specified zone.

Syntax

```
database delete ipv6bindings <sessions-cluster-name> <zone-name> <start-address> <end-address>
```

Command Parameters*Table 36: Parameter Description*

Command Parameter	Description
sessions-cluster-name	Specifies the sessions cluster name on which deletion job has to be performed.
zone-name	Specifies the zone from which bindings have to be deleted. Note <ul style="list-style-type: none"> • If zone name is default, IPv6 bindings for the range are deleted from all shards of database cluster. • If zone name is not default, IPv6 bindings for the range are deleted only from shards assigned to the specified zone.
start-address	Start address of IPv6 address range.
end-address	End address of IPv6 address range.

Command Mode

OPERATIONAL

VNFs

Binding

Command Usage

Use the `database delete ipv6bindings` command to delete IPv6 bindings for the specified address range from the specified zone.

Examples

The following example deletes IPv6 bindings from a specific zone:

```
database delete ipv6bindings session-ipv6-AB pune 7507:9903:1808:8000 7507:9903:1808:8fff
```

The following example deletes IPv6 bindings from the default zone:

```
database delete ipv6bindings session-ipv6-AB default 7507:9903:1808:8000 7507:9903:1808:8fff
```

db-authentication set-password database redis password

To set the Redis authentication password.

Syntax

```
db-authentication set-password database redis password <clear text password>
```

Command Parameters

Table 37: Parameter Description

Command Parameter	Description
<clear text password>	<p>A clear text password used for Redis authentication.</p> <p>The password is stored in consul datastore in encrypted format.</p> <p>The Redis password is stored in consul datastore in encrypted format and synchronized to <code>draTopology.ini</code> which is used by dra-endpoint application.</p> <p>The service reads the password from consul datastore and password is updated in the console data store with encrypted password.</p> <p>Data store and <code>draTopology.ini</code> format:</p> <pre>redis/config/password:<encrypted password></pre>

Command Mode

OPERATIONAL

VNFs

DRA

Command Usage

Use the database authentication command to set the Redis password which is used to access Redis data store.

Examples

The following is an example to set the Redis authentication password:

```
admin@orchestrator[master-0m]# db-authentication set-password database redis password
Value for 'password' (<string>): *****
result SUCCESS
```

db-authentication show-password database redis

To display the encrypted redis password.

Syntax

```
db-authentication show-password database redis
```

Command Mode

OPERATIONAL

VNFs

DRA

Command Usage

Use the database authentication command to display the Redis password.

Examples

The following is an example to display the Redis authentication password:

```
admin@orchestrator[master-0m]# db-authentication show-password database redis
result
result PASSWORD : 72261348A44594381D2E84ADDD1E6D9A
```

db-authentication remove-password database redis

To remove Redis authentication password.

Syntax

```
db-authentication remove-password database redis current-password password
```

Command Parameters*Table 38: Parameter Description*

Command Parameter	Description
password	Clear text password to be removed on redis need to be provided.

Command Mode

OPERATIONAL

VNFs

DRA

Command Usage

Use the `db-authentication` command to remove Redis authentication password.

Examples

The following is an example to remove Redis authentication password:

```
admin@orchestrator[master-0m]# db-authentication remove-password database redis
Value for 'current-password' (<string>): *****
result SUCCESS
```

db-authentication show-password database mongo

To display the encrypted MongoDB password.

Syntax

```
db-authentication show-password database mongo
```

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the database authentication command to display the MongoDB password.

Examples

The following is an example:

```
scheduler# db-authentication show-password database mongo
result
adminuser: 3300901EA069E81CE29D4F77DE3C85FA
```

db-authentication set-password database mongo password

Used to create users (adminuser and backupuser) with credentials in the MongoDB.

Syntax

```
db-authentication set-password database mongo password <password>
```

Command Parameters

Table 39: Parameter Description

Command Parameter	Description
password	Clear text password to be set on Mongo DB need to be provided.

Command Mode

OPERATIONAL

VNFs

DRA and Binding

Command Usage

This command is used to create users (adminuser and backupuser) with credentials in the MongoDB.

Examples

The following is an example to create users with credentials:

```
admin@orchestrator[binding-master]# db-authentication set-password database mongo password
Value for 'password' (<string>): *****
result SUCCESS
```

db-authentication remove-password database mongo

Used to remove the users (admin user and backup user) and password from all the databases.

Syntax

```
db-authentication remove-password database mongo current-password <password>
```

Command Parameters

Table 40: Parameter Description

Command Parameter	Description
password	Clear text password to be removed on MongoDB need to be provided.

Command Mode

OPERATIONAL

VNFs

DRA and Binding

Command Usage

Use to remove users and password from the mongo databases. Before using this command the database should be in transition authentication state and after this command rolling restart is mandatory.

Examples

The following is an example to remove-password in mongo database:

```
admin@orchestrator[binding-master]# db-authentication remove-password database mongo
Value for 'current-password' (<string>): *****
result SUCCESS
```

db-authentication change-password database mongo

Used to change the admin user password in all the databases.

Syntax

```
db-authentication change-password database mongo current-password <current password>
new-password <New password> user adminuser
```

Command Parameters

Table 41: Parameter Description

Command Parameter	Description
Current Password	Current password set in MongoDB.
New Password	New password to be set in MongoDB.

Command Mode

OPERATIONAL

VNFs

DRA and Binding

Command Usage

This command change password of adminuser in all the MongoDB.

Examples

The following is an example to change-password in MongoDB:

```
admin@orchestrator[binding-master]# db-authentication change-password database mongo user
adminuser
Value for 'current-password' (<string>): *****
Value for 'new-password' (<string>): *****
result SUCCESS
```

db-authentication sync-password database mongo

Used to synchronize the backup user password same as admin user password..

Syntax

```
db-authentication sync-password database mongo
```

Command Mode

OPERATIONAL

VNFs

DRA and Binding

Command Usage

This command is used to sync password in all the MongoDB.

Examples

The following is an example to synchronize the passwords:

```
admin@orchestrator[binding-master]# db-authentication sync-password database mongo
result
SUCCESS : Mongo password sync successful
```

db-authentication enable-transition-auth database mongo

Used to configure the transition authentication parameter. Rolling restart should be executed after this command.

Syntax

```
db-authentication enable-transition-auth database mongo
```

Command Mode

OPERATIONAL

VNFs

Binding

Command Usage

Use this command to configure the transition authentication parameter.

Examples

The following is an example to configure the transition authentication parameter:

```
admin@orchestrator[binding-master]# db-authentication enable-transition-auth database mongo
```

db-authentication disable-transition-auth database mongo

Used to remove the transition authentication parameter. Rolling restart should be done after this command.

Syntax

```
db-authentication disable-transition-auth database mongo
```

Command Mode

OPERATIONAL

VNFs

Binding

Command Usage

Use this command to remove the transition authentication parameter.

Examples

The following is an example to disable transition authorization in MongoDB:

```
admin@orchestrator[binding-master]# db-authentication disable-transition-auth database mongo
```

db-authentication rolling-restart database mongo

Used to restart all the database instances where primary members is followed by secondary members.

Syntax

```
db-authentication rolling-restart database mongo
```


Command Mode

OPERATIONAL

VNFs

Binding

Command Usage

Use this command to restart all the database instances where primary members will be followed by secondary members.

Examples

The following is an example to restart all the database instances:

```
admin@orchestrator[binding-master]# db-authentication rolling-restart database mongo
```

db-authentication rolling-restart-parallel database mongo

Used to restart multiple database instances in parallel without affecting the availability of DB cluster.

Syntax

```
db-authentication rolling-restart-parallel database mongo
```

Command Mode

OPERATIONAL

VNFs

Binding

Command Usage

Use `db-authentication rolling-restart-parallel database mongo` command to restart multiple database instances in parallel without affecting the availability of DB cluster.



Note `db-authentication rolling-restart-parallel database mongo` command is dependent on `show database parallel-upgrade-plan`.

If `show database parallel-upgrade-plan` does not provide any output, then do not use `db-authentication rolling-restart-parallel database mongo`. Instead use `db-authentication rolling-restart database mongo` command.

Example: If `show database parallel-upgrade-plan` displays the following output:

```
admin@orchestrator[an-dbmaster]# show database parallel-upgrade-plan
BATCH  MODULE          HOST          ADDRESS
-----
1      mongo-node-101  an-dbmaster   192.168.11.40
1      mongo-node-102  an-dbcontrol-0 192.168.11.41
1      mongo-node-103  an-dbcontrol-1 192.168.11.42
2      mongo-node-104  an-pers-db-0   192.168.11.43
3      mongo-node-105  an-pers-db-1   192.168.11.44
```

then, `db-authentication rolling-restart-parallel database mongo` combines 101, 102 and 103 in batch 1 and restarts all of them at the same time.

After batch 1, node 104 from batch 2 is restarted followed by node 105 (from batch 3). So, all the nodes from same batch are restarted in parallel. However nodes from different batch are restarted in sequential manner.

A `batch_interval` parameter can be added as follows:

```
admin@orchestrator[an-master]# db-authentication rolling-restart-parallel batch_interval 8
database mongo
```

where, `batch_interval` is an integer and accepts range between 8 to 60. By default, the value is 10. It represents the delay duration in seconds between processing of 2 subsequent batches. After executing this command, batch-wise status can be tracked using `db-authentication rolling-restart-parallel-status database mongo` command.

Examples

The following is an example to trigger a parallel restart for mongo-nodes.

```
db-authentication rolling-restart-parallel database mongo
```

db-authentication rolling-restart-parallel-status database mongo

Used to track the status of `rolling-restart-parallel` command.

Syntax

```
db-authentication rolling-restart-parallel-status database mongo
```

Command Mode

OPERATIONAL

VNFs

Binding

Command Usage

Use `db-authentication rolling-restart-parallel-status database mongo` command to track the status of `rolling-restart-parallel` command.

Examples

The following example shows which batch is completed out of total batches.

```
admin@orchestrator[an-dbmaster]# db-authentication rolling-restart-parallel-status database
mongo
result Still in progress...Batch 1 out of total 3 is completed at 2019-12-10T23:16:25.799
admin@orchestrator[an-dbmaster]# db-authentication rolling-restart-parallel-status database
mongo
result Still in progress...Batch 2 out of total 3 is completed at 2019-12-10T23:16:37.656
admin@orchestrator[an-dbmaster]# db-authentication rolling-restart-parallel-status database
mongo
result Parallel rolling restart completed!! Batch 3 out of total 3 got completed at
2019-12-10T23:16:49.844
admin@orchestrator[an-dbmaster]# db-authentication rolling-restart-parallel-status database
mongo
result
Parallel Rolling Restart: Not Scheduled/Completed/Just triggered
admin@orchestrator[an-dbmaster]#
```

db-authentication rolling-restart-status database mongo

Used to display the status of rolling restart as in-progress or completed.

Syntax

```
db-authentication rolling-restart-status database mongo
```

Command Mode

OPERATIONAL

VNFs

Binding

Command Usage

Use this command to display the status of rolling restart as in-progress or completed.

Examples

The following is an example to display the status of rolling restart:

```
admin@orchestrator[binding-master]# db-authentication rolling-restart-status database mongo
result
Rolling Restart: In Progress ...
```

db connect admin

Connects to an underlying admin database.

Syntax

No additional arguments.

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the db connect admin command to connect to the underlying admin database. Once within this database, the user will have read / write access to the admin database via a mongodb CLI. The capabilities of the mongodb CLI are not described in this document.

db connect binding

Connects to an underlying binding database.

Syntax

```
db connect binding { ipv4 | ipv6 | imsi-apn | msisdn-apn | slf }
```

Command Parameters

Table 42: Parameter Description

Command Parameter	Description
ipv4	Connect to the IPv4 binding database.
ipv6	Connect to the IPv6 binding database.
imsi-apn	Connect to the IMSI-APN binding database.
msisdn-apn	Connect to the MSISDN-APN binding database.

Command Mode

OPERATIONAL

VNFs

DRA

Command Usage

Use the db connect binding command to connect to the underlying binding database. Once within this database, the user will have read / write access to the binding database via the mongodb CLI. The capabilities of the mongodb CLI are not described in this document.

db connect session

Connects to an underlying admin database.

Syntax

No additional arguments.

Command Mode

OPERATIONAL

VNFs

DRA

Command Usage

Use the db connect session command to connect to the underlying session database. Once within this database, the user will have read / write access to the session database via a mongodb CLI. The capabilities of the mongodb CLI are not described in this document.

debug collect-db-logs-advanced collect

Used to collect mongod logs from specified VMs based on the start and end timestamps.

You can also add the maximum storage capacity of logs to be allowed as input. Once the maximum capacity is reached, the log collection stops.

**Note**

The log collection is limited to 15 days. If you need logs beyond 15, you must login to VM directly to pull the logs.

Syntax

```
debug collect-db-logs-advanced collect <max-allowed-log-size-in-gb> <start-time> <end-time>
[VM-names]
```

Command Parameters

Table 43: Parameter Description

Command Parameter	Description
max-allowed-log-size-in-gb	Maximum size of the logs to be collected.
start-time	Specify the start time to start collecting the logs.
end-time	Specify the end time to end collecting the logs.
VM-names (Optional)	Docker engine VM names to be mentioned with space in between. If the VM names are not specified, the logs are collected for all the VMs in VNF.

Command Mode

Operational

VNFs

DRA Binding

Command Usage

Use this command to collect mongod logs from specified binding VNF VMs based on the start and end timestamps.

Output files from this command can be accessed using the following link:

<https://<MasterVM>/orchestrator/downloads/debug/consolidated/consolidated-db-logs/>

Examples

The following is an example:

```
debug collect-db-logs-advanced collect 4 2020-07-14T23:30:09 2020-07-15T04:15:20 VM-1 VM-2
```

Output file: consolidated-db-logs_<StartDate>_<EndDate>.tar.gz

debug collect-db-logs-advanced scan

Used to create a single consolidated log file of all MongoDB logs collected from different VMs based on start and end timestamps.

Before executing `debug collect-db-logs-advanced scan` command, you need to execute `collect` command which pulls all the logs from different VMs into `tar.gz`.



Note This command allows you to input timestamps in maximum of 6 hours time interval. Currently, this command expects `tar.gz` file to be present in the respective storage location and creates `consolidated-log-output` in same place.

Syntax

```
debug collect-db-logs-advanced scan <start-time> <end-time> [VM-names]
```

Command Parameters

Table 44: Parameter Description

Command Parameter	Description
start-time	Specify the start time to start scanning the logs.
end-time	Specify the end time to end scanning the logs.
VM-names (Optional)	Docker engine VM names to be mentioned with space in between. If the VM names are not specified, the logs are collected for all the VMs in VNF.

Command Mode

Operational

VNFs

DRA Binding

Command Usage

Use this command to scan the MongoDB logs collected from different binding VMs based on start and end timestamps.

Output files from this command can be accessed using the following link:

<https://<MasterVM>/orchestrator/downloads/debug/consolidated/consolidated-db-logs/>

Examples

The following is an example:

```
debug collect-db-logs-advanced scan 2020-07-14T23:30:09 2020-07-15T04:15:20 VM-1 VM-2
```

Output file: `consolidated-logs-output`

debug packet-capture gather

Gathers all running packet captures.

Syntax

```
debug packet-capture gather directory directory
```

Command Parameters*Table 45: Parameter Description*

Command Parameter	Description
directory	The directory to store the resultant pcap files. This directory is available for downloading via the web file download interface at <a href="https://<master ip>/orchestrator/downloads/debug/<directory>">https://<master ip>/orchestrator/downloads/debug/<directory> .

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the `debug packet-capture gather` to gather all completed or currently running pcaps. This command is sent to all machines with active `tcpdump` commands and stops the given commands. After all commands are stopped, the command will gather the resultant pcap files and make them available at <https://<master ip>/orchestrator/downloads/debug/<directory>>.

debug packet-capture purge

Purges all existing pcap files.

Syntax

```
debug packet-capture purge
```

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the `debug packet-capture purge` after all relevant packet captures have been downloaded from the application. The system does not automatically purge packet captures. You need to manage the amount of space used by the packet captures using this command.

debug packet-capture start

Starts a packet capture on a given IP address and port.

Syntax

```
debug packet-capture start ip-address ip-address port port timer-seconds timer-seconds
```

Command Parameters

Table 46: Parameter Description

Command Parameter	Description
ip-address	The IP address to start the packet capture. This address can either be IPv4 or IPv6..
port	The port to start the packet capture.
timer-seconds	Duration to run the packet capture - measured in seconds

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the debug packet-capture start command to start a tcp-dump on the given IP address and port within the CPS cluster. The packet capture will run for the given timer period and then shutdown automatically. The packet captures can be gathered using the debug packet-capture gather command.

debug tech

Gather logs and debug information to support troubleshooting.

Syntax

```
debug tech
```

Command Parameters

None

Command Mode

OPERATIONAL – Not available via NETCONF/RESTCONF

VNFs

All

Command Usage

Use this command to gather logs and debug information to support troubleshooting.

The results of the command are available at <https://<master ip>/orchestrator/downloads/debug/tech>.

Examples

```
scheduler# debug tech
```

docker connect

Connects to a docker service and launches a bash shell running on the system.

Syntax

```
docker connect container-id
```

Command Parameters

Table 47: Parameter Description

Command Parameter	Description
container-id	The docker container to open a bash shell. Use the show docker service command to find the list of valid container-ids.

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the `docker connect` to open a bash shell within a container. This command is primarily used for advanced debugging of the system. Once within a container, you can execute Linux commands and interact with the running container processes.

docker exec

Used to support executing specific command on specific or all the containers.

Syntax

```
docker exec <container-name> <command>
```

Command Parameters

Table 48: Parameter Description

Command Parameter	Description
container-name	Specifies the container-name (prefix or full-name). Enter the complete name for running the command in all the containers.
command	The command that needs to be executed on the containers.

Command Mode

Operational

VNFs

All

Command Usage

Use `docker exec <container-name> <command>` to take container-name and command as an argument. Container-name can be prefix or full name. If the command is having space then it should be provided between double quotes.

Examples

The following example shows sample commands:

Example 1: Stop the db-monitor process in mongo-monitor containers.

```
docker exec mongo-mon "supervisorctl stop db-monitor"
```

Example 2: Get the supervisorctl status from all the containers.

```
docker exec all "supervisorctl status"
```

docker restart

Restarts a docker service that is currently running.

Syntax

```
docker restart container-id container-id
```

Command Parameters

Table 49: Parameter Description

Command Parameter	Description
container-id	The docker container to restart. Use the show docker service command to find the list of valid container-ids.

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the `docker restart` to restart a running docker service. This command is primarily useful to restore a non-responsive service at the request of Cisco TAC or Cisco Engineering.

docker start

Starts Diameter application container.

Syntax

```
docker start <container-id>
```

Command Parameters

Table 50: Parameter Description

Command Parameter	Description
container-id	Diameter application container name

Command Mode

OPERATIONAL

VNFs

DRA

docker stop

Stops Diameter application container.

Syntax

```
docker stop <container-id>
```

Command Parameters*Table 51: Parameter Description*

Command Parameter	Description
container-id	Diameter application container name

Command Mode

OPERATIONAL

VNFs

DRA

Command Usage

This command ensures the following tasks are completed before the container is stopped:

- the required DPR messages are sent out to all connected peers
- VIP moves to another director

dra migration

enable-migration

Enable migration handling for moving from mongo-sharded database to application-sharded database.

Syntax

```
dra migration enable-migration true
no dra migration enable-migration
```

Command Mode

CONFIG

VNFs

DRA VNF

Command Usage

Enable handling of database migration. If binding record is not found in primary database (default, application-sharded database cluster) then the binding lookup is done in secondary database (default, mongo-sharded database cluster).

Examples

The following is an example:

```
admin@orchestrator[master-0](config)# dra migration enable-migration true
```

enable-mongo-sharded-db-as-primary-db

Mongo-sharded database is considered as primary database during migration handling.

Syntax

```
dra migration enable-mongo-sharded-db-as-primary-db [true|false]
no dra migration enable-mongo-sharded-db-as-primary-db
```

Command Mode

CONFIG

VNFs

DRA VNF

Command Usage

Make mongo-sharded database as the primary database for binding lookup (lookup bindings in mongo-sharded database first and if the binding record is not found then the binding is lookup in application-sharded database).



Note By default, application-sharded database is considered as primary database.

Examples

The following is an example:

```
admin@orchestrator[master-0](config)# dra migration enable-mongo-sharded-db-as-primary-db
true
```

enable-skipping-probe-message-binding-lookup

Skip binding lookup in secondary database for probe/dummy AAR messages.

Syntax

```
dra migration enable-skipping-probe-message-binding-lookup [true|false]
no dra migration enable-skipping-probe-message-binding-lookup
```

Command Mode

CONFIG

VNFs

DRA VNF

Command Usage

Enable skipping binding lookup in secondary database for probe/dummy Rx AAR messages (sent by PCRF as part of binding database health check).

Examples

The following is an example:

```
admin@orchestrator[master-0](config)# dra migration
enable-skipping-probe-message-binding-lookup true
```

end

Used to terminate a configuration session.

Syntax

end

Command Mode

CONFIG

VNFs

All

Command Usage

Use the end command to exit any configuration mode and return directly to operational mode. If you enter this command without committing the changes to the target configuration, you are prompted to do so:

```
Uncommitted changes found, commit them before exiting(yes/no/cancel)?[cancel]:
```

- Entering **yes** saves configuration changes to the running configuration file, exits the configuration session, and returns to the operational mode.
- If errors are found in the running configuration, the configuration session does not end. To view the errors, enter the `show configuration (config)` command with the failed keyword.
- Entering **no** exits the configuration session and returns to the operational mode without committing the configuration changes.
- Entering **cancel** leaves the CLI prompt in the current configuration session without exiting or committing the configuration changes.

Examples

The following is an example:

```
network dns host reladsdsdydral.client.3gppnetwork.org local address X:X::X:X
admin@orchestrator[scheduler] (config-host-reladsdsdydral.client.3gppnetwork.org/local) # end
Uncommitted changes found, commit them? [yes/no/CANCEL]
```

external-aaa pam gid-mapping

Configures the gid mapping for various group roles.

Syntax

```
external-aaa pam gid-mapping <gid:int> <group name>
```

Command Parameters

Table 52: Parameter Description

Command Parameter	Description
gid:int	GID mapping value.
group name	Group name for which gid mapping is required.

Command Mode

CONFIG

VNFs

All

Command Usage

Use `external-aaa pam gid-mapping` to configure LDAP user gid mapping for various group roles such as, grafana-admin, policy-admin, policy-ro, and so on.

Based on the roles configured for the LDAP user gid, access permissions can be set accordingly.

Example

```
admin@orchestrator(config)# external-aaa pam gid-mapping 1000 policy-admin
admin@orchestrator(config-gid-mapping-1000/policy-admin)# commit
Commit complete.
```

You can display the status of configuration by running the following command:

```
admin@orchestrator# show running-config external-aaa | tab
```

Sample Output:

```
admin@orchestrator# show running-config external-aaa | tab
```



```
GID   GROUP
-----
1000  policy-admin
```

license feature

Registers a system license.

Syntax

```
license feature id encrypted-license encrypted-license
no license feature id
```

Command Parameters

Table 53: Parameter Description

Command Parameter	Description
id	ID of the license as provided by Cisco.
encrypted-license	The encrypted license as provided by Cisco.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the `license feature` to add and remove licenses from the running system.

load

Used to load configuration from file or terminal.

Syntax

```
load { merge | replace | override } { <file> | terminal }
```

Command Parameters

Table 54: Parameter Description

Command Parameter	Description
merge	Merge content of file/terminal with current configuration..

Command Parameter	Description
replace	Replace the content of file/terminal for the corresponding parts of the current configuration. In case of replace, the parts that are common in the file/terminal are replaced and rest of the configuration is not modified.
override	In case of override, the entire configuration is deleted (with the exception of hidden data) before loading the new configuration from the file/terminal.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the load command to merge/replace/override from file or terminal.

Examples

The configuration file can contain replace: and delete: directives. The following is an example:

```
system {
parent-mo {
child-mo 1 {
attr 10;
}
child-mo 2 {
attr 5;
}
}
}
```

If you want to delete child-mo 2, you can create a configuration file containing either:

- **replace:**

```
system {
replace:
parent-mo {
child-mo 1 {
attr 2;
}
}
}
```

- **delete:**

```
system {
parent-mo {
delete:
child-mo 2 {
attr 5;
}
}
```

```
}
}
```

logger set

Sets the various log levels for application logging.

Syntax

```
logger set logger-name { trace | debug | info | warn | error | off }
```

Command Parameters

Table 55: Parameter Description

Command Parameter	Description
logger-name	Name of the logger to enable at the given log level.
trace	Enables trace logging and higher.
debug	Enables debug logging and higher.
info	Enables info logging and higher.
warn	Enables warn logging and higher.
error	Enables error logging.
off	Turns off all logging for the logger.

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the `logger set` to enable various levels of application logging. The logger names are provided by Cisco per application and are not defined here.

Examples

The following is an example:

```
logger set com.broadhop debug
```

logger clear

Clears a log level defined using the `logger set` command.

Syntax

```
logger clear logger-name
```

Command Parameters

Table 56: Parameter Description

Command Parameter	Description
logger-name	Name of the logger to enable at the given log level.

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the `logger clear` to reset the logging level for an application logger to the default level. The current set of logger levels can be found using the `show logger level` command.

monitor log application

Tails the cluster wide application log.

Syntax

```
monitor log application
```

Command Mode

OPERATIONAL

VNFs

DRA

Command Usage

Use the `monitor log application` to tail the `consolidated-qns.log` running on the `cc-monitor` docker services. If the `cc-monitor` docker services are not running, this command will fail.

Examples

The following is an example:

```
scheduler# monitor log application
binding-s3.weave.local 2017-03-06 00:07:07,256 [LicenseManagerProxy] INFO
consolidated.sessions - TPS_COUNT:                SESSION_COUNT:
                        LICENSE_COUNT: 100000000
binding-s4.weave.local 2017-03-06 00:07:15,577 [LicenseManagerProxy] INFO
consolidated.sessions - TPS_COUNT:                SESSION_COUNT:
                        LICENSE_COUNT: 100000000
diameter-endpoint-s1.weave.local 2017-03-06 00:07:21,041 [LicenseManagerProxy] INFO
consolidated.sessions - TPS_COUNT:                SESSION_COUNT:
```

monitor log container

Tails a specific docker container using the `monitor log container` command.

Syntax

```
monitor log container container-id
```

Command Parameters

Table 57: Parameter Description

Command Parameter	Description
container-id	The container's log file to monitor. Use the <code>show docker service</code> command to list the valid container-ids.

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the `monitor log container` command to tail the docker container log. This will provide the output for all non-application messages for the given container.

Examples

The following is an example:

```
scheduler# monitor log container svn
<<< Started new transaction, based on original revision 94
    * editing path : __tmp_run_stage ... done.
----- Committed revision 94 >>>
```

```
<<< Started new transaction, based on original revision 95
* editing path : __tmp_run_backup ... done.
```

monitor log engine

Tails the cluster wide engine log using the `monitor log engine` command.

Syntax

```
monitor log engine
```

Command Mode

OPERATIONAL

VNFs

DRA

Command Usage

Use the `monitor log engine` to tail the `consolidated-engine.log` running on the `cc-monitor` docker services. If the `cc-monitor` docker services are not running this command will fail.

nacm rule-list

Specifies access restrictions for a user group.

Verify the users in the group before applying restrictions. To specify restrictions for any group, ensure that the admin user is not part of that group. By default, admin user is configured in a each group.

Syntax

```
nacm rule-list <rule-name> group <group-name> cmdrule <cmdrule-name> command <command to restrict> access-operations exec action deny
```

Command Parameters

Table 58: Parameter Description

Command Parameter	Description
rule-list	Name of rule list.
group	Name of the group or list of groups to which the rules apply.
command	Command that is restricted for the user group.

Command Parameter	Description
access-operations	Used to match the operation that ConfD tries to perform. It must be one or more of the values from the accessoperations-type: create, read, update, delete, exec
action	If all of the previous fields match, the rule as a whole matches and the value of action (permit or deny) is taken. If a match is found, a decision is made whether to permit or deny the request in its entirety. If action is permit, the request is permitted; if action is deny, the request is denied.

Command Mode

CONFIG

VNFs

All

Command Usage

To delete the admin user from the read-only group, use the following command:

```
scheduler(config)#no nacm groups group crd-read-only user-name admin
```

For the configuration to take effect, log out of the CLI session and log in again after configuring any nacm rule-list.

Examples

Restrict crd-read-only group from config command:

```
scheduler(config)#nacm rule-list crdreadgrp group crd-read-only cmdrule denyconfig command
  config access-operations exec action deny
scheduler(config-cmdrule-denyconfig)# commit
```

Restrict crd-read-only and policy-ro group from config command:

```
scheduler(config)#nacm rule-list readonly-restrict group [ crd-read-only policy-ro ] cmdrule
  cfg-restrict command config access-operations exec action deny
scheduler(config-cmdrule-cfg-restrict)#commit
```

Restrict crd-read-only and policy-ro group from docker command:

```
scheduler(config)#nacm rule-list readonly-restrict group [ crd-read-only policy-ro ] cmdrule
  docker-restrict command docker access-operations exec action deny
scheduler(config-cmdrule-docker-restrict)# commit
```

Restrict crd-read-only and policy-ro group from system stop command:

```
scheduler(config)#nacm rule-list readonly-restrict group [ crd-read-only policy-ro ] cmdrule
  sys-stop command "system stop" access-operations exec action deny
scheduler(config-cmdrule-sys-stop)# commit
```

Restrict crd-read-only and policy-ro group from system start command:

```
scheduler(config)#nacm rule-list readonly-restrict group [ crd-read-only policy-ro ] cmdrule
  sys-start command "system start" access-operations exec action deny
scheduler(config-cmdrule-sys-start)# commit
```

Restrict load override command for all the users including admin:

```
scheduler(config)#nacm rule-list readonly-restrict group [ * ] cmdrule load-override command
  "load override" access-operations exec action deny
scheduler(config-cmdrule-load-override)# commit
```

network dns server

Adds a network DNS server for the cluster to use.

Syntax

```
network dns server address
no network dns server address
```

Command Parameters

Table 59: Parameter Description

Command Parameter	Description
address	<p>The IP address of the DNS server that the cluster can use.</p> <p>Note This address must be available to all servers within the cluster and is generally on an OAM network or the internal network.</p>

Command Mode

CONFIG

VNFs

All

Command Usage

The network DNS server command triggers the addition of a DNS server to the DNS resolution that the application utilizes. These servers are added in the order they appear in the configuration to the DNS resolution.

Examples

The following example adds a DNS server:

```
scheduler(config)# network dns server 10.10.10.10
```


network dns host

Adds a network host to IP address mapping for the cluster to use.

Syntax

```
network dns host host domain address address
no network dns host host domain
```

Command Parameters

Table 60: Parameter Description

Command Parameter	Description
host	The host name of the host mapping to store.
domain	The domain name of the host mapping to store. Use local for hosts that do not have a domain name.
address	The IP address of the host / domain name mapping.

Command Mode

CONFIG

VNFs

All

Command Usage

The network DNS host command triggers the addition of a host / domain mapping to a specific IP address. This is useful when the upstream DNS services do not have a host / domain name mapping or upstream DNS server is not available to the cluster.

Examples

The following example adds a DNS server:

```
scheduler(config)# network dns host test local address 10.10.10.10
```

network virtual-service

Used to configure virtual floating IP address on various interfaces.

Syntax

```
network virtual-service name of floating ip floating-ip floating ip address mask net mask
digits broadcast broadcast address interface interface-id virtual-router-id virtual router
```

```

    id tracking-service prefix of service to monitor for IP address diameter-endpoint host ip
    address of host to put the floating ip priority priority of host

exit

host ip address of host to put the floating ip priority priority of host

commit

end

```

Command Parameters

Table 61: Parameter Description

Command Parameter	Description
name of floating ip	Name of the floating IP address. to be configured Virtual Network Service Name must contain a minimum of 1 character and a maximum length of 8 characters.
floating ip address	The floating IP address to manage with the virtual service.
net mask digits	The network mask (digits) for the floating IP address. Default: 24
broadcast address	The broadcast address of the floating IP.
interface-id	Interface ID.
virtual router id	virtual-router-id is the identity for a virtual router for hosts that are managed for VIP. Value range is from 0 to 255. For more details, refer to VRRP (Virtual Router Redundancy Protocol) RFC 3768 and keepalive documentation.
prefix of service to monitor for IP address	This parameter is a string used to define the service to be monitored.
ip address of host to put the floating ip	IP address of the host where floating IP is hosted.
priority of host	Priority of the host on which the service must run. Priority range is from 1 to 255. Higher the value, higher is the priority.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the `network virtual-service` command to configure virtual floating IP address on various interfaces that is managed using keepalive and the VRRP protocol. This command should be used in conjunction with the `network virtual-service host` command to assign floating IPs to given hosts.



Note To use within OpenStack, you must enable Protocol 112 on the security group – this is the VRRP protocol used by Keepalive. VRRP is configured as protocol number and not name. Hence, while configuring from dashboard, select protocol as 'Other' and in the text box below, enter 112 as protocol.

Examples

The following example creates a floating IP on two hosts:



Note Enter the command manually.

IPv4 VIP config:

```
scheduler(config)# network virtual-service GxVip12 floating-ip 172.22.33.51 mask 24 broadcast
172.22.33.255 interface ens161 virtual-router-id 1 tracking-service diameter-endpoint host
172.22.33.43 priority 2
exit
host 172.22.33.44 priority 1
commit
end
```

IPv6 VIP config:

```
scheduler(config)# network virtual-service RxVip12 floating-ip 2003:2235::51 mask 64 interface
ens192 virtual-router-id 2 tracking-service diameter-endpoint host 2003:2235::44 priority
2
exit
host 2003:2235::43 priority 1
commit
end
```

You can check the status of configuration on the scheduler by running the following command:

```
show running-config network
```

Sample Output:

```
network virtual-service GxVip12
virtual-router-id 1
floating-ip      172.22.33.51
mask            24
broadcast       172.22.33.255
host 172.22.33.43
  priority 2
!
host 172.22.33.44
```

```

    priority 1
    !
    !

```

Requirement

As a part of OpenStack configuration to have allowed-address-pairs configured on the VMs that are going to host the VIP.

Here is an example for ESC:

Under **vm_group > interfaces > interface**, you need to add the following configuration:

```

<allowed_address_pairs>
  <address>
    <ip_address>10.81.70.44</ip_address>
    <netmask>255.255.255.0</netmask>
  </address>
</allowed_address_pairs>

```



Note The above mentioned configuration needs to be done on all the interfaces of all the VMs where you want a virtual IP.

network virtual-service name host

Adds a new virtual-service floating IP address to the system.

Syntax

```

network virtual-service name host address priority priority
no network virtual-service name host address

```

Command Parameters

Table 62: Parameter Description

Command Parameter	Description
name	The logical name of the virtual service floating IP. Virtual Network Service Name must contain a minimum of 1 character and a maximum length of 8 characters.
address	The IP of the host that should manage this floating IP.
priority	The priority of the host relative other hosts within the group. Default: 100

Command Mode

CONFIG

VNFs

All

Command Usage

Use this command to add new hosts to a virtual service. The hosts added will be start a Keepalive process to manage the floating IP via the VRRP process.

Examples

The following example adds a floating IP on a host:

```
scheduler(config)# network virtual-service test host 10.84.100.136 priority 100
```

ntp server

Creates an NTP server for the system to synchronize system clocks.

Syntax

```
ntp server name address address
```

Command Parameters

Table 63: Parameter Description

Command Parameter	Description
name	Name of the server.
address	IP address or FQDN of the NTP server.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the `ntp server` command to synchronize the clocks of each virtual machine within the cluster. When this command is used, each node will run an NTP service. The NTP service is either a client or relay as described below:

- A relay node is a node that can reach at least one of the NTP servers defined in the configuration. The relay nodes are configured to point to the ntp servers defined in the server.

- A client node is an internal node that cannot reach an NTP server. The client nodes are configured to point to the relay nodes.

Examples

The following is an example:

```
scheduler(config)# ntp server server1 address 10.10.10.10
```

revert

Used to copy running configuration into current configuration.

Syntax

```
revert
```

Command Mode

CONFIG

VNFs

All

Command Usage

Use the revert command to copy running configuration into the current configuration.

Examples

The following is an example:

```
admin@orchestrator[an-master] (config)#revert
```

rollback configuration

Used to rollback the running configuration to a previous configuration.

Syntax

```
rollback configuration <commit-id>
```

Command Mode

CONFIG

VNFs

All

Command Usage

- Each time the commit command is entered, a commit ID is assigned to the new configuration. You can revert the system to the configuration of a previous commit ID with the rollback configuration command.
- The system stores a limited number of old configurations. The number of old configurations to store is configured in the `confd.conf` file. If more configurations are stored than the configured number, then the oldest configuration is removed before creating a new one.
- The most recently committed configuration (the running configuration) is number 0, the next most recent 1, and so on.
- The files are called `rollback0 - rollbackX`, where X is the maximum number of saved committed configurations.
- Use `show configuration commit list` to display a list of the commit IDs available for rollback operations.

```
show configuration commit list
2018-10-15 09:58:21
SNo. ID      User      Client      Time Stamp      Label      Comment
~~~~ ~~~~~~
0      10012     admin     cli          2018-10-15 09:57:59
```

Examples

The following is an example:

```
rollback configuration 0
```

scheduling external-service

Creates a docker service that is external to the installed application.

Syntax

```
scheduling external-service name image image cap-add cap-add environment environment
host-network { true | false } port-mapping port-mapping run-level run-level scalable { true
| false } scheduling-slot scheduling-slot volume volume
```

Command Parameters

Table 64: Parameter Description

Command Parameter	Description
name	Name of the service
image	Fully qualified image name.
scalable (optional)	Scale multiple instances across hosts. Default is false.

Command Parameter	Description
run-level (optional)	Relative run level between external services. Default is 0.
host-network (optional)	Bind to the host network. Default is to the overlay network.
volume (optional)	Volume mounts in the format is as follows: <host path>:<docker path>. Additional mounts are separated by ",".
port-mapping (optional)	Port mapping of the format is as follows: <external>:<internal>. Additional mounts are separated by ",".
cap-add (optional)	Linux capabilities to add to the container. Additional mounts are separated by ",".
scheduling-slot (optional)	Scheduling slot to start the container (for all containers). Use the show running-config docker engine command to view list of scheduling slots.
environment (optional)	Environment variables to export into the container in the format given below: <KEY>=<VALUE> Additional mounts are separated by ",".

Command Mode

CONFIG

VNFs

All

Command Usage

The `scheduling external-service` instructs the scheduling application to run the defined docker image on the given scheduling slots based on the configuration defined. Once scheduled the external-service appears in the `show scheduling status` and the `show docker service` commands.

scheduling vm-target

Calculates a vm-target for an external scaling system.

Syntax

```
scheduling vm-target name group-size group-size k k max max min min override override query
query scale-up-threshold scale-up-threshold
```

```
no scheduling vm-target name
```

Command Parameters**Table 65: Parameter Description**

Command Parameter	Description
name	Name or identifier for the vm-target rule.
group-size (optional)	Size of the scaling group. Default is one
k (optional)	K value in an n + k redundancy model. Default is one.
max (optional)	Maximum value to calculate for the vm-target.
min (optional)	Minimum value to calculate for the vm-target.
override (optional)	Override value for the vm-target. This overrides anything the equation would calculate.
query	Query to calculate a raw scaling value.
scale-up-threshold	Divisor when calculating the scaling number. The query's raw value is divided by the scale-up-threshold to get a the value of n in an n+k redundancy model.

Command Mode

CONFIG

VNFs

All

Command Usage

The `scheduling vm-target` instructs the system to calculate VM scaling targets which can be used by the system to add and remove scaling VMs as required. The following algorithm is used to calculate the VM target for a given “name”:

$$\text{vm-target(name)} = \text{roundup}((\text{query value}) / (\text{scale-up-threshold})) * \text{group-size} + K$$

show alert status

Displays the status of all alerts in the system. It displays either all alert statuses or alerts for a specific named alert.

Syntax

```
show alert status rule-name
```

Command Parameters

Table 66: Parameter Description

Command Parameter	Description
rule-name (optional)	Displays alert statuses for a given rule-name.

Command Mode

OPERATIONAL

VNFs

All

Examples

The following is an example:

```
scheduler# show scheduling status
                                OUT
                                RUN  OF
MODULE INSTANCE LEVEL STATE DATE
-----
consul 1          50  RUNNING false
admin-db 1        75  RUNNING false
memcached-vip 1  100  RUNNING false
prometheus 1     100  RUNNING false
prometheus 2     100  RUNNING false
prometheus 3     100  RUNNING false
```

Table 67: Parameter Description

Parameter	Description
Name	Rule-name of the alert.
Event Host	Host where the alert was generated.
Status	Status of the alert. Valid values are: <ul style="list-style-type: none"> firing resolved

Parameter	Description
Message	Current alert message.
Update Time	Timestamp of the first alert message that transitioned to the given status.

show configuration

Used to display information about the current configuration session changes.

Syntax

```
show configuration
```

Command Mode

CONFIG

VNFs

All

Command Usage

- To display the configuration changes compared to the running configuration if any.
- Possible to display the configuration changes based on configuration component.

Examples

The following is an example:

```
admin@orchestrator[an-master](config)# aaa authentication users user test1 password ****
gid 100 homedir / ssh_keydir / uid 9340
admin@orchestrator[an-master](config-user-test1)#
admin@orchestrator[an-master](config)# show configuration
aaa authentication users user test1
uid          9340
gid          100
password    $1$AWYdJW5S$g2wXilsJSumbCXPYgGzQW0
ssh_keydir  /
homedir     /
!
```

show configuration commit

Used to display the changes made to the running configuration by previous configuration commits, a configuration commit, or for a range of configuration commits.

Use the `show configuration commit changes` command to display the information about the current configuration session changes.

Syntax

```
show configuration commit changes
show configuration commit list
```

Command Mode

CONFIG

VNFs

All

Command Usage

- Each time a configuration is committed with the commit command, the configuration commit operation is assigned a commit ID. The `show configuration commit changes` command displays the configuration changes made since the specified commit.
- To display a list of the available commit IDs, enter the `show configuration commit list` command.

Examples

The following is an example:

```
show configuration commit changes
!
! Created by: admin
! Date: 2018-10-15 09:57:59
! Client: cli
!
aaa authentication users user anil
uid          9340
gid          100
password     $1$7aB1WW0D$31n7YEGkLeTjWHoK2cVOE/
ssh_keydir   /
homedir     /
!
```

```
show configuration commit list
2018-10-15 11:20:39
SNo. ID      User      Client      Time Stamp      Label      Comment
~~~~ ~~      ~~~~      ~~~~~~      ~~~~~~      ~~~~~~      ~~~~~~
0    10012    admin     cli          2018-10-15 09:57:59
```

show configuration rollback

Used to display changes that are made by the rollback configuration command. To display the list of rollback commit IDs, use the `show configuration rollback changes` command.

Syntax

```
show configuration rollback changes
```

Command Mode

ALL

VNFs

All

Command Usage

Use `show configuration rollback changes` command to display changes that are made by the rollback configuration command.



Note The most recent commits are retained by the system. As new commit IDs are added, the oldest commit IDs are discarded and are no longer available for rollback operations.

Examples

The following is an example:

```
show configuration rollback changes 0
no aaa authentication users user test1
```

show database

`show database status` displays the currently configured database clusters members.

`show database parallel-upgrade-plan` is used to print the parallel upgrade plan appropriate for database shard layout across nodes. If parallel upgrade option is selected, all the nodes in a batch are upgraded in parallel.

`show database parallel-upgrade-plan-details` is used to print the parallel upgrade plan with details of shards and servers selected in each batch. Orchestrator ensures that the members of the same shard are scheduled in different batches to minimize the impact on the shards during parallel upgrade. You can use this command to review the plan and assess the impact of performing a parallel upgrade of DB cluster.

Syntax

```
show database status
show database parallel-upgrade-plan
show database parallel-upgrade-plan-details
```

Command Mode

OPERATIONAL

VNFs

All

Examples

The following is an example:

```
scheduler# show database status
```

ADDRESS	PORT	NAME	STATUS	TYPE	CLUSTER		
					NAME	SHARD	REPLICA SET
192.168.65.2	27018	shardA	PRIMARY	replica_set	test	shardA	rs-shardA
192.168.65.2	27019	-	PRIMARY	config_server	test	cfg	test-configsrv
192.168.65.2	27017	-	CONNECTED	mongos	test	router-1	test-configsrv

Table 68: Output Description

Command Parameter	Description
Address	The address of the database process.
Port	The port the database service is running.
Name	Name of the database process.
Status	<p>The current status of the mongo process. Valid states are:</p> <ul style="list-style-type: none"> • CONNECTED – The mongo router is connected to the config servers • NOT_CONNECTED – The mongo router is not connected to the config servers • NO_CONNECTION – The process is not up or is not monitored • STARTUP – The DB node is in the STARTUP mode • PRIMARY – The DB node is the current PRIMARY • SECONDARY – The DB node is a SECONDARY node • RECOVERING – The DB node is currently RECOVERING from a restart or other failure • STARTUP2 – The DB node is in STARTUP2 mode • UNKNOWN – The DB node is in an UNKNOWN state • ARBITER – The DB node is currently an active ARBITER • NOT_INITIALIZED – The DB node is not initialized and pending initialization

Command Parameter	Description
Type	The type of the mongo process. Valid values are: <ul style="list-style-type: none"> • replica_set – a member of the replica set • config_server – a member of the config server replica set • mongos – a mongo router process
Cluster Name	The name of the cluster that owns the process.
Shard	The name of the associated shard.
Replica Set	The name of the replica set associated to the process.

To print the parallel upgrade plan appropriate for database shard layout across nodes.

```
admin@orchestrator[master-6]# show database parallel-upgrade-plan
BATCH  MODULE          HOST          ADDRESS
-----
1      mongo-node-101  master-6      172.20.27.36
1      mongo-node-102  control-7     172.20.27.40
1      mongo-node-103  control-8     172.20.27.39
1      mongo-node-104  persistence-db-3  2003:3030:27c1:913:250:56ff:fea6:53
2      mongo-node-105  persistence-db-4  2003:3030:27c1:913:250:56ff:fea6:54
```

To print the parallel upgrade plan with details of shards and servers selected in each batch.

```
admin@orchestrator[master-6]# show database parallel-upgrade-plan-details
BATCH  MODULE          HOST          ADDRESS          PORT  CLUSTER
NAME   SHARD          SERVER        STATUS
-----
1      mongo-node-101  master-6      172.20.27.36    27019
imsi-msisdn  shdb-3  imsi-msisdn  SECONDARY
1      mongo-node-102  control-7     172.20.27.40    27019
session-ipv6-AB  shdb-3  session-ipv6-AB  SECONDARY
1      mongo-node-103  control-8     172.20.27.39    27019
imsi-msisdn  shdb-2  imsi-msisdn  SECONDARY
1      mongo-node-104  persistence-db-3  2003:3030:27c1:913:250:56ff:fea6:53  27017
imsi-msisdn  shard-1  server-c     SECONDARY
1      mongo-node-104  persistence-db-3  2003:3030:27c1:913:250:56ff:fea6:53  27018
imsi-msisdn  shard-2  server-c     SECONDARY
1      mongo-node-104  persistence-db-3  2003:3030:27c1:913:250:56ff:fea6:53  27021
imsi-msisdn  shard-3  server-c     PRIMARY
1      mongo-node-104  persistence-db-3  2003:3030:27c1:913:250:56ff:fea6:53  27020
imsi-msisdn  shard-4  server-c     SECONDARY
1      mongo-node-104  persistence-db-3  2003:3030:27c1:913:250:56ff:fea6:53  27022
session-ipv6-AB  shard-5  server-c     SECONDARY
1      mongo-node-104  persistence-db-3  2003:3030:27c1:913:250:56ff:fea6:53  27023
session-ipv6-AB  shard-6  server-c     SECONDARY
1      mongo-node-104  persistence-db-3  2003:3030:27c1:913:250:56ff:fea6:53  27024
session-ipv6-AB  shard-7  server-c     PRIMARY
1      mongo-node-104  persistence-db-3  2003:3030:27c1:913:250:56ff:fea6:53  27025
session-ipv6-AB  shard-8  server-c     SECONDARY
2      mongo-node-105  persistence-db-4  2003:3030:27c1:913:250:56ff:fea6:54  27017
imsi-msisdn  shard-1  server-d     SECONDARY
2      mongo-node-105  persistence-db-4  2003:3030:27c1:913:250:56ff:fea6:54  27018
imsi-msisdn  shard-2  server-d     SECONDARY
2      mongo-node-105  persistence-db-4  2003:3030:27c1:913:250:56ff:fea6:54  27021
imsi-msisdn  shard-3  server-d     SECONDARY
```

```

2      mongo-node-105 persistence-db-4 2003:3030:27c1:913:250:56ff:fea6:54 27020
imsi-msisdn shard-4 server-d PRIMARY
2      mongo-node-105 persistence-db-4 2003:3030:27c1:913:250:56ff:fea6:54 27022
session-ipv6-AB shard-5 server-d SECONDARY
2      mongo-node-105 persistence-db-4 2003:3030:27c1:913:250:56ff:fea6:54 27023
session-ipv6-AB shard-6 server-d SECONDARY
2      mongo-node-105 persistence-db-4 2003:3030:27c1:913:250:56ff:fea6:54 27024
session-ipv6-AB shard-7 server-d SECONDARY
2      mongo-node-105 persistence-db-4 2003:3030:27c1:913:250:56ff:fea6:54 27025
session-ipv6-AB shard-8 server-d PRIMARY

```

show docker engine

Displays the status of the clusters docker engines.

Syntax

```
show docker engine
```

Command Mode

OPERATIONAL

VNFs

All

Examples

The following is an example:

```

scheduler# show docker engine

```

ID	STATUS	MISSED PINGS
binding-73d3dc	CONNECTED	0
binding-8a8d17	CONNECTED	0
binding-c74547	CONNECTED	0
binding-dabba5	CONNECTED	0
control-0	CONNECTED	0
control-1	CONNECTED	0
control-2	CONNECTED	0
diameter-endpoint-0	CONNECTED	0
diameter-endpoint-1	CONNECTED	0
diameter-endpoint-2	CONNECTED	0
diameter-endpoint-3	CONNECTED	0
master-0	CONNECTED	0
session-shard-1-e079cf	CONNECTED	0
session-shard-2-80941f	CONNECTED	0

Table 69: Parameter Description

Parameter	Description
ID	The identifier within the cluster of the docker engine. Generally, this maps to the hostname where the engine resides.

Parameter	Description
Status	Indicates if the scheduling application is connected to the docker engine running on a host.
Missed Pings	The number of consecutive missed pings for a given host.

show docker service

Displays the currently running docker services.

Syntax

```
show docker service
```

Command Mode

OPERATIONAL

VNFs

All

Examples

The following is an example:

```
scheduler# show docker service
MODULE      INSTANCE  NAME                VERSION              ENGINE              CONTAINER ID
STATE      MESSAGE  PENALTY BOX
-----
admin-db    1         mongo-admin-a      3.4.0.0              control-0           mongo-admin-a
HEALTHY    false    -
admin-db    1         mongo-admin-arb    3.4.0.0              master-0            mongo-admin-arb
HEALTHY    false    -
admin-db    1         mongo-admin-b      3.4.0.0              control-1           mongo-admin-b
HEALTHY    false    -
admin-db    1         mongo-admin-setup  12.9.9-2017         master-0            mongo-admin-setup
HEALTHY    false    -
binding     1         binding            -03-03.123.797af71  12.9.9-dra.2017    binding-73d3dc     binding-s1
HEALTHY    false    -
binding     1         session-router     -03-03.115.0f485ef  3.4.0.0            binding-73d3dc     session-router-s1
HEALTHY    false    -
binding     2         binding            12.9.9-dra.2017    binding-8a8d17     binding-s2
HEALTHY    false    -
-03-03.115.0f485ef
```

Table 70: Parameter Description

Parameter	Description
Module	Scheduling module that is executing the docker service.

Parameter	Description
Instance	For scalable modules, the instance number that the service relates.
Name	Logical name of the service.
Version	Version of the image executing.
Engine	Engine identifier that is executing the docker service.
Container ID	Container id of the docker service.
State	Current state of the docker service.
Penalty Box	Indicates if the service is waiting to be rescheduled if an error occurred.
Message	Message related to the penalty box designation.

show dra-distributor

Displays the output of ipvsadm (Virtual Server administration) from all distributor VMs.

Syntax

```
show dra-distributor [ daemon | list | rate | stats ]
```

Command Parameters

Table 71: Parameter Description

Command Parameter	Description
daemon	Displays the sync daemon status and multicast interface.
list	Lists the Distributor Service table.
rate	Displays rate information for connection, bytes, and packets per second of Distributor services.
stats	Displays statistic information of Distributor Services.

Command Mode

OPERATIONAL

VNFs

All

Examples

The following are examples:

```
show dra-distributor list
```

```
=====
dra-distributor stats for vpas-A-dra-distributor-client-a
Prot LocalAddress:Port Scheduler Flags
-> RemoteAddress:Port Forward Weight ActiveConn InActConn
TCP 172.16.241.10:3868 wlc
-> 172.16.241.3:3868 Route 1 6 0
-> 172.16.241.4:3868 Route 1 7 0
-> 172.16.241.5:3868 Route 1 6 0
-> 172.16.241.6:3868 Route 1 6 0
TCP 172.16.241.74:3868 wlc
-> 172.16.241.67:3868 Route 1 1 0
-> 172.16.241.68:3868 Route 1 1 0
-> 172.16.241.69:3868 Route 1 1 0
-> 172.16.241.70:3868 Route 1 1 0
TCP [2606:ae00:3001:8311:172:16:241:109]:3868 wlc
-> [2606:ae00:3001:8311:172:16:241:102]:3868 Route 1 5 0
-> [2606:ae00:3001:8311:172:16:241:103]:3868 Route 1 5 0
-> [2606:ae00:3001:8311:172:16:241:104]:3868 Route 1 5 0
-> [2606:ae00:3001:8311:172:16:241:105]:3868 Route 1 9 0
=====
dra-distributor stats for vpas-A-dra-distributor-client-b
Prot LocalAddress:Port Scheduler Flags
-> RemoteAddress:Port Forward Weight ActiveConn InActConn
TCP 172.16.241.10:3868 wlc
-> 172.16.241.3:3868 Route 1 6 0
-> 172.16.241.4:3868 Route 1 7 0
-> 172.16.241.5:3868 Route 1 6 0
-> 172.16.241.6:3868 Route 1 6 0
TCP 172.16.241.74:3868 wlc
-> 172.16.241.67:3868 Route 1 1 0
-> 172.16.241.68:3868 Route 1 1 0
-> 172.16.241.69:3868 Route 1 1 0
-> 172.16.241.70:3868 Route 1 1 0
TCP [2606:ae00:3001:8311:172:16:241:109]:3868 wlc
-> [2606:ae00:3001:8311:172:16:241:102]:3868 Route 1 5 0
-> [2606:ae00:3001:8311:172:16:241:103]:3868 Route 1 5 0
-> [2606:ae00:3001:8311:172:16:241:104]:3868 Route 1 5 0
-> [2606:ae00:3001:8311:172:16:241:105]:3868 Route 1 9 0
=====
dra-distributor stats for vpas-A-dra-distributor-server-a
Prot LocalAddress:Port Scheduler Flags
-> RemoteAddress:Port Forward Weight ActiveConn InActConn
TCP 172.16.242.10:3868 wlc
-> 172.16.242.3:3868 Route 1 3 0
-> 172.16.242.4:3868 Route 1 3 0
-> 172.16.242.5:3868 Route 1 3 0
-> 172.16.242.6:3868 Route 1 3 0
TCP 172.16.242.138:3868 wlc
-> 172.16.242.131:3868 Route 1 5 0
-> 172.16.242.132:3868 Route 1 4 0
-> 172.16.242.133:3868 Route 1 4 0
-> 172.16.242.134:3868 Route 1 4 0
=====
dra-distributor stats for vpas-A-dra-distributor-server-b
Prot LocalAddress:Port Scheduler Flags
-> RemoteAddress:Port Forward Weight ActiveConn InActConn
TCP 172.16.242.10:3868 wlc
-> 172.16.242.3:3868 Route 1 3 0
-> 172.16.242.4:3868 Route 1 3 0
-> 172.16.242.5:3868 Route 1 3 0
```

show dra-distributor

```

-> 172.16.242.6:3868          Route 1 3 0
TCP 172.16.242.138:3868 wlc
-> 172.16.242.131:3868      Route 1 5 0
-> 172.16.242.132:3868      Route 1 4 0
-> 172.16.242.133:3868      Route 1 4 0
-> 172.16.242.134:3868      Route 1 4 0

```

```
show dra-distributor daemon
```

```
=====
dra-distributor stats for vpas-A-dra-distributor-client-a
backup sync daemon (mcast=ens160, syncid=201)
=====
```

```
dra-distributor stats for vpas-A-dra-distributor-client-b
backup sync daemon (mcast=ens160, syncid=201)
=====
```

```
dra-distributor stats for vpas-A-dra-distributor-server-a
backup sync daemon (mcast=ens160, syncid=202)
=====
```

```
dra-distributor stats for vpas-A-dra-distributor-server-b
backup sync daemon (mcast=ens160, syncid=202)
=====
```

```
show dra-distributor rate
```

```
=====
dra-distributor stats for vpas-A-dra-distributor-client-a
Prot LocalAddress:Port          CPS    InPPS    OutPPS    InBPS    OutBPS
-> RemoteAddress:Port
TCP 172.16.241.10:3868          0    35080    0 17784626    0
-> 172.16.241.3:3868           0    7753    0 3856300    0
-> 172.16.241.4:3868           0    9521    0 4867718    0
-> 172.16.241.5:3868           0    7249    0 3607296    0
-> 172.16.241.6:3868           0   10557    0 5453342    0
TCP 172.16.241.74:3868         0    2896    0 1269265    0
-> 172.16.241.67:3868          0    740    0 317735    0
-> 172.16.241.68:3868          0    824    0 321847    0
-> 172.16.241.69:3868          0    550    0 309638    0
-> 172.16.241.70:3868          0    782    0 320007    0
TCP [2606:ae00:3001:8311:172:16:241:109]:3868 0 18551    0 17887169
0
-> [2606:ae00:3001:8311:172:16:241:102]:3868 0 3714    0 3581895
0
-> [2606:ae00:3001:8311:172:16:241:103]:3868 0 4037    0 3878454
0
-> [2606:ae00:3001:8311:172:16:241:104]:3868 0 4012    0 3877344
0
-> [2606:ae00:3001:8311:172:16:241:105]:3868 0 6789    0 6549476
0
=====
```

```
dra-distributor stats for vpas-A-dra-distributor-client-b
Prot LocalAddress:Port          CPS    InPPS    OutPPS    InBPS    OutBPS
-> RemoteAddress:Port
TCP 172.16.241.10:3868          0     0     0     0     0
-> 172.16.241.3:3868           0     0     0     0     0
-> 172.16.241.4:3868           0     0     0     0     0
-> 172.16.241.5:3868           0     0     0     0     0
-> 172.16.241.6:3868           0     0     0     0     0
TCP 172.16.241.74:3868         0     0     0     0     0
-> 172.16.241.67:3868          0     0     0     0     0
-> 172.16.241.68:3868          0     0     0     0     0
-> 172.16.241.69:3868          0     0     0     0     0
-> 172.16.241.70:3868          0     0     0     0     0
TCP [2606:ae00:3001:8311:172:16:241:109]:3868 0     0     0     0     0
0
-> [2606:ae00:3001:8311:172:16:241:102]:3868 0     0     0     0     0
0
-> [2606:ae00:3001:8311:172:16:241:103]:3868 0     0     0     0     0

```

```

0
-> [2606:ae00:3001:8311:172:16:241:104]:3868      0      0      0      0
0
-> [2606:ae00:3001:8311:172:16:241:105]:3868      0      0      0      0
0

```

```

=====
dra-distributor stats for vpas-A-dra-distributor-server-a
Prot LocalAddress:Port      CPS      InPPS    OutPPS    InBPS    OutBPS
-> RemoteAddress:Port
TCP 172.16.242.10:3868      0      29969    0 19567201    0
-> 172.16.242.3:3868      0      7363     0 4884850     0
-> 172.16.242.4:3868      0      7435     0 4885241     0
-> 172.16.242.5:3868      0      7636     0 4911014     0
-> 172.16.242.6:3868      0      7534     0 4886099     0
TCP 172.16.242.138:3868    0      24373    0 8103149     0
-> 172.16.242.131:3868    0      5940     0 1677292     0
-> 172.16.242.132:3868    0      8316     0 3543717     0
-> 172.16.242.133:3868    0      4823     0 1429692     0
-> 172.16.242.134:3868    0      5293     0 1452448     0
=====

```

```

dra-distributor stats for vpas-A-dra-distributor-server-b
Prot LocalAddress:Port      CPS      InPPS    OutPPS    InBPS    OutBPS
-> RemoteAddress:Port
TCP 172.16.242.10:3868      0      0         0      0         0
-> 172.16.242.3:3868      0      0         0      0         0
-> 172.16.242.4:3868      0      0         0      0         0
-> 172.16.242.5:3868      0      0         0      0         0
-> 172.16.242.6:3868      0      0         0      0         0
TCP 172.16.242.138:3868    0      0         0      0         0
-> 172.16.242.131:3868    0      0         0      0         0
-> 172.16.242.132:3868    0      0         0      0         0
-> 172.16.242.133:3868    0      0         0      0         0
-> 172.16.242.134:3868    0      0         0      0         0

```

```
show dra-distributor stats
```

```

=====
dra-distributor stats for vpas-A-dra-distributor-client-a
Prot LocalAddress:Port      Conns    InPkts   OutPkts   InBytes   OutBytes
-> RemoteAddress:Port
TCP 172.16.241.10:3868      5 130888K    0 67428M     0
-> 172.16.241.3:3868      1 28763786   0 14532M     0
-> 172.16.241.4:3868      2 34872671   0 17887M     0
-> 172.16.241.5:3868      1 26758954   0 13554M     0
-> 172.16.241.6:3868      1 37715757   0 19818M     0
TCP 172.16.241.74:3868     1 9892533    0 4791M      0
-> 172.16.241.67:3868     0 2535586    0 1206M      0
-> 172.16.241.68:3868     0 2627786    0 1208M      0
-> 172.16.241.69:3868     1 1940733    0 1058M      0
-> 172.16.241.70:3868     0 2578653    0 1208M      0
TCP [2606:ae00:3001:8311:172:16:241:109]:3868      5 70270305   0 68098M
0
-> [2606:ae00:3001:8311:172:16:241:102]:3868      0 14039247   0 13718M
0
-> [2606:ae00:3001:8311:172:16:241:103]:3868      0 15233935   0 14707M
0
-> [2606:ae00:3001:8311:172:16:241:104]:3868      0 15271681   0 14903M
0
-> [2606:ae00:3001:8311:172:16:241:105]:3868      5 24425635   0 23490M
0
=====

```

```

dra-distributor stats for vpas-A-dra-distributor-client-b
Prot LocalAddress:Port      Conns    InPkts   OutPkts   InBytes   OutBytes
-> RemoteAddress:Port
TCP 172.16.241.10:3868      25 3046M      0 1577G      0
-> 172.16.241.3:3868      5 575759K    0 295G       0

```

show history

```

-> 172.16.241.4:3868          5 568825K      0    288G      0
-> 172.16.241.5:3868          5 564563K      0    282G      0
-> 172.16.241.6:3868          5 534960K      0    273G      0
TCP 172.16.241.74:3868        4 172396K      0    83111M    0
-> 172.16.241.67:3868         1 41803986     0    20709M    0
-> 172.16.241.68:3868         1 45090996     0    20883M    0
-> 172.16.241.69:3868         0         11          0    10472     0
-> 172.16.241.70:3868         1 41847316     0    20711M    0
TCP [2606:ae00:3001:8311:172:16:241:109]:3868 24 1635M      0    1581G
0
-> [2606:ae00:3001:8311:172:16:241:102]:3868 5 306946K     0    298G
0
-> [2606:ae00:3001:8311:172:16:241:103]:3868 5 357153K     0    342G
0
-> [2606:ae00:3001:8311:172:16:241:104]:3868 5 339724K     0    332G
0
-> [2606:ae00:3001:8311:172:16:241:105]:3868 4 300748K     0    290G
0

```

```

=====
dra-distributor stats for vpas-A-dra-distributor-server-a
Prot LocalAddress:Port          Conns  InPkts  OutPkts  InBytes  OutBytes
-> RemoteAddress:Port
TCP 172.16.242.10:3868          38 401155K   0    3050G    0
-> 172.16.242.3:3868           7 782570K   0    508G    0
-> 172.16.242.4:3868           7 789557K   0    513G    0
-> 172.16.242.5:3868           7 979702K   0    623G    0
-> 172.16.242.6:3868           8 1166M    0    759G    0
TCP 172.16.242.138:3868        55 3724M    0    1230G    0
-> 172.16.242.131:3868        11 579165K   0    159G    0
-> 172.16.242.132:3868        12 1079M    0    418G    0
-> 172.16.242.133:3868        11 843389K   0    306G    0
-> 172.16.242.134:3868        10 557000K   0    156G    0
=====

```

```

dra-distributor stats for vpas-A-dra-distributor-server-b
Prot LocalAddress:Port          Conns  InPkts  OutPkts  InBytes  OutBytes
-> RemoteAddress:Port
TCP 172.16.242.10:3868          0         0         0         0         0
-> 172.16.242.3:3868           0      785         0    1149048   0
-> 172.16.242.4:3868           0      817         0     43388    0
-> 172.16.242.5:3868           0     1178         0    2029844   0
-> 172.16.242.6:3868           0     2069         0    2386744   0
TCP 172.16.242.138:3868        0    10926         0    3854392   0
-> 172.16.242.131:3868        0     2648         0     994176   0
-> 172.16.242.132:3868        0     1358         0     537100   0
-> 172.16.242.133:3868        0     2271         0     995296   0
-> 172.16.242.134:3868        0     1440         0     618544   0

```

show history

Displays the history of commands executed on the system.

Syntax

```
show history
```

Command Mode

OPERATIONAL

VNFs

All

Examples

The following is an example:

```
scheduler# show history
03-04 16:56:03 -- show docker service | include diameter
03-04 16:56:22 -- show docker service | include diameter | include diameter-endpoint-0
03-04 16:57:31 -- docker connect docker-host-info-s8
03-04 16:59:19 -- docker connect socket-forwarder-s1
03-04 17:01:02 -- ifconfig
03-04 17:01:22 -- docker connect socket-forwarder-s1
03-04 17:01:54 -- docker connect diameter-endpoint-s2
03-04 17:03:32 -- docker connect diameter-endpoint-s2
03-04 17:05:25 -- docker connect diameter-endpoint-s1
```

show license details

Displays the current license details installed on the system.

Syntax

```
show license details
```

Command Mode

OPERATIONAL

VNFs

All

Examples

The following is an example:

```
scheduler# show license details
ID          DEFAULT  COUNT      EXPIRATION
-----
SP_CORE    true      100000000  2017-06-02T02:04:07+00:00
```

Table 72: Parameter Description

Parameter	Description
ID	ID of the license entry.
Default	Indicates if this is the default 90 day license installed on system install.
Count	Count for the given license.
Expiration	Expiration timestamp for the license.

show log application

Displays the application log in a viewer that enables you to scroll and search.

Syntax

```
show log application
```

Command Mode

OPERATIONAL

VNFs

DRA

show log engine

Displays the engine log in a viewer that enables you to scroll and search.

Syntax

```
show log engine
```

Command Mode

OPERATIONAL

VNFs

DRA

show logger level

Displays the current logger levels in the system that overrides the default logging.

Syntax

```
show logger level
```

Command Mode

OPERATIONAL

VNFs

All

Examples

The following is an example:

```

scheduler# show logger level
Logger      Current Level
-----
dra         warn

```

Table 73: Parameter Description

Parameter	Description
Logger	The logger that is overridden.
Current Level	The current level of logging.

show orchestrator-database-status

Displays the MongoDB members database status running on orchestrator, orchestrator-backup-a, and orchestrator-backup-b containers.

Syntax

```
show orchestrator-database-status
```

Command Parameters

None

Command Mode

Operational

VNFs

All

Examples

The following example also shows a sample output:

```

admin@orchestrator[an-dbmaster]# show orchestrator-database-status
ADDRESS          PORT      STATUS
-----
orchestrator     27017    PRIMARY
orchestrator-backup-a  27017    SECONDARY
orchestrator-backup-b  27017    SECONDARY

```



Note In case any member is down or not able to retrieve its status, it is shown as NO_CONNECTION. For all other members, respective mongo status is displayed.

For example, if orchestrator-backup-a mongo member is down.

```
admin@orchestrator[an-dbmaster]# show orchestrator-database-status
ADDRESS                PORT        STATUS
-----
orchestrator           27017      PRIMARY
orchestrator-backup-a 27017      NO_CONNECTION
orchestrator-backup-b 27017      SECONDARY
```

show patches

Lists the patches that are in /data/orchestrator/patches directory.

Syntax

```
show patches
```

Command Mode

OPERATIONAL

VNFs

All

Command Usage

The `show patches` indicates the patch that is loaded in the given patch directory and not a patch that is applied to the system .

show running-config binding db-connection-settings

Displays the binding DB write connection settings.

Syntax

```
show running-config binding db-connection-settings
```

Command Mode

OPERATIONAL

VNFs

All

Examples

The following is an example:

```
scheduler# show running-config binding db-connection-settings | tab
                                MAX
BINDING  CONNECT  SOCKET  WAIT  CONNECTIONS
TYPE    TIMEOUT  TIMEOUT TIME   PER HOST
-----
drasession      500      1000   500   10
```

show running-config binding db-read-connection-settings

Displays the binding DB read connection settings.

Syntax

```
show running-config binding db-read-connection-settings
```

Command Mode

OPERATIONAL

VNFs

All

Examples

The following is an example:

```
scheduler# show running-config binding db-connection-settings | tab
```

BINDING TYPE	CONNECT	SOCKET	MAX WAIT	CONNECTIONS PER HOST FOR READ	ACCEPTABLE
	TIMEOUT FOR READ	TIMEOUT FOR READ	TIME FOR READ		LATENCY DIFFERENCE FOR READ
ipv6	500	1000	500	10	5
imsiapn	500	1000	500	10	5
msisdnapn	500	1000	500	10	5
drasession	500	1000	500	10	5

show running-config binding shard-metadata-db-connection

Displays the binding shard metadata database connection.

Syntax

```
show running-config binding shard-metadata-db-connection
```

Command Mode

OPERATIONAL

VNFs

All

Examples

The following is an example:

```
scheduler# show running-config binding shard-metadata-db-connection | tab
```

SHARD

```

METADATA
BINDING
TYPE          HOST          PORT
-----
ipv6          193.1.163.114 27019
ipv6          193.1.163.115 27019
ipv6          193.1.163.164 27019
ipv4          193.1.163.114 27019
ipv4          193.1.163.115 27019
ipv4          193.1.163.164 27019
imsiapn      193.1.163.116 27019
imsiapn      193.1.163.25  27019
imsiapn      193.1.163.63  27019
imsiapn      193.1.163.65  27019
imsiapn      93.1.163.165  27019
msisdnapi   193.1.163.116 27019
msisdnapi   193.1.163.25  27019
msisdnapi   193.1.163.63  27019
msisdnapi   193.1.163.65  27019
msisdnapi   93.1.163.165  27019
drasession  193.1.163.114 27019
drasession  193.1.163.115 27019
drasession  193.1.163.164 27019

```

show scheduling effective-scheduler

Displays the effective scheduler running in the system.

Valid results are HA and AIO.

Syntax

```
show scheduling effective-scheduler
```

Command Mode

OPERATIONAL

VNFs

All

Examples

The following is an example:

```

scheduler# show scheduling effective-scheduler
scheduling effective-scheduler HA

```

show scheduling status

Displays the currently loaded modules.

Syntax

```
show scheduling status
```

Command Mode

OPERATIONAL

VNFs

All

Examples

The following is an example:

```
scheduler# show scheduling status
```

MODULE	INSTANCE	RUN LEVEL	STATE	OUT OF DATE
consul	1	50	RUNNING	false
admin-db	1	75	RUNNING	false
memcached-vip	1	100	RUNNING	false
prometheus	1	100	RUNNING	false
prometheus	2	100	RUNNING	false
prometheus	3	100	RUNNING	false

Table 74: Parameter Description

Parameter	Description
Module	Module name that is running.
Instance	The instance number scheduled for scalable modules.
Run Level	The relative run level of the module compared to other modules. In an upgrade, the system reschedules from highest run level to lowest run level and in a downgrade the system schedules from low to high.
State	The current state of the module. Valid states are: <ul style="list-style-type: none"> • RUNNING • SCHEDULING • STOPPING
Out of Date	Indicates whether the software is out of date with the running system.

show scheduling vm-target

Displays the results of the scheduling vm-target calculation.

Syntax

```
show scheduling vm-target
```

Command Mode

OPERATIONAL

VNFs

All

Parameter Description

Parameter	Description
group	The vm-target group name that the count applies.
Count	The calculated count of VMs for scaling.

show system diagnostics

Shows the current diagnostics.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Command Parameters*Table 75: Parameter Description*

Command Parameter	Description
Node ID	ID of the node where the diagnostics was run.
Check	The ID of the check that was run.
IDX	For Checks that return multiple results the corresponding index number
Status	Indicates if the check is passing or not.
Message	The corresponding message for the diagnostic.

Examples

```

scheduler# show system diagnostics | tab
NODE          CHECK ID          IDX  STATUS  MESSAGE
-----
binding-s1    serfHealth        1    passing Agent alive and reachable

binding-s1    service:cisco-policy-api 1    passing TCP connect localhost:8080: Success

binding-s1    service:cisco-policy-app 1    passing CLEARED: Session creation is allowed

binding-s1    service:cisco-policy-app 2    passing CLEARED: -Dcom.broadhop.developer.mode
           is disabled

```

show system history

Shows the history of system events.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Command Parameters

Table 76: Parameter Description

Command Parameter	Description
IDX	The index of the event in the system history log.
Event Time	Timestamp of the event in the system history log.
Module	The internal module that generated the history log entry.
Message	The message associated with the log entry.

Examples

```

scheduler# show system history
IDX  EVENT TIME          MODULE          MESSAGE
-----

```

```

1   2017-02-04T02:04:02.469+00:00  system      System started
2   2017-02-04T02:04:29.021+00:00  docker-engine  Adding docker engine session-shard-2-80941f
3   2017-02-04T02:04:29.096+00:00  docker-engine  Adding docker engine diameter-endpoint-3
4   2017-02-04T02:04:29.187+00:00  docker-engine  Adding docker engine diameter-endpoint-2
5   2017-02-04T02:04:29.303+00:00  docker-engine  Adding docker engine binding-c74547
6   2017-02-04T02:04:29.375+00:00  docker-engine  Adding docker engine control-2
7   2017-02-04T02:04:29.503+00:00  docker-engine  Adding docker engine session-shard-1-e079cf
8   2017-02-04T02:04:29.583+00:00  docker-engine  Adding docker engine control-1
9   2017-02-04T02:04:29.671+00:00  docker-engine  Adding docker engine control-0
10  2017-02-04T02:04:29.751+00:00  docker-engine  Adding docker engine binding-dabba5
11  2017-02-04T02:04:29.843+00:00  docker-engine  Adding docker engine binding-73d3dc
12  2017-02-04T02:04:29.981+00:00  docker-engine  Adding docker engine binding-8a8d17

```

show system secrets open

Shows if the system secrets are unsealed.

This command returns true if the secrets are unsealed and false if they are still sealed. To open the system secrets, see [system secrets unseal](#) , on page 189.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Examples

```

scheduler# show system secrets open
system secrets open true

```

show system secrets paths

Shows the current set secrets.

This command does not show the value of the secrets only the path and if the value is readable by the system.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Command Parameters

Table 77: Parameter Description

Command Parameter	Description
Path	The identifying path of the secret.
Status	Indicates if the path can be read by the system.

Examples

```
scheduler# show system secrets paths
PATH STATUS
-----
test valid
```

show system software available-versions

Shows the list of available software versions to upgrade or downgrade a system.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Examples

```
scheduler# show system software available-versions
VERSION
-----
12.9.9-dra.2017-03-03.115.0f485ef
```

show system software docker-repository

Shows the currently configured docker-repository.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Examples

```
scheduler# show system software docker-repository
system software docker-repository registry:5000
```

show system software version

Shows the currently installed software version.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Examples

```
scheduler# show system software version
system software version 12.9.9-dra.2017-03-03.115.0f485ef
```

show system software iso stage file

Displays the currently staged files in the /data/isos/staged-isos folder.

Syntax

```
show system software iso stage file
```

Command Parameters

None

Command Mode

OPERATIONAL

VNFs

All

Examples

The following example also shows a sample output:

```
scheduler# show system software iso stage file
NAME                               CREATED                               SIZE MB  MD5 SUM
-----
cisco-policy-dra.iso 2017-05-17T12:35:58+00:00 1100.04 c636794475b76e84041901b0ca3dcac4
```

Where:

- Name: The filename of the iso.
- Created: The date the file was created on the file system.
- Size MB: The size of the file in megabytes.
- MD5 Sum: The MD5 sum of the file.

show system software iso details

Displays the currently active ISOs that are loaded on the system.

Syntax

```
show system software iso details
```

Command Parameters

None

Command Mode

OPERATIONAL

VNFs

All

Examples

The following example also shows a sample output:

CATEGORY	NAME	VERSION	QUALIFIER	CREATED	ACTIVE	MB
product	cisco-policy-dra	12.9.9	dra.2017-05-17.441.6968d89	2017-05-17T13:4:15.708+00:00	true	1102.9

Where:

- **Category:** The type of ISO. Either product or extras. Extras can be used to load external docker images for use by external services.
- **Name:** The product name of the ISO
- **Version:** The version of the ISO
- **Qualifier:** The qualifier of the ISO
- **Created Date:** The creation date of the ISO on the file system
- **Active:** Indicates if the registry is currently pointing to the ISO to download images.
- **Size:** The size of the ISO on the file system.

show system status

Shows 100% if the minimum set of containers are running for the system to operate.

A system status of 100% does not guarantee the following:

- The system is fully configured through the CLI or Policy Builder.
- All redundant VMs are UP. For example, a worker VM, and a distributor VM.
- Distributor VMs are UP.

To verify a system is healthy and all desired VMs are active, execute the following commands:

- `show docker engine`
- `show system status`
- `show system diagnostics`
- `show docker service`
- `show alerts`

Syntax

```
show system status
```

Command Parameters

None

Command Mode

OPERATIONAL

VNFs

All

Examples

The following example also shows a sample output:

```
scheduler# show system status
```

show system status debug

Shows if the system is currently configured with debug tools.

Syntax

```
show system status debug
```

Command Parameters

None

Command Mode

OPERATIONAL

VNFs

All

Examples

The following example also shows a sample output:

```
scheduler# show system status debug
system status debug false
```

Where:

- Debug: Indicates if the system is configured to deploy containers with debug tools

show system status downgrade

Shows if the system is currently downgrading the installed software.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Examples

```
scheduler# show system status downgrade
system status downgrade false
```

show system status running

Shows if the system is currently running.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Examples

```
scheduler# show system status running
system status running true
```

show system status upgrade

Shows if the system is currently upgrading an installed software.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Examples

```
scheduler# show system status upgrade
system status upgrade false
```

statistics bulk file

Defines a new bulk statistics file that the system generates on a regular basis.

Syntax

```
statistics bulk file name header
  header query query format
format no bulk file name
```

Command Parameters

Table 78: Parameter Description

Command Parameter	Description
name	The base name of the bulk statistics file to create. The final file name generated has the following format: <name>-<timestamp in seconds>.csv
header	The exact text of the header to put at the start of all new files.
query	The Prometheus query to execute to build the bulk statistics. The query format is described in the Prometheus documentation: https://prometheus.io/docs/querying/basics/
format	The format of the output line. Each time series returned from the query that is executed will pass through the formatting string. Substitution variables appear as $\${variable}$. The following pre-defined variables exist in addition to the ones returned from Prometheus: <ul style="list-style-type: none"> • current-value – last value returned • max-value – max value over last 5 minutes • avg-value – average value over last 5 minutes • min-value – minimum value over last 5 minutes • timestamp – timestamp of when the sample was taken in the following format: yyyy-MM-dd'T'HH:mm:ss'Z'

Command Mode

CONFIG

VNFs

All

Command Usage

Use the bulk file command to define a bulk statistics file that supplements the default bulk statistics files created by the system. The format and queries are user defined.

Examples

The following example creates a bulk file on peer message rates:

```
statistics bulk file peer_tps
  query "peer_message_total{remote_peer!=\"\"}"
  format ${app_id},${direction},${instance},${local_peer},
${remote_peer},${type},${current-value}
!
```

statistics bulk interval

Modifies the timer that the system uses to generate the bulk statistics that are defined via the bulk file command.

Syntax

```
statistics bulk interval interval no bulk interval
```

Command Parameters

Table 79: Parameter Description

Command Parameter	Description
interval	Timer length (in seconds) used to trigger a new bulk statistics file.

Command Mode

CONFIG

VNFs

All

Command Usage

Use the bulk interval command to control the timer length in triggering a new bulk statistics file.

Notes:

1. The generation of bulk statistics runs +/- 10 seconds of the interval.
2. The generation of bulk statistics is not synchronized to the minute.
3. The default interval, if not defined, is 300 seconds.

Examples

The following example creates a bulk file every 10 minutes:

```
scheduler(config)# bulk interval 600
```

statistics detail

Adds a statistics detail for the system to capture.

Syntax

```
statistics detail query category name query query format format scale scale
```

Command Parameters

Table 80: Parameter Description

Command Parameter	Description
category	Category of the statistic.
name	Name of the statistic.
query	Prometheus query to execute in order to retrieve the statistics.
format (optional)	Formatting rule for the statistic. The labels from the Prometheus query are substituted using the <code>\${label}</code> format.
scale (optional)	Scaling factor to take the raw value and scale to by the scale factor. A negative value divides by the scale factor and a positive value multiples by the scale factor.

Command Mode

CONFIG

VNFs

All

Command Usage

The statistics detail command triggers the application to monitor a given statistic and record it in memory and for reporting using the show statistics detail command. The values are refreshed every 10 seconds.

Examples

```
statistics detail query diameter success-message-tps
  query "sum(rate(diameter_endpoint_request_total{result_code=\"2001\"}[10s])) by
  (app_id,message_type) "
  format "${app_id} ${message_type}"
  !
```

statistics icmp-ping

Creates a probe that tests whether a host is up using ICMP ping.

Syntax

```
statistics icmp-ping address no statistics icmp-ping address
```

Command Parameters

Table 81: Parameter Description

Command Parameter	Description
address	The address to ping via ICMP. The resultant statistics are stored in the following metric: <ul style="list-style-type: none"> • probe_success • probe_duration_seconds • probe_ip_protocol

Command Mode

CONFIG

VNFs

All

Command Usage

Use the statistic icmp-ping command to instruct the monitoring system to ping the given address using the ICMP protocol. The IP address must be reachable via the master, control-a, and control-b hosts.

Examples

The following example creates an ICMP ping test:

```
scheduler(config)# statistics icmp-ping 10.10.10.10
```

statistics summary

Adds a statistics summary for the system to capture.

Syntax

```
statistics summary query category name query query scale scale
```

Command Parameters

Table 82: Parameter Description

Command Parameter	Description
category	Category of the statistic.
name	Name of the statistic.
query	Prometheus query to execute in order to retrieve the statistics.
scale (optional)	Scaling factor to take the raw value and scale to by the scale factor. A negative value divides by the scale factor and a positive value multiples by the scale factor.

Command Mode

CONFIG

VNFs

All

Command Usage

The statistics summary command triggers the application to monitor a given statistic and record it in memory and for reporting using the show statistics summary command. The values are refreshed every 10 seconds.

The summary command does not support "group by" operations to show multiple lines from a single query.

Examples

```
statistics summary query diameter tps
  query "sum(rate(diameter_endpoint_request_total{result_code=\"2001\"}[10s]))"
!
```

Storage Health Check Service Commands

show storage-health-check service

Displays the health check settings. The following are default values:

Interval = 3 seconds

Failover Hold Time = 30 seconds

Syntax

```
admin@orchestrator[vPAS-A-master]# show storage-health-check service
Parameter          Value
-----
enable             true
failover-hold-time 10
interval           2
```

storage-health-check service <enable | disable | restart>

enable – Enables storage health check on diameter nodes

disable – Disables storage health check on diameter nodes

restart – Restarts storage health check on diameter nodes. Restart needs to be performed if health check settings are modified after enabling the service.

Configuring Storage Health Check Settings

The following commands can be used to configure storage health check settings.

```
storage-health-check set interval <value in seconds>
```

```
storage-health-check set failover-hold-time <value in seconds>
```

```
storage-health-check clear interval
```

Reset to default.

```
storage-health-check clear failover-hold-time
```

Reset to default.

Applying Configuration Changes

If the interval or failover-hold-time is updated after enabling health check service, then the changes does not automatically take effect. The service needs to be restarted for the changes to take effect by using the following command:

```
storage-health-check service restart
```

If the configuration is updated prior to enabling the service, enabling the service applies the latest settings.

```
storage-health-check service enable
```

system abort-downgrade

Stops a downgrade that is in progress.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Command Usage

The system abort-downgrade command stops the current rolling downgrade of the system. This command is only available when the system is in the process of downgrading and is not available after the downgrade is complete. Once this command is issued, [system upgrade , on page 195](#) command should be issued to revert this software to the previous version.

system abort-upgrade

Stops an upgrade that is in progress.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Usage Guidelines

The system abort-upgrade command stops the current rolling upgrade of the system. This command is only available when the system is in the process of upgrading is not available after the upgrade is complete. Once the command is issued, [system downgrade, on page 183](#) command should be issued to revert this software to the previous version.

system downgrade

Downgrades the system to a older software version.

Syntax

```
system downgrade version version [consul-downgrade [true/false] [snapshot_name]]
```

Command Mode

OPERATIONAL

VNFs

All

Command Parameters*Table 83: Parameter Description*

Command Parameter	Description
version	The new software version to install into the system.
consul-downgrade	consul-downgrade is an optional parameter. For more information , see consul-downgrade, on page 184 .

consul-downgrade

During upgrade, it takes a snapshot of existing consul data which are yet to be upgraded and saves as *<version-name>* (to which you are upgrading) and upgrade proceeds normally. Post upgrade all consul servers/agents will be upgraded to newer version.

For example, if you are upgrading from 19.5.0.release to 20.x.0.release, snapshot name is *20.x.0.release*.

If the value is set as true, following operations are carried out:

- Check if you have provided snapshot-name. If you have not provided the snapshot name, by default, it takes current version as snapshot. You can also provide the snapshot name. To list all the available snapshots, use `consul list-snapshots` command.
- If snapshot is present, then consul is restored with the snapshot and further downgrade proceeds normally.
- If snapshot is not present, then downgrade does not get started and an error is displayed.
- If you have provided the snapshot-name, then snapshot (if exists) in `/data/orchestrator/config/snapshot/` is verified and consul is restored with the given snapshot and downgrade continues.
- In case of no snapshot, an error is displayed.

**Note**

Post rollback, consul data is of state before upgrade if consul downgrade is selected during ISO rollback. Hence, if changes are made to the consul config post upgrade, they are lost and you need to reapply the config changes.



Caution You cannot restore newer version snapshot on an old consul server.

Example:

1. When upgrading to any new version (for example, from v1 to v2), it takes consul snapshot as `/data/orchestrator/config/snapshot-consul/v2`.
2. During downgrade (for example, from v2 to v1), provide snapshot name in `system-downgrade` command.
3. When upgrading to v3 from v2 (for example, consul version for v1 is 1.0.0, consul version for v2 is 1.5.3 and consul version for v3 is 1.5.3). Upgrade from v1 to v2, snapshot is store as v2; from v2 to v3, snapshot is stored as v3.
4. If you want to downgrade directly from v3 to v1 and you do not provide the snapshot name, by default, it takes the snapshot of v3 and consul version is 1.5.3. The downgrade fails. You must provide the snapshot name in `system-downgrade` command as v2.

Command Usage

The `system downgrade` command installs new software on the system using a rolling downgrade approach to minimize service interruption. Care must be taken to ensure that the `system downgrade` command is used when moving from a higher software version to a lower version of the software. The rolling downgrade upgrades the software modules in startup order. After the command is issued, the CLI disconnects while the CLI software is restarted. The CLI generally becomes available within 30 seconds. Once the CLI becomes available, the status of the upgrade can be monitored using the [show scheduling status, on page 166](#) command.

Examples

```
system downgrade version 12.9.9-dra.2017-03-03.115.0f485ef
```

system disable-debug

Disables debug tools in deployed containers.

Syntax

```
system disable-debug
```

Command Parameters

None

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the system disable-debug command to turn off debugging tools on newly launched containers.

Examples

The following example disables debug tools:

```
scheduler# system disable-debug
```

system disable-external-services

Disables external services that are currently running in the system.

Syntax

```
system disable-external-services
```

Command Parameters

None

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the system disable-external-services to stop all services registered with the scheduling external-service command.

Examples

The following example disables external services:

```
scheduler# system disable-external-services
```

system enable-debug

Enables debug tools in deployed containers.

Syntax

```
system enable-debug
```

Command Parameters

None

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the system enable-debug command to turn on debugging tools on newly launched containers.

Examples

The following example enables debug tools:

```
scheduler# system enable-debug
```

system enable-external-services

Enable external registered services.

Syntax

```
system enable-external-services
```

Command Parameters

None

Command Mode

OPERATIONAL

VNFs

All

Command Usage

Use the system enable-external-services command to enable external services that are currently registered with the scheduling external-service command.

Examples

The following example enables external services:

```
scheduler# system enable-external-services
```

system secrets add-secret

Adds a secret to the system.

Syntax

```
system add-secret path path secret secret
```

Command Mode

OPERATIONAL

VNFs

All

Command Parameters*Table 84: Parameter Description*

Command Parameter	Description
Path	The identifying path of the secret to add.
Secret	The clear text value of the secret to add.

Command Usage

The system add-secret command adds a secret to the system. This command is available only if the secrets are open. See [show system secrets open](#) , on page 170.

system secrets remove-secret

Removes a secret from the system.

Syntax

```
system remove-secret path path
```

Command Mode

OPERATIONAL

VNFs

All

Command Parameters*Table 85: Parameter Description*

Command Parameter	Description
Path	The identifying path of the secret to remove.

Command Usage

The system remove-secret command removes a secret from the system. This command is available only if the secrets are open. See [show system secrets open , on page 170](#).

system secrets set-passcode

Overwrites the current passcode that is used to encrypt or decrypt the master key for the secrets.

Syntax

```
system secrets set-passcode passcode
```

Command Mode

OPERATIONAL

VNFs

All

Command Parameters

Table 86: Parameter Description

Command Parameter	Description
Passcode	The new passcode to seal the secrets.

Command Usage

The system secrets command is used to change the passcode to unlock the secrets stored within the operational database. All secrets are encrypted using a randomly generated master-key that is encrypted/decrypted by the end-user provided passcode. If the passcode is lost, then the secrets currently stored are not recoverable. This command is available only if the secrets are open. See [show system secrets open , on page 170](#).

system secrets unseal

Unseals the secrets if a non-default passcode is used to seal the secrets.

Syntax

```
system secrets unseal passcode passcode
```

Command Mode

OPERATIONAL

VNFs

All

Command Parameters*Table 87: Parameter Description*

Command Parameter	Description
Passcode	The passcode to unseal the secrets.

Command Usage

The system secrets unseal command is used to unlock any stored secrets so that they can be shared with services that require a clear text secret or password. An example of this is a database connection password.

system software iso stage clean

Remove all downloaded ISOs from the stage directory.

Syntax

```
system software iso stage clean
```

Command Parameters

None

Command Mode

OPERATIONAL

VNFs

All

Command Usage

The system software iso stage clean command removes all files that have been staged in the hosts /data/isos/staged-isos/ directory. This command should be run after an ISO file has been uploaded via the system software iso load command.

Examples

```
scheduler# system software iso stage clean
```

system software iso stage pull

Downloads a software ISO to the stage directory on the host.

Syntax

```
system software iso stage pull URL
```

Command Parameters

Table 88: Parameter Description

Command Parameter	Description
URL	The URL to download into the hosts /data/isos/staged-isos/ directory. If the URL ends with the zsync suffix, then the zsync command is invoked to retrieve the file.

Command Mode

OPERATIONAL - Not available via NETCONF/RESTCONF

VNFs

All

Command Usage

Invocation of the command downloads the given URL to the /data/isos/staged-isos/ directory. After invocation of this command, invocation of the show system software iso stage file command shows details of the downloaded file and the system software iso load command loads the file into the system.

Examples

The following example also shows a sample output:

```
scheduler# system software iso stage pull
http://171.70.34.121/microservices/latest/cisco-policy-dra.iso
--2017-05-17 15:08:39-- http://171.70.34.121/microservices
/latest/cisco-policy-dra.iso
Connecting to 171.70.34.121:80... connected.
HTTP request sent, awaiting response... 200 OK
Length: 1153468416 (1.1G) [application/octet-stream]
Saving to: 'cisco-policy-dra.iso'

cisco-policy-dra.iso          4%[====>
                               ] 45.85M  4.07MB/s   eta 4m 27s
```

system software iso activate

Activate an existing ISO.

Syntax

```
system software iso activate category [product|extras] name name version version qualifier
qualifier
```

Command Parameters

Table 89: Parameter Description

Command Parameter	Description
Category	The category to load the ISO. Either product or extras can be selected. The extras category represents a docker registry that contains external (non-product) docker images.
Name	The product name of the ISO to activate.
Version	The version of the ISO to activate
Qualifier	The qualifier of the ISO to activate

Command Mode

OPERATIONAL

VNFs

All

Command Usage

The system software iso activate command triggers the system to restart the local docker registry to point to the given ISO. This command should be run before upgrading or downgrading the software.

Examples

The following example loads and activates a product ISO:

```
scheduler# system software iso activate category product name cisco-policy-dra version
12.9.9 qualifier dra.2017-05-17.441.6968d89
```

system software iso delete

Deletes an existing ISO.

Syntax

```
system software iso delete category [product|extras] name name version version qualifier
qualifier
```

Command Parameters

Table 90: Parameter Description

Command Parameter	Description
Category	The category to load the ISO. Either product or extras can be selected. The extras category represents a docker registry that contains external (non-product) docker images.
Name	The product name of the ISO to delete.
Version	The version of the ISO to delete
Qualifier	The qualifier of the ISO to delete

Command Mode

OPERATIONAL

VNFs

All

Command Usage

The system software iso delete command triggers the system to remove the ISO. This command can only be run on non-active ISOs.

Examples

The following example deletes an ISO:

```
scheduler# system software iso delete category product name cisco-policy-dra version 12.9.9
qualifier dra.2017-05-17.441.6968d89
```

system software iso load

Load a new ISO into the system.

Syntax

```
system software iso load category [product|extras] file filename activate [true|false]
```

Command Parameters

Table 91: Parameter Description

Command Parameter	Description
Category	The category to load the ISO. Either product or extras can be selected. The extras category represents a docker registry that contains external (non-product) docker images.
Filename	The filename of the ISO to load.
Activate	Indicates whether the system should switch the internal docker registry to point to the new ISO.

Command Mode

OPERATIONAL

VNFs

All

Command Usage

The system software iso load command triggers unpacking of the staged ISO into a permanent location on the host. This command is executed before a system upgrade command can be executed.

Examples

The following example loads and activates an ISO:

```
scheduler# system software iso load category product file cisco-policy-dra.iso activate true
```

system start

Starts all the services on a system that has been currently stopped.

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Usage Guidelines

The system start command performs a controlled startup of the system by starting all the services in a rolling fashion taking into account various service dependencies.

system stop

Stops all the services on the system (excluding the CLI, NETCONF, and RESTCONF service).

Syntax

There are no arguments for this command.

Command Mode

OPERATIONAL

VNFs

All

Command Usage

The system stop commands performs a controlled shutdown of the system by stopping all the services in the reverse order of start-up.



Note For ephemeral databases (such as session), all data is lost on a system stop command.

system upgrade

Upgrades the system to a new software version.

The option `database-upgrade-parallel` enables parallel upgrade of database nodes. This option is provided to reduce the upgrade time without impacting the availability of DB cluster.

Syntax

```
system upgrade version <version>
```

```
system upgrade version <version> database-upgrade-parallel <true/false>
```

Command Mode

OPERATIONAL

VNFs

All

Command Parameters

Table 92: Parameter Description

Command Parameter	Description
version	The new software version to install into the system.

Command Usage

The system upgrade command installs new software on the system using a rolling upgrade approach to minimize service interruption. Care must be taken to ensure that upgrade command is used when moving from a lower software version to a higher version of the software. The rolling upgrade upgrades the software modules in reverse start-up order. After the command is issued, the CLI disconnects while the CLI software is restarted. The CLI generally become available within 30 seconds. Once the CLI becomes available, the status of the upgrade can be monitored using the `show scheduling status` command.

Examples

To trigger an upgrade as usual. Mongo nodes goes sequential upgrade.

```
system upgrade version 12.9.9-dra.2017-03-03.115.0f485ef
```

To trigger a parallel upgrade for mongo-nodes.

```
system upgrade version 19.5.0 database-upgrade-parallel true
```