

# Readme for Device Pack 4 for Cisco Prime Infrastructure 3.5

---

**Revised: 01/10/2019**

This Readme provides information on installing and upgrading, bug fixes, and additional documentation for Cisco Prime Infrastructure, Release 3.5.

## Contents

Viewing New Devices Supported.....	2
NBAR2 Protocol pack Update .....	2
Product Alert System Update .....	2
System Requirements.....	2
Package Details.....	3
Device Packs Installation .....	3
Installing the Device Packs from cisco.com .....	3
Installing the Device Packs from Local Storage .....	4
Installing the Device Pack on High Availability Mode.....	4
Troubleshooting Device Pack Release Installs in High Availability Implementations.....	5
Caveats .....	5
Resolved Problems .....	6
Bugs Resolved in Device Pack 4 .....	6
Bugs Resolved in Device Packs 1 To 3.....	6
Known Problems.....	7
Prime Infrastructure Device Pack Issues.....	7
Device Platform Issues.....	7
Obtaining Documentation and Submitting a Service Request .....	7

## Viewing New Devices Supported

To view the devices that are supported in this Device Pack, please see

[https://www.cisco.com/c/dam/en/us/td/docs/net\\_mgmt/prime/infrastructure/35/supported/devices/PI35-Supported-Device-List.xlsx](https://www.cisco.com/c/dam/en/us/td/docs/net_mgmt/prime/infrastructure/35/supported/devices/PI35-Supported-Device-List.xlsx)

## NBAR2 Protocol pack Update

For more details on the NBAR2 protocol pack update in Prime Infrastructure, please refer to [Prime Infrastructure 3.5 User Guide](#).

For more details on the NBAR2 Protocol Pack, please refer to [NBAR2 Protocol Pack 44.0.0 Release Notes](#).

## Product Alert System Update

Device Pack 4 contains the following files

- 1) Product Alert System Metadata Database dump file dated 11-June-2019
- 2) RBML file dated 10-June-2019

The database dump and RBML file is used by Prime Infrastructure to generate the following reports:

- Product Security Incident Response Team (PSIRT) report
- Hardware End of Life (HW-EOX) report
- Software End of Life (SW-EOX) report
- Field Notice (FN) report

## System Requirements

Install the Device Packs on a server running Cisco Prime Infrastructure version 3.5.

Note: You cannot install this UBF on Cisco Prime Infrastructure version 3.4 or any earlier releases.

## Package Details

Files	Description
Device-Pack-4-PI3.5-21.ubf	Updated Bundle File with Incremental Device Updates. File size: 155 MB


## Device Packs Installation

You can install the Device Packs in one of two ways:

- From Cisco.com. See [Installing the Device Packs from cisco.com](#).
- From a local storage. See [Installing the Device Packs from cisco.com](#)

### Installing the Device Packs from cisco.com

1. Log in to the Prime Infrastructure 3.5 server.
2. Choose **Administration > Software Update**.
3. Click **Download**.
4. Log in with your cisco.com credentials to check for updates directly from the Prime Infrastructure server.
5. Select Device-Pack-4-PI3.5-21.ubf and click **Download**.
6. Click **Install** to install the Device Pack.  
A pop-up will be thrown to restart the Cisco Prime Infrastructure server automatically.

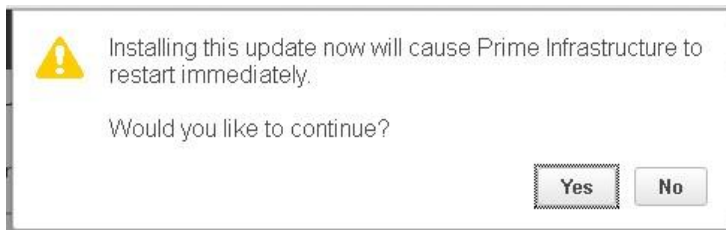

7. If you click **Yes** in the pop-up, the installation will continue and Prime Infrastructure will restart automatically after the installation.
8. If you click **No** in the pop-up, the installation will fail. You must click **Install** to continue the Installation.

## Installing the Device Packs from Local Storage

1. Log in to Prime Infrastructure 3.5 server.
2. Choose **Administration > Software Update**.
3. Click **Upload**.

Use one of the following options to upload the UBF file.

### a) Upload from local computer

Click the **Upload from local computer** radio button in the **Upload Update** window.


Click **Browse**, navigate to the file, and click **OK**. After the successful upload, the software will appear under the **Files** tab.

### b) Copy from server's local disk

Click the **Copy from server's local disk** radio button in the **Upload Update** window.

Click **Select** and choose the UBF file in **Select file from local disk** pop-up window and click **Select**. After the successful upload, the software will appear under the **Files** tab.

4. Click **Install** to install the Device Packs.  
A pop-up will be thrown to restart the Cisco Prime Infrastructure server automatically.

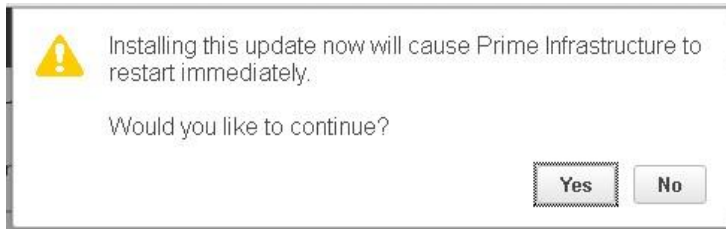

5. If you click **Yes** in the pop-up, the installation will continue and Prime Infrastructure will restart automatically after the installation.
6. If you click **No** in the pop-up, the installation will fail. You must click **Install** to continue the Installation.

*Note: If you previously added a device that is newly supported in this Device Pack, you need to delete the device from Prime Infrastructure and then add it again.*


## Installing the Device Pack on High Availability Mode

Download the Prime Infrastructure 3.5 Device Pack Device-Pack-4-PI3.5-21.ubf and save the file in your local system.

To install the downloaded Prime Infrastructure 3.5- Device Pack 4 Device-Pack-4-PI3.5-21.ubf in High Availability mode follow the below steps:

*Note: Prime Infrastructure 3.5 Device Pack 4 release can be applied only in primary and secondary standalone servers. The server will restart automatically once the installation is complete. The restart typically takes 25 to 35 minutes. You cannot apply Prime Infrastructure 3.5 Device Pack 4 when HA is enabled.*

If you are installing Cisco Prime Infrastructure 3.5 Device Pack 4 on High Availability (HA) paired servers, you will get the following error message:

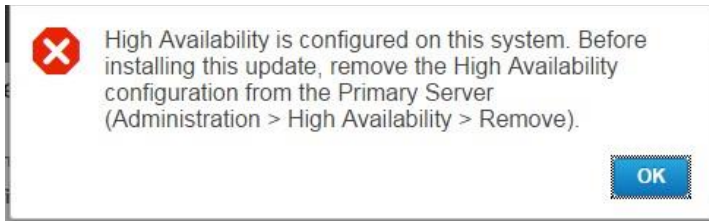

For more details, see [Removing HA Via the GUI](#) in the Cisco Prime Infrastructure 3.5 Administrator Guide.

- Continue the patching once HA removed completely. For more details, see the [Patching New High Availability Servers](#) section in the *Cisco Prime Infrastructure 3.5 Administration Guide*.

## Troubleshooting Device Pack Release Installs in High Availability Implementations

If you are unable to apply this device pack release in a High Availability (HA) implementation, check whether your network bandwidth, throughput and latency meets the network requirements recommended in [Network Throughput Restrictions on HA](#) section in the Cisco Prime Infrastructure 3.5 Administration Guide. In a few cases, continued or intermittent throughput problems can cause a complete failure. If you believe this has occurred, contact Cisco TAC for support.

In all cases, you can use the backup-logs command on one or both servers to get information on the source of the failure. For more information, see the [backup-logs](#) section in the *Command Reference Guide for Cisco Prime Infrastructure 3.5*.

## Caveats

- ISSU is not supported for 9400 Series and will be supported in future DP releases
- Prime Infrastructure shows the maximum value of speed and duplex for the device interface if you configure speed and duplex as auto in the device
- Few devices does not support TFTP for copying image, if the file size exceeds 512 MB. In such cases, we recommend you to use FTP or SCP for copying image.

- SWIM operations aren't supported for Child VDCs of Nexus Device
- VG4XX and VG2XX devices are listed under device group Cisco VG200 Series Gateways, it will be moved under Cisco VG Series Gateways in Cisco Prime Infrastructure Version 3.7

## Resolved Problems

### Bugs Resolved in Device Pack 4

Bug ID	Summary	Device Platform
CSCvq59675	Smart Flash Delete Before Distribution removes license files within flash directory.	Catalyst 3750x
CSCvq62927	SWIM Activation job fails to reboot the device '3560X & ISR 4k'.	ISR 4K, Catalyst 3560x
CSCvq76155	Image recommendation for 4500X is not working on Prime Infrastructure 3.6.	Catalyst 4500X
CSCvq76867	Prime Infrastructure 3.4.1 does not distribute code to standby 9400 supervisor.	Catalyst 9400
CSCvq29486	Prime Infrastructure 3.4 with Device Pack 10 fails to set boot variable on 3850 stack switch running in bundle mode.	Catalyst 3850, 3650

### Bugs Resolved in Device Packs 1 To 3

Bug ID	Summary	Device Platform
CSCvp52841	Prime Infrastructure may be unable to SWIM distribute an image to an ASA 5585-X.	ASA 5585-X
CSCvp45281	Prime Infrastructure SWIM deployment is failing for 3750.	Cat 3750
CSCvo00251	Partial collection failure for WAAS devices in Prime Infrastructure.	WAAS
CSCvn96848	Nexus 5K port-channel interface descriptions not available in Prime Infrastructure 3.4 port groups.	Nexus
CSCvo93637	False change audit updated for config change in device.	All

CSCvp06032	IPv6 devices don't have address_address field populated with their IP in Protocolendpoint table.	Cat 9400
------------	--	----------

## Known Problems

### Prime Infrastructure Device Pack Issues

Bug ID	Summary	Device Platform
CSCvd48225	Unable to upgrade Cat 4500 running with Sup5 in dual Sup mode.	Catalyst 4500 Sup5
CSCve08505	Distribution will not work when Catalyst 4507 in RPR mode.	Catalyst 4507 in RPR mode
CSCvi53119	Cat9k devices not shown in the device selection combo box while deploying ACL templates.	Cat 9K

### Device Platform Issues

Bug ID	Summary	Device Platform
CSCvd65726	Prime Infrastructure will not show the sensor value properly as device not returning value for the SNMP mib objectmibnsnmpsmicevSensor[142].	CDB
CSCve18887	Prime Infrastructure will not show the module status as CDB device CLI shows module status as NA.	CDB
CSCul35901	Install all command will fail in Nexus saying free space is less than threshold even if we have free space to copy another image.	Nexus

## Obtaining Documentation and Submitting a Service Request

For information on obtaining documentation, submitting a service request, and gathering additional information, see What's New in Cisco Product Documentation at:

<http://www.cisco.com/en/US/docs/general/whatsnew/whatsnew.html>.

Subscribe to what's New in Cisco Product Documentation, which lists all new and revised Cisco technical documentation, as an RSS feed and deliver content directly to your desktop using a reader application. The RSS feeds are a free service.

---

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

© 2019 Cisco Systems, Inc. All rights reserved.