



# Cluster Expansion—Compute-only Nodes

---

- [Overview, on page 1](#)
- [Pre-expansion Checklist, on page 1](#)
- [Cluster Expansion— M5 Blade Servers \(M.2 SATA\) Or M4 Blade Servers \(Local SAS Drives\), on page 5](#)
- [Cluster Expansion— M4 Blade Servers \(Fibre Chanel SAN\), on page 34](#)

## Overview

You can add converged or compute-only nodes to expand a Hyper-V cluster. Below is the list of supported converged and compute-only nodes in Hyper-V clusters.

- **Converged Nodes**—HX220c M5, HX240c M5, HX220c AF M5, HX240c AF M5
- **Compute-only Nodes**—B200 M5, B200 M4 Blade Servers, and C220 M5 C-Series Rack Servers

The following procedure describes adding **compute-only** nodes to expand a Hyper-V cluster. This expansion workflow includes Windows OS installation and is not performed as part of cluster creation using HX Installer. To expand Hyper-V clusters with converged nodes, refer to [Cluster Expansion—Converged Nodes](#).

## Pre-expansion Checklist

To add **compute-only** nodes to expand your Hyper-V cluster, complete the following pre-expansion checklist that summarizes key requirements, considerations and tasks.

Requirement/Task	Description	
Supported Versions and Platforms	<b>HX Data Platform</b>	3.5(2a) and later  <b>Important</b> If your cluster is running on releases earlier than 3.5(2a), ensure that you upgrade your existing cluster to 3.5(2a) at the minimum.
	<b>Compute-only Nodes and Storage Options</b>	<b>Attention</b> UCS B200 M5 blade servers with M.2 SATA drives.  HW RAID M.2 (UCS-M2-HWRAID and HX-M2-HWRAID) is not supported on Compute-only nodes.  UCS B200 M4 blade servers with local SAS or Fibre Channel SANs.
	<b>Windows ISO</b>	Customer provided Windows 2016 Datacenter edition ISO.
<b>Maximum Compute to Converged ratio</b>	1:1	
<b>Maximum Cluster Size</b>	A single cluster can have a maximum of 32 nodes.	
<b>Network Speed</b>	Mixing network speeds between compute-only nodes and HyperFlex converged nodes is not recommended. For example, if the existing network connectivity of the converged nodes is 40 GbE, then the compute-only nodes should also be connected at 40 Gb speeds.	
<b>Determine Boot Disk Connection</b>	Based on your topology, and the type of compute-only nodes that you want to add, choose one of the following expansion scenarios: <ul style="list-style-type: none"> <li>Cluster Expansion for UCS M5 blade servers with M.2 SATA drives, or UCS M4 blade servers with Local SAS drives</li> </ul> <p><b>Note</b> HW RAID M.2 (UCS-M2-HWRAID and HX-M2-HWRAID) is not supported on Compute-only nodes.</p> <ul style="list-style-type: none"> <li>Cluster Expansion for UCS M4 blade servers with Fibre Channel</li> </ul>	
<b>Boot Disk Capacity</b>	Ensure that you have only ONE boot disk of size <b>greater than 240GB</b> during Windows OS installation. After cluster expansion is complete, you may choose additional disks.	

Requirement/Task	Description
Stage HyperFlex Driver Image	

Requirement/Task	Description
	<p>The <b>Windows ISO</b> and <b>HyperFlex Driver image</b> files must be placed on a shared location (such as HX Installer) that is reachable from Cisco UCS Manager and the Out-of-band subnet. Use the following steps to download and host the HyperFlex Driver Image and Windows ISO in a shared location within the installer VM.</p> <p>For <b>Windows Server 2016</b>, perform the following steps to prepare a suitable Driver image for automated OS install.</p> <ol style="list-style-type: none"> <li>1. Connect to your HX Installer VM and browse to the folder that contains the <code>/var/www/localhost/images/</code>.</li> <li>2. Copy the HyperFlex Driver Image (<code>/opt/springpath/packages/latest.img</code>) to the images folder (<code>/var/www/localhost/images/</code>).</li> </ol> <p>For <b>Windows Server 2019</b>, perform the following steps to prepare a suitable Driver image for automated OS install.</p> <ol style="list-style-type: none"> <li>1. Copy the HyperFlex Driver Image. For example, run the following command: <pre>rsync -avzP /opt/springpath/packages/latest.img /var/www/localhost/images/install.img</pre> </li> <li>2. Mount the HyperFlex Driver Image. For example, run the following command: <pre>mkdir -p /mnt/install-img &amp;&amp; mount -o loop,rw /var/www/localhost/images/install.img /mnt/install-img</pre> </li> <li>3. Copy the answer file specific to Windows Server 2019. For example, run the following command: <pre>cp /opt/springpath/packages/FactoryUnattendXML/WindowsServer2019/Autounattend.xml /mnt/install-img/Autounattend.xml</pre> </li> <li>4. Edit the Autounattend.xml file by changing the value for Size to increase the boot partition size. For example: <pre>&lt;CreatePartition wcm:action="add"&gt; &lt;Order&gt;2&lt;/Order&gt; &lt;Extend&gt;&gt;false&lt;/Extend&gt; &lt;Size&gt;92160&lt;/Size&gt; &lt;Type&gt;Primary&lt;/Type&gt; &lt;/CreatePartition&gt;</pre> <p>Change the value of <code>&lt;Size&gt;</code> from 92160 to 195668.</p> </li> <li>5. Unmount the HyperFlex Driver Image. For example, run the following command:</li> </ol>

Requirement/Task	Description
	<p><b>umount /mnt/install-img</b></p> <p><b>Note</b> You cannot install Windows Server 2019 or 2016 on SD cards.</p> <p><b>Note</b> The DiskID referenced in autounattend.xml should correctly point to the local disk on the compute node where the OS is installed.</p>
<b>Multipathing with Fibre Channel SAN</b>	Do NOT use multipathing with Fibre Channel SANs.
<b>Fabric Interconnect Support</b>	Compute-only node expansion is supported only when the compute node are on the same Fabric Interconnects.

## Cluster Expansion— M5 Blade Servers (M.2 SATA) Or M4 Blade Servers (Local SAS Drives)

### Procedure Overview

The Hyper-V cluster expansion procedure for adding **UCS M5 Blade Servers (M.2 SATA) Or M4 Blade Servers (Local SAS Drives)** consists of the following sequence of tasks:

1. [Pre-expansion Checklist](#)
2. [Cisco UCS Manager Configuration, on page 5](#)
3. [Microsoft OS Installation, on page 12](#)
4. [Hypervisor Configuration, HXDP Software Installation and Cluster Expansion, on page 24](#)
5. Perform the following post installation steps:
  - [Configuring a Static IP Address for Live Migration and VM Network](#)
  - [\(Optional\) Post Installation Constrained Delegation](#)
  - [Configure Local Default Paths](#)
  - [Checking the Windows Version on the Hyper-V Host](#)

### Cisco UCS Manager Configuration

The following procedure describes configuring Cisco UCS Manager using HX Installer.

## Procedure

### Step 1

Log into the HX Data Platform Installer using the following steps:


- In a browser, enter the URL for the VM where HX Data Platform Installer was installed.
- Use the credentials: `username: root`, `password: Cisco123`

**Important** Systems ship with a default password of `Cisco123` that must be changed during installation. You cannot continue installation unless you specify a new user supplied password.

- Read the EULA. Click **I accept the terms and conditions**. Click **Login**.


### Step 2

In the **Select a Workflow** page, select **Expand Cluster > Compute Node**.

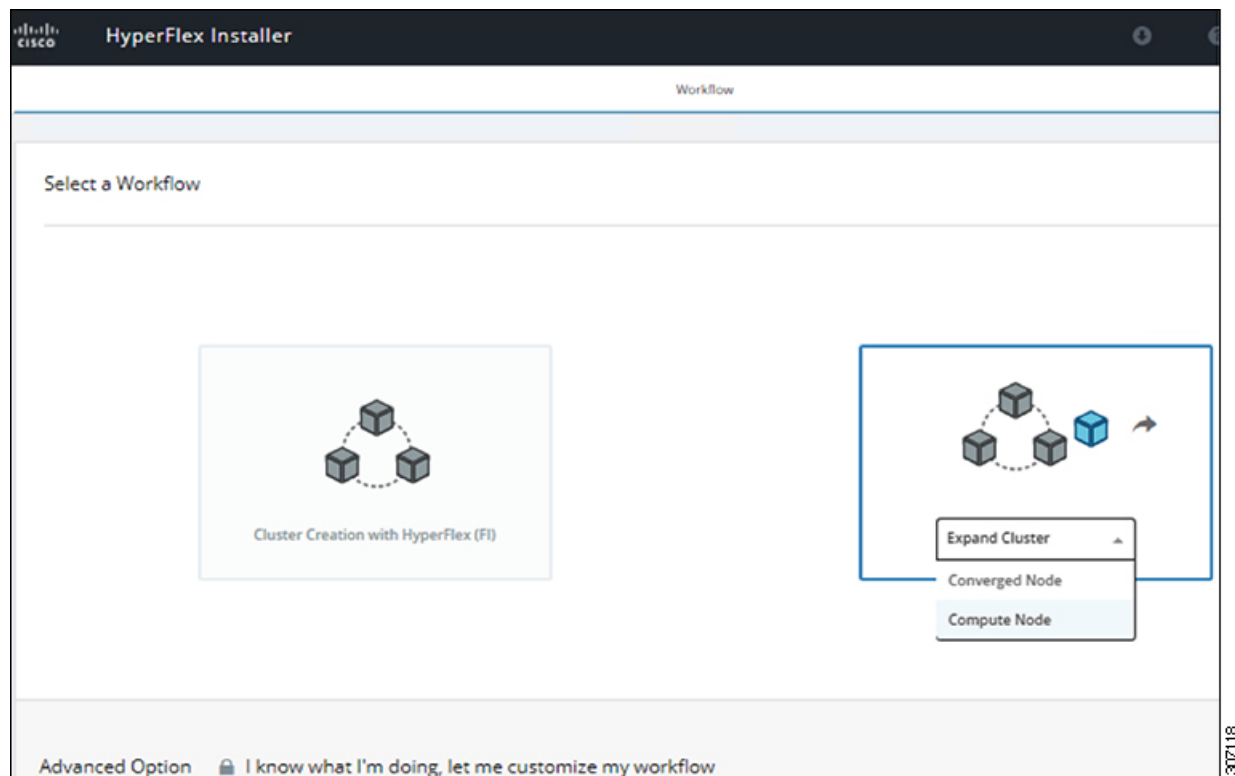


### Step 3

In the next screen, click **Run UCS Manager Configuration** and then **Continue**.

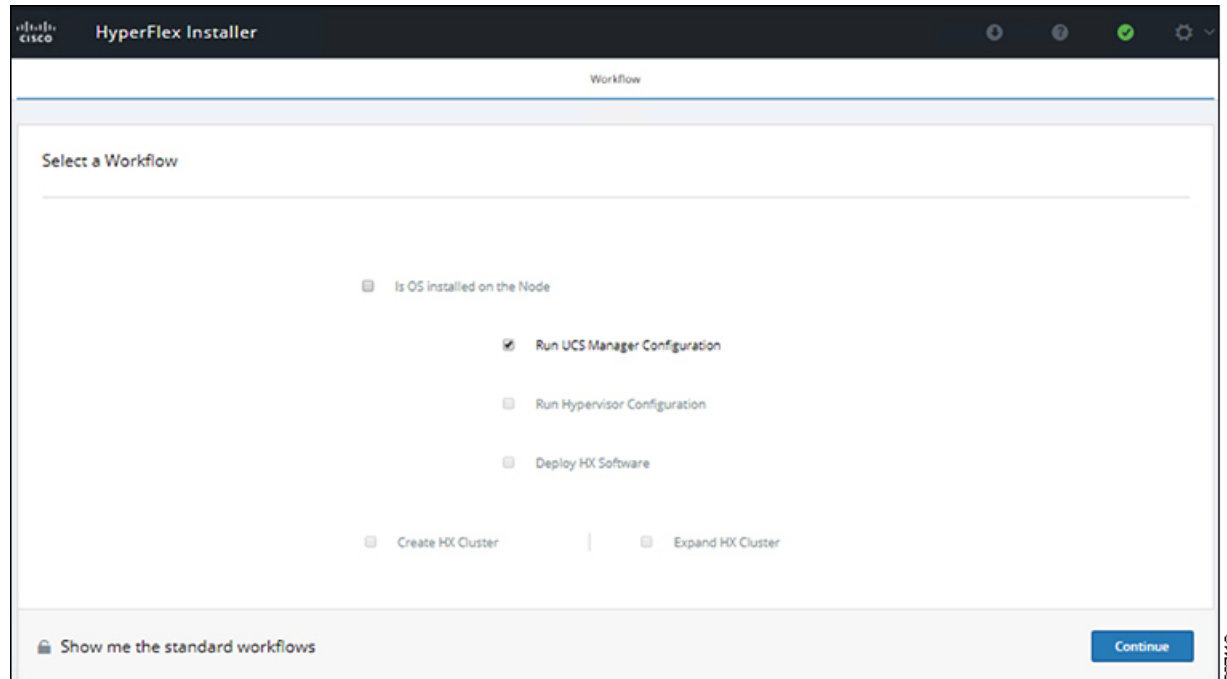

**Caution** Do not choose any other workflow option at this point.

**Step 4** Click **Confirm** in the pop-up that displays.

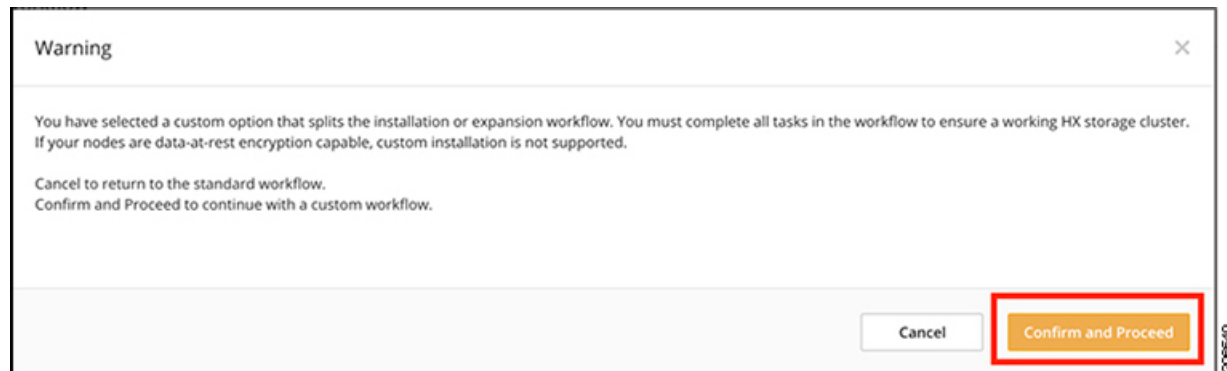

**Step 5** In the **Credentials** page, complete the following fields for UCS Manager.

Field	Description
UCS Manager Host Name	FQDN or the VIP address of the UCS Manager.
UCS Manager User Name and Password	Administrator user and password or a user with UCS Manager administrative privileges.


Use the following illustration as a reference for entering values in this page.

The screenshot shows the HyperFlex Installer interface. The 'UCSM Configuration' tab is selected, displaying a configuration area with a dashed border. The configuration area contains the text 'Drag and drop configuration files here or' and a 'Select a File' button. Below the configuration area are '< Back' and 'Continue' buttons. The 'Credentials' tab is also visible, showing fields for 'UCS Manager Host Name' (10.65.121.240), 'UCS Manager User Name' (admin), and 'Password' (masked with asterisks).

Click **Continue** to proceed. The installer will now try to connect to the UCS Manager and query for available servers. The configuration pane will be populated as the installer progresses. After the query finishes a screen with the available servers is displayed.

**Step 6** In the **Server Selection** page, choose all the servers that you want to install in the cluster and click **Continue**.



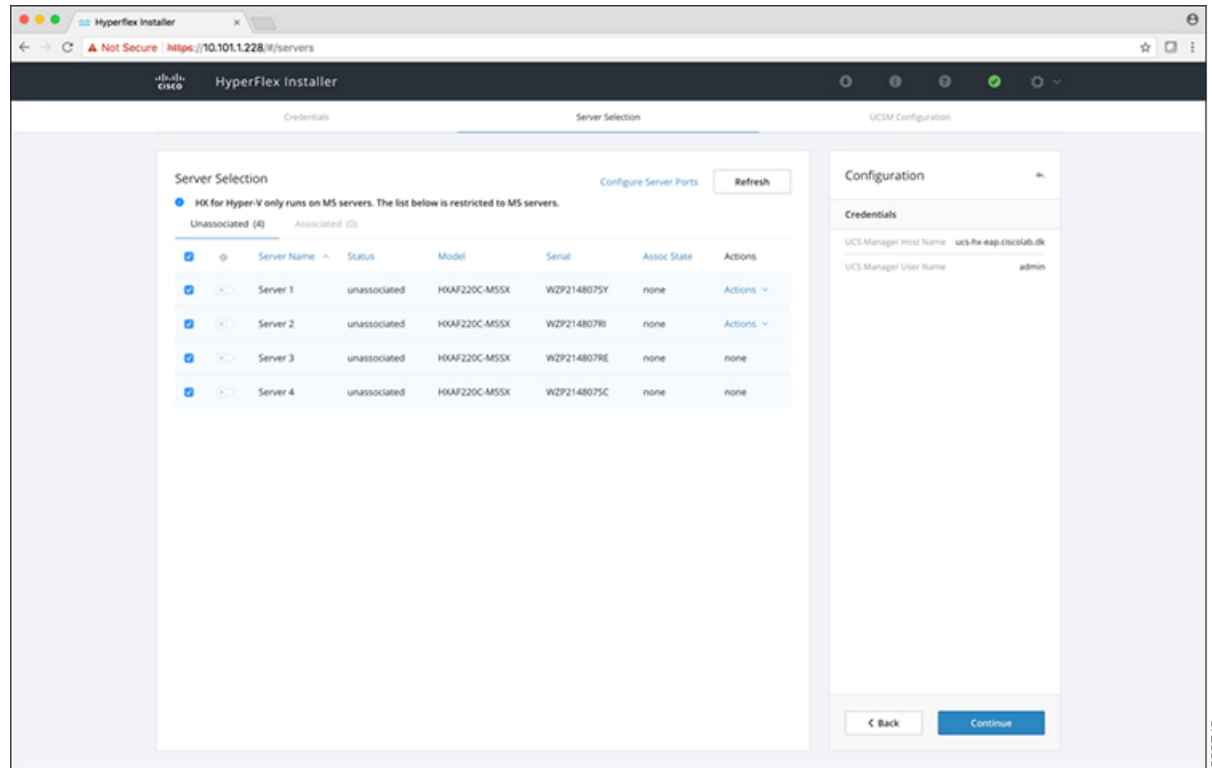

**Step 7** In the **UCSM Configuration** page, complete the following fields for **VLAN Configuration**.

HyperFlex needs to have at least 4 VLANs to function, each needs to be on different IP subnets and extended from the fabric interconnects to the connecting uplink switches, to ensure that traffic can flow from the Primary Fabric Interconnect (Fabric A) to the Subordinate Fabric Interconnect (Fabric B).

Name	Usage	ID
hx-inband-mgmt	Hyper-V and HyperFlex VM mgmt.	10
hx-storage-data	HyperFlex storage traffic	20
hx-livemigrate	Hyper-V Live Migration network	30
vm-network	VM guest network	100,101

Use the following illustration as a reference for entering values in this page.

VLAN Configuration			
VLAN for Hypervisor and HyperFlex management		VLAN for HyperFlex storage traffic	
VLAN Name	VLAN ID	VLAN Name	VLAN ID
<input type="text" value="hx-inband-mgmt"/>	<input type="text"/>	<input type="text" value="hx-storage-data"/>	<input type="text"/>
VLAN for VM Live Migration		VLAN for VM Network	
VLAN Name	VLAN ID	VLAN Name	VLAN ID(s)
<input type="text" value="hx-livemigrate"/>	<input type="text"/>	<input type="text" value="vm-network"/>	<input type="text"/>

- Note**
- Do not use VLAN 1 as it is not best practice and can cause issues with disjoint layer 2.
  - vm-network can be multiple VLANs added as a comma separated list.

**Caution** Renaming the 4 core networks is not supported.

### Step 8

Enter the remaining network configuration for MAC Pool, 'hx' IP Pool for Cisco IMC, Cisco IMC access management (Out of band or in band)

Field	Description	Value
<b>MAC Pool</b>		
MAC pool prefix	MAC address pool for the HX cluster, to be configured in UCSM by the installer. Ensure that the mac address pool isn't used anywhere else in your layer 2 environment.	00:25:b5:xx
<b>'hx' IP Pool for Cisco IMC</b>		
IP Blocks	The range of IP addresses that are used for Out-Of-Band management of the HyperFlex nodes.	10.193.211.124-.127
Subnet Mask	The subnet mask for the Out-Of-Band network	255.255.0.0
Gateway	The gateway address for the Out-Of-Band network	10.193.0.1
<b>Cisco IMC access management (Out of band or In band)</b>		
In band (recommended) Out of Band	Select the option that was used for converged-nodes cluster creation.	




Field	Description	Example Value
VSAN B ID	The unique identifier assigned to the network for the subordinate fabric interconnect (FI-B).	70

**Step 9**      **Advanced Section**

Field	Description	Example Value
UCS Firmware Server Version	Choose the appropriate UCS Server Firmware version.	3.2(3a)
HyperFlex Cluster Name	This user defined name will be used as part of the service profile naming In UCSM for easier identification.	
Org Name	The org. name is used for isolating the HX environment from the rest of the UCS platform to ensure consistency.	HX-Cluster1

**Step 10**      When you click **Start**, the installer validates your input and then begins configuring UCS Manager.

**Step 11**      When the HX Data Platform Installer is finished, then you are ready to proceed to next step.

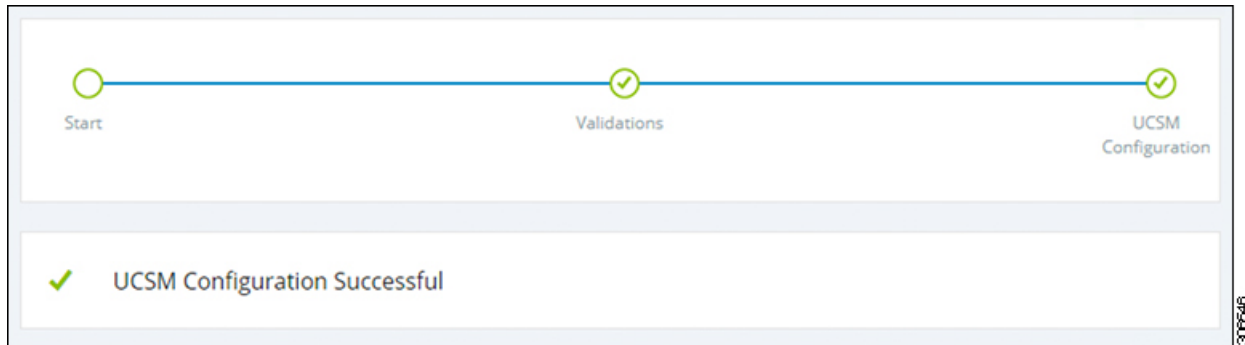

## Microsoft OS Installation

For Microsoft OS installation, you will need to first configure a vMedia policy in Cisco UCS Manager to map the following two image files:

- Customer provided **Windows 2016 Datacenter edition ISO** or **Windows Server 2019 Datacenter-Desktop Experience ISO**, and
- Cisco provided **Cisco HyperFlex Driver image**.



**Note**      Ensure network connectivity exists between the fileshare and all server management IP addresses.


## Procedure

### Step 1 Launch Cisco UCS Manager:

- In your web browser, type the **Cisco UCS Manager** IP address.
- Click **Launch UCS Manager**.
- In the login screen, enter the with the username as **admin** and the password set in the beginning of the installation. Click **Log in**.

### Step 2 Create a vMedia policy for the Windows OS and Cisco driver images:

- In the Navigation pane, click **Servers**.
- Expand **Servers > Policies > root > Sub-Organizations > hx-cluster\_name > vMedia Policies**
- Right-click **vMedia Policies** and select **Create vMedia Policy HyperFlex**.

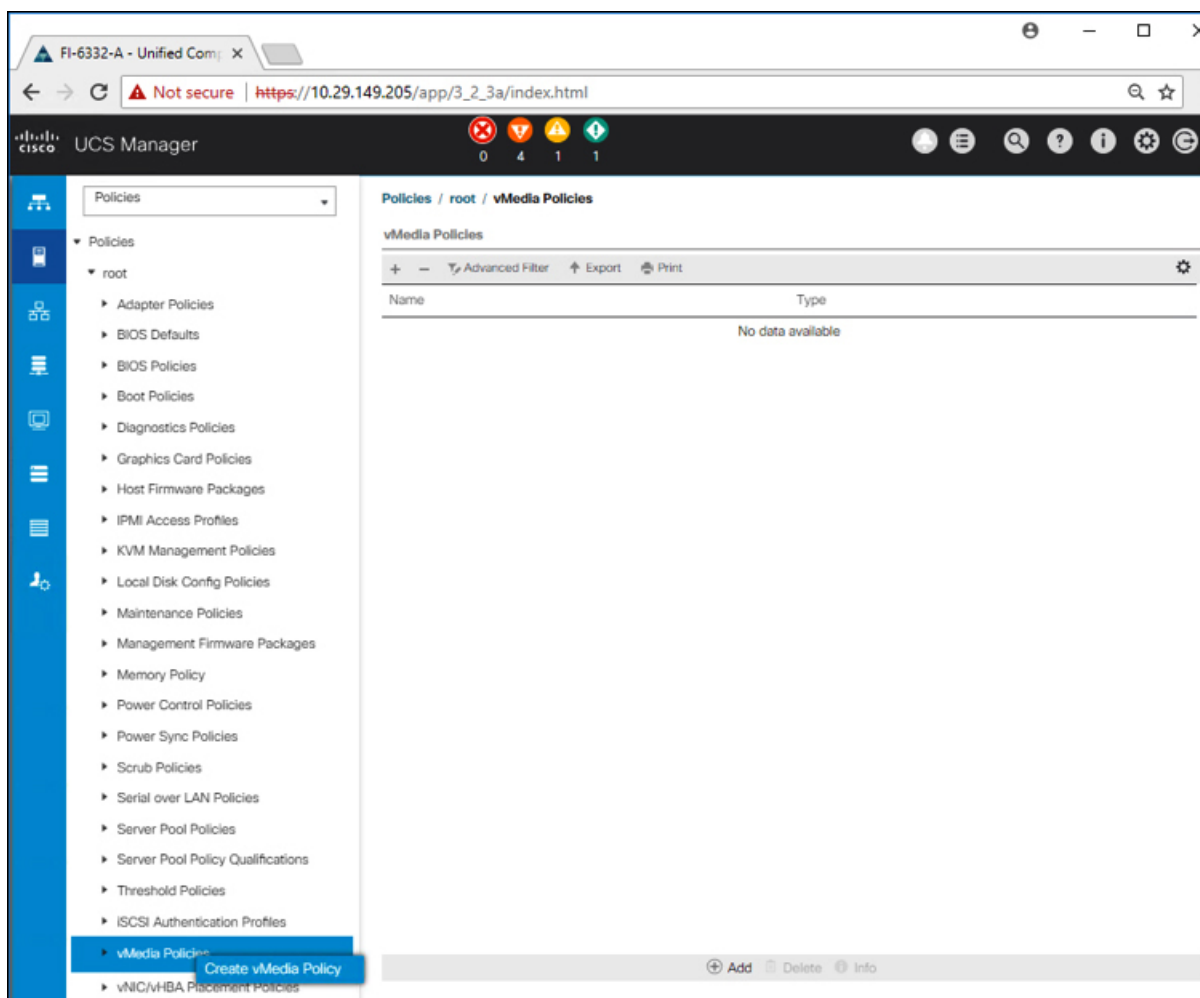

- In the **Create vMedia Policy** dialog box, complete the following fields:

Field Name	Description
<b>Name</b>	<p>The name of the vMedia policy. For example, <i>HX-vMedia</i>.</p> <p>This name can be between 1 and 16 alphanumeric characters. You cannot use spaces or any special characters other than - (hyphen), _ (underscore), : (colon), and . (period), and you cannot change this name after the object is saved.</p>
<b>Description</b>	<p>A description of the policy. We recommend including information about where and when the policy should be used. Maximum 115 characters.</p>
<b>Retry on Mount Failure</b>	<p>Designates if the vMedia will continue mounting when a mount failure occurs. This can be:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b></li> <li>• <b>No</b></li> </ul> <p><b>Note</b> The default setting is <b>Yes</b>. When <b>Yes</b> is selected the remote server will continue to try to mount the vMedia mount process until it is successful, or you disable this option. If you select <b>No</b>, a warning message will appear indicating retry on mount failure will not work in case of mount failure.</p>

Refer to the following screenshot as an example:

**Create vMedia Policy**

Name :

Description :

Retry on Mount Failure:  No  Yes

**vMedia Mounts**

Name	Type	Protocol	Authentica...	Server	Filename	Remote Pa...	User	Remap on ...
No data available								

+ Add Delete Info

OK Cancel

- e) On the icon bar under the **vMedia Mounts** pane, click **+ Add**. In the **Create vMedia Mount** dialog box, complete the following fields:

Field Name	Description	Example Value
<b>Name</b>	Name for the mount point.	Windows-ISO
<b>Description</b>	Can be used for more information.	Windows Server 2016 image or Windows Server 2019 image
<b>Device Type</b>	Type of image that you want to mount. This can be: <ul style="list-style-type: none"> <li>• <b>CDD</b>—Scriptable vMedia CD.</li> <li>• <b>HDD</b>—Scriptable vMedia HDD.</li> </ul>	CDD
<b>Protocol</b>	The protocol used for accessing the share where the ISO files are located.	HTTP
<b>Hostname/IP Address</b>	IP address or FQDN of the server hosting the images.	10.101.1.92

Field Name	Description	Example Value
<b>Image Name Variable</b>	This value is not used in HyperFlex installation.	None
<b>Remote File</b>	The filename of the ISO file that you want to mount.	
<b>Remote Path</b>	The path on the remote server to where the file resides	
<b>Username</b>	If you use CIFS or NFS a username might be necessary	
<b>Password</b>	If you use CIFS or NFS a password might be necessary	

Refer to the screenshot below as an example:

**Create vMedia Mount**

Name : Windows-ISO

Description : Windows Server 2016 Image

Device Type :  CDD  HDD

Protocol :  NFS  CIFS  HTTP  HTTPS

Hostname/IP Address : 10.29.149.212

Image Name Variable :  None  Service Profile Name

Remote File : en\_windows\_server\_2016\_x64\_dvd\_9327751.iso

Remote Path : /images/

Username :

Password :

Remap on Eject :

OK Cancel

306787

- f) Click **OK**. When you click **OK**, you will now be returned to the **vMedia Policies** screen, and you should see the information that you just submitted.



Create vMedia Policy

Name : HX-vMedia

Description :

Retry on Mount Failure:  No  Yes

vMedia Mounts

Name	Type	Protocol	Authentica...	Server	Filename	Remote Pa...	User	Remap on ...
Windo...	CDD	HTTP	Default	10.29.149...	en_windo...	/images/		No


+ - Advanced Filter ↑ Export Print

+ Add - Delete Info

OK Cancel


306788

- g) Repeat **Steps 2e and 2f**, however, change the type to **HDD** and the remote file name to the **Cisco HyperFlex driver image**.
- h) At the end of this step, the two vMedia mounts will be listed in the Create vMedia Policy screen as shown in the following screenshot:

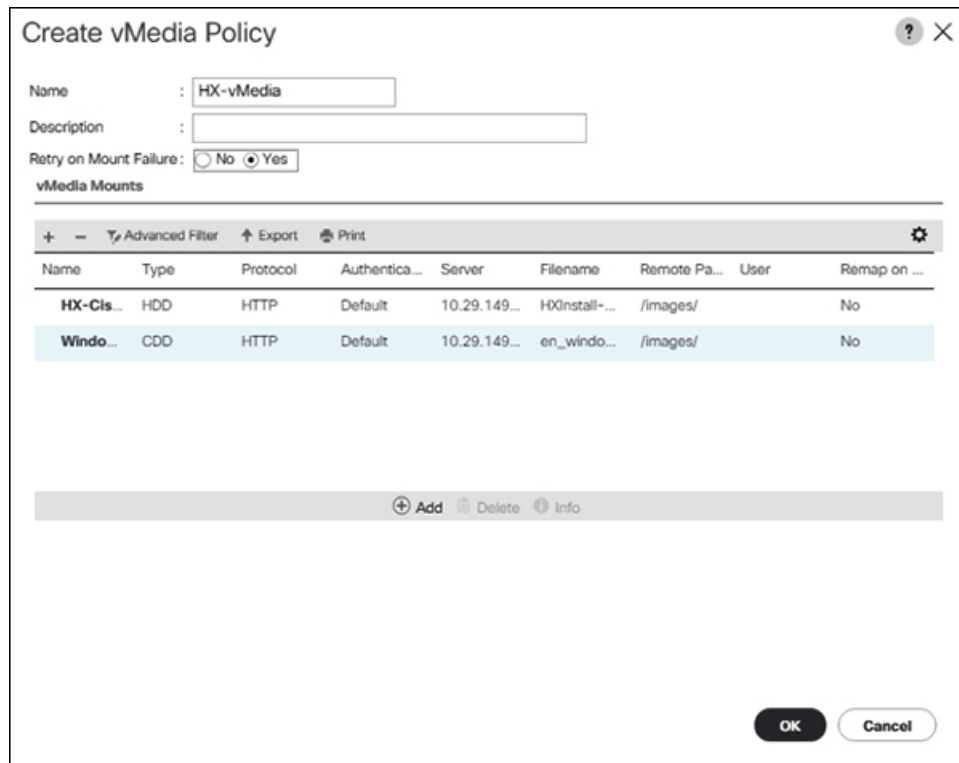


**Step 3 Associate the vMedia Policy to a Service Profile:**


- a) In the Navigation pane, select **Servers > Service Profile Templates > root > Sub-Organizations > hx-cluster\_name > Service Template compute-nodes, or compute-nodes-m5**

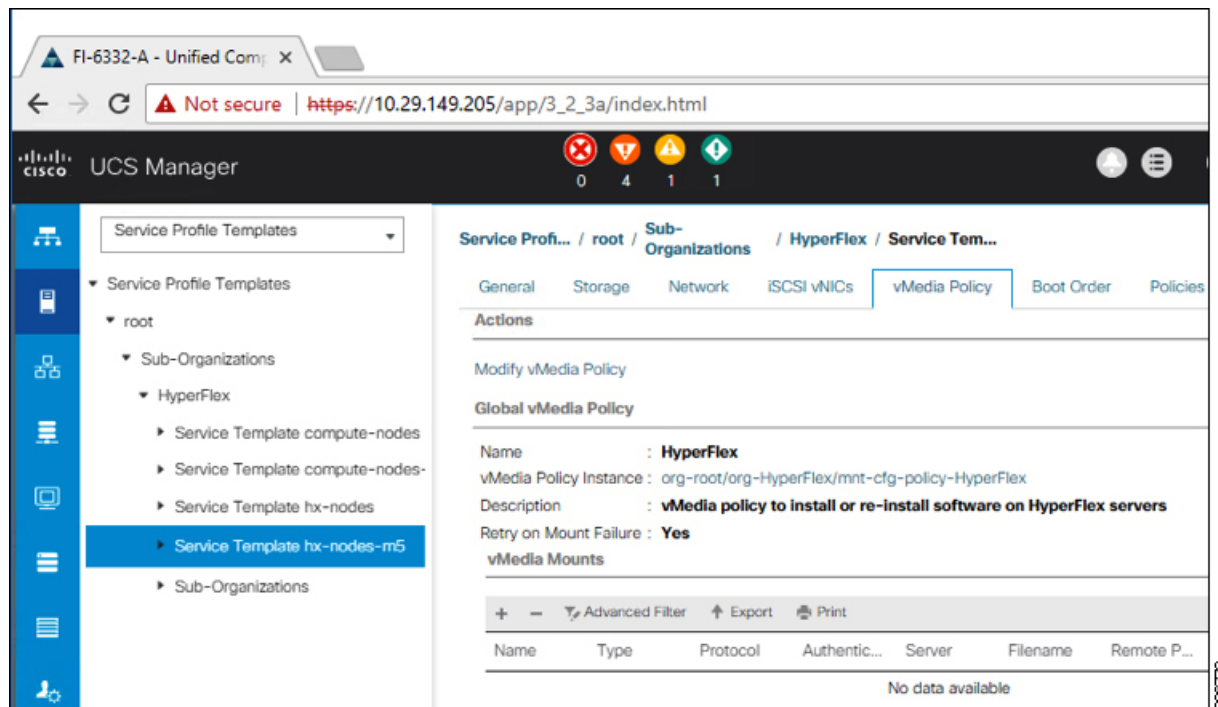

- b) Click the **vMedia Policy** tab. Then, click **Modify vMedia Policy**
- c) Choose the **vMedia Policy** that you created earlier from the drop-down selection, and click **OK** twice.

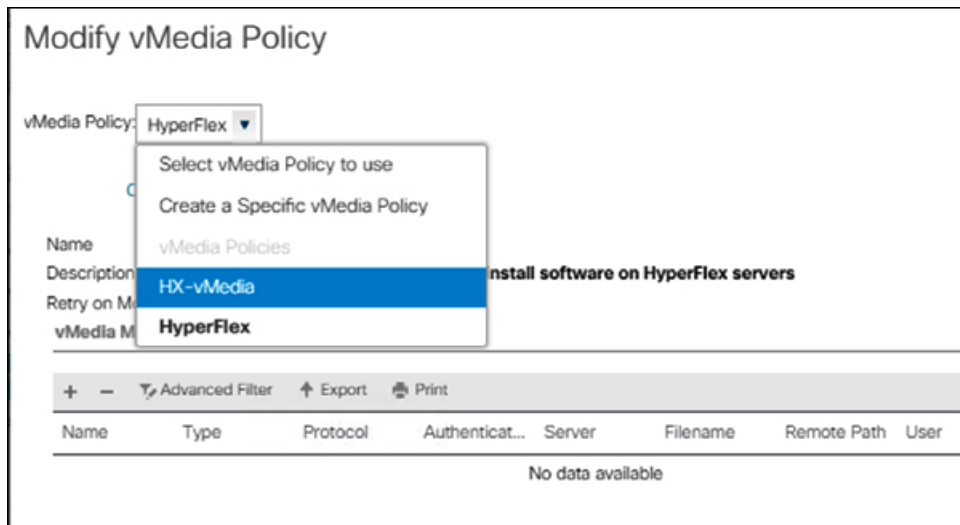


- d) Under the **General** tab, verify that the vMedia policy is added to the Service Profile.

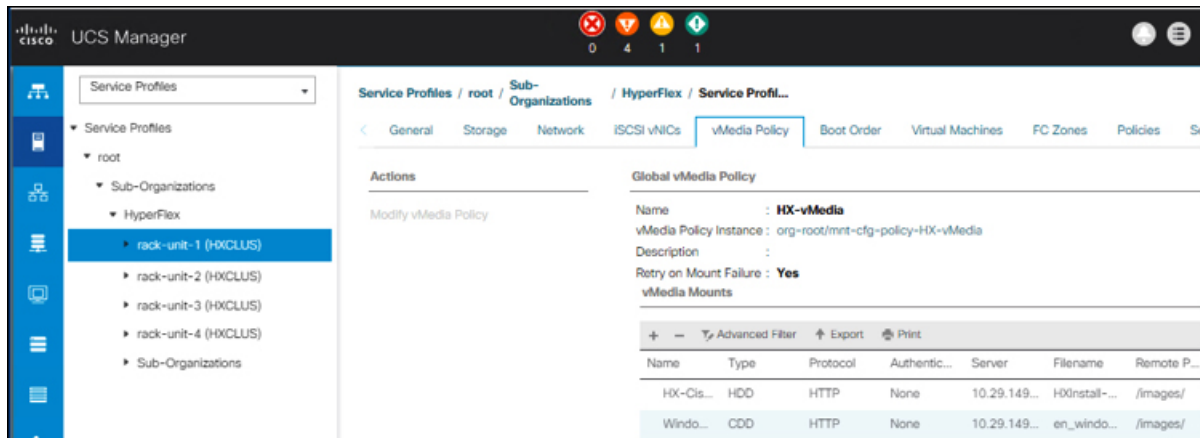


#### Step 4 Modify Boot Policy and set the boot order to have CIMC CD/DVD to the list:

- a) In the Navigation pane, click the **Servers** tab.
- b) Expand **Servers > Policies > root > > Boot Policies > hx-compute, or hx-compute-m5**

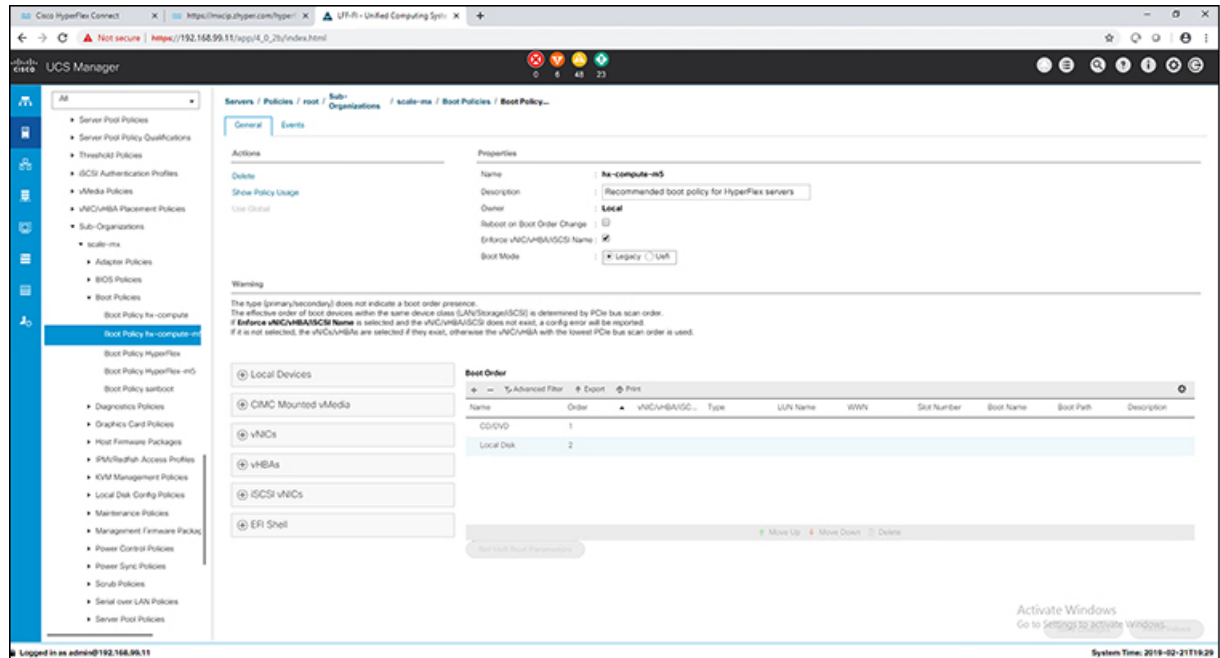

- c) In the **Boot Order** configuration pane, click **CIMC Mounted CD/DVD**. Then, click **Add CIMC Mounted CD/DVD** to add this to the boot order. Move it to the top of the boot order using the **Move up** button.


**Important** As shown in the screenshot below, the **CIMC Mounted CD/DVD** option must be highest in the boot order preceding the other options, **Embedded Local Disk** and **CD/DVD**.

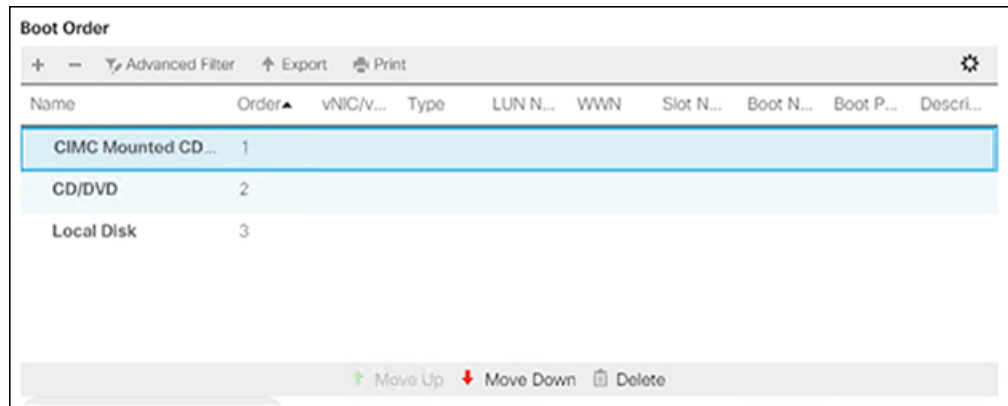

- d) Click **Save Changes**, and click **OK** in the **Success** dialog box. The modified boot policy is saved.


**Step 5 Verify successful vMedia mounting:**

- a) On the **Equipment** tab, select one of the servers.
- b) Click **Inventory > CIMC**, scroll down and ensure for mount entry #1(OS image) and mount entry #2 (Cisco HyperFlex driver image) you see status as **Mounted** and there are no failures.

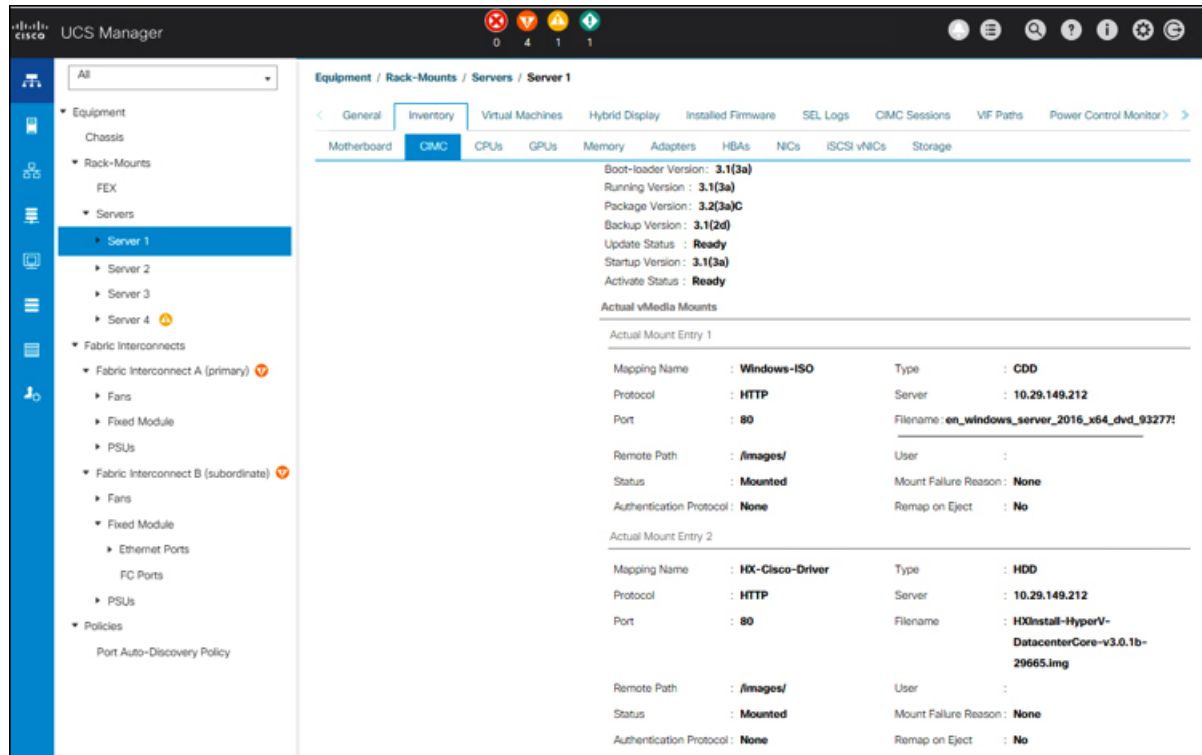

- c) In the menu bar, click **Servers** and choose the first HyperFlex service profile.
- d) Click the **General tab** and choose **Actions > KVM Console>>**.

**Note** The KVM console will try to open in a new browser. Be aware of any pop-up blockers. Allow the pop-ups and re-open the KVM

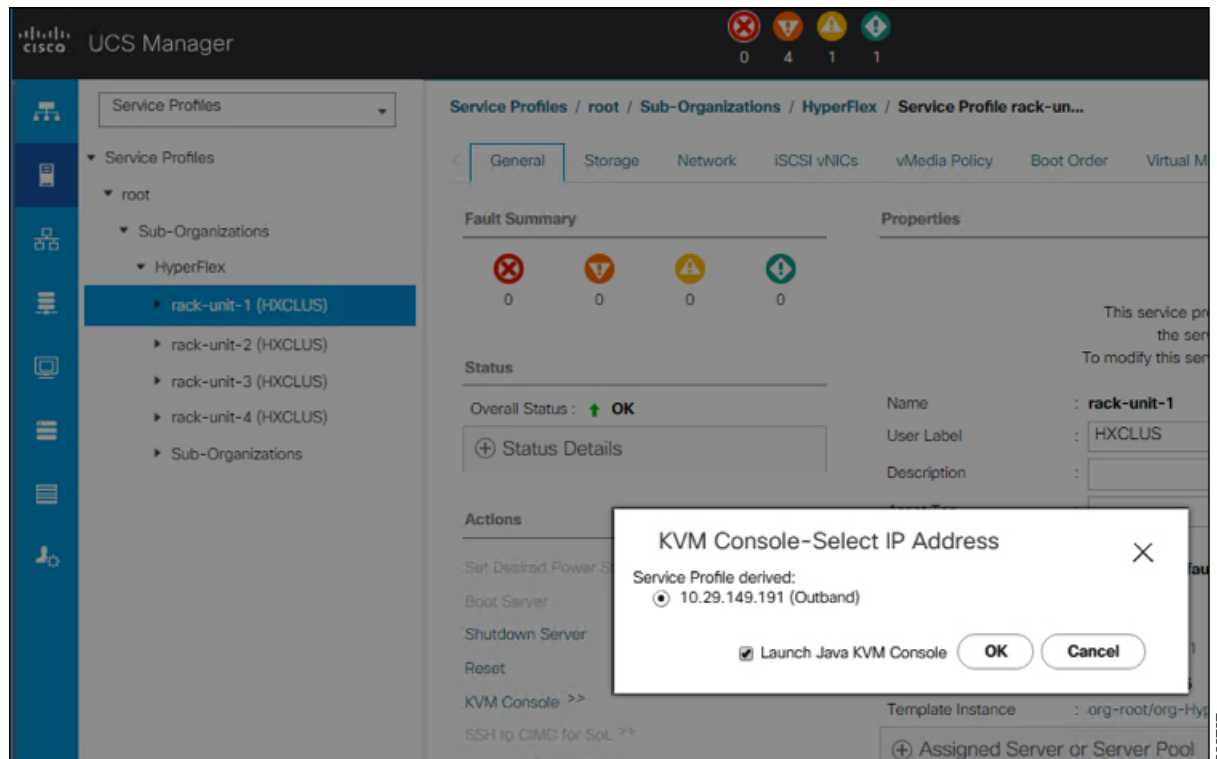

- e) Reboot the host, launch the KVM Console, and power on the server to monitor the progress of the Windows installation. You should see the **Loading Files** screen appear. Windows should install automatically without user intervention.

**Note** The option to install Windows automatically without user intervention is applicable for fresh or first-time installations only. For reinstallations, or if the node already contains a Windows partition, you will need to respond to the prompt to "Press any key to boot from CD/DVD".

You should see a blue screen and within a few moments you should see the **Setup is starting** message. The host will reboot a few times. If automated installation does not begin, double-check that both images are mounted to the server.

- f) The installation is complete when you get a clear command prompt at `c:\users\administrator>`. This is applicable for both Windows Core and Desktop Experience installations. It may take several minutes for the Driver Image to be copied and installed.

**Note** Ignore the prompt with the **The system cannot find the file specified** message.

**Important** Ensure that you have completed **Steps e and f**, on ALL servers that will be part of the HX cluster.

**Note** If Microsoft Windows OS is already installed on the node, you must click **any** key to continue when the node boots back up so that the fresh OS installation can happen.

If you haven't clicked **any** key to continue, and an existing node with a previous OS installed is used to expand, then the new installation is skipped causing further expansion to fail.

- g) Login to each server and verify the following:

Run powershell command: `Get-ScheduledTask -TaskName HXInstallbootstraplauncherTask`. Verify that the HX Install Bootstrap Launcher task is running. Sample output as follows:

TaskPath	TaskName	State
----- \ -----	----- HXInstallbootstraplauncherTask	----- Running

Validate that the log line "Done with HX PostSysPrepSetup" exists in

C:\ProgramData\Cisco\HyperFlex\Install\Log\PostSysprepSetup.log.

Run powershell command: `Get-Command Get-VMSwitch`. Verify that the command runs successfully (no exception). Sample output as follows:

CommandType	Name	Version	Source
----- Cmdlet	----- Get-VMSwitch	----- 2.0.0.0	----- Hyper-V

**Step 6 Reset the vMedia policy back to the default HyperFlex policy:**

- Update the vMedia policy for compute nodes. Go to **Servers > Service Profile Templates > root > Sub-Organizations > hx-cluster\_name > Service Template compute-nodes, or compute-nodes-m5**. Then, click on **Modify vMedia Policy**.
- Under the vMedia Policy drop-down selection, choose "HyperFlex" policy.

**Step 7 Restore the boot order to the one before installation:**

- In the Navigation pane, click the **Servers** tab.
- Expand **Servers > Policies > root > > Boot Policies > hx-compute, or hx-compute-m5**
- In the **Boot Order** configuration pane, use the **Move Down** button to move **CIMC Mounted CD/DVD** option to the bottom of the list.

**Step 8 Change the local Administrator password to match the password on the existing cluster.**

- Log in to the newly-installed compute node.
- Open a command prompt.
- Run the following command: `net user Administrator <password>`.

**Step 9 Update the password for HXInstallbootstraplauncherTask and verify that it is Running:**

- Stop the scheduled task "HXInstallbootstraplauncherTask" if it is running.

For example:

```
Get-ScheduledTask -TaskName "HXInstallbootstraplauncherTask" | Stop-ScheduledTask
```

- Update task credentials.

For example:

```
Get-ScheduledTask -TaskName "HXInstallbootstraplauncherTask" | Set-ScheduledTask -User "Administrator" -Password <password>
```

- Start the scheduled task and verify that it is Running.

For example:

```
Get-ScheduledTask -TaskName "HXInstallbootstraplauncherTask" | Start-ScheduledTask
```


```
Get-ScheduledTask -TaskName "HXInstallbootstraplauncherTask"
```

# Hypervisor Configuration, HXDP Software Installation and Cluster Expansion

After the installation of Windows OS is completed, perform the following steps to configure the hypervisor, install the HX Data Platform Software and expand the cluster.

## Procedure

- Step 1** **Re-open** the HX Data Platform Installer and log in.
- Step 2** You might need to “start over” because the previous workflow was finished. Click on the gear icon in the top right corner and select **Start Over**.
- Step 3** In the **Select a Workflow** page, select **Expand Cluster > Compute Node**.

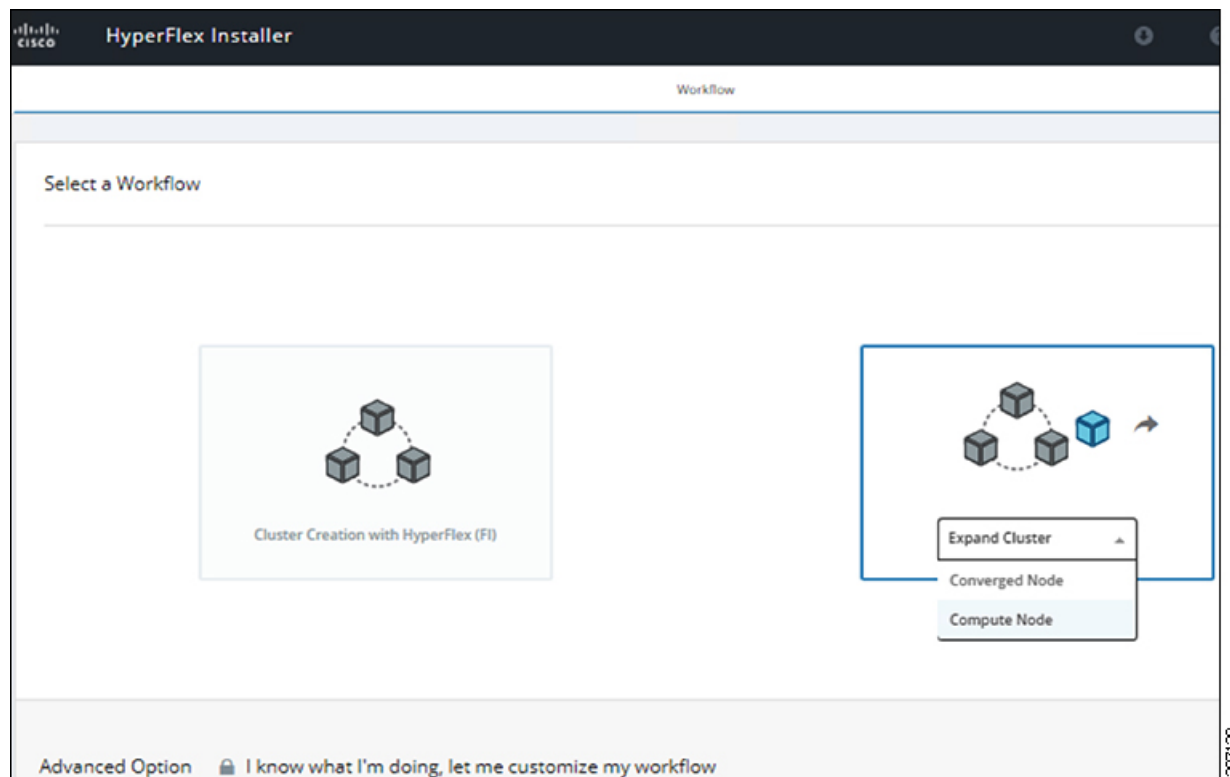

- Step 4** In the **Select a Workflow** page, select **Expand HX Cluster**. Leave the **Is OS installed on the Node**, **Run Hypervisor Configuration** and **Deploy HX Software** checkboxes selected.



Select a Workflow

Is OS installed on the Node

Run UCS Manager Configuration

Run Hypervisor Configuration

Deploy HX Software

Create HX Cluster |  Expand HX Cluster

Show me the standard workflows Continue

**Step 5** In the **Warning** dialog box, click **Confirm and Proceed**.

**Warning** ✕


You have selected a custom option that splits the installation or expansion workflow. You must complete all tasks in the workflow to ensure a working HX storage cluster.  
If your nodes are data-at-rest encryption capable, custom installation is not supported.

Cancel to return to the standard workflow.  
Confirm and Proceed to continue with a custom workflow.

Cancel Confirm and Proceed

**Step 6** In the **Cluster** page, complete the following fields:

Field	Description	Example Value
HX Cluster Management IP	The management IP address for the HX cluster	10.104.252.135
Cluster Admin User	Administrator username	admin
Password	Administrator password	

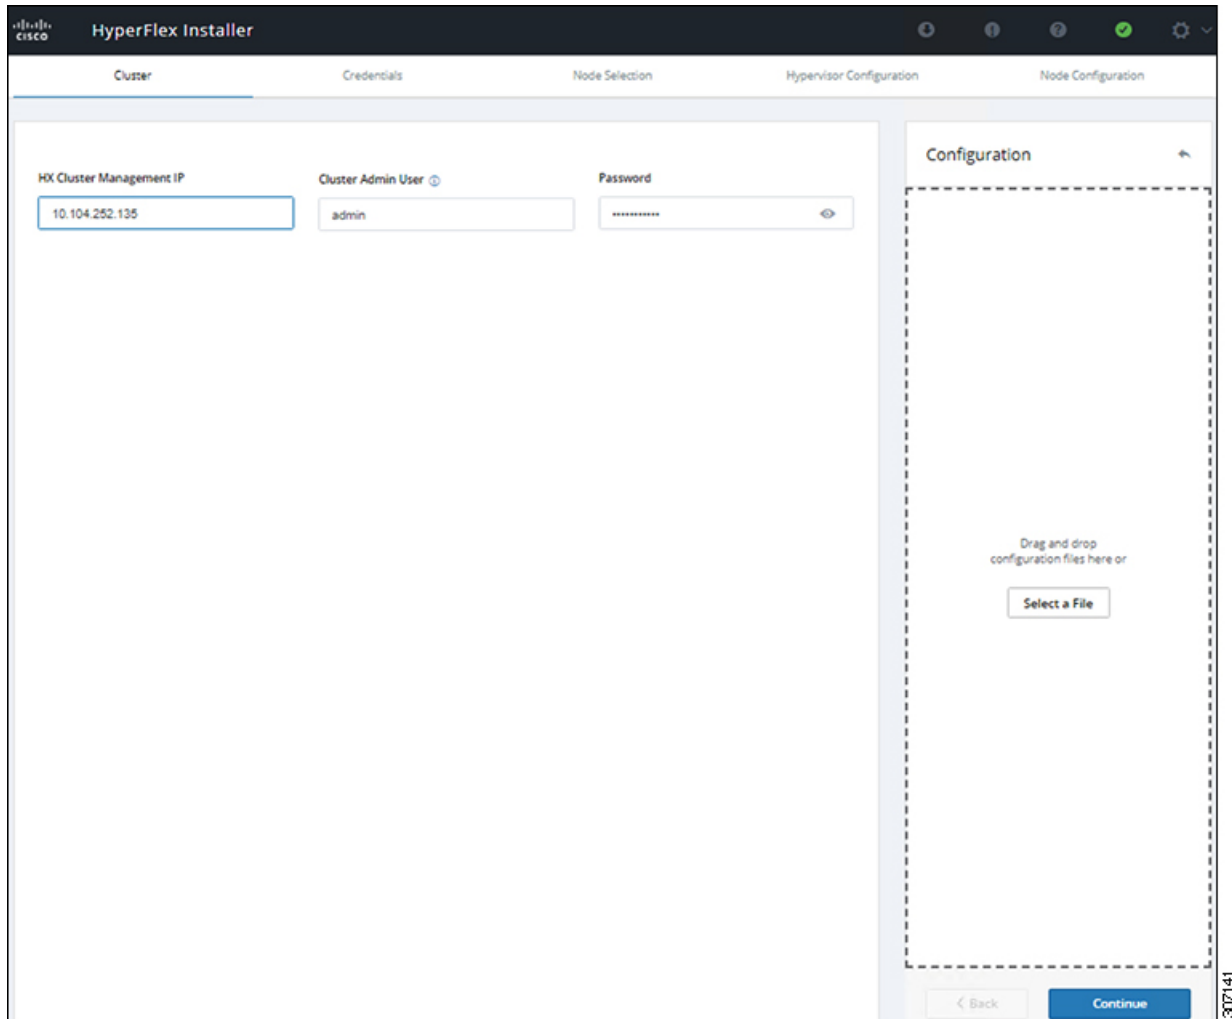

**Step 7** In the **Credentials** page, complete the following fields:

**Table 2: UCS Manager Credentials**

Field		
UCS Manager Host Name	FQDN or the VIP address of UCSM.	
UCS Manager User Name	Admin user or a user with UCSM admin rights.	
Password	Password for the UCS Manager User Name.	

Table 3: Domain Information

Field		
HX Service Account	The HX service account that was created in the preinstallation phase.	hxadmin
Password	Password for the HX service account.	
Configure Constrained Delegation now (recommended) Constrained Delegation later	Select one of the checkboxes. Constrained Delegation is required for VM Live Migration.	


Use the following illustration as a reference for entering values in this screen.

The screenshot displays the 'HyperFlex Installer' interface, specifically the 'Credentials' step. The top navigation bar includes 'Cluster', 'Credentials', 'Node Selection', 'Hypervisor Configuration', and 'Node Configuration'. The main content area is divided into several sections:

- Connection Status:** Shows 'Connected to: 10.104.252.135', 'State: ONLINE', 'Health: HEALTHY', and 'Size: 4'.
- UCS Manager Credentials:** Includes input fields for 'UCS Manager Host Name' (10.05.121.240), 'UCS Manager User Name' (admin), and 'Password' (masked).
- Domain Information:** Includes input fields for 'HX Service Account' (hxadmin) and 'Password' (masked).
- Constrained Delegation:** Two radio buttons are present: 'Configure Constrained Delegation now (recommended)' (selected) and 'Configure Constrained Delegation later'.
- Service Account:** A checked checkbox labeled 'Use HX Service Account'.

A right-hand sidebar titled 'Configuration' shows a 'Cluster' section with 'Management Cluster' at IP 10.104.252.135. At the bottom of the main area are '< Back' and 'Continue' buttons.

**Step 8** In the **Node Selection** page, choose all the servers that you want to install in the cluster and click **Continue**.

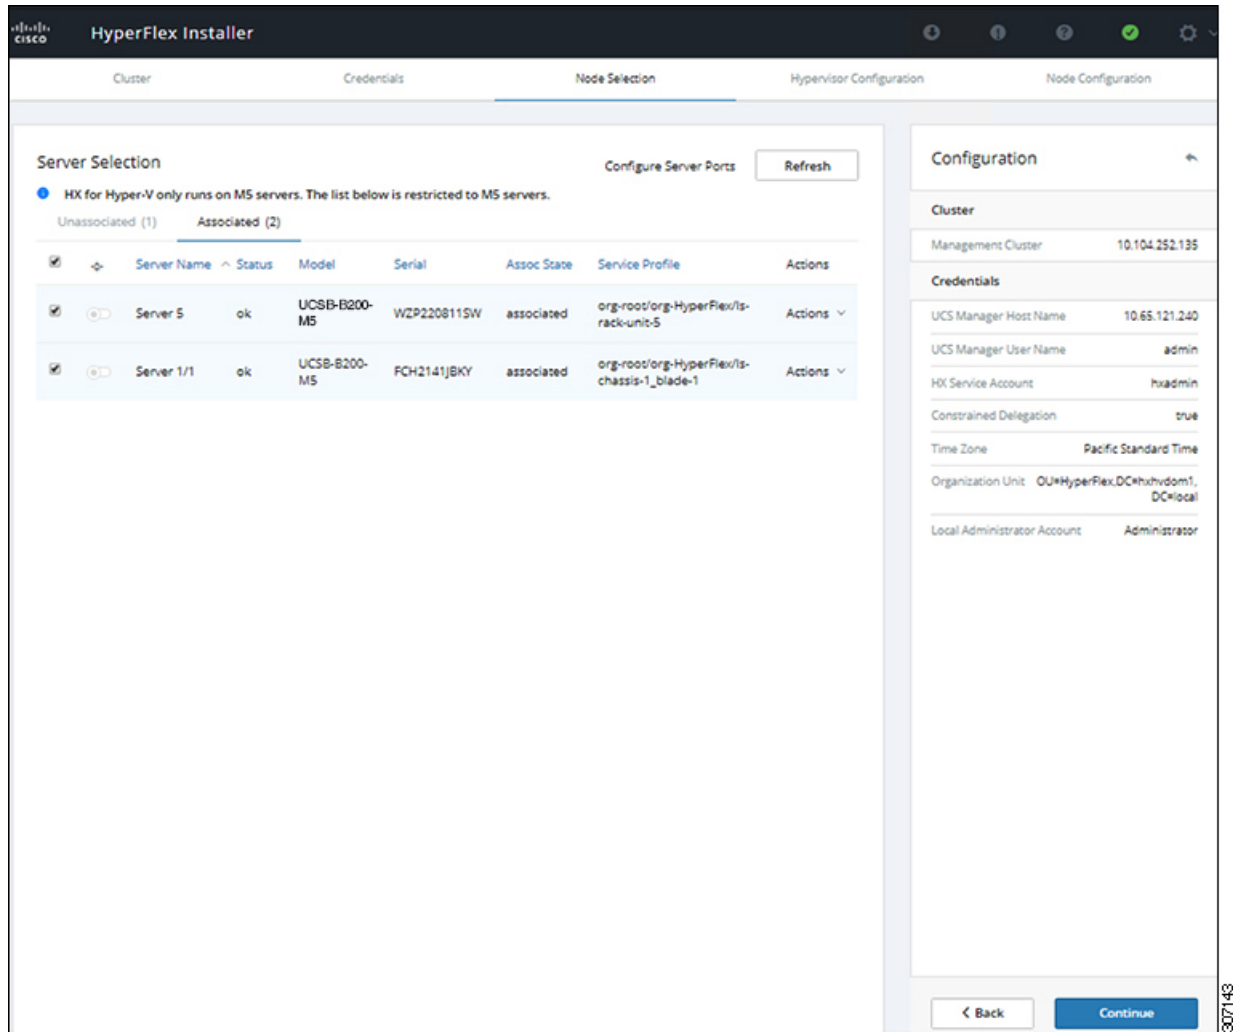

**Step 9** In the **Hypervisor Configuration** page, complete the following fields for **VLAN Configuration**, **Hypervisor Settings**, and **Hypervisor Credentials**.

**VLAN Configuration**—HyperFlex needs to have at least 4 VLANs, each needs to be on different IP subnets and extended from the fabric interconnects to the connecting uplink switches, to ensure that traffic can flow from the Primary Fabric Interconnect (Fabric A) to the Subordinate Fabric Interconnect (Fabric B).

Use the following illustration as a reference for entering values in this screen.

### VLAN Configuration

<b>VLAN for Hypervisor and HyperFlex management</b>		<b>VLAN for HyperFlex storage traffic</b>	
VLAN Name	VLAN ID	VLAN Name	VLAN ID
<input type="text" value="hx-inband-mgmt"/>	<input type="text"/>	<input type="text" value="hx-storage-data"/>	<input type="text"/>
<b>VLAN for VM Live Migration</b>		<b>VLAN for VM Network</b>	
VLAN Name	VLAN ID	VLAN Name	VLAN ID(s)
<input type="text" value="hx-livemigrate"/>	<input type="text"/>	<input type="text" value="vm-network"/>	<input type="text"/>

**Hypervisor Settings**—If you leave the checkbox Make IP Addresses and Hostnames Sequential as checked then the installer will automatically fill the rest of the servers sequential from the first.

**Hypervisor Credentials**— Enter the Local administrator username on the Hyper-V hosts. Click **Continue**.

**Step 10** In the **Node Configuration** page, complete the fields for **Hypervisor Settings** and **IP Addresses**.

Field	Description	Example Value
Subnet Mask	Subnet mask for the hypervisor hosts management network	255.255.255.0
Gateway	Default gateway for the hypervisor hosts management network	10.101.251.1
DNS Servers	Comma separated list for the DNS Servers in the AD that the hypervisor hosts are going to be member.	10.101.251.1

Use the following illustration as reference for entering values in this screen.

The screenshot displays the HyperFlex Installer interface in the 'Hypervisor Configuration' step. The main configuration area includes:

- Hypervisor Settings:** Subnet Mask (255.255.255.0), Gateway (10.104.252.1), DNS Server(s) (10.104.252.44), and Failover Cluster Name (hshvwo).
- IP Addresses:** A checkbox for 'Make Hypervisor Name and IP Address Sequential' is checked. Primary DNS Suffix is HXHVDOM1.LOCAL. Additional DNS Suffixes are Management - VLAN 613 (HXHVDOM1.LOCAL) and Data - VLAN 3172 (Hostname or IP Address).
- Server Configuration Table:**

ID	Name	Hypervisor	Storage Controller	Hypervisor	Storage Controller
Server 1/1 compute	hshvbo2	192.168.11.87			
Server 5 compute	hshvoo1	192.168.11.88			


The right sidebar shows configuration details for:

- Cluster:** Management Cluster (10.104.252.135)
- Credentials:** UCS Manager Host Name (10.65.121.240), UCS Manager User Name (admin), HX Service Account (hxadmin), Constrained Delegation (true), Time Zone (Pacific Standard Time), Organization Unit (OU=HyperFlex.DC=hxvdo m1.DC=local), Local Administrator Account (Administrator)
- Node Selection:** Server 1/1 (FCH2141JBKY / UCSB-8200-M5), Server 5 (WZP2208115W / UCSC-C220-M5SX)
- Hypervisor Configuration:** VLAN Name (hxinband-mgmt, 613), VLAN Name (hx-storage-data, 3172), VLAN Name (hx-livemigrate, 3173), VLAN Name (vm-network, 3176,3174), Subnet Mask (255.255.255.0)

Buttons for '< Back' and 'Start' are located at the bottom of the sidebar.

Click **Start** to begin the Hypervisor Configuration. The installation now continues and configures the Hypervisor hosts.

**Step 11** In the **Warning** dialog box, click **Confirm and Proceed**.

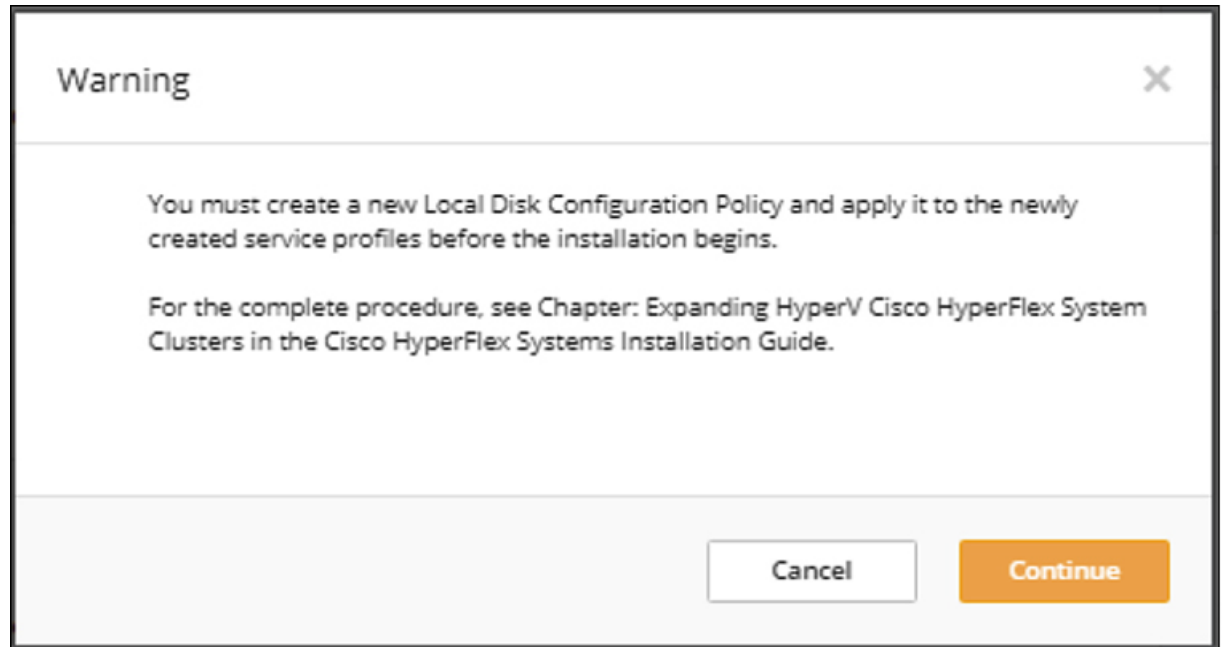

**Step 12** The **Progress** screen displays the status of the hypervisor configuration and cluster expansion.

The screenshot displays the HyperFlex Installer interface. At the top, a progress bar shows the following steps: Start, Config Installer (completed), Hypervisor Configuration (in progress), Deploy Validation, Deploy, Expansion Validation, and Cluster Expansion. The main content area is titled "Hypervisor Configuration in Progress" and shows a list of tasks under the heading "Hypervisor Configuration - Overall". The tasks are: Login to UCS API (checked), Querying vMedia mount status (checked), Inventorying org of specified servers (checked), Inventorying physical servers (checked), Logout from UCS API (checked), CONFIGURATION COMPLETED SUCCESSFULLY (checked), and Waiting for all servers to acquire IP address... (loading). Below this, there are sections for "blade-1" and "rack-unit-5", both with "Waiting for server to acquire IP address..." (loading) and "In Progress" buttons. On the right side, there is a "Configuration" panel with the following details:

Cluster	
Management Cluster	10.104.252.135
Credentials	
UCS Manager Host Name	10.65.121.240
UCS Manager User Name	admin
HX Service Account	hxadmin
Constrained Delegation	true
Time Zone	Pacific Standard Time
Organization Unit	O=HyperFlex,DC=rhuhvdo,DC=local
Local Administrator Account	Administrator
Node Selection	
Server 1/1	FCH2141JBKY / UCSB-B200-M5
Server 5	WZP2208115W / UCSC-C220-M5SX
Hypervisor Configuration	
VLAN Name	hx-inband-mgmt
VLAN ID	613
VLAN Name	hx-storage-data
VLAN ID	3172
VLAN Name	hx-livemigrate
VLAN ID	3173
VLAN Name	vm-network
VLAN ID(s)	3176,3174
Subnet Mask	255.255.255.0
Gateway	10.104.252.1
DNS Server(s)	10.104.252.44

**Step 13** When the process finishes successfully, the **Summary** page displays the completion status.




The screenshot shows the HyperFlex Installer Summary page. At the top, it displays the cluster name 'hxxvsmb' with 'ONLINE' and 'HEALTHY' status indicators. Below this, a table lists various cluster configuration parameters. The 'Servers' section contains a table with columns for Model, Serial Number, Management Hypervisor, Management Storage Controller, Data Network Hypervisor, and Data Network Storage Controller. At the bottom right, there are two buttons: 'Back to Workflow Selection' and 'Launch HyperFlex Connect'.

Parameter	Value	Parameter	Value
Version	3.5.2a-31586	Domain Name	HXXVDOM1.LOCAL
Cluster Management IP Address	hxxvcp.HXXVDOM1.LOCAL	Fallover cluster Name	hxxvwfc
Cluster Data IP Address	192.168.11.135	DNS Server(s)	10.104.252.44
Replication Factor	Three copies	NTP Server(s)	10.104.252.44
Available Capacity	10.7 TB		

Model	Serial Number	Management Hypervisor	Management Storage Controller	Data Network Hypervisor	Data Network Storage Controller
HXAF240C-M5SX	WZP22020L9E	10.104.252.127	10.104.252.131	192.168.11.127	192.168.11.131
UCSC-C220-M5SX	WZP2208115W	10.104.252.87		192.168.11.86	
HXAF240C-M5SX	WZP22020L96	10.104.252.129	10.104.252.133	192.168.11.129	192.168.11.133
HXAF240C-M5SX	WZP220216WY	10.104.252.128	10.104.252.132	192.168.11.128	192.168.11.132
UCSB-B200-M5	FCH2141JBKY	10.104.252.86		192.168.11.87	
HXAF240C-M5SX	WZP22020L9B	10.104.252.130	10.104.252.134	192.168.11.130	192.168.11.134

To login to HX Connect, click **Launch HX Connect**. The HX Connect **Dashboard** page displays cluster health, operational status and information for the newly added compute-only nodes in the cluster.

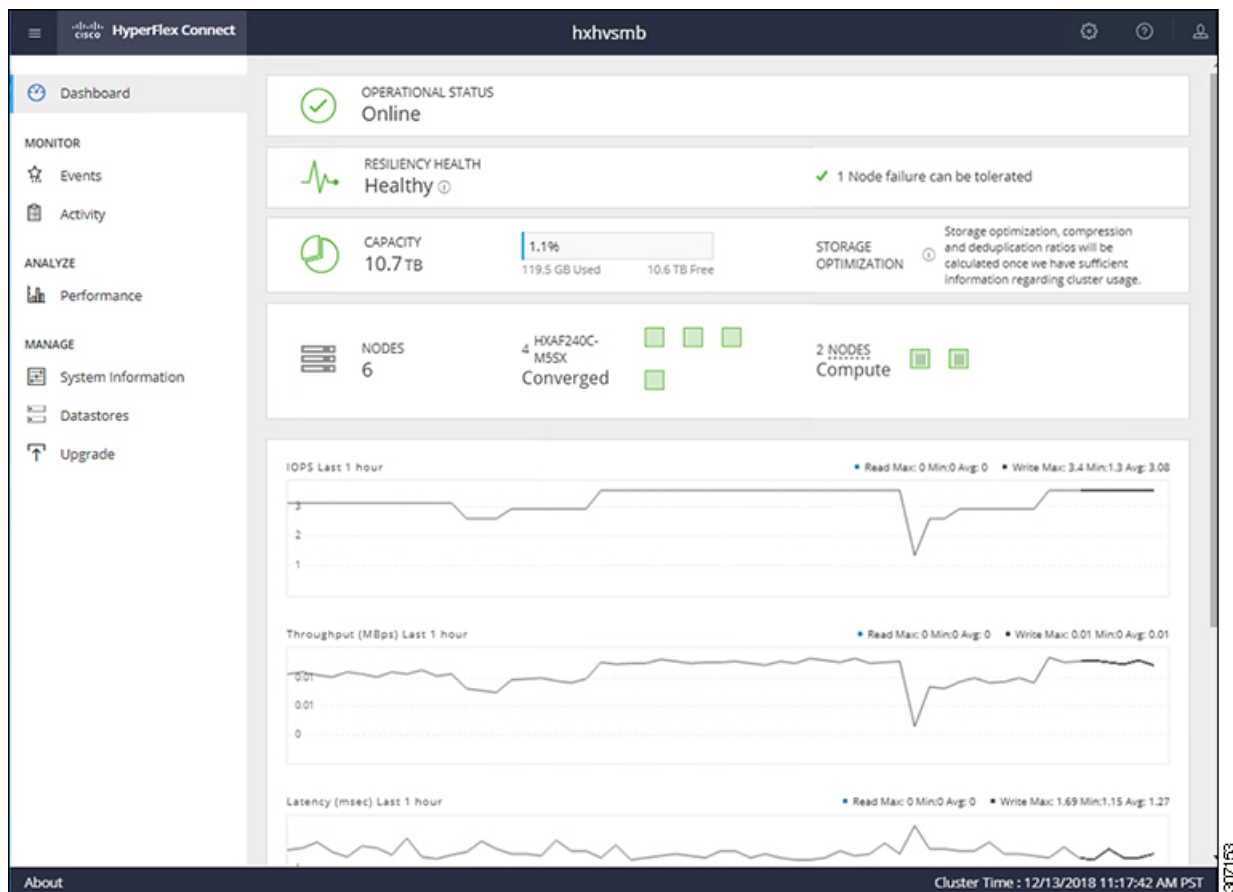

## Cluster Expansion—M4 Blade Servers (Fibre Channel SAN)

### Overview

The Hyper-V cluster expansion procedure for **UCS B200 M4 blade servers with Fibre Channel** storage boot option consists of the following sequence of tasks:

1. [Pre-expansion Checklist](#)
2. [Cisco UCS Manager Configuration](#)
3. [Microsoft Windows OS Installation, on page 35](#)
4. [Hypervisor Configuration, HXDP Software Installation and Cluster Expansion](#)
5. Perform the following post installation steps:
  - [Configuring a Static IP Address for Live Migration and VM Network](#)
  - [\(Optional\) Post Installation Constrained Delegation](#)

- [Configure Local Default Paths](#)
- [Checking the Windows Version on the Hyper-V Host](#)

## Microsoft Windows OS Installation


This procedure is when you wish to expand your Hyper-V cluster by adding **UCS B200 M4 Blade servers (compute-only nodes)** and enable **Fibre Channel SAN** boot option.

### Procedure

- 
- Step 1** Launch UCS Manager and log in.
- Step 2** **Perform the following steps to clone a Service Profile template:**
- In the Navigation pane, click **Servers**.
  - Expand the node for the organization where you want to clone and select **Create a Clone**
  - In the **Create Clone from Service Profile** dialog box, enter a name you to use for the new profile in the **Clone Name** field (Example: **hx-compute**). Click **OK**.
- Step 3** **Perform the following steps to enable FC Zoning:**
- In the Navigation pane, go to **SAN > VSAN**.
  - Ensure that the **Enabled** radio-button is selected under **FC Zoning**.
- Step 4** Unbind your blade server from the current Service Profile template, and bind it to the newly created template in Step 2.
- Step 5** Perform the following steps to mount the HyperFlex Driver Image file and modify the `autounattend.xml` file:
- Connect to your HX Installer VM and navigate to the shared folder that contains the Windows ISO and HyperFlex Driver Image files.
  - Run the following commands to mount the HyperFlex image:
 

```
mkdir /mnt/hx-img
mount /var/www/localhost/images/latest.img /mnt/hx-img
```
  - Open the `autounattend.xml` file, search for `DiskID` and change the value from 0 to the value in Windows PE ( WinPE).
- Step 6** Perform the following steps to configure a SAN boot policy:
- Select the newly created Service Profile Template from Step 2 and go to the **Boot Order** tab. Click **Modify Boot Policy**. In the **Modify Boot Policy** page, click **Create Boot Policy**.
  - Expand vHBAs, select **Add SAN Boot**, and in the name field, type the name of the vHBA(Example: `hx-ext-fc-a`).
  - Select **Primary** and click **OK**.
  - In the **Add SAN Boot Target**, leave the **Boot Target LUN** set to 0. In the **Boot Target WWPN** field, type the WWPN from your storage array. Verify **Type** is set to **Primary** and click **OK**.
- Step 7** **Create a vMedia policy for the Windows OS and Cisco driver images:**
- In the Navigation pane, click **Servers**.
  - Expand **Servers > Policies > root > Sub-Organizations > hx-cluster\_name > vMedia Policies**

- c) Right-click **vMedia Policies** and select **Create vMedia Policy HyperFlex**.

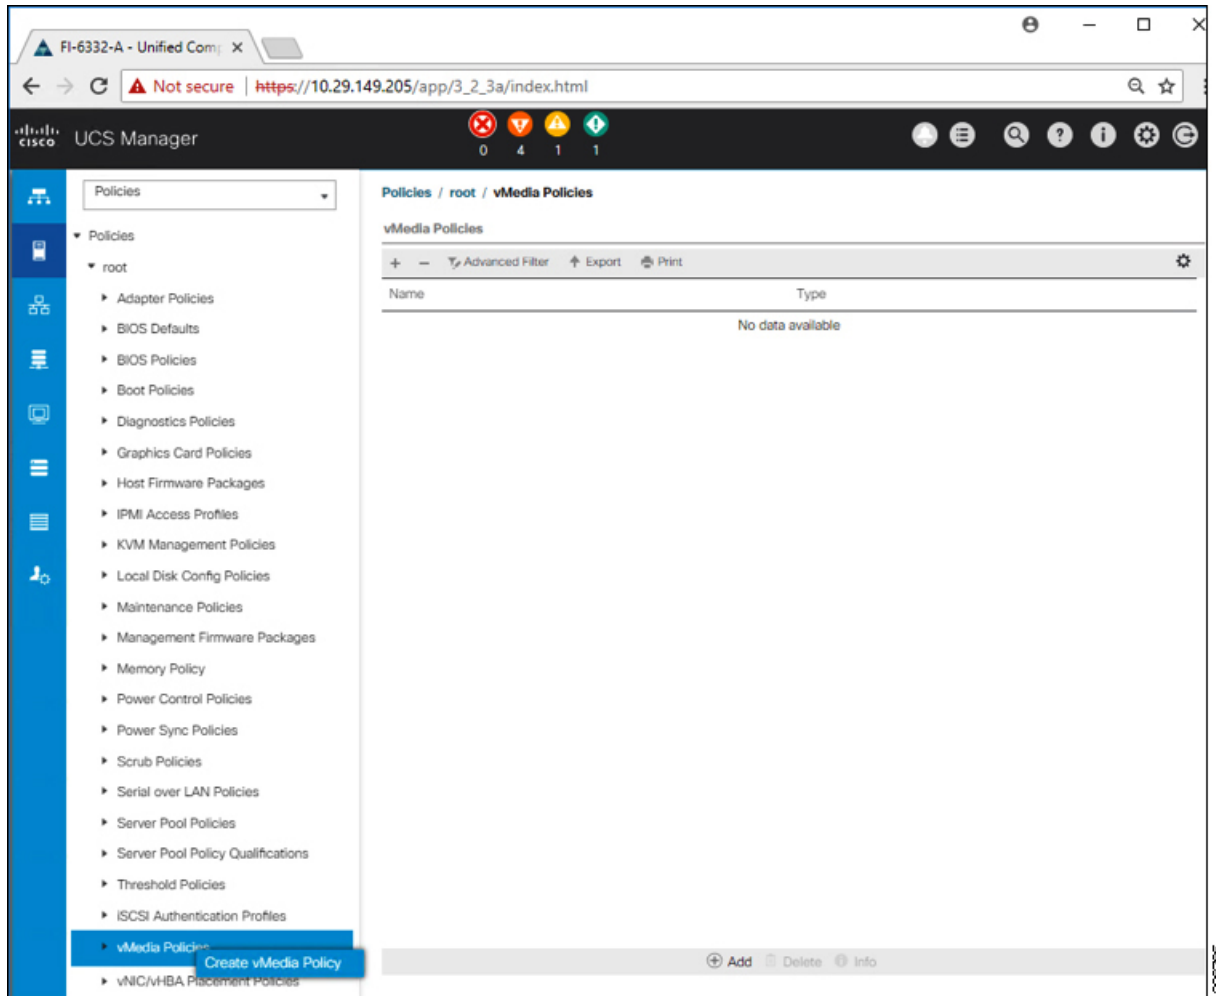

- d) In the **Create vMedia Policy** dialog box, complete the following fields:

Field Name	Description
<b>Name</b>	The name of the vMedia policy. For example, <i>HX-vMedia</i> .  This name can be between 1 and 16 alphanumeric characters. You cannot use spaces or any special characters other than - (hyphen), _ (underscore), : (colon), and . (period), and you cannot change this name after the object is saved.
<b>Description</b>	A description of the policy. We recommend including information about where and when the policy should be used. Maximum 115 characters.

Field Name	Description
<b>Retry on Mount Failure</b>	<p>Designates if the vMedia will continue mounting when a mount failure occurs. This can be:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b></li> <li>• <b>No</b></li> </ul> <p><b>Note</b> The default setting is <b>Yes</b>. When <b>Yes</b> is selected the remote server will continue to try to mount the vMedia mount process until it is successful or you disable this option. If you select <b>No</b>, a warning message will appear indicating retry on mount failure will not work in case of mount failure.</p>

Refer to the following screenshot as an example:

The screenshot shows a 'Create vMedia Policy' dialog box. The 'Name' field contains 'HX-vMedia'. The 'Description' field is empty. The 'Retry on Mount Failure' section has 'Yes' selected. Below this is a table titled 'vMedia Mounts' with columns: Name, Type, Protocol, Authentica..., Server, Filename, Remote Pa..., User, and Remap on ... The table is currently empty and displays 'No data available'. At the bottom of the dialog are 'OK' and 'Cancel' buttons.

- e) On the icon bar under the **vMedia Mounts** pane, click **+ Add**. In the **Create vMedia Mount** dialog box, complete the following fields:

Field Name	Description	Example Value
<b>Name</b>	Name for the mount point.	Windows-ISO
<b>Description</b>	Can be used for more information.	Windows Server 2016 image

Field Name	Description	Example Value
<b>Device Type</b>	Type of image that you want to mount. This can be: <ul style="list-style-type: none"> <li>• <b>CDD</b>—Scriptable vMedia CD.</li> <li>• <b>HDD</b>—Scriptable vMedia HDD.</li> </ul>	CDD
<b>Protocol</b>	The protocol used for accessing the share where the ISO files are located.	HTTP
<b>Hostname/IP Address</b>	IP address or FQDN of the server hosting the images.	10.101.1.92
<b>Image Name Variable</b>	This value is not used in HyperFlex installation.	None
<b>Remote File</b>	The filename of the ISO file that you want to mount.	
<b>Remote Path</b>	The path on the remote server to where the file resides	
<b>Username</b>	If you use CIFS or NFS a username might be necessary	
<b>Password</b>	If you use CIFS or NFS a password might be necessary	

Refer to the screenshot below as an example:

**Create vMedia Mount** ? X

Name : Windows-ISO

Description : Windows Server 2016 Image

Device Type :  CDD  HDD

Protocol :  NFS  CIFS  HTTP  HTTPS

Hostname/IP Address : 10.29.149.212

Image Name Variable :  None  Service Profile Name

Remote File : en\_windows\_server\_2016\_x64\_dvd\_9327751.iso

Remote Path : /images/

Username :

Password :

Remap on Eject :

OK Cancel

306767

- f) Click **OK**. When you click **OK**, you will now be returned to the **vMedia Policies** screen, and you should see the information that you just submitted.

**Create vMedia Policy**

Name : HX-vMedia

Description :

Retry on Mount Failure:  No  Yes

**vMedia Mounts**

Name	Type	Protocol	Authentica...	Server	Filename	Remote Pa...	User	Remap on ...
Windo...	CDD	HTTP	Default	10.29.149...	en_windo...	/images/		No

⊕ Add ⊖ Delete ⓘ Info

OK Cancel

- g) Repeat **Steps 2e and 2f**, however, change the type to **HDD** and the remote file name to the **Cisco HyperFlex driver image**.
- h) At the end of this step, the two vMedia mounts will be listed in the Create vMedia Policy screen as shown in the following screenshot:



### Create vMedia Policy

Name :

Description :

Retry on Mount Failure:  No  Yes

**vMedia Mounts**

Name	Type	Protocol	Authentica...	Server	Filename	Remote Pa...	User	Remap on ...
HX-Cls...	HDD	HTTP	Default	10.29.149...	HXInstall-...	/images/		No
Windo...	CDD	HTTP	Default	10.29.149...	en_windo...	/images/		No

+ Add    - Delete    ? Info

OK    Cancel

### Step 8 Associate the vMedia Policy to a Service Profile:


- a) In the Navigation pane, select **Servers > Service Profile Templates > root > Sub-Organizations > hx-cluster\_name > Service Template compute-nodes, or compute-nodes-m5**

The screenshot shows the UCS Manager web interface. The navigation pane on the left is expanded to show the path: Service Profile Templates > root > Sub-Organizations > HyperFlex > Service Template hx-nodes-m5. The main content area displays the configuration for the vMedia Policy. The configuration includes:


- Name:** HyperFlex
- vMedia Policy Instance:** org-root/org-HyperFlex/mnt-cfg-policy-HyperFlex
- Description:** vMedia policy to install or re-install software on HyperFlex servers
- Retry on Mount Failure:** Yes

The vMedia Mounts table is currently empty, with the text "No data available" displayed below it.

- b) Click the **vMedia Policy** tab. Then, click **Modify vMedia Policy**
- c) Choose the **vMedia Policy** that you created earlier from the drop-down selection, and click **OK** twice.

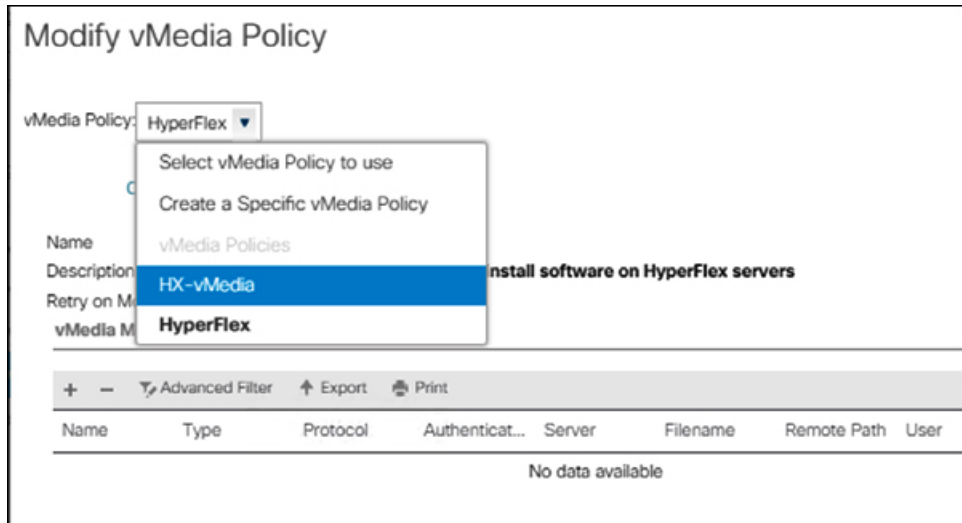


- d) Under the **General** tab, verify that the vMedia policy is added to the Service Profile.

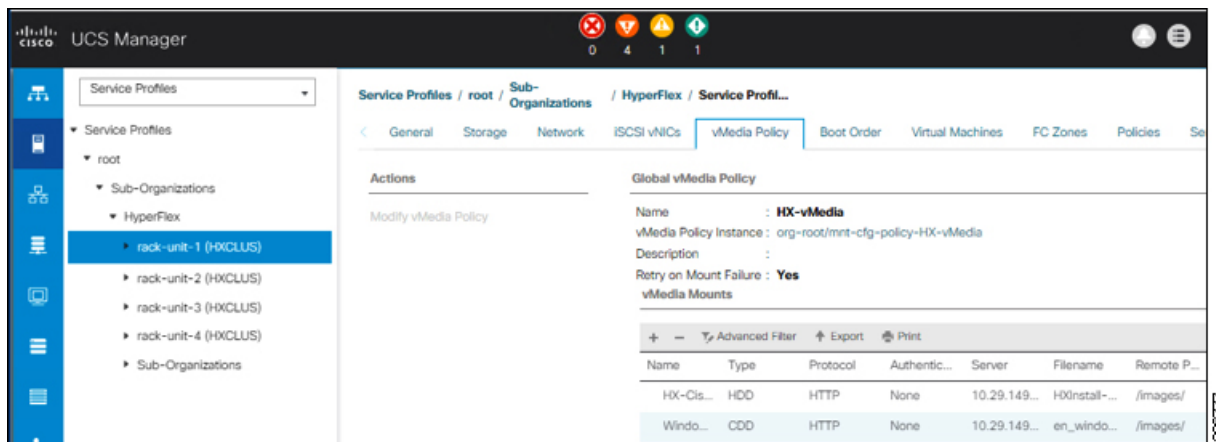

**Step 9**      **Modify Boot Policy and set the boot order to have CIMC CD/DVD to the list:**

- a) In the Navigation pane, click the **Servers** tab.
- b) Expand **Servers > Policies > root > > Boot Policies > hx-compute, or hx-compute-m5**

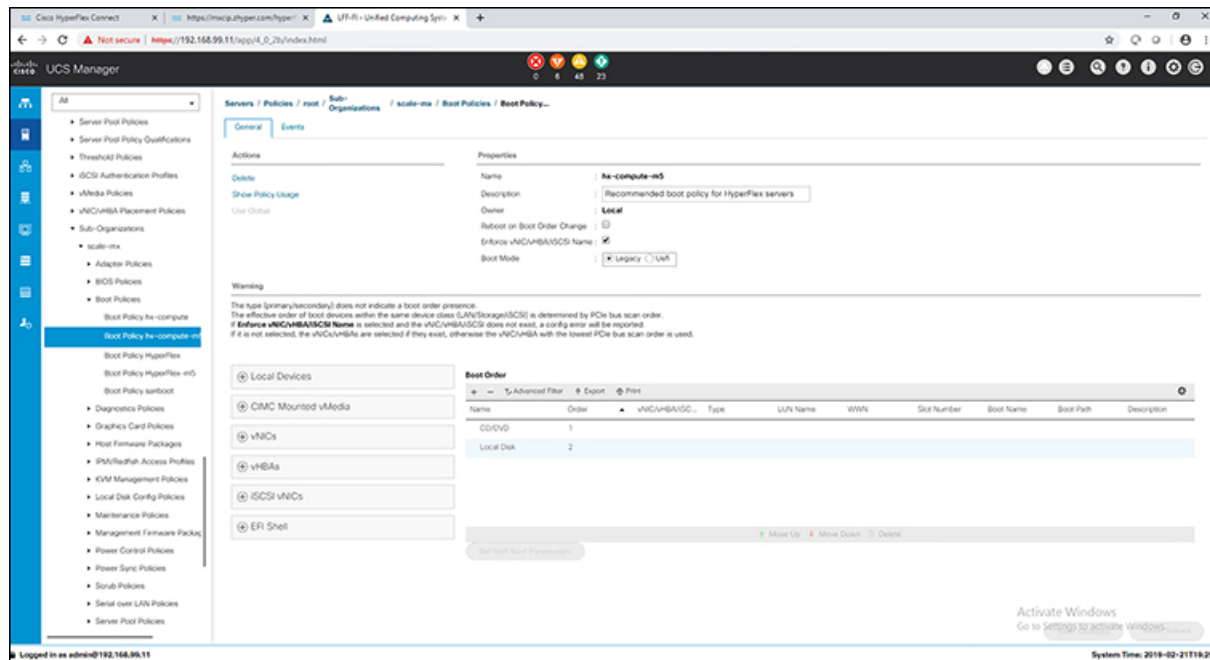

- c) (For M5 Servers only) In the **Boot Order** configuration pane, click **CIMC Mounted CD/DVD**. Then, click **Add CIMC Mounted CD/DVD** to add this to the boot order. Move it to the top of the boot order using the **Move up** button.

**Important** The **CIMC Mounted CD/DVD** option must be highest in the boot order preceding the other options, **Embedded Local Disk** and **CD/DVD**.


(For M4 Servers with Local SAS Drivers) In the **Boot Order** configuration pane, click **vHBAs**. Then, click **Add SAN Boot** to add this to the boot order.

- d) Click **Save Changes**, and click **OK** in the **Success** dialog box. The modified boot policy is saved.

## Step 10


**Verify successful vMedia mounting:**

- On the **Equipment** tab, select one of the servers.
- Click **Inventory > CIMC**, scroll down and ensure for mount entry #1(OS image) and mount entry #2 (Cisco HyperFlex driver image) you see status as **Mounted** and there are no failures.

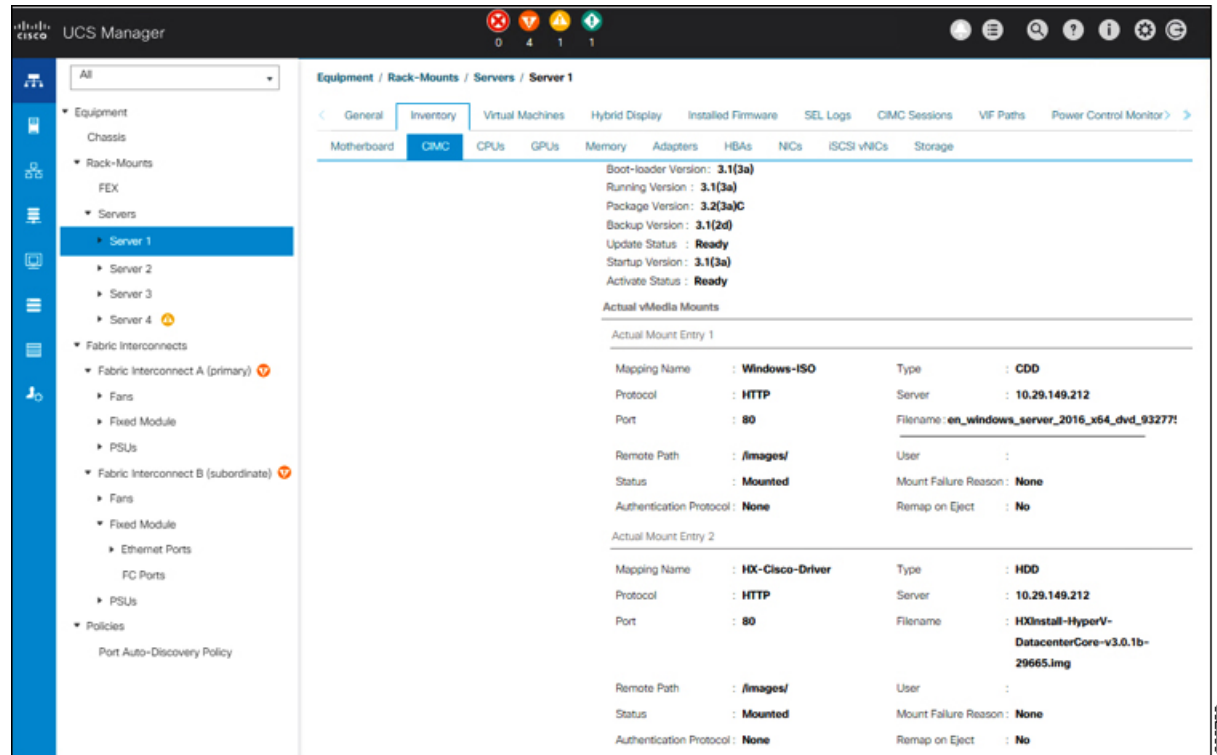

- c) In the menu bar, click **Servers** and choose the first HyperFlex service profile.
- d) Click the **General tab** and choose **Actions > KVM Console>>**.

**Note** The KVM console will try to open in a new browser. Be aware of any pop-up blockers. Allow the pop-ups and re-open the KVM

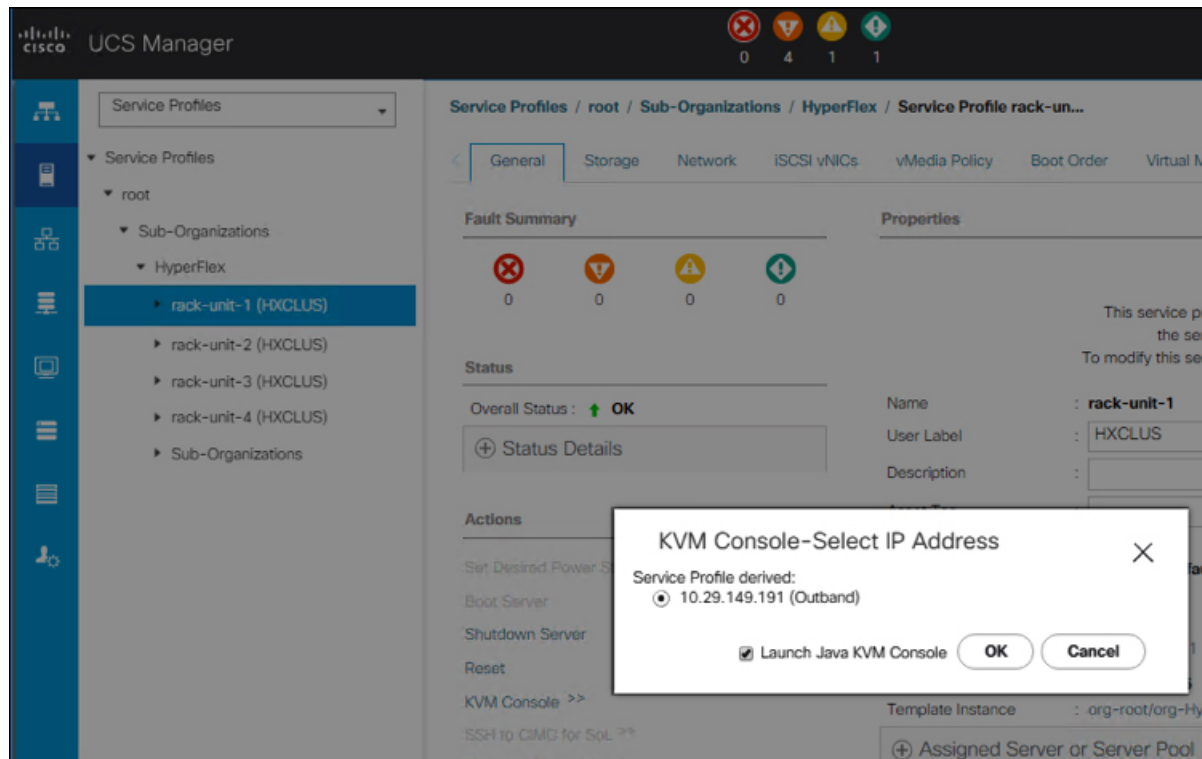

- e) Reboot the host, launch the KVM Console, and power on the server to monitor the progress of the Windows installation. You should see the **Loading Files** screen appear. Windows should install automatically without user intervention. You should see a blue screen and within a few moments you should see the **Setup is starting** message. If automated installation does not begin, double-check that both images are mounted to the server.
- f) Once Windows installation completes, a command prompt will show up. Wait for the installation to complete. The host will then reboot a few times. The installation is complete when you get a clear command prompt at `c:\users\administrator>`. It may take several minutes and reboot operations for the Driver Image to be copied and installed.

**Note** Ignore the prompt with the **The system cannot find the file specified** message.

**Important** Ensure that you have completed **Steps e and f**, on ALL servers that will be part of the HX cluster.

- g) Login to each server, enter the command `C>Users>Administrator>Get-ScheduledTask` and verify that the HX Install Bootstrap Launcher task is running.

#### Step 11 Remove the vMedia policy from the service profile:


- a) To un-map the vMedia policy from the service profile, go to **Servers > Service Profile Templates > root > Sub-Organizations > hx-cluster\_name > Service Template compute-nodes, or compute-nodes-m5**. Then, click on **Modify vMedia Policy**.
- b) Under the vMedia Policy drop-down selection, deselect the vMedia policy (*HX-vMedia*) previously used to map the two images.

#### Step 12 Restore the boot order to the one before installation:

- a) In the Navigation pane, click the **Servers** tab.
- b) Expand **Servers > Policies > root > > Boot Policies > hx-compute, or hx-compute-m5**

- c) In the **Boot Order** configuration pane, use the **Move Down** button to move **CIMC Mounted CD/DVD** option to the bottom of the list.

Refer to the screenshot below for the boot order after it is restored in this step:

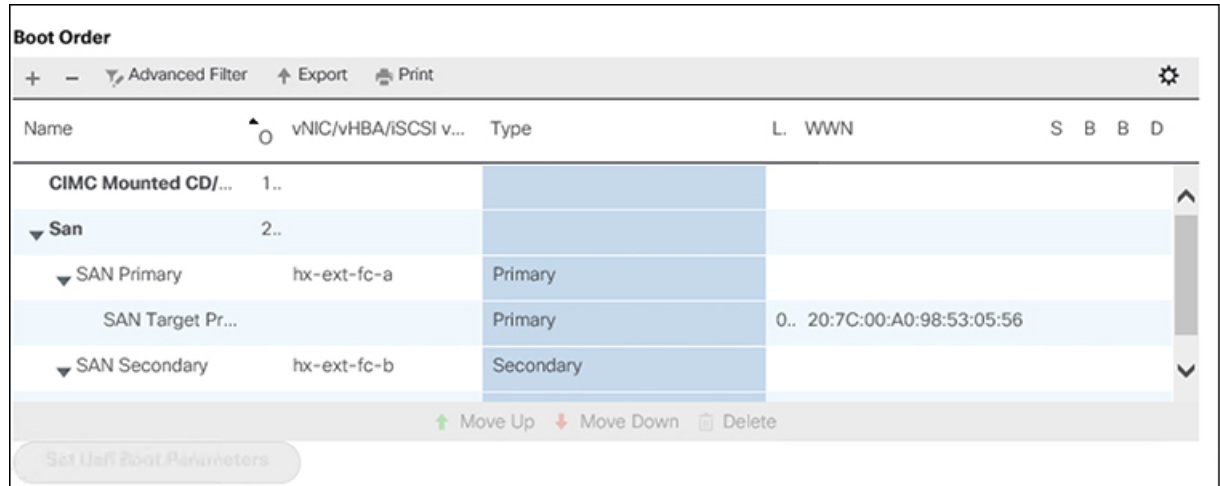

**What to do next**

At the end of this procedure, Windows OS is successfully installed. Then, continue to "[Hypervisor Configuration, HXDP Software Installation and Cluster Expansion](#)" to complete the remaining steps in the cluster expansion workflow.